Nama : Imron
NPM : 232310021
Mata Kuliah : Lab PW TI24PA2
Praktikum 5

Hasil

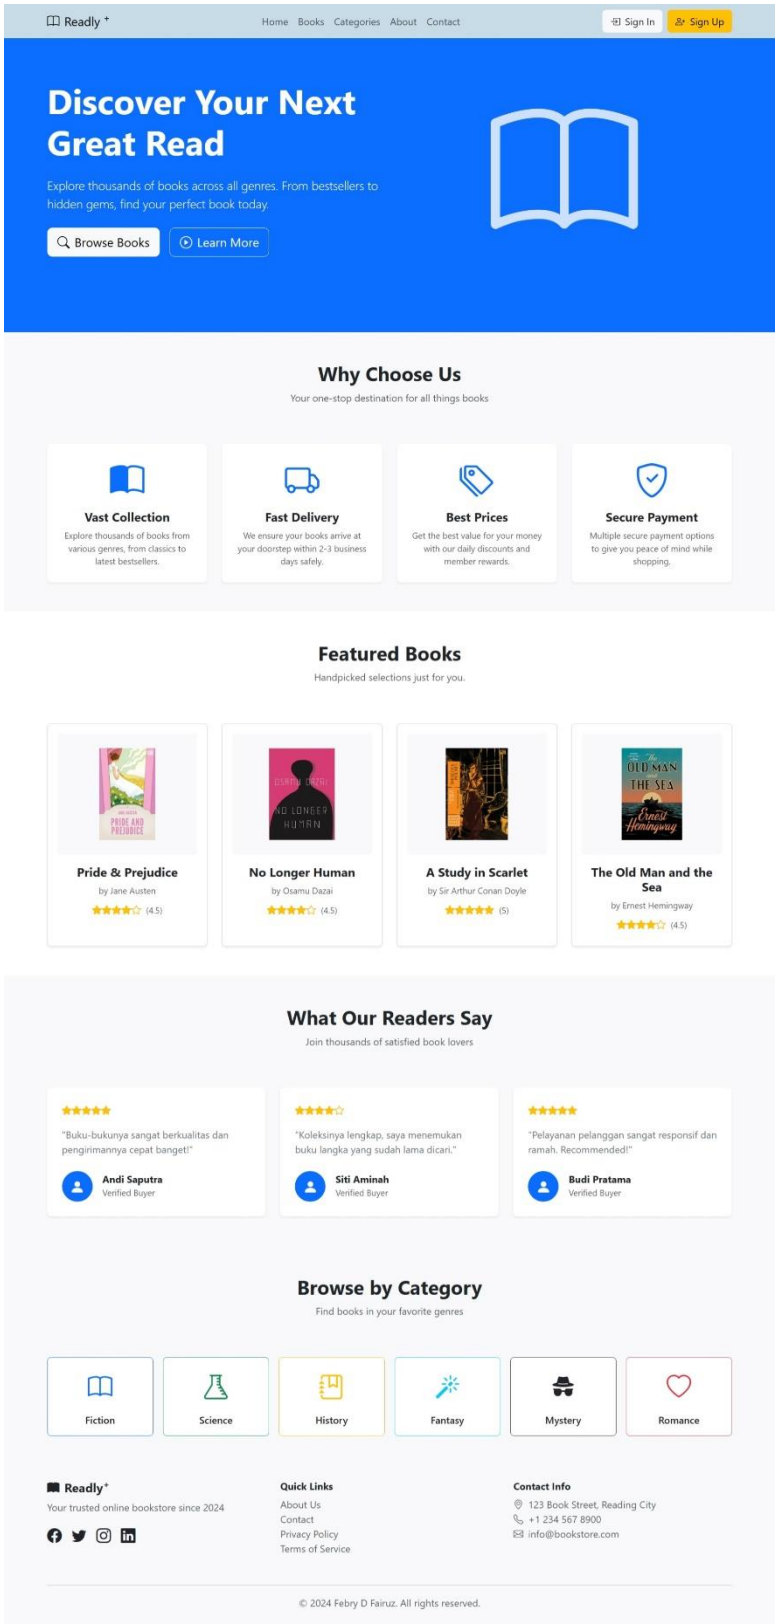

1. Installasi bootstrap

```
PS C:\2026\PW\MERN-STACK\first-project-react> npm install bootstrap bootstrap-icons react-bootstrap
  npm audit fix --force

Run `npm audit` for details.
PS C:\2026\PW\MERN-STACK\first-project-react>
```

```
import type { Metadata } from "next";     'import type'
import { Geist, Geist_Mono } from "next/font/google";
import "./globals.css";
import "bootstrap/dist/css/bootstrap.min.css";
import "bootstrap-icons/font/bootstrap-icons.css";
```

2. Struktur Folder

3. Src\components \ui\buttons.jsx

buttons.jsx

```
import React from "react";
const Button = ({
  children,
  variant = "primary",
  size = "md",
  outline = false,
  icon,
  iconPosition = "left",
  disabled = false,
  loading = false,
  fullWidth = false,
  className = "",
  onClick,
  type = "button",
  ...props
}) => {
  const variantClass = outline ? `btn-outline-${variant}` : `btn-${variant}`;
  const sizeClass = size === "md" ? `btn-${size}` : "";
  const widthClass = fullWidth ? "w-100" : "";
  const disabledClass = disabled || loading ? "disabled" : "";
  const buttonClasses =
    `btn ${variantClass} ${sizeClass} ${widthClass} ${disabledClass} ${className}`.trim();
  return (
    <button
      type={type}
      className={buttonClasses}
      onClick={onClick}
      disabled={disabled || loading}
      {...props}
    >
      {loading ? (
        <>
          <span
            className="spinner-border spinner-border-sm me-2"
            role="status"
            aria-hidden="true"
          ></span>
          Loading...
        </>
      ) : (
        <>
          {icon && iconPosition === "left" && (
            <i className={`bi bi-${icon} me-2`}></i>
          )}
          {children}
          {icon && iconPosition === "right" && (
            <i className={`bi bi-${icon} ms-2`}></i>
          )}
        </>
      )}
    </button>
  );
};
export { Button };
```

4. Src\components\landing-pages\index.jsx

```jsx
import React from "react";
import { Navbar } from "./components/navbar";
import { HeroSection } from "./components/herosection";
import { FeaturesSection } from "./components/featuredbookssection";
import { ChooseUs } from "./components/chooseus";
import { TestimonialSection } from "./components/testimonsection";
import { Footers } from "./components/footers";
import { CategoriesSection } from "./components/categoriessection";

export default function LandingPages() {
  return (
    <div>
      <Navbar />
      <HeroSection />
      <ChooseUs />
      <FeaturesSection />
      <TestimonialSection />
      <CategoriesSection />
      <Footers />
    </div>
  );
}
```

5. Src\components\landing-pages\components\categoriessection.jsx

categoriessection.jsx

```jsx
import React from "react";
const genre_data = [
  { name: "Fiction", icon: "bi-book", color: "primary" },
  { name: "Science", icon: "bi-flask", color: "success" },
  { name: "History", icon: "bi-journal-bookmark", color: "warning" },
  { name: "Fantasy", icon: "bi-magic", color: "info" },
  { name: "Mystery", icon: "bi-incognito", color: "dark" },
  { name: "Romance", icon: "bi-heart", color: "danger" },
];

export function CategoriesSection() {
  return (
    <section id="categories" className="py-5 bg-light">
      <div className="container">
        <div className="row mb-5">
          <div className="col">
            <h2 className="fw-bold text-center">Browse by Category</h2>
            <p className="text-center text-muted">
              Find books in your favorite genres
            </p>
          </div>
        </div>

        <div className="row g-3">
          {genre_data.map((category, index) => (
            <div key={index} className="col-md-4 col-lg-2">
              <div
                className={`card text-center border-${category.color} h-100`}
              >
                <div class="card-body">
                  <i
                    className={`bi ${category.icon} text-${category.color}`}
                    style={{ fontSize: "2.5rem" }}
                  ></i>
                  <h6 class="mt-3 mb-0">{category.name}</h6>
                </div>
              </div>
            </div>
          ))}
        </div>
      </div>
    </section>
  );
}
```

6. Src\components\landing-pages\components\chooseus.jsx

chooseus.jsx

```jsx
import React from "react";

const ListChoose = [
  {
    id: 1,
    title: "Vast Collection",
    description:
      "Explore thousands of books from various genres, from classics to latest bestsellers.",
    icon: "bi bi-book-half",
  },
  {
    id: 2,
    title: "Fast Delivery",
    description:
      "We ensure your books arrive at your doorstep within 2-3 business days safely.",
    icon: "bi bi-truck",
  },
  {
    id: 3,
    title: "Best Prices",
    description:
      "Get the best value for your money with our daily discounts and member rewards.",
    icon: "bi bi-tags",
  },
  {
    id: 4,
    title: "Secure Payment",
    description:
      "Multiple secure payment options to give you peace of mind while shopping.",
    icon: "bi bi-shield-check",
  },
];

const ChooseCard = ({ item }) => {
  const { title, description, icon } = item;

  return (
    <div className="col-md-3">
      <div className="card h-100 border-0 shadow-sm transition-hover">
        <div className="card-body text-center p-4">
          <div className="mb-3">
            <i className={`${icon} display-4 text-primary`}></i>
          </div>
          <h5 className="fw-bold">{title}</h5>
          <p className="text-muted small mb-0">{description}</p>
        </div>
      </div>
    </div>
  );
};

const ChooseUs = () => {
  return (
    <section id="choose" className="py-5 bg-light">
      <div className="container">
        <div className="row mb-5">
          <div className="col-12">
            <h2 className="fw-bold text-center">Why Choose Us</h2>
            <p className="text-center text-muted">
              Your one-stop destination for all things books
            </p>
          </div>
        </div>

        <div className="row g-4">
          {ListChoose.map((item) => (
            <ChooseCard key={item.id} item={item} />
          ))}
        </div>
      </div>
    </section>
  );
};

export { ChooseUs };
```

7. Src\components\landing-pages\components\featuredbooksection.jsx

featuredbookssection.jsx

```jsx
export function FeaturesSection() {
  return (
    <section id="books" className="py-5">
      <div className="container">
        <div className="row mb-5">
          <div className="col">
            <h2 className="fw-bold text-center">Featured Books</h2>
            <p className="text-center text-muted">
              Handpicked selections just for you.
            </p>
          </div>
        </div>
        <div class="row g-4">
          {ListBooks.map((book) => (
            <div key={book.id} className="col-md-6 col-lg-3">
              <BookCard book={book} />
            </div>
          ))}
        </div>
      </div>
    </section>
  );
}

const ListBooks = [
  {
    id: 1,
    title: "Pride & Prejudice",
    img: "pp.jpg",
    author: "Jane Austen",
    is_free: false,
    sinopsis:
      " Elizabeth Bennet, gadis cerdas dari keluarga menengah di pedesaan Inggris, yang
mengatasi prasangka (prejudice) untuk menemukan cinta dengan Mr. Darcy, bangsawan kaya yang
angkuh (pride)",
    rating: 4.5,
    views: 100,
  },
  {
    id: 2,
    title: "No Longer Human",
    img: "human.webp",
    author: "Osamu Dazai",
    is_free: false,
    sinopsis:
      "Yozo Oba, seorang pria yang merasa terasing dari kemanusiaan dan gagal memahami
manusia. Sepanjang hidupnya, Yozo mengenakan 'topeng' badut untuk menutupi depresi, ketakutan,
dan rasa tidak amannya, yang akhirnya membawa pada kehancuran diri, kecanduan, dan
keputusasaan mendalam.",
    rating: 4.5,
    views: 100,
  },
  {
    id: 3,
    title: "A Study in Scarlet",
    img: "sh.jpg",
    author: "Sir Arthur Conan Doyle",
    is_free: false,
    sinopsis:
      "Dr John H. Watson bertemu dengan detektif besar Sherlock Holmes dan bersama-sama mereka
memecahkan kasus pembunuhan, di mana Watson kagum pada 'ilmu deduksi' Holmes.",
    rating: 5,
    views: 100,
  },
  {
    id: 4,
    title: "The Old Man and the Sea",
    img: "old.jpg",
    author: "Ernest Hemingway",
    is_free: false,
    sinopsis:
      "Novel The Old Man and The Sea bercerita tentang lelaki tua bernama Santiago. Ia tidak
pernah menyerah untuk terus berlayar dengan kapal kecilnya demi mendapatakan seekor ikan.
Lelaki tua itu dijuluki “Salao”, orang yang tersial dari yang sial karena selama 84 hari
berlayar selalu gagal membawa pulang seekor ikan pun.",
    rating: 4.5,
    views: 100,
  },
];

const BookCard = ({ book }) => {
  const { title, author, rating, img } = book;

  // Fungsi untuk merender bintang berdasarkan rating
  const renderStars = (rating) => {
    return [...Array(5)].map((_, i) => (
      <i
        key={i}
        className={`bi bi-star${i < Math.floor(rating) ? "-fill" : ""} text-warning`}
      ></i>
    ));
  };

  return (
    <div className="card h-100 shadow-sm">
      <div className="card-body text-center">
        <div className="bg-light p-4 mb-3 rounded">
          {img ? (
            <img
              src={`/books-images/${img}`}
              alt={title}
              className="img-fluid"
              style={{ maxHeight: "150px", objectFit: "cover" }}
            />
          ) : (
            <i
              className="bi bi-book-half"
              style={{ fontSize: "4rem", color: "#6c757d" }}
            ></i>
          )}
        </div>
        <h5 className="card-title fw-bold">{title}</h5>
        <p className="text-muted small mb-2">by {author}</p>
        <div className="mb-2">
          {renderStars(rating)}
          <span className="ms-2 text-muted small">({rating})</span>
        </div>
      </div>
    </div>
  );
};
```

8. Src\components\landing-pages\components\footers.jsx

```jsx
const socialLinks = [
  { icon: "facebook", url: "#", label: "Facebook" },
  { icon: "twitter", url: "#", label: "Twitter" },
  { icon: "instagram", url: "#", label: "Instagram" },
  { icon: "linkedin", url: "#", label: "LinkedIn" },
];
const quickLinks = [
  { text: "About Us", url: "#" },
  { text: "Contact", url: "#" },
  { text: "Privacy Policy", url: "#" },
  { text: "Terms of Service", url: "#" },
];
const contactItems = [
  { icon: "geo-alt", text: "123 Book Street, Reading City" },
  { icon: "telephone", text: "+1 234 567 8900" },
  { icon: "envelope", text: "info@bookstore.com" },
];
const SocialMediaLinks = ({ links, iconSize = "1.5rem", className = "" }) => {
  return (
    <div className={`d-flex gap-3 ${className}`}>
      {links.map((link, index) => (
        <a
          key={index}
          href={link.url}
          className="text-dark"
          arialabel={link.label}
        >
          <i
            className={`bi bi-${link.icon}`}
            style={{ fontSize: iconSize }}
          ></i>
        </a>
      ))}
    </div>
  );
};
const FooterSection = ({ title, children, className = "" }) => {
  return (
    <div className={`col-md-4 mb-3 ${className}`}>
      <h6 className="fw-bold">{title}</h6>
      {children}
    </div>
  );
};
const ContactInfo = ({ items, className = "" }) => {
  return (
    <ul className={`list-unstyled text-muted ${className}`}>
      {items.map((item, index) => (
        <li key={index}>
          <i className={`bi bi-${item.icon} me-2`}></i>
          {item.text}
        </li>
      ))}
    </ul>
  );
};
const LinkList = ({ links, className = "" }) => {
  return (
    <ul className={`list-unstyled ${className}`}>
      {links.map((link, index) => (
        <li key={index}>
          <a href={link.url} className="text-muted text-decoration-none">
            {link.text}
          </a>
        </li>
      ))}
    </ul>
  );
};

import React from "react";
export function Footers() {
  return (
    <footer id="contact" className="bg-light py-4">
      <div className="container">
        <div className="row">
          <div className="col-md-4 mb-3">
            <h5 className="fw-bold">
              <i className="bi bi-book-fill me-2"></i>
              Readly<sup>+</sup>
            </h5>
            <p className="text-muted">
              Your trusted online bookstore since 2024
            </p>
            <SocialMediaLinks links={socialLinks} />
          </div>
          <FooterSection title="Quick Links">
            <LinkList links={quickLinks} />
          </FooterSection>
          <FooterSection title="Contact Info">
            <ContactInfo items={contactItems} />
          </FooterSection>
        </div>
        <hr />
        <div className="text-center text-muted">
          <p className="mb-0">
            &copy; 2024 Febry D Fairuz. All rights reserved.
          </p>
        </div>
      </div>
    </footer>
  );
}
```

9. Src\components\landing-pages\components\herosection.jsx

herosection.jsx

```
import { Button } from "../../ui/buttons";
export function HeroSection() {
  return (
    <section
      id="home"
      className="relative min-h-screen flex items-center overflow-hidden bg-primary text-
white"
      style={styles.section}
    >
      <div className="container">
        <div className="row align-items-center">
          <div className="col-lg-6">
            <h1 className="display-4 fw-bold mb-4">
              Discover Your Next Great Read
            </h1>
            <p className="lead mb-4">
              Explore thousands of books across all genres. From bestsellers to
              hidden gems, find your perfect book today.
            </p>
            <div className="d-flex gap-3">
              <Button className="btn btn-light btn-lg">
                <i className="bi bi-search me-2"></i>
                Browse Books
              </Button>
              <Button className="btn btn-outline-light btn-lg">
                <i className="bi bi-play-circle me-2"></i>
                Learn More
              </Button>
            </div>
          </div>
          <div className="col-lg-6 text-center mt-4 mt-lg-0">
            <i
              className="bi bi-book"
              style={{ fontSize: "15rem", opacity: 0.8 }}
            ></i>
          </div>
        </div>
      </div>
    </section>
  );
}
const styles = {
  section: {
    minHeight: "100vh",
    marginTop: "-70px",
    paddingTop: "70px",
    display: "flex",
    alignItems: "center",
  },
};
```

10. Src\components\landing-pages\components\navbar.jsx

navbar.jsx

```jsx
import { Button } from "../../ui/buttons";
export function Navbar() {
  const menu_nav = [
    { id: 1, name: "Home", link: "#home" },
    { id: 2, name: "Books", link: "#books" },
    { id: 3, name: "Categories", link: "#categories" },
    { id: 4, name: "About", link: "#about" },
    { id: 5, name: "Contact", link: "#contact" },
  ];
  return (
    <nav
      className={`navbar navbar-expand-lg fixed-top transition-navbar`}
      style={styles.navigationBar}
    >
      <div className="container">
        <a className="navbar-brand" href="#">
          <i className="bi bi-book me-2"></i>
          Readly <sup>+</sup>
        </a>
        <button
          className="navbar-toggler"
          type="button"
          data-bs-toggle="collapse"
          data-bs-target="#navbarNav"
        >
          <span className="navbar-toggler-icon"></span>
        </button>
        <div className="collapse navbar-collapse" id="navbarNav">
          <ul className="navbar-nav mx-auto">
            {menu_nav.map((menu, index) => (
              <li className="nav-item" key={index}>
                <a className="nav-link" href={menu.link}>
                  {menu.name}
                </a>
              </li>
            ))}
          </ul>
          <div className="d-flex gap-2">
            <Button className="btn btn-light text-dark">
              <i className="bi bi-box-arrow-in-right me-2"></i>
              Sign In
            </Button>
            <Button className="btn btn-warning">
              <i className="bi bi-person-plus me-2"></i>
              Sign Up
            </Button>
          </div>
        </div>
      </div>
    </nav>
  );
}
const styles = {
  navigationBar: {
    backgroundColor: "rgba(247, 248, 226, 0.8)",
    transition: "all 0.3s ease-in-out",
  },
};
```

11. Src\components\landing-pages\components\testimonisection.jsx

testimonsection.jsx

```
import React from "react";

const user_testimonials = [
  {
    name: "Andi Saputra",
    review: "Buku-bukunya sangat berkualitas dan pengirimannya cepat banget!",
    rating: 5,
  },
  {
    name: "Siti Aminah",
    review:
      "Koleksinya lengkap, saya menemukan buku langka yang sudah lama dicari.",
    rating: 4,
  },
  {
    name: "Budi Pratama",
    review: "Pelayanan pelanggan sangat responsif dan ramah. Recommended!",
    rating: 5,
  },
];

export function TestimonialSection() {
  return (
    <section className="py-5 bg-light">
      <div className="container">
        <div className="row mb-5">
          <div className="col">
            <h2 className="fw-bold text-center">What Our Readers Say</h2>
            <p className="text-center text-muted">
              Join thousands of satisfied book lovers
            </p>
          </div>
        </div>

        <div className="row g-4">
          {user_testimonials.map((testimonial, index) => (
            <div key={index} className="col-md-4">
              <div className="card h-100 shadow-sm border-0">
                <div class="card-body p-4">
                  <div className="mb-3">
                    {[...Array(5)].map((_, i) => (
                      <i
                        key={i}
                        // Perbaikan: template literal jangan diputus barisnya
                        className={`bi bi-star${i < testimonial.rating ? "-fill" : ""} text-
warning`}
                      ></i>
                    ))}
                  </div>

                  <p className="card-text mb-4 italic text-secondary">
                    "{testimonial.review}"
                  </p>

                  <div className="d-flex align-items-center">
                    <div
                      className="bg-primary rounded-circle d-flex align-items-center justify-
content-center"
                      style={{ width: "50px", height: "50px" }}
                    >
                      <i
                        className="bi bi-person-fill text-white"
                        style={{ fontSize: "1.5rem" }}
                      ></i>
                    </div>
                    <div className="ms-3">
                      <h6 className="mb-0 fw-bold">{testimonial.name}</h6>
                      <small className="text-muted">Verified Buyer</small>
                    </div>
                  </div>
                </div>
              </div>
            </div>
          ))}
        </div>
      </div>
    </section>
  );
}
```