

# Lecture 7-1. Maps



**Sunghyun Cho**

Professor

Division of Computer Science

chopro@hanyang.ac.kr

HANYANG UNIVERSITY








## Maps

- ❏ A map models a searchable collection of key-value entries
- ❏ The main operations of a map are for searching, inserting, and deleting items
- ❏ Multiple entries with the same key are **not** allowed
- ❏ **Applications:**
  - address book
  - student-record database



HANYANG UNIVERSITY

# The Map ADT

-  **get(k)**: if the map M has an entry with key k, return its associated value; else, return null
-  **put(k, v)**: insert entry (k, v) into the map M; if key k is not already in M, then return null; else, return old value associated with k
-  **remove(k)**: if the map M has an entry with key k, remove it from M and return its associated value; else, return null
-  **size()**, **isEmpty()**
-  **entrySet()**: return an iterable collection of the entries in M
-  **keySet()**: return an iterable collection of the keys in M
-  **values()**: return an iterator of the values in M




## Example

<b>Operation</b>	<b>Output</b>	<b>Map</b>
isEmpty()	<b>true</b>	$\emptyset$
put(5,A)	<b>null</b>	(5,A)
put(7,B)	<b>null</b>	(5,A),(7,B)
put(2,C)	<b>null</b>	(5,A),(7,B),(2,C)
put(8,D)	<b>null</b>	(5,A),(7,B),(2,C),(8,D)
put(2,E)	<i>C</i>	(5,A),(7,B),(2,E),(8,D)
get(7)	<i>B</i>	(5,A),(7,B),(2,E),(8,D)
get(4)	<b>null</b>	(5,A),(7,B),(2,E),(8,D)
get(2)	<i>E</i>	(5,A),(7,B),(2,E),(8,D)
size()	4	(5,A),(7,B),(2,E),(8,D)
remove(5)	<i>A</i>	(7,B),(2,E),(8,D)
remove(2)	<i>E</i>	(7,B),(8,D)
get(2)	<b>null</b>	(7,B),(8,D)
isEmpty()	<b>false</b>	(7,B),(8,D)



# A Simple List-Based Map

- ❏ We can efficiently implement a map using an unsorted list
  - We store the items of the map in a list  $S$  (based on a doubly-linked list), in arbitrary order

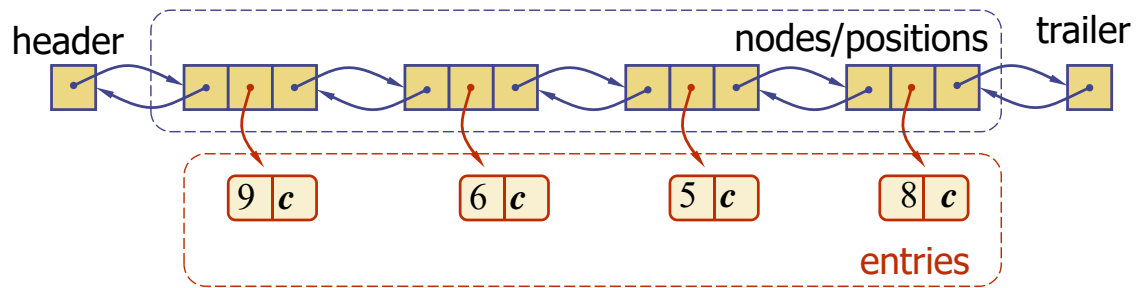

HANYANG UNIVERSITY

5

## The get(k) Algorithm

**Algorithm** get(k):

$B = S.\text{positions}()$  { $B$  is an iterator of the positions in  $S$ }

**while**  $B.\text{hasNext}()$  **do**

$p = B.\text{next}()$  { the next position in  $B$  }

**if**  $p.\text{element}().\text{getKey}() = k$  **then**

**return**  $p.\text{element}().\text{getValue}()$

**return null** {there is no entry with key equal to  $k$ }



HANYANG UNIVERSITY

6

# The put(k,v) Algorithm

**Algorithm** put(k,v):

B = S.positions()

**while** B.hasNext() **do**

p = B.next()

**if** p.element().getKey() = k **then**

t = p.element().getValue()

S.set(p,(k,v))

**return** t {return the old value}

S.addLast((k,v))

n = n + 1 {increment variable storing number of entries}

**return null** { there was no entry with key equal to k }



HANYANG UNIVERSITY

# The remove(k) Algorithm

**Algorithm** remove(k):

B =S.positions()

**while** B.hasNext() **do**

p = B.next()

**if** p.element().getKey() = k **then**

t = p.element().getValue()

S.remove(p)

n = n - 1 {decrement number of entries}

**return** t {return the removed value}

**return null** {there is no entry with key equal to k}




HANYANG UNIVERSITY

# Performance of a List-Based Map

## Performance:

- **put**, **get** and **remove** take  $O(n)$  time since in the worst case (the item is not found) we traverse the entire sequence to look for an item with the given key

-  The unsorted list implementation is effective only for maps of small size or for maps in which puts are the most common operations, while searches and removals are rarely performed (e.g., historical record of logins to a workstation)

