


# Lecture 9-2: Quick Sort

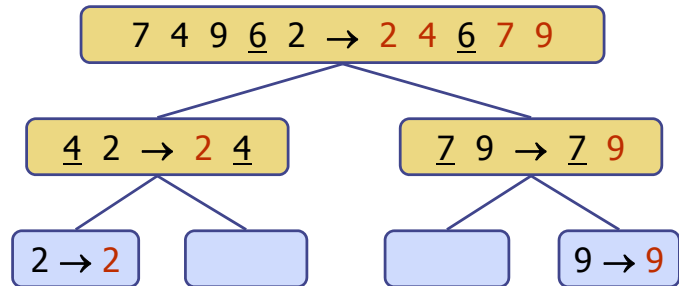

**Sunghyun Cho**

Professor

Division of Computer Science


chopro@hanyang.ac.kr

HANYANG UNIVERSITY

## Quick-Sort

◆ **Quick-sort** is a randomized sorting algorithm based on the divide-and-conquer paradigm:

- **Divide**: pick a random element  $x$  (called **pivot**) and partition  $S$  into
  - ◆  $L$  elements less than  $x$
  - ◆  $E$  elements equal  $x$
  - ◆  $G$  elements greater than  $x$
- **Recur**: sort  $L$  and  $G$
- **Conquer**: join  $L$ ,  $E$  and  $G$

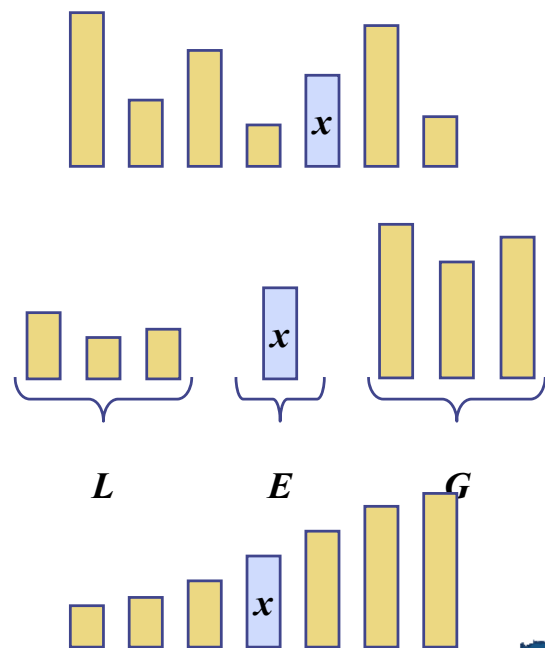

# Partition

- ◆ We partition an input sequence as follows:
  - We remove, in turn, each element  $y$  from  $S$  and
  - We insert  $y$  into  $L$ ,  $E$  or  $G$ , depending on the result of the comparison with the pivot  $x$
- ◆ Each insertion and removal is at the beginning or at the end of a sequence, and hence takes  $O(1)$  time
- ◆ Thus, the partition step of quick-sort takes  $O(n)$  time

## Algorithm *partition*( $S, p$ )

**Input** sequence  $S$ , position  $p$  of pivot

**Output** subsequences  $L$ ,  $E$ ,  $G$  of the elements of  $S$  less than, equal to, or greater than the pivot, resp.

$L, E, G \leftarrow$  empty sequences

$x \leftarrow S.remove(p)$

**while**  $\neg S.isEmpty()$

$y \leftarrow S.remove(S.first())$

**if**  $y < x$

$L.addLast(y)$

**else if**  $y = x$

$E.addLast(y)$

**else**  $\{ y > x \}$


$G.addLast(y)$

**return**  $L, E, G$




# Quick-Sort Tree

- ◆ An execution of quick-sort is depicted by a binary tree
  - Each node represents a recursive call of quick-sort and stores
    - ◆ Unsorted sequence before the execution and its pivot
    - ◆ Sorted sequence at the end of the execution
  - The root is the initial call
  - The leaves are calls on subsequences of size 0 or 1

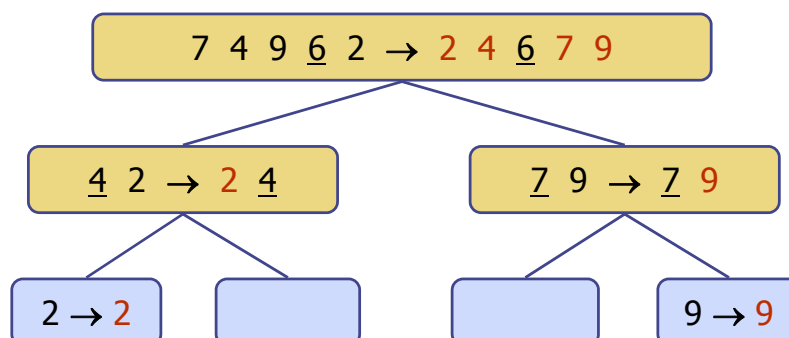

# Execution Example

## ◆ Pivot selection

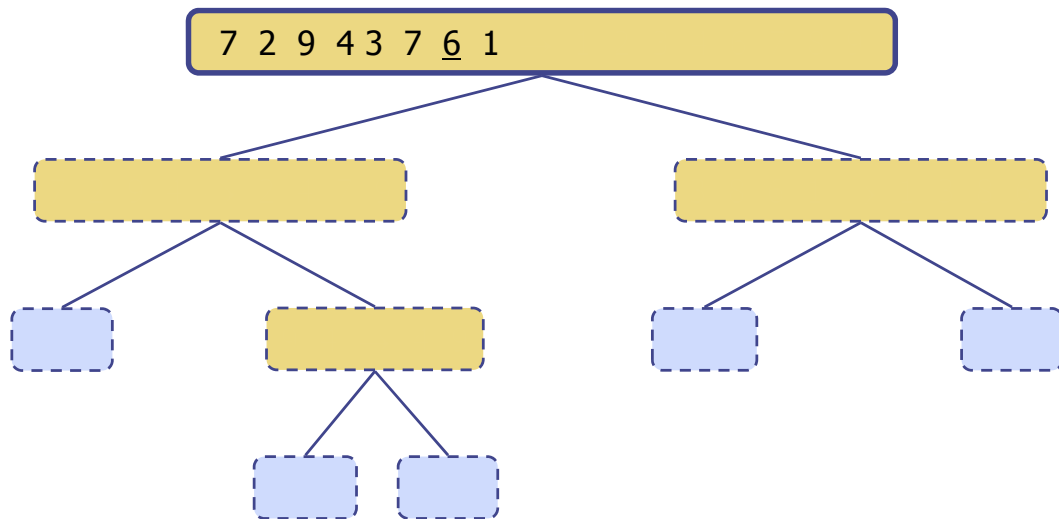


5



HANYANG UNIVERSITY

# Execution Example (cont.)

## ◆ Partition, recursive call, pivot selection

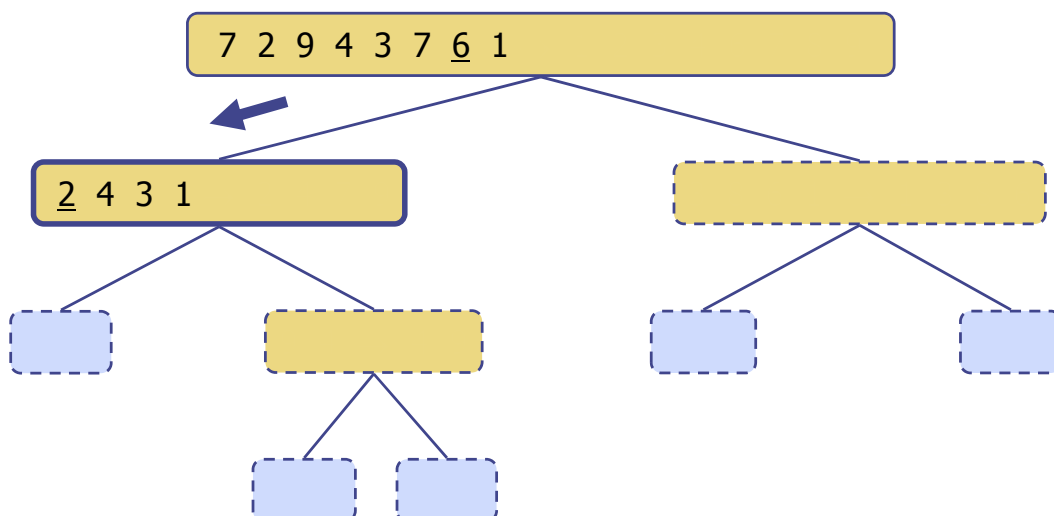


6



HANYANG UNIVERSITY


## Execution Example (cont.)

◆ Partition, recursive call, base case

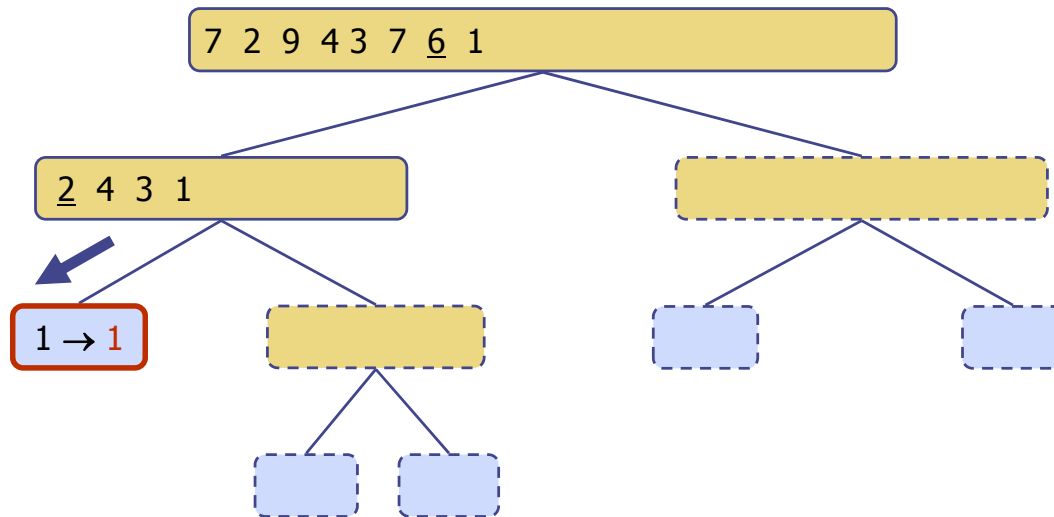


## Execution Example (cont.)

◆ Recursive call, ..., base case, join

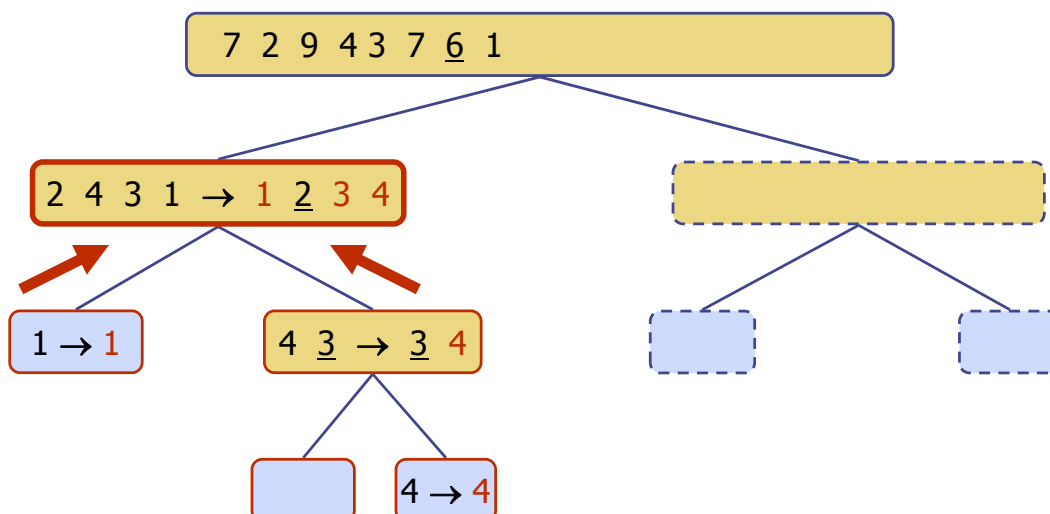


## Execution Example (cont.)

### ◆ Recursive call, pivot selection

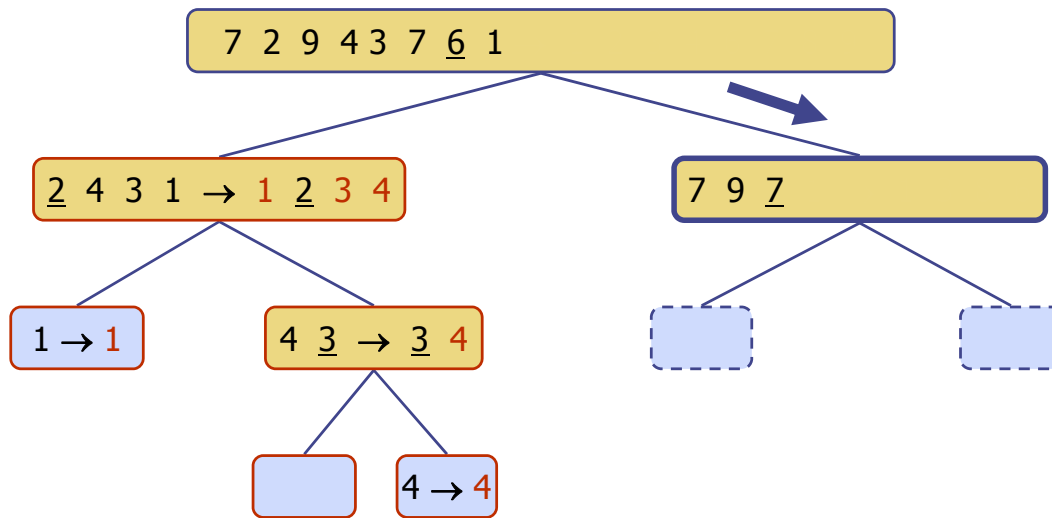


## Execution Example (cont.)

### ◆ Partition, ..., recursive call, base case

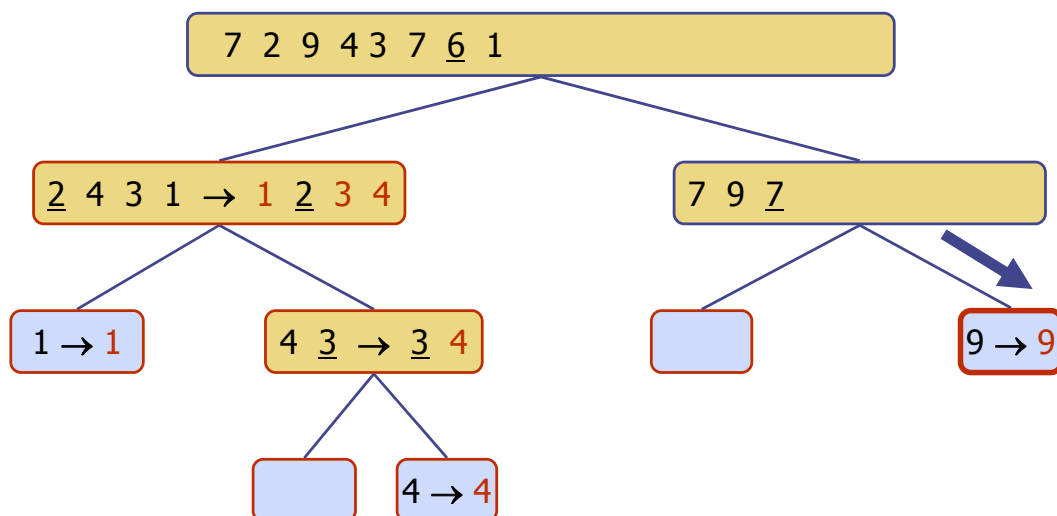

## Execution Example (cont.)

### ◆ Join, join

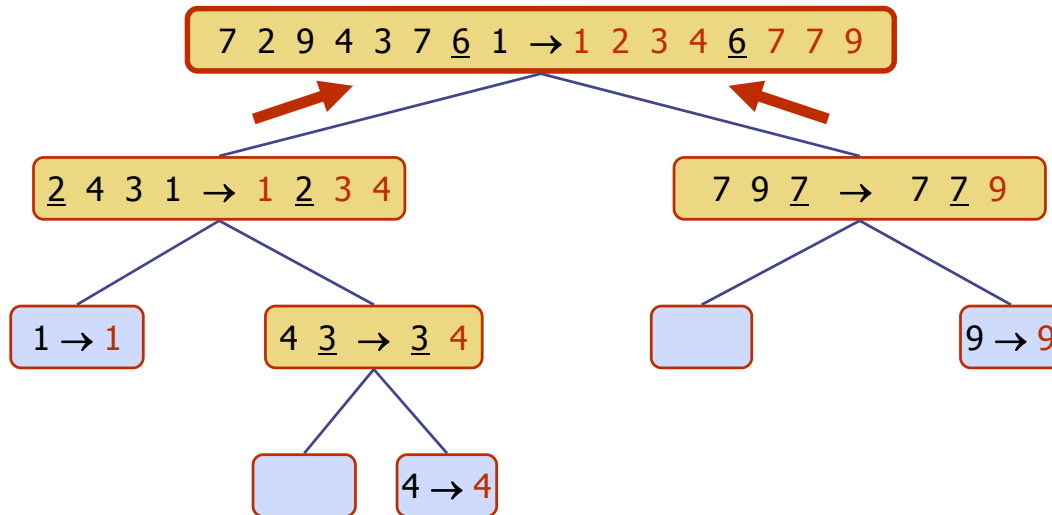

11



HANYANG UNIVERSITY


## Worst-case Running Time

- ◆ The worst case for quick-sort occurs when the pivot is the unique minimum or maximum element
- ◆ One of  $L$  and  $G$  has size  $n - 1$  and the other has size 0
- ◆ The running time is proportional to the sum

$$n + (n - 1) + \dots + 2 + 1$$

- ◆ Thus, the worst-case running time of quick-sort is  $O(n^2)$

depth time

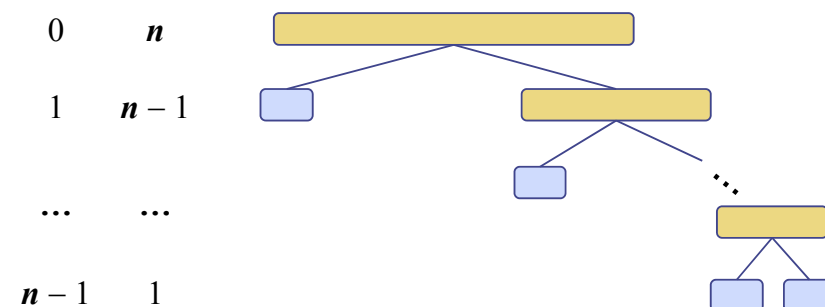


HANYANG UNIVERSITY


12

# Expected Running Time

- Consider a recursive call of quick-sort on a sequence of size  $s$ 
  - Good call:** the sizes of  $L$  and  $G$  are each less than  $3s/4$  생길 확률은 0.5
  - Bad call:** one of  $L$  and  $G$  has size greater than  $3s/4$




Good call




Bad call

- A call is **good** with probability  $1/2$ 
  - $1/2$  of the possible pivots cause good calls:

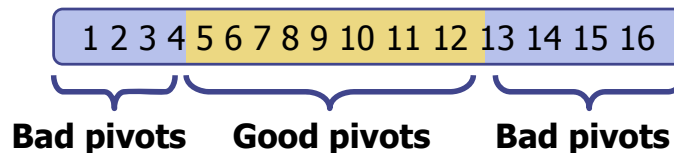

# Expected Running Time (Randomized Q-S)

- Probabilistic Fact:** The expected number of coin tosses required in order to get  $k$  heads is  $2k$
- For a node of depth  $i$ , we expect
  - $i/2$  ancestors are good calls
  - The size of the input sequence for the current call is at most  $(3/4)^{i/2}n$
- Therefore, we have
  - For a node of depth  $2\log_{4/3}n$ , the expected input size is one
  - The expected height of the quick-sort tree is  $O(\log n)$
- The amount of work done at the nodes of the same depth is  $O(n)$
- Thus, the expected (average) running time of quick-sort is  $O(n \log n)$

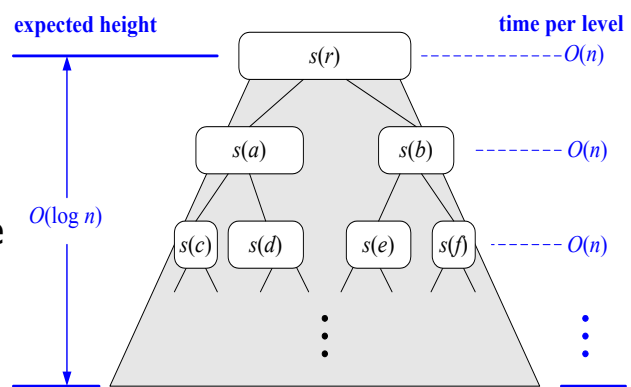

total expected time:  $O(n \log n)$



# In-Place Quick-Sort

- ◆ Quick-sort can be implemented to run in-place
- ◆ In the partition step, we use replace operations to rearrange the elements of the input sequence such that
  - the elements less than the pivot have rank less than  $h$
  - the elements equal to the pivot have rank between  $h$  and  $k$
  - the elements greater than the pivot have rank greater than  $k$
- ◆ The recursive calls consider
  - elements with rank less than  $h$
  - elements with rank greater than  $k$

**Algorithm** *inPlaceQuickSort*( $S, l, r$ )

**Input** sequence  $S$ , ranks  $l$  and  $r$

**Output** sequence  $S$  with the elements of rank between  $l$  and  $r$  rearranged in increasing order

**if**  $l \geq r$

**return**

$i \leftarrow$  a random integer between  $l$  and  $r$

$x \leftarrow S.\text{elemAtRank}(i)$

$(h, k) \leftarrow \text{inPlacePartition}(x)$

*inPlaceQuickSort*( $S, l, h - 1$ )

*inPlaceQuickSort*( $S, k + 1, r$ )



# In-Place Partitioning

- ◆ Perform the partition using two indices to split  $S$  into  $L$  and  $E \cup G$  (a similar method can split  $E \cup G$  into  $E$  and  $G$ ).


$j$

$k$

3 2 5 1 0 7 3 5 9 2 7 9 8 9 7 6 9

(pivot = 6)

- ◆ Repeat until  $j$  and  $k$  cross:
  - Scan  $j$  to the right until finding an element  $\geq x$ .
  - Scan  $k$  to the left until finding an element  $< x$ .
  - Swap elements at indices  $j$  and  $k$

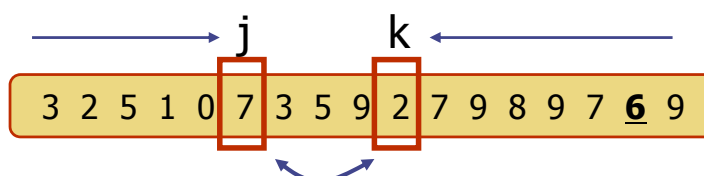



# Summary of Sorting Algorithms

Algorithm	Time	Notes
selection-sort	$O(n^2)$	<ul style="list-style-type: none"><li>▪ in-place</li><li>▪ slow (good for small inputs)</li></ul>
insertion-sort	$O(n^2)$	<ul style="list-style-type: none"><li>▪ in-place</li><li>▪ slow (good for small inputs)</li></ul>
quick-sort	$O(n \log n)$ expected	<ul style="list-style-type: none"><li>▪ in-place, randomized</li><li>▪ fastest (good for large inputs)</li></ul>
heap-sort	$O(n \log n)$	<ul style="list-style-type: none"><li>▪ in-place</li><li>▪ fast (good for large inputs)</li></ul>
merge-sort	$O(n \log n)$	<ul style="list-style-type: none"><li>▪ sequential data access</li><li>▪ fast (good for huge inputs)</li></ul>

