

Your Apps

Create New App




🔍 Filter apps by name or workspace

← → ↺

api.slack.com/apps

☆

 slack api

Q Search

Documentation




Tutorials

Y

Your Apps

Create New App

Q Filter apps by name or workspace

App Name	Workspace	Distribution Status
 Alerts		
 demoApp		
 testApp		

Create an app

3

×

Choose how you'd like to configure your app's scopes and settings.

From scratch

Use our configuration UI to manually add basic info, scopes, settings, & features to your app.

>

From an app manifest

Use a manifest file to add your app's basic info, scopes, settings & features to your app.

>


Need help? Check our [documentation](#), or [see an example](#)

Your App Configuration

[Learn about tokens](#)

Generate Token

Don't see an app you're looking for? [Sign in to another workspace.](#)

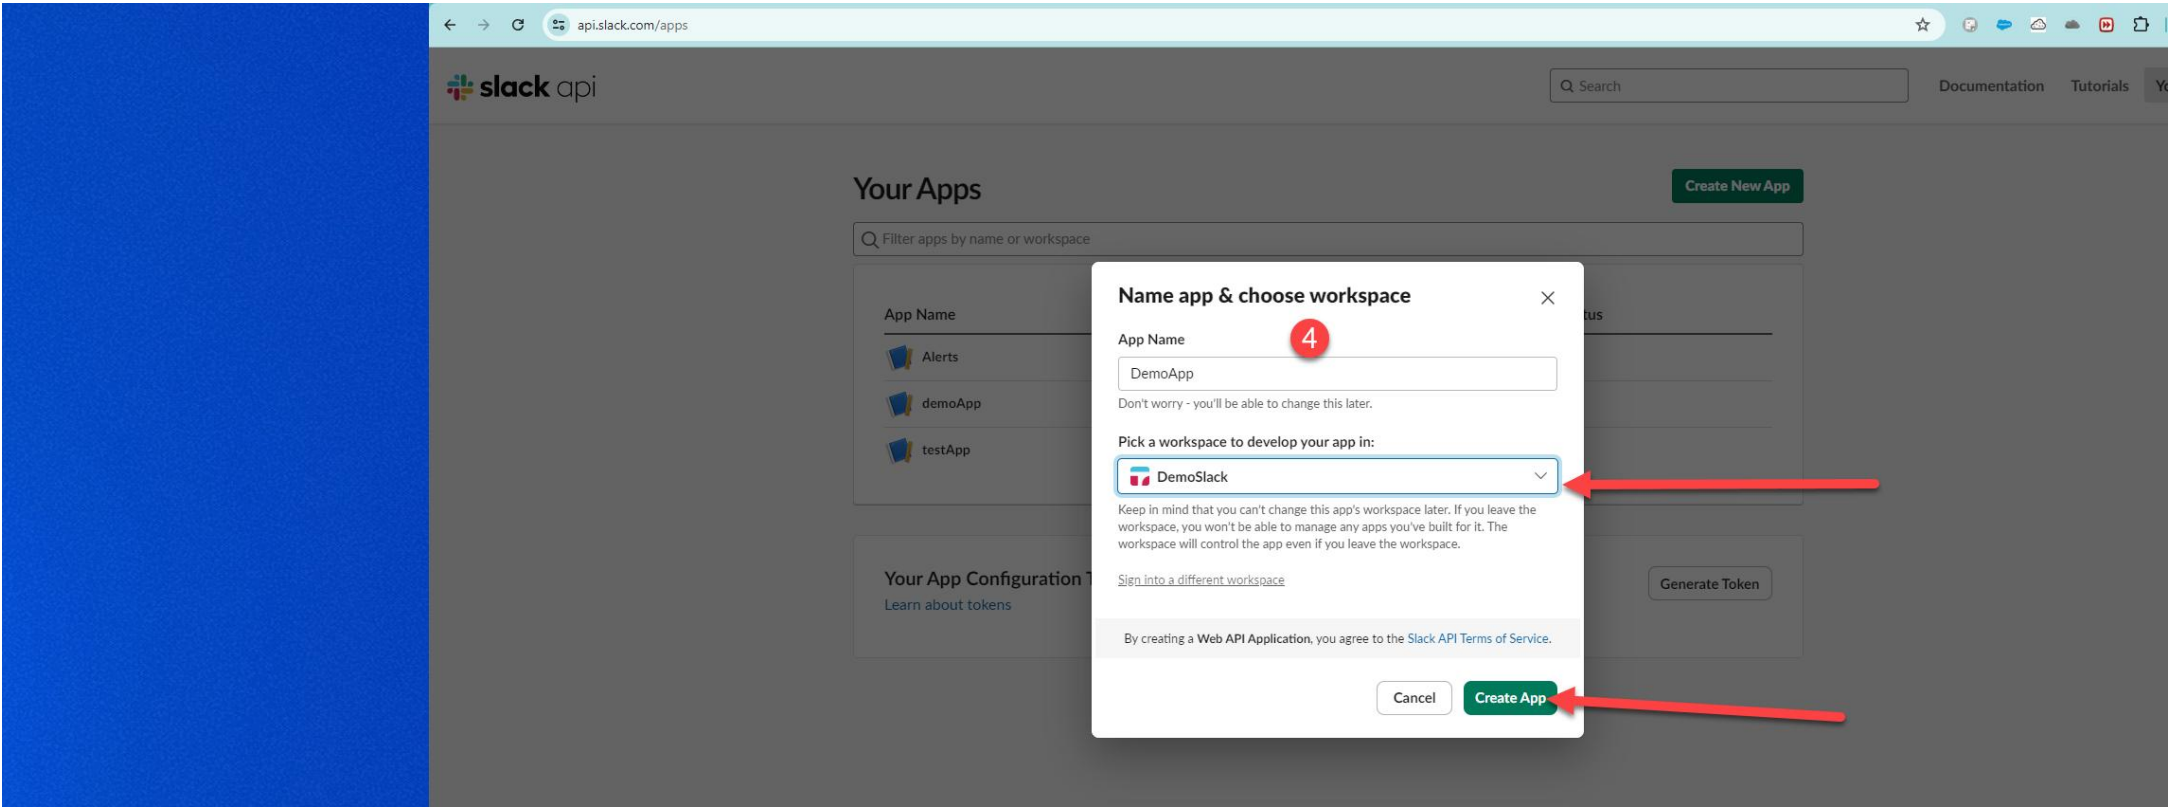

DemoApp ▼

Settings

Basic Information

Collaborators
Socket Mode
Install App
Manage Distribution

Features

App Home
Org Level Apps
Incoming Webhooks
Interactivity & Shortcuts
Slash Commands
Workflow Steps

OAuth & Permissions

Event Subscriptions
User ID Translation
App Manifest
Beta Features

Submit to App Directory

Review & Submit

Give feedback

Basic Information

Building Apps for Slack

Create an app that's just for your workspace (or build one that can be used by any workspace) by following the steps below.

Add features and functionality ▼

Choose and configure the tools you'll need to create your app (or review all our documentation).

Building an internal app locally or behind a firewall?

To receive your app's payloads over a WebSockets connection, enable [Socket Mode](#) for your app.

Incoming Webhooks

Post messages from external sources into Slack.

Interactive Components

Add components like buttons and select menus to your app's interface, and create an interactive experience for users.

Slash Commands

Allow users to perform app actions by typing commands in Slack.

Event Subscriptions

Make it easy for your app to respond to activity in Slack.

Bots

Allow users to interact with your app through channels and conversations. 🌟

Permissions

Configure permissions to allow your app to interact with the Slack API.

Socket Mode
Install App
Manage Distribution

Features

App Home
Org Level Apps
Incoming Webhooks
Interactivity & Shortcuts
Slash Commands
Workflow Steps

OAuth & Permissions

Event Subscriptions
User ID Translation
App Manifest
Beta Features

Submit to App Directory

Review & Submit

Give feedback

Slack ♥

Help
Contact
Policies
Our Blog

into token rotation allows app tokens to automatically expire after they're issued within your app code. [View documentation](#).

⚠ At least one redirect URL needs to be set below before this app can be opted into token rotation

Opt In

OAuth Tokens for Your Workspace

These [OAuth Tokens](#) will be automatically generated when you finish connecting the app to your workspace. You'll use these tokens to authenticate your app.

Install to Workspace

Redirect URLs

You will need to configure redirect URLs in order to automatically generate the Add to Slack button or to distribute your app. If you pass a URL in an OAuth request, it must (partially) match one of the URLs you enter here. [Learn more](#).

Redirect URLs

You haven't added any Redirect URLs

Add New Redirect URL

Save URLs

Settings

Basic Information
Collaborators
Socket Mode
Install App
Manage Distribution

Features

App Home
Org Level Apps
Incoming Webhooks
Interactivity & Shortcuts
Slash Commands
Workflow Steps

OAuth & Permissions

Event Subscriptions
User ID Translation
App Manifest
Beta Features

Submit to App Directory

Review & Submit

Give feedback

Slack ♥
Help
Contact
Policies
Our Blog

Advanced token security via token rotation

Recommended for developers building on or for security-minded organizations – opting into token rotation allows app tokens to automatically expire after they're issued within your app code. [View documentation](#).

⚠ At least one redirect URL needs to be set below before this app can be opted into token rotation

Opt In

OAuth Tokens for Your Workspace

These tokens were automatically generated when you installed the app to your team. You can use these to authenticate your app. [Learn more](#).

User OAuth Token

[Redacted Token] [Copy](#)

Access Level: Workspace

Bot User OAuth Token

xxxb-7249707650706-7272568527776-ADLCekNjzIR6TmJZKzjEFJql [Copy](#)

Access Level: Workspace

Reinstall to Workspace

Redirect URLs

You will need to configure redirect URLs in order to automatically generate the Add to Slack button or to distribute your app. If you pass a URL in an OAuth request, it must (partially) match one of the URLs you enter here. [Learn more](#).

Redirect URLs

You haven't added any Redirect URLs

Add New Redirect URL

Save URLs

User Token Scopes

Scopes that access user data and act on behalf of users that authorize them.

OAuth Scope	Description	
channels:read	View basic information about public channels in a workspace	🗑
chat:write	Send messages on a user's behalf	🗑
files:write	Upload, edit, and delete files on a user's behalf	🗑
groups:read	View basic information about a user's private channels	🗑
im:read	View basic information about a user's direct messages	🗑
mpim:read	View basic information about a user's group direct messages	🗑

Add an OAuth Scope

Scopes define the API methods an app is allowed to call, which information and capabilities are available on the workspace it's installed on. Many scopes are restricted to specific resources like channels or files.

Restrict API Token Usage

Slack can limit use of your app's OAuth tokens to a list of IP addresses and ranges you provide. Slack will then reject Web API method calls from unlisted IP addresses. [Learn More](#).

Allowed IP Address Ranges

You haven't added any IP address ranges

Add a new IP address range

Save IP address ranges

Revoke All OAuth Tokens

You can revoke all OAuth tokens if you want to invalidate the access any existing tokens have to Slack workspace data. Users will need to grant your app permissions again to use it.

Revoke Tokens