

PSK Org Readiness Report

Passport Seva Kendra on Salesforce — data model, UAT plan and outstanding work

ORG ALIAS

psk-dev

EDITION

Developer Edition

USERNAME

admin@passportoffice.com

ORG ID

00DdM00000BGnjBUAT

SOURCE API VERSION

67.0

BUILD DATE

3 August 2026

GIT COMMIT

5130d7c (feature/psk-full-buildout) · uncommitted changes present

GENERATED

2026-08-03 12:20 UTC · node v22.21.1

INSTANCE

https://passport-seva-kendra-dev-ed.develop.my.salesforce.com

SCANNED TREE

force-app/main/default · 16 PSK objects

1. Executive summary

2. **Data model** — ERD and the snapshot decision

3. Object inventory

4. Per-object UAT checklist

5. Lifecycle walkthrough script

6. Persona access matrix

7. **Action items** — 15 open

8. Org limits and storage

9. **Appendix** — commands, validation and sharing reference

Every count in this document was recomputed from the metadata tree at generation time, not transcribed. Counts are therefore **as of 2026-08-03 12:20 UTC** at commit `5130d7c`; re-run `node scripts/pdf/generate-report.mjs` to refresh them.

Independent portfolio project. Not affiliated with the Ministry of External Affairs, Passport Seva, or any government body. All data in the org is synthetic.

01 Executive summary

16

PSK OBJECTS
+ 2 metadata types

222

CUSTOM FIELDS
across PSK objects

60

VALIDATION
RULES
0 inactive

9

SHARING RULES
11 roles · 6 groups


8

PSK PERM SETS
6 queues

15

OPEN ITEMS
2 PO

METADATA SHIPPED

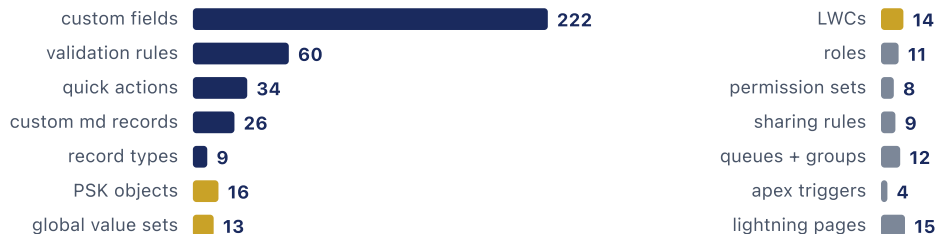

WHAT THE ORG CAN DO END TO END

- Hold a passport application through its entire declared lifecycle on one object — `Passport_Application__c` — with twelve `Status__c` values from Draft to Delivered, six record types (Fresh, Re-issue, Tatkal, Lost/Damaged, Minor, Diplomatic/Official) and a Path that renders the stage bar on the record page.
- Save a half-finished form. Drafts are deliberately saveable with almost nothing filled in; the four validation rules only bite once `Status__c` leaves Draft, which is the whole point of the "a draft is the same object in Draft status" design.
- Carry a golden identity record separate from the application. `Citizen__c` is the current truth about a person; the application keeps its own as-submitted copy of the applicant's details (see the Data Model section for why that duplication is intentional).
- Model the fulfilment tail end to end in metadata: `Passport__c` (the issued booklet, with its own Ordinary / Diplomatic / Official record types), `Print_Job__c` and `Dispatch__c` — with booklet pages, validity, ECR, category, place of issue and the delivery address all derived by cross-object formula rather than re-keyed.
- Price an application without code. `Fee_Matrix__mdt` carries a record per record-type × booklet-pages × validity combination, and `SLA_Config__mdt` carries a normal and a Tatkal target for every processing stage.
- Enforce role- and criteria-based visibility. A role hierarchy, public groups, work queues and criteria-based sharing rules route Tatkal, high-risk, diplomatic, granting-stage and fulfilment-stage records to the right teams without opening the org up.
- Present a purpose-built app. The Application Management Console has a branded navy header, a curated tab set, a custom Lightning home page and four LWCs (home dashboard, application sidebar, sidebar summary, risk meter) backed by Apex controllers with test classes.
- Reuse picklist vocabulary. Shared value sets — Indian states, gender, region, payment mode/status, document status, fulfilment status, courier partner, relationship, severity, language — are Global Value Sets, so a new object inherits the vocabulary instead of re-declaring it.

WHAT IT STILL CANNOT DO

- No approval anywhere. Granting a Diplomatic or Official passport is currently a picklist change by anyone with edit access — there is no Approval Process in the org at all.
- No citizen self-service. There is no Experience Cloud site for applicants; every step of the journey is staff-mediated. The inherited *Internal Zone* community and its self-registration controllers are template leftovers, not a PSK applicant portal.
- No reporting. Zero reports, dashboards or custom report types exist for any PSK object, so there is no way to answer "how many applications are stuck at Police Verification" other than a list view.
- No region-based sharing. Enterprise Territory Management is not enabled and cannot be enabled by deploy, and criteria-based sharing cannot read `PSK_Office__r.Region__c` through the lookup — so office/region scoping is unimplemented.
- No field-level encryption. Shield Platform Encryption is unavailable in Developer Edition, so `Aadhaar-Token__c` is stored as plain text.
- No integrations. n8n, Twilio and the AI enrichment layer are designed for but not built; `Notification_Log__c` exists and is empty of real sends.

- No visa department. `Visa_Application__c`, `Country__c` and `Sponsor__c` are unbuilt, although a Visa Processing Team role, a PSK Visa Team public group and a `PSK_Visa_Type` global value set are already in place waiting for them.
- No localisation. Every `objectTranslations/` bundle is an en_US stub echoing the English label, despite `Citizen__c.Preferred_Language__c` existing to record a citizen's language preference.

SUPPORTING CONFIGURATION IN THE TREE

Global value sets (13): `Indian_States` `PSK_Courier_Partner` `PSK_Document_Status` `PSK_Fulfilment_Status` `PSK_Gender` `PSK_Language` `PSK_Payment_Mode` `PSK_Payment_Status` `PSK_Region` `PSK_Relationship` `PSK_Severity` `PSK_Visa_Type` `PSK_World_Region`

Roles (11): `Audit_And_Compliance` `CEO_and_Admins` `Document_Verification` `Fulfilment_Team` `Granting_Officers` `Help_Desk_Support` `Passport_Office_Manager` `Passport_Processing_Team` `Police_Verification_Team` `Regional_Passport_Officer` `Visa_Processing_Team`

Queues (6): `Document_Verification` `Granting` `Objections` `Police_Verification` `Printing_And_Dispatch` `Risk_Review`

Public groups (6): `PSK_All_Staff` `PSK_Auditors` `PSK_Fulfilment_Team` `PSK_Managers` `PSK_Verification_Team` `PSK_Visa_Team`

Custom metadata records: `Fee_Matrix__mdt` 10 records · `SLA_Config__mdt` 16 records

LWCs (14): `pskApplicationSidebar` `pskApplicationTimeline` `pskCitizen360` `pskDocumentChecklist` `pskFeeCalculator` `pskFulfilmentBoard` `pskHomeDashboard` `pskHomeSidebarSummary` `pskMyWorkQueue` `pskOfficeCapacityBoard` `pskPassportCard` `pskPassportValidator` `pskRiskMeter` `pskSlotPicker`

Apex triggers (4): `AppointmentTrigger` `PassportApplicationTrigger` `PassportTrigger` `PaymentTrigger`


Object quick actions (34): 20 on PSK objects — 15 create, 19 update

Permission set groups (3): `PSK_Back_Office_PSG` `PSK_Front_Office_PSG` `PSK_Leadership_PSG`

Custom apps (4): `Application_Management_Console` `PSK_Operations_Console` `Passport_Validator` `Trailhead_Data_Manager`

02 Data model

Six objects carry the weight of the system. `Passport_Application__c` sits at the centre with 56 fields, 6 record types and 13 validation rules — the “few objects, many fields” philosophy in one place. Everything else either identifies a person, records an issued booklet, or tracks fulfilment.

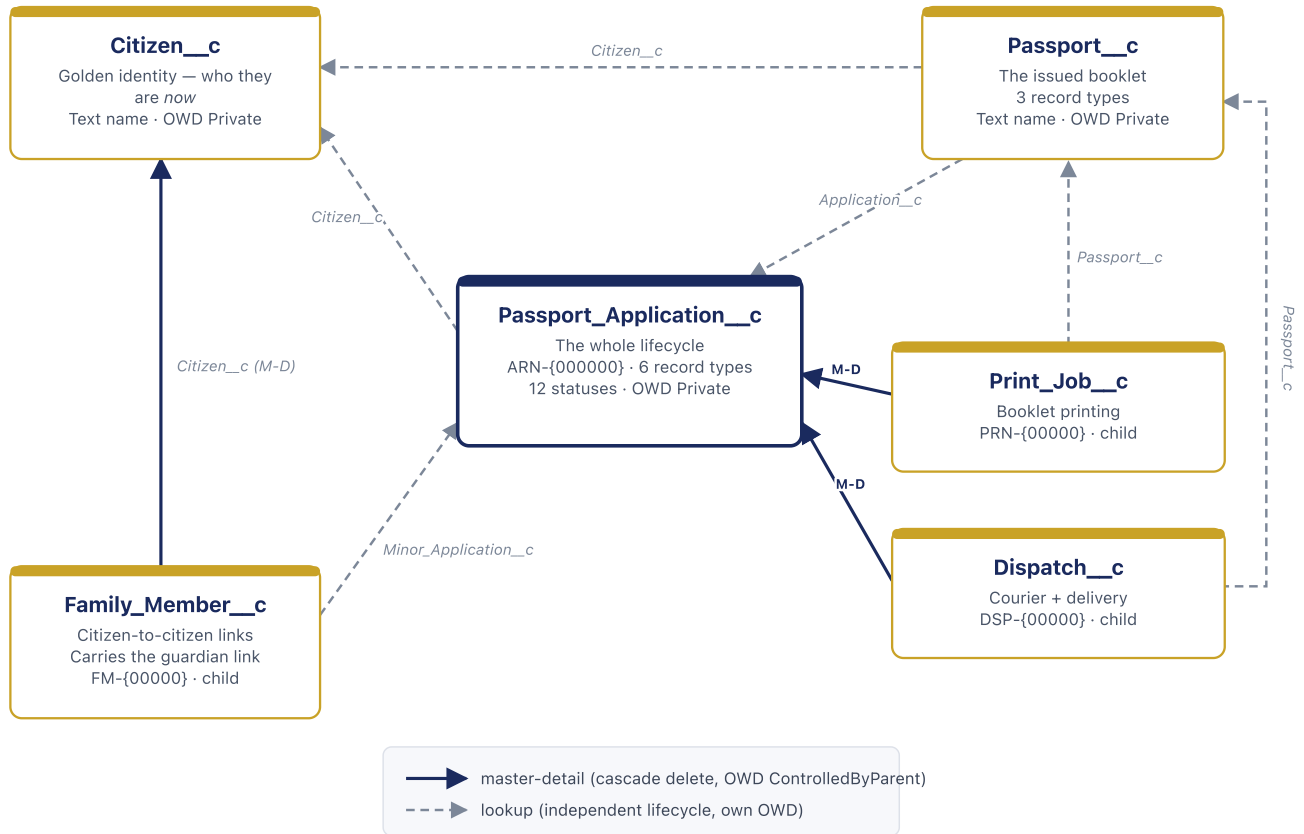

WHY THE APPLICATION DUPLICATES THE APPLICANT'S DETAILS

`Passport_Application__c` carries its own `First_Name__c`, `Last_Name__c`, `Date_of_Birth__c`, `Mobile__c` and full address even though it also has a `Citizen__c` lookup to the golden identity record. That is deliberate, not an oversight.

A passport application is a legal instrument. The details *as declared at submission* are what get printed into the booklet, what the police verify against, and what an audit or a court would later be asked to examine. They are a snapshot of a declaration made on a date, not a live view of a person.

If those fields were cross-object formulas reading `Citizen__r`, then the day a citizen moved house or corrected a spelling, every historical application would silently rewrite itself — including applications already granted and printed. The record of what was declared would be destroyed by the act of keeping the citizen record current. Snapshotting is the only correct answer.

`Citizen__c` therefore answers "who is this person *now*"; the application answers "what did they declare *then*". Both are needed, and they are allowed to disagree.

WHERE DUPLICATION IS AVOIDED

- **Passport__c** re-keys nothing from the application. Booklet_Pages__c , Validity_Years__c , ECR_Status__c and Passport_Category__c are TEXT(Application__r...) formulas, Holder_Name__c is assembled by formula from the application's name parts, and Place_of_Issue__c is PSK_Office__r.Name . The booklet's own facts — file number, issue and expiry dates, status — are the only stored fields.
- **Dispatch__c** builds Delivery_Address__c as a formula over Passport_Application__r's address lines, so a courier label can never drift from the application it was raised against.
- **Family_Member__c** reads Member_Date_of_Birth__c and Member_Mobile__c through Related_Citizen__r , and Display_Name__c falls back to a typed Member_Name__c only when there is no linked citizen record to read from.
- **Print_Job__c** and **Dispatch__c** both expose ARN__c as Passport_Application__r.Name rather than storing the ARN string.
- The rule of thumb the model follows: *snapshot a declaration, derive a fact.*

Every PSK relationship in the tree

CHILD OBJECT	FIELD	TYPE	PARENT	CHILD RELATIONSHIP NAME
Appointment__c	Passport_Application__c	master-detail	Passport_Application__c	Appointments
Appointment__c	Slot__c	master-detail	Slot__c	Appointments
Citizen__c	Account__c	lookup	Account	Citizen_Profiles
Dispatch__c	Passport_Application__c	master-detail	Passport_Application__c	Dispatches
Dispatch__c	Passport__c	lookup	Passport__c	Dispatches
Document_Checklist_Item__c	Passport_Application__c	master-detail	Passport_Application__c	Document_Checklist_Items
Family_Member__c	Citizen__c	master-detail	Citizen__c	Family_Members
Family_Member__c	Minor_Application__c	lookup	Passport_Application__c	Guardian_Links
Family_Member__c	Related_Citizen__c	lookup	Citizen__c	Related_Family_Members
Notification_Log__c	Passport_Application__c	lookup	Passport_Application__c	Notification_Logs
Objection__c	Passport_Application__c	master-detail	Passport_Application__c	Objections
PSK__c	Manager__c	lookup	User	Managed_PSK_Offices
Passport_Application__c	Applicant__c	lookup	Account	Passport_Applications
Passport_Application__c	Citizen__c	lookup	Citizen__c	Applications
Passport_Application__c	PSK_Office__c	lookup	PSK__c	Passport_Applications
Passport__c	Application__c	lookup	Passport_Application__c	Passports
Passport__c	Citizen__c	lookup	Citizen__c	Passports
Passport__c	PSK_Office__c	lookup	PSK__c	Issued_Passports
Passport__c	Previous_Passport__c	lookup	Passport__c	Reissued_Passports
Payment__c	Passport_Application__c	master-detail	Passport_Application__c	Payments
Police_Verification__c	Passport_Application__c	lookup	Passport_Application__c	Police_Verifications
Print_Job__c	Passport_Application__c	master-detail	Passport_Application__c	Print_Jobs
Print_Job__c	Passport__c	lookup	Passport__c	Print_Jobs

CHILD OBJECT	FIELD	TYPE	PARENT	CHILD RELATIONSHIP NAME
Print_Job__c	Print_Facility__c	lookup	PSK__c	Print_Jobs
Renewal__c	Converted_Application__c	lookup	Passport_Application__c	Converted_Renewals
Renewal__c	Passport_Application__c	lookup	Passport_Application__c	Renewals
Risk_Flag__c	Passport_Application__c	lookup	Passport_Application__c	Risk_Flags
Risk_Flag__c	Reviewed_By__c	lookup	User	Reviewed_Risk_Flags
Slot__c	PSK_Office__c	master-detail	PSK__c	Slots

Cross-object formula fields — the derived, not-duplicated facts

OBJECT	FIELD	FORMULA
Dispatch__c	ARN__c	Passport_Application__r.Name
Dispatch__c	Delivery_Address__c	Passport_Application__r.Address_Line1__c & BR() & IF(ISBLANK(Passport_Application__r.Address_Line2__c), "", Passport_Application__r.Address_Line2__c & BR()) & Passport_Application__r.City__c & ", " & TEXT(Passport_Application__r.State__c) & " " & Passport_Application__r.Pincode__c
Family_Member__c	Display_Name__c	IF(ISBLANK(Related_Citizen__c), BLANKVALUE(Member_Name__c, "(unnamed)"), Related_Citizen__r.Name)
Family_Member__c	Member_Date_of_Birth__c	Related_Citizen__r.Date_of_Birth__c
Family_Member__c	Member_Mobile__c	Related_Citizen__r.Mobile__c
Passport__c	Booklet_Pages__c	TEXT(Application__r.Booklet_Pages__c)
Passport__c	ECR_Status__c	TEXT(Application__r.ECR_Status__c)
Passport__c	Holder_Name__c	TRIM(Application__r.First_Name__c & " " & IF(ISBLANK(Application__r.Middle_Name__c), "", Application__r.Middle_Name__c & " ") & Application__r.Last_Name__c)
Passport__c	Passport_Category__c	TEXT(Application__r.Passport_Category__c)
Passport__c	Place_of_Issue__c	PSK_Office__r.Name
Passport__c	Validity_Years__c	TEXT(Application__r.Validity_Years__c)
Print_Job__c	ARN__c	Passport_Application__r.Name

03 Object inventory

16 PSK objects plus 2 custom metadata types, as of commit 5130d7c. Field counts exclude standard fields. Inherited template objects (Account, OpportunityHistory__c, Reseller_Account_Plan__c) are excluded.

API NAME	LABEL	OWD	NAME FIELD	RECORD TYPES	FIELDS	TAB	APP
Appointment__c	Appointment	ControlledByParent	Auto Number APT-{000000}	none	7	✓	Passport Seva Console, PSK Operations
Citizen__c	Citizen	Private	Text — Citizen Name	none	21	✓	Passport Seva Console, Passport Validator
Dispatch__c	Dispatch	ControlledByParent	Auto Number DSP-{000000}	none	16	✓	Passport Seva Console, PSK Operations
Document_Checklist_Item__c	Document Checklist Item	ControlledByParent	Auto Number DCI-{0000000}	none	8	✓	Passport Seva Console
Family_Member__c	Family Member	ControlledByParent	Auto Number FM-{00000}	none	9	✓	Passport Seva Console
Notification_Log__c	Notification Log	Private	Auto Number NOTIF-{000000}	none	9	✓	Passport Seva Console
Objection__c	Objection	ControlledByParent	Auto Number OBJ-{00000}	none	8	✓	Passport Seva Console
PSK__c	PSK Office	Read	Text — Office Name	none	14	✓	Passport Seva Console, PSK Operations
Passport_Application__c	Passport Application	Private	Auto Number ARN-{000000}	Diplomatic_Official, Fresh, Lost_Damaged, Minor, Re_Issue, Tatkal	56	✓	Passport Seva Console
Passport__c	Passport	Private	Text — Passport Number	Diplomatic, Official, Ordinary	20	✓	Passport Seva Console, Passport Validator
Payment__c	Payment	ControlledByParent	Auto Number PAY-{000000}	none	8	✓	Passport Seva Console
Police_Verification__c	Police Verification	Private	Auto Number PV-{00000}	none	9	✓	Passport Seva Console
Print_Job__c	Print Job	ControlledByParent	Auto Number PRN-{00000}	none	14	✓	Passport Seva Console, PSK Operations
Renewal__c	Renewal	Private	Auto Number REN-{000000}	none	7	✓	Passport Seva Console
Risk_Flag__c	Risk Flag	Private	Auto Number RISK-{00000}	none	8	✓	Passport Seva Console

API NAME	LABEL	OWD	NAME FIELD	RECORD TYPES	FIELDS	TAB	APP
Slot__c	Appointment Slot	ControlledByParent	Auto Number SL0T- {0000000}	none	8	✓	Passport Seva Console, PSK Operations
Fee_Matrix__mdt	Fee Matrix	Custom Metadata Type		—	7	—	10 records deployed
SLA_Config__mdt	SLA Config	Custom Metadata Type		—	7	—	16 records deployed

04 Per-object UAT checklist

Print this section and tick as you go. Every row was generated from the metadata actually on disk, so a row that looks wrong means the metadata is wrong — not the checklist. Rows carrying a **flag** are gaps the generator detected rather than tests to run.

Appointment__c Appointment · OWD ControlledByParent · 7 fields · 0 record types · 3 validation rules

- ☐ Create a record from the **Appointment** tab.
Name auto-assigns in the form `APT-{000000}`.
- ☐ Create from the parent's quick action: on a `Passport_Application__c` record, use **New Appointment**.
Action `Passport_Application__c.New_Appointment`, parent field `Passport_Application__c` pre-filled and read-only.
- ☐ Create from the parent: open a `Passport_Application__c` record and use the *New* action on the **Appointments** related list.
The `Passport_Application__c` master-detail is pre-filled and cannot be changed after save.
- ☐ Create from the parent: open a `Slot__c` record and use the *New* action on the **Appointments** related list.
no quick action
The `Slot__c` master-detail is pre-filled and cannot be changed after save. No purpose-built quick action targets this object from that parent — the generic New action is all a tester has.
- ☐ Confirm cascade delete: deleting the parent removes this child.
OWD is `ControlledByParent`, so record access follows the parent — verify with a persona that cannot see the parent.
- ☐ Validation rule `Check_Out_After_Check_In` trips as designed.
Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Check_In_Time__c)), NOT(ISBLANK(Check_Out_Time__c)), Check_Out_Time__c <= Check_In_Time__c )`
Expect: save is blocked with "Check Out Time must be later than Check In Time."
- ☐ Validation rule `Completed_Requires_Check_In` trips as designed.
Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Completed"), ISBLANK(Check_In_Time__c) )`
Expect: save is blocked with "Enter a Check In Time before marking the appointment Completed. If the applicant never arrived, use No Show."
- ☐ Validation rule `Slot_Not_Overbooked` trips as designed.
Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISNEW(), NOT(ISBLANK(Slot__r.Capacity__c)), Slot__r.Booking_Count__c >= Slot__r.Capacity__c )`
Expect: save is blocked with "This slot is full. Choose a slot with remaining capacity."
- ☐ Highlights panel falls back to the system default — no compact layout is defined.
Confirm the default is acceptable or author one.
- ☐ Page layout *Appointment Layout* is assigned and its sections are in a deliberate order.
No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.
- ☐ List views behave.
No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.
- ☐ Field history tracking is on.
Change a tracked field and confirm the History related list records old → new value and the user.

Citizen__c Citizen · OWD Private · 21 fields · 0 record types · 5 validation rules

The golden identity record for a person who deals with the passport office. Applications keep their own copy of the applicant details as an immutable as-submitted snapshot; this object is the current truth about the person.

- ☐ Create a record from the **Citizen** tab.

The *Citizen Name* text name is required and saves as typed.

- ☐ Quick action **Verify KYC** (`Verify_KYC`, Update) appears on the highlights panel and does what it says.

Expect it to set `KYC_Status__c` → Verified. Confirm it is blocked when a validation rule should stop it.

- ☐ Validation rule `Blacklist_Requires_Reason` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( Is_Blacklisted__c, ISBLANK(Blacklist_Reason__c) )`

Expect: save is blocked with "Enter a Blacklist Reason before marking this citizen as blacklisted."

- ☐ Validation rule `DOB_Not_In_Future` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Date_of_Birth__c)), Date_of_Birth__c > TODAY() )`

Expect: save is blocked with "Date of Birth cannot be in the future. Enter the citizen's actual date of birth."

- ☐ Validation rule `Mobile_Format` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Mobile__c)), NOT(REGEX(Mobile__c, "^[6-9][0-9]{9}$")) )`

Expect: save is blocked with "Enter a 10-digit Indian mobile number starting with 6, 7, 8 or 9 (no spaces, +91 or dashes)."

- ☐ Validation rule `Pincode_Format` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Pincode__c)), NOT(REGEX(Pincode__c, "^[1-9][0-9]{5}$")) )`

Expect: save is blocked with "Enter a 6-digit pincode that does not start with 0."

- ☐ Validation rule `Verified_KYC_Requires_Aadhaar` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(KYC_Status__c, "Verified"), NOT(Aadhaar_Verified__c) )`

Expect: save is blocked with "KYC cannot be set to Verified until Aadhaar Verified is checked. Complete Aadhaar verification first."

- ☐ Compact layout `Citizen_Compact` appears in the highlights panel (**assigned as primary**).

Expect these fields, in order: `Name`, `KYC_Status__c`, `Mobile__c`, `Age__c`, `Is_Blacklisted__c`.

- ☐ Related lists appear with the right columns.

Expect 4: **Family_Members** (`Family_Member__c.Citizen__c`, M-D); **Related_Family_Members** (`Family_Member__c.Related_Citizen__c`, lookup); **Applications** (`Passport_Application__c.Citizen__c`, lookup); **Passports** (`Passport__c.Citizen__c`, lookup). Each should show its own Name plus Status and the key date, not just Name.

- ☐ Page layout *Citizen Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

3 list views deployed — open each, confirm filters return rows and the columns are the ones an officer needs.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Dispatch__c Dispatch · OWD ControlledByParent · 16 fields · 0 record types · 4 validation rules

Courier despatch and delivery tracking for a printed booklet.

- ☐ Create a record from the **Dispatch** tab.

Name auto-assigns in the form `DSP-{00000}`.

- ☐ Create from the parent's quick action: on a `Passport_Application__c` record, use **New Dispatch**.

Action `Passport_Application__c.New_Dispatch`, parent field `Passport_Application__c` pre-filled and read-only.

- ☐ Create from the parent: open a `Passport_Application__c` record and use the *New* action on the **Dispatches** related list.

The `Passport_Application__c` master-detail is pre-filled and cannot be changed after save.

- ☐ Quick action **Mark Delivered** (`Mark_Delivered`, Update) appears on the highlights panel and does what it says.

Expect it to set `Status__c` → Delivered. Confirm it is blocked when a validation rule should stop it.

- ☐ Confirm cascade delete: deleting the parent removes this child.

OWD is `ControlledByParent`, so record access follows the parent — verify with a persona that cannot see the parent.

- ☐ Validation rule `Delivered_Requires_Date_And_Receiver` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Delivered"), OR( ISBLANK(Delivered_Date__c), ISBLANK(Received_By__c) ) )`

Expect: save is blocked with "Enter both the Delivered Date and who the passport was Received By before marking the dispatch Delivered."

- ☐ Validation rule `Expected_Delivery_Not_Before_Dispatch` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Dispatched_Date__c)), NOT(ISBLANK(Expected_Delivery_Date__c)), Expected_Delivery_Date__c < DATEVALUE(Dispatched_Date__c) )`

Expect: save is blocked with "Expected Delivery Date cannot be earlier than the Dispatched Date."

- ☐ Validation rule `In_Transit_Requires_Tracking` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( OR( ISPICKVAL(Status__c, "In Transit"), ISPICKVAL(Status__c, "Out for Delivery") ), ISBLANK(Tracking_Number__c) )`

Expect: save is blocked with "Enter the courier Tracking Number before moving the dispatch to In Transit or Out for Delivery."

- ☐ Validation rule `Returned_Requires_Reason` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Returned"), ISBLANK(TEXT(Return_Reason__c)) )`

Expect: save is blocked with "Select a Return Reason when marking the dispatch as Returned."

- ☐ Compact layout `Dispatch_Compact` appears in the highlights panel (deployed, not the primary assignment).

Expect these fields, in order: `Name`, `Status__c`, `Courier_Partner__c`, `Tracking_Number__c`, `Delivered_Date__c`.

- ☐ Page layout *Dispatch Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Document_Checklist_Item__c Document Checklist Item · OWD ControlledByParent · 8 fields · 0 record types · 3 validation rules

- ☐ Create a record from the **Document Checklist Item** tab.
Name auto-assigns in the form `DCI-{0000000}`.
- ☐ Create from the parent's quick action: on a `Passport_Application__c` record, use **New Document Item**.
Action `Passport_Application__c.New_Document_Item`, parent field `Passport_Application__c` pre-filled and read-only.
- ☐ Create from the parent: open a `Passport_Application__c` record and use the *New* action on the **Document_Checklist_Items** related list.
The `Passport_Application__c` master-detail is pre-filled and cannot be changed after save.
- ☐ Quick action **Mark Received** (`Mark_Received`, Update) appears on the highlights panel and does what it says.
Expect it to set `Status__c` → Received. Confirm it is blocked when a validation rule should stop it.
- ☐ Quick action **Mark Verified** (`Mark_Verified`, Update) appears on the highlights panel and does what it says.
Expect it to set `Status__c` → Verified. Confirm it is blocked when a validation rule should stop it.
- ☐ Confirm cascade delete: deleting the parent removes this child.
OWD is `ControlledByParent`, so record access follows the parent — verify with a persona that cannot see the parent.
- ☐ Validation rule `Received_Requires_Received_Date` trips as designed.
Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Received"), ISBLANK(Received_Date__c) )`
Expect: save is blocked with "Enter the Received Date when marking a document as Received."
- ☐ Validation rule `Rejected_Requires_Rejection_Reason` trips as designed.
Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Rejected"), ISBLANK(Rejection_Reason__c) )`
Expect: save is blocked with "Enter a Rejection Reason when rejecting a document. The applicant is told this reason."
- ☐ Validation rule `Verified_Requires_Verified_Date` trips as designed.
Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Verified"), ISBLANK(Verified_Date__c) )`
Expect: save is blocked with "Enter the Verified Date when marking a document as Verified."
- ☐ Highlights panel falls back to the system default — no compact layout is defined.
Confirm the default is acceptable or author one.
- ☐ Page layout *Document Checklist Item Layout* is assigned and its sections are in a deliberate order.
No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.
- ☐ List views behave.
No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.
- ☐ Field history tracking is on.
Change a tracked field and confirm the History related list records old → new value and the user.

Family_Member__c Family Member · OWD ControlledByParent · 9 fields · 0 record types · 3 validation rules

Links one citizen to another as a family relationship. Also carries the guardian link used by minor passport applications.

- ☐ Create a record from the **Family Member** tab.

Name auto-assigns in the form `FM-{00000}`.

- ☐ Create from the parent's quick action: on a `Citizen__c` record, use **New Family Member**.

Action `Citizen__c.New_Family_Member`, parent field `Citizen__c` pre-filled and read-only.

- ☐ Create from the parent: open a `Citizen__c` record and use the *New* action on the **Family_Members** related list.

The `Citizen__c` master-detail is pre-filled and cannot be changed after save.

- ☐ Confirm cascade delete: deleting the parent removes this child.

OWD is `ControlledByParent`, so record access follows the parent — verify with a persona that cannot see the parent.

- ☐ Validation rule `Cannot_Relate_To_Self` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Related_Citizen__c)), Related_Citizen__c = Citizen__c )`

Expect: save is blocked with "A citizen cannot be their own family member. Pick a different Related Citizen."

- ☐ Validation rule `Either_Related_Citizen_Or_Name` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISBLANK(Related_Citizen__c), ISBLANK(Member_Name__c) )`

Expect: save is blocked with "Either link a Related Citizen or type a Member Name. A family member needs at least one of the two."

- ☐ Validation rule `Minor_Application_Requires_Guardian_Flag` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Minor_Application__c)), NOT(Is_Guardian__c) )`

Expect: save is blocked with "Only a guardian can be linked to a Minor Application. Check Is Guardian, or clear the Minor Application lookup."

- ☐ Compact layout `Family_Member_Compact` appears in the highlights panel (**assigned as primary**).

Expect these fields, in order: `Name`, `Relationship__c`, `Display_Name__c`, `Is_Guardian__c`.

- ☐ Page layout *Family Member Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Notification_Log__c Notification Log · OWD Private · 9 fields · 0 record types · 1 validation rule

- ☐ Create a record from the **Notification Log** tab.

Name auto-assigns in the form `NOTIF-{000000}`.

- ☐ Create from the parent's quick action: on a `Passport_Application__c` record, use **Log Notification**.

Action `Passport_Application__c.Log_Notification`, parent field `Passport_Application__c` pre-filled and read-only.

- ☐ Validation rule `Sent_Requires_Date_And_Recipient` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( OR( ISPICKVAL(Status__c, "Sent"), ISPICKVAL(Status__c, "Delivered") ), OR( ISBLANK(Sent_Date__c), ISBLANK(Recipient_Number__c) ) )`

Expect: save is blocked with "Enter both the Sent Date and the Recipient Number when logging a notification as Sent or Delivered."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Page layout *Notification Log Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Objection__c

Objection · OWD ControlledByParent · 8 fields · 0 record types · 2 validation rules

- ☐ Create a record from the **Objection** tab.

Name auto-assigns in the form OBJ-**{00000}**.

- ☐ Create from the parent's quick action: on a **Passport_Application__c** record, use **New Objection**.

Action **Passport_Application__c.New_Objection**, parent field **Passport_Application__c** pre-filled and read-only.

- ☐ Create from the parent: open a **Passport_Application__c** record and use the *New* action on the **Objections** related list.

The **Passport_Application__c** master-detail is pre-filled and cannot be changed after save.

- ☐ Quick action **Resolve Objection** (**Resolve_Objection**, Update) appears on the highlights panel and does what it says.

Expect it to set **Status__c** → Resolved. Confirm it is blocked when a validation rule should stop it.

- ☐ Confirm cascade delete: deleting the parent removes this child.

OWD is **ControlledByParent**, so record access follows the parent — verify with a persona that cannot see the parent.

- ☐ Validation rule **Resolved_Date_Not_Before_Raised** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: **AND(NOT(ISBLANK(Raised_Date__c)), NOT(ISBLANK(Resolved_Date__c)), Resolved_Date__c < Raised_Date__c)**

Expect: save is blocked with "Resolved Date cannot be earlier than the Raised Date."

- ☐ Validation rule **Resolved_Requires_Notes_And_Date** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: **AND(ISPICKVAL(Status__c, "Resolved"), OR(ISBLANK(Resolution_Notes__c), ISBLANK(Resolved_Date__c)))**

Expect: save is blocked with "Enter both Resolution Notes and a Resolved Date before marking the objection Resolved."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Page layout *Objection Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

PSK__c PSK Office · OWD Read · 14 fields · 0 record types · 2 validation rules

- ☐ Create a record from the **PSK Office** tab.

The *Office Name* text name is required and saves as typed.

- ☐ Validation rule **Capacity_Per_Day_Must_Be_Positive** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Capacity_Per_Day__c)), Capacity_Per_Day__c <= 0 )`

Expect: save is blocked with "Capacity Per Day must be at least 1. To stop an office taking appointments, uncheck Is Active instead."

- ☐ Validation rule **Pincode_Format** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Pincode__c)), NOT(REGEX(Pincode__c, "[1-9][0-9]{5}$")) )`

Expect: save is blocked with "Enter a 6-digit pincode that does not start with 0."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Related lists appear with the right columns.

Expect 4: **Passport_Applications** (`Passport_Application__c.PSK_Office__c`, lookup); **Issued_Passports** (`Passport__c.PSK_Office__c`, lookup); **Print_Jobs** (`Print_Job__c.Print_Facility__c`, lookup); **Slots** (`Slot__c.PSK_Office__c`, M-D). Each should show its own Name plus Status and the key date, not just Name.

- ☐ Page layout *PSK Office Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Passport_Application__c

Passport Application · OWD Private · 56 fields · 6 record types · 13 validation rules

- ☐ Create a record from the **Passport Application** tab.

Name auto-assigns in the form `ARN-{000000}`.

- ☐ Create from the parent's quick action: on a `Citizen__c` record, use **New Passport Application**.

Action `Citizen__c.New_Passport_Application`, parent field `Citizen__c` pre-filled and read-only.

- ☐ Validation rule `Cannot_Grant_With_Pending_Payment` trips as designed.

Input: On an application with `Payment_Status__c` = **Not Paid** (or Pending / Failed / Refunded), set `Status__c` = **Granting**.

Expect: save is blocked with "Payment must be Paid before the application can move to Granting."

- ☐ Validation rule `Citizen_Required_On_Submit` trips as designed.

Input: With the rule **active**: on an application with `Citizen__c` blank, set `Status__c` = **Submitted**. Also confirm that while the rule is **inactive** the same save succeeds — that is the shipped state.

Expect: save is blocked with "Link the applicant's Citizen record before submitting this application."

- ☐ Validation rule `Clearance_Level_Only_For_Diplomatic` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(TEXT(Clearance_Level__c))), NOT(ISPICKVAL(Passport_Category__c, "Diplomatic")), NOT(ISPICKVAL(Passport_Category__c, "Official"))) )`

Expect: save is blocked with "Clearance Level applies only to Diplomatic and Official passports. Clear it, or change the Passport Category."

- ☐ Validation rule `Consent_Requires_Alert_Mobile` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISPICKVAL(Status__c, "Draft")), Notification_Consent__c, ISBLANK(Mobile_For_Alerts__c) )`

Expect: save is blocked with "Enter a Mobile For Alerts number, or uncheck Notification Consent."

- ☐ Validation rule `Diplomatic_Requires_Clearance_Level` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISPICKVAL(Status__c, "Draft")), OR( ISPICKVAL(Passport_Category__c, "Diplomatic"), ISPICKVAL(Passport_Category__c, "Official") ), ISBLANK(TEXT(Clearance_Level__c)) )`

Expect: save is blocked with "Select a Clearance Level before submitting a Diplomatic or Official passport application."

- ☐ Validation rule `Lost_Damaged_Requires_Reason` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISPICKVAL(Status__c, "Draft")), RecordType.DeveloperName = "Lost_Damaged", ISBLANK(TEXT(Reason_For_Reissue__c)) )`

Expect: save is blocked with "Select a Reason For Reissue (Lost or Damaged) before submitting a Lost/Damaged application."

- ☐ Validation rule `Minor_Needs_Guardian_Consent` trips as designed.

Input: On a Minor application with all core fields filled, tick `Applied_For_Minor__c`, leave `Guardian_Consent__c` unticked, set `Status__c` = **Submitted**.

Expect: save is blocked with "Guardian Consent is required for a minor application before submission."

- ☐ Validation rule `Minor_Validity_Must_Be_5` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISPICKVAL(Status__c, "Draft")), Applied_For_Minor__c, NOT(ISPICKVAL(Validity_Years__c, "5"))) )`

Expect: save is blocked with "A minor's passport is valid for 5 years. Set Validity Years to 5."

- ☐ Validation rule `Mobile_Format` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Mobile__c)), NOT(REGEX(Mobile__c, "^[6-9][0-9]{9}$"))) )`

Expect: save is blocked with "Enter a 10-digit Indian mobile number starting with 6, 7, 8 or 9 (no spaces, +91 or dashes)."

- ☐ Validation rule `No_Backward_Move_Once_Delivered` trips as designed.

Input: On an application already saved at `Status__c` = **Delivered**, change `Status__c` to **Dispatch** and save.

Expect: save is blocked with "A Delivered application cannot be moved back to an earlier stage."

- ☐ Validation rule `Pincode_Format` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Pincode__c)), NOT(REGEX(Pincode__c, "^[1-9][0-9]{5}$"))) )`

Expect: save is blocked with "Enter a 6-digit pincode that does not start with 0."

- ☐ Validation rule **Reissue_Requires_Previous_Passport** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISPICKVAL(Status__c, "Draft")), OR( RecordType.DeveloperName = "Re_Issue", RecordType.DeveloperName = "Lost_Damaged" ), ISBLANK(Previous_Passport_No__c) )`

Expect: save is blocked with "Enter the Previous Passport Number before submitting a Re-Issue or Lost/Damaged application."

- ☐ Validation rule **Require_Core_Fields_On_Submit** trips as designed.

Input: On a Fresh application with only **First_Name__c** = *Anjali* filled, set **Status__c** = **Submitted** and save.

Expect: save is blocked with "First Name, Last Name, Date of Birth, Mobile and Address Line 1 are required before submitting."

- ☐ Record type **Diplomatic / Official** shows only its subsetted picklist values.

Booklet_Pages__c → 60 · **Clearance_Level__c** → Ambassador / Consular / Delegation / Govt Deputation / Minister · **ECR_Status__c** → ECNR · **Gender__c** → Female / Male / Transgender · **Marital_Status__c** → Divorced / Married / Single / Widowed · **Passport_Category__c** → Diplomatic / Official · **Payment_Mode__c** → Challan / Credit Card / Debit Card / Net Banking / UPI · **Payment_Status__c** → Failed / Not Paid / Paid / Pending / Refunded · **Police_Verification_Type__c** → No PV · **Validity_Years__c** → 10 / 5

- ☐ Record type **Fresh** shows only its subsetted picklist values.

Booklet_Pages__c → 36 / 60 · **ECR_Status__c** → ECNR / ECR · **Gender__c** → Female / Male / Transgender · **Marital_Status__c** → Divorced / Married / Single / Widowed · **Passport_Category__c** → Ordinary · **Payment_Mode__c** → Challan / Credit Card / Debit Card / Net Banking / UPI · **Payment_Status__c** → Failed / Not Paid / Paid / Pending / Refunded · **Police_Verification_Type__c** → Post-PV / Pre-PV · **Validity_Years__c** → 10 / 5

- ☐ Record type **Lost / Damaged** shows only its subsetted picklist values.

Booklet_Pages__c → 36 / 60 · **ECR_Status__c** → ECNR / ECR · **Gender__c** → Female / Male / Transgender · **Marital_Status__c** → Divorced / Married / Single / Widowed · **Passport_Category__c** → Ordinary · **Payment_Mode__c** → Challan / Credit Card / Debit Card / Net Banking / UPI · **Payment_Status__c** → Failed / Not Paid / Paid / Pending / Refunded · **Police_Verification_Type__c** → Pre-PV · **Reason_For_Reissue__c** → Damaged / Lost · **Validity_Years__c** → 10 / 5

- ☐ Record type **Minor** shows only its subsetted picklist values.

Booklet_Pages__c → 36 · **ECR_Status__c** → ECNR · **Gender__c** → Female / Male / Transgender · **Marital_Status__c** → Divorced / Married / Single / Widowed · **Passport_Category__c** → Ordinary · **Payment_Mode__c** → Challan / Credit Card / Debit Card / Net Banking / UPI · **Payment_Status__c** → Failed / Not Paid / Paid / Pending / Refunded · **Police_Verification_Type__c** → No PV · **Validity_Years__c** → 5

- ☐ Record type **Re-issue** shows only its subsetted picklist values.

Booklet_Pages__c → 36 / 60 · **ECR_Status__c** → ECNR / ECR · **Gender__c** → Female / Male / Transgender · **Marital_Status__c** → Divorced / Married / Single / Widowed · **Passport_Category__c** → Ordinary · **Payment_Mode__c** → Challan / Credit Card / Debit Card / Net Banking / UPI · **Payment_Status__c** → Failed / Not Paid / Paid / Pending / Refunded · **Police_Verification_Type__c** → No PV / Post-PV · **Reason_For_Reissue__c** → Change of Details / Expiry / Pages Exhausted · **Validity_Years__c** → 10 / 5

- ☐ Record type **Tatkal** shows only its subsetted picklist values.

Booklet_Pages__c → 36 / 60 · **ECR_Status__c** → ECNR / ECR · **Gender__c** → Female / Male / Transgender · **Marital_Status__c** → Divorced / Married / Single / Widowed · **Passport_Category__c** → Ordinary · **Payment_Mode__c** → Challan / Credit Card / Debit Card / Net Banking / UPI · **Payment_Status__c** → Failed / Not Paid / Paid / Pending / Refunded · **Police_Verification_Type__c** → Post-PV · **Reason_For_Reissue__c** → Damaged / Expiry / Lost · **Validity_Years__c** → 10 / 5

- ☐ Path **PSK Path - Diplomatic / Official** renders on the record page and advances one step at a time.

Record type **Diplomatic_Official**, field **Status__c**, 12 steps. Guidance text shows on every step; *Mark Status as Complete* advances and re-stamps **Stage_Entered_Date__c**.

- ☐ Path **PSK Path - Lost / Damaged** renders on the record page and advances one step at a time.

Record type **Lost_Damaged**, field **Status__c**, 12 steps. Guidance text shows on every step; *Mark Status as Complete* advances and re-stamps **Stage_Entered_Date__c**.

- ☐ Path **Passport Application Path** renders on the record page and advances one step at a time.

Record type **Fresh**, field **Status__c**, 12 steps. Guidance text shows on every step; *Mark Status as Complete* advances and re-stamps **Stage_Entered_Date__c**.

- ☐ Path **Passport Application Path - Minor** renders on the record page and advances one step at a time.

Record type **Minor**, field **Status__c**, 12 steps. Guidance text shows on every step; *Mark Status as Complete* advances and re-stamps **Stage_Entered_Date__c**.

- ☐ Path **Passport Application Path - Re-issue** renders on the record page and advances one step at a time.
Record type `Re_Issue`, field `Status__c`, 12 steps. Guidance text shows on every step; *Mark Status as Complete* advances and re-stamps `Stage_Entered_Date__c`.
- ☐ Path **Passport Application Path - Tatkal** renders on the record page and advances one step at a time.
Record type `Tatkal`, field `Status__c`, 12 steps. Guidance text shows on every step; *Mark Status as Complete* advances and re-stamps `Stage_Entered_Date__c`.
- ☐ Compact layout `PSK_Compact` appears in the highlights panel (**assigned as primary**).
Expect these fields, in order: `Name`, `Status__c`, `Passport_Category__c`, `Citizen__c`, `Risk_Score__c`.
- ☐ Compact layout `PSK_Compact_Minor` appears in the highlights panel (deployed, not the primary assignment).
Expect these fields, in order: `Name`, `Status__c`, `Guardian_Name__c`, `Guardian_Consent__c`, `Citizen__c`.
- ☐ Compact layout `PSK_Compact_Reissue` appears in the highlights panel (deployed, not the primary assignment).
Expect these fields, in order: `Name`, `Status__c`, `Previous_Passport_No__c`, `Previous_Passport_Expiry__c`, `Reason_For_Reissue__c`.
- ☐ Related lists appear with the right columns.
Expect 13: **Appointments** (`Appointment__c.Passport_Application__c`, M-D); **Dispatches** (`Dispatch__c.Passport_Application__c`, M-D); **Document_Checklist_Items** (`Document_Checklist_Item__c.Passport_Application__c`, M-D); **Guardian_Links** (`Family_Member__c.Minor_Application__c`, lookup); **Notification_Logs** (`Notification_Log__c.Passport_Application__c`, lookup); **Objections** (`Objection__c.Passport_Application__c`, M-D); **Passports** (`Passport__c.Application__c`, lookup); **Payments** (`Payment__c.Passport_Application__c`, M-D); **Police_Verifications** (`Police_Verification__c.Passport_Application__c`, lookup); **Print_Jobs** (`Print_Job__c.Passport_Application__c`, M-D); **Converted_Renewals** (`Renewal__c.Converted_Application__c`, lookup); **Renewals** (`Renewal__c.Passport_Application__c`, lookup); **Risk_Flags** (`Risk_Flag__c.Passport_Application__c`, lookup). Each should show its own Name plus Status and the key date, not just Name.
- ☐ Page layout *Passport Application Layout - Diplomatic*, *Passport Application Layout - Minor*, *Passport Application Layout - Reissue*, *Passport Application Layout* is assigned and its sections are in a deliberate order.
Expect: Lifecycle → Applicant Details → Address → Application Details → Payment → Verification & Compliance → Consent & Notifications → System.
- ☐ List views behave.
1 list view deployed — open each, confirm filters return rows and the columns are the ones an officer needs.
- ☐ Field history tracking is on.
Change a tracked field and confirm the History related list records old → new value and the user.

Passport__c

 Passport · OWD Private · 20 fields · 3 record types · 5 validation rules

An issued passport booklet. Deliberately linked to its application by lookup rather than master-detail: a booklet must outlive the application record, and cascade-deleting a travel document would be unacceptable.

- ☐ Create a record from the **Passport** tab.

The *Passport Number* text name is required and saves as typed.

- ☐ Quick action **Report Lost** (`Report_Lost` , Update) appears on the highlights panel and does what it says.

Expect it to set `Status__c` → Lost, `Cancellation_Reason__c` → Lost. Confirm it is blocked when a validation rule should stop it.

- ☐ Validation rule `Active_Requires_Issue_And_Expiry_Dates` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Active"), OR( ISBLANK(Date_of_Issue__c), ISBLANK(Date_of_Expiry__c) ) )`

Expect: save is blocked with "An Active passport needs both a Date of Issue and a Date of Expiry."

- ☐ Validation rule `Cancelled_Requires_Reason` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( OR( ISPICKVAL(Status__c, "Cancelled"), ISPICKVAL(Status__c, "Lost"), ISPICKVAL(Status__c, "Surrendered") ), ISBLANK(TEXT(Cancellation_Reason__c)) )`

Expect: save is blocked with "Select a Cancellation Reason when the passport status is Cancelled, Lost or Surrendered."

- ☐ Validation rule `Expiry_After_Issue` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT( ISBLANK(Date_of_Issue__c) ), NOT( ISBLANK(Date_of_Expiry__c) ), Date_of_Expiry__c <= Date_of_Issue__c )`

Expect: save is blocked with "Date of Expiry must be after Date of Issue."

- ☐ Validation rule `External_Id_Must_Mirror_Number` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT( ISBLANK(Name) ), External_Id__c <> Name )`

Expect: save is blocked with "External Id must be identical to the Passport Number. Copy the passport number into External Id."

- ☐ Validation rule `Passport_Number_Format` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT( ISBLANK(Name) ), NOT( REGEX(Name, "^[A-PR-WY][0-9]{7}$") ) )`

Expect: save is blocked with "Enter a valid Indian passport number: one letter (A-Z excluding I, O, Q, X, Z) followed by 7 digits, e.g. K1234567."

- ☐ Record type **Diplomatic** shows only its subsetted picklist values.

`Cancellation_Reason__c` → Reissued / Lost / Damaged / Surrendered / Revoked / Data%20Error · `Status__c` → Active / Expired / Cancelled / Surrendered / Reissued

- ☐ Record type **Official** shows only its subsetted picklist values.

`Cancellation_Reason__c` → Reissued / Lost / Damaged / Surrendered / Revoked / Data%20Error · `Status__c` → Active / Expired / Cancelled / Surrendered / Reissued

- ☐ Record type **Ordinary** shows only its subsetted picklist values.

`Cancellation_Reason__c` → Reissued / Lost / Damaged / Surrendered / Revoked / Data%20Error · `Status__c` → Active / Expired / Cancelled / Lost / Surrendered / Reissued

- ☐ Compact layout `Passport_Compact` appears in the highlights panel (deployed, not the primary assignment).

Expect these fields, in order: `Name` , `Status__c` , `Holder_Name__c` , `Date_of_Expiry__c` , `Days_To_Expiry__c` .

- ☐ Related lists appear with the right columns.

Expect 3: **Dispatches** (`Dispatch__c.Passport__c` , lookup); **Reissued_Passports** (`Passport__c.Previous_Passport__c` , lookup); **Print_Jobs** (`Print_Job__c.Passport__c` , lookup). Each should show its own Name plus Status and the key date, not just Name.

- ☐ Page layout *Passport Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Payment__c Payment · OWD ControlledByParent · 8 fields · 0 record types · 4 validation rules

- ☐ Create a record from the **Payment** tab.

Name auto-assigns in the form `PAY-{000000}`.

- ☐ Create from the parent's quick action: on a `Passport_Application__c` record, use **Collect Payment**.

Action `Passport_Application__c.Collect_Payment`, parent field `Passport_Application__c` pre-filled and read-only.

- ☐ Create from the parent: open a `Passport_Application__c` record and use the *New* action on the **Payments** related list.

The `Passport_Application__c` master-detail is pre-filled and cannot be changed after save.

- ☐ Confirm cascade delete: deleting the parent removes this child.

OWD is `ControlledByParent`, so record access follows the parent — verify with a persona that cannot see the parent.

- ☐ Validation rule `Amount_Cannot_Exceed_Application_Fee` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Amount__c)), NOT(ISBLANK(Passport_Application__r.Fee__c)), Passport_Application__r.Fee__c > 0, Amount__c > Passport_Application__r.Fee__c )`

Expect: save is blocked with "Payment Amount cannot be more than the application Fee. Check the amount, or correct the Fee on the application."

- ☐ Validation rule `Amount_Must_Be_Positive` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Amount__c)), Amount__c <= 0 )`

Expect: save is blocked with "Amount must be greater than zero."

- ☐ Validation rule `Refunded_Requires_Gateway_Response` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Refunded"), ISBLANK(Gateway_Response__c) )`

Expect: save is blocked with "Paste the gateway refund response into Gateway Response before marking the payment Refunded."

- ☐ Validation rule `Success_Requires_Reference` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Success"), ISBLANK(Payment_Reference__c) )`

Expect: save is blocked with "Enter the gateway Payment Reference before marking the payment Successful."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Page layout *Payment Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Police_Verification__c

Police Verification · OWD Private · 9 fields · 0 record types · 4 validation rules

- ☐ Create a record from the **Police Verification** tab.

Name auto-assigns in the form `PV-{00000}`.

- ☐ Quick action **Mark Adverse** (`Mark_Adverse`, Update) appears on the highlights panel and does what it says.

Expect it to set `Status__c` → Adverse. Confirm it is blocked when a validation rule should stop it.

- ☐ Quick action **Mark Cleared** (`Mark_Cleared`, Update) appears on the highlights panel and does what it says.

Expect it to set `Status__c` → Cleared. Confirm it is blocked when a validation rule should stop it.

- ☐ Validation rule `Adverse_Requires_Remarks` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Adverse"), ISBLANK(Remarks__c) )`

Expect: save is blocked with "Enter Remarks describing the adverse finding before setting the status to Adverse."

- ☐ Validation rule `Cleared_Requires_Report_Date` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Cleared"), ISBLANK(Report_Received_Date__c) )`

Expect: save is blocked with "Enter the Report Received Date when marking police verification as Cleared."

- ☐ Validation rule `Referred_Requires_Station_And_Date` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISPICKVAL(Status__c, "Not Initiated")), OR( ISBLANK(Police_Station__c), ISBLANK(Referred_Date__c) ) )`

Expect: save is blocked with "Enter the Police Station and the Referred Date before moving police verification past Not Initiated."

- ☐ Validation rule `Report_Date_Not_Before_Referral` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Referred_Date__c)), NOT(ISBLANK(Report_Received_Date__c)), Report_Received_Date__c < Referred_Date__c )`

Expect: save is blocked with "Report Received Date cannot be earlier than the Referred Date."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Page layout *Police Verification Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Print_Job__c Print Job · OWD ControlledByParent · 14 fields · 0 record types · 4 validation rules

A booklet personalisation/printing run for an application.

- ☐ Create a record from the **Print Job** tab.

Name auto-assigns in the form PRN-{00000}.

- ☐ Create from the parent's quick action: on a **Passport_Application__c** record, use **New Print Job**.

Action **Passport_Application__c.New_Print_Job**, parent field **Passport_Application__c** pre-filled and read-only.

- ☐ Create from the parent: open a **Passport_Application__c** record and use the *New* action on the **Print_Jobs** related list.

The **Passport_Application__c** master-detail is pre-filled and cannot be changed after save.

- ☐ Quick action **Mark Printed** (**Mark_Printed**, Update) appears on the highlights panel and does what it says.

Expect it to set **Status__c** → Printed. Confirm it is blocked when a validation rule should stop it.

- ☐ Confirm cascade delete: deleting the parent removes this child.

OWD is **ControlledByParent**, so record access follows the parent — verify with a persona that cannot see the parent.

- ☐ Validation rule **Failed_Requires_Reason** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Failed"), ISBLANK(Failure_Reason__c) )`

Expect: save is blocked with "Enter a Failure Reason when marking the print job as Failed."

- ☐ Validation rule **Printed_Requires_Date** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Printed"), ISBLANK(Printed_Date__c) )`

Expect: save is blocked with "Enter the Printed Date when marking the print job as Printed."

- ☐ Validation rule **Printed_Requires_Quality_Check** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Printed"), NOT(Quality_Check_Passed__c) )`

Expect: save is blocked with "A print job cannot be marked Printed until Quality Check Passed is checked. Use Quality Check status while the booklet is being inspected."

- ☐ Validation rule **Reprint_Requires_Reason** trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Status__c, "Reprint Required"), ISBLANK(TEXT(Reprint_Reason__c)) )`

Expect: save is blocked with "Select a Reprint Reason when setting the status to Reprint Required."

- ☐ Compact layout **Print_Job_Compact** appears in the highlights panel (deployed, not the primary assignment).

Expect these fields, in order: **Name**, **Status__c**, **ARN__c**, **Batch_Number__c**, **Printed_Date__c**.

- ☐ Page layout *Print Job Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Renewal__c

Renewal · OWD Private · 7 fields · 0 record types · 1 validation rule

- ☐ Create a record from the **Renewal** tab.

Name auto-assigns in the form `REN-{000000}`.

- ☐ Validation rule `Converted_Requires_Converted_Application` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Outreach_Status__c, "Converted"), ISBLANK(Converted_Application__c) )`

Expect: save is blocked with "Link the new application in Converted Application before setting Outreach Status to Converted."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Page layout *Renewal Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Risk_Flag__c

Risk Flag · OWD Private · 8 fields · 0 record types · 2 validation rules

- ☐ Create a record from the **Risk Flag** tab.

Name auto-assigns in the form `RISK-{000000}`.

- ☐ Create from the parent's quick action: on a `Passport_Application__c` record, use **Raise Risk Flag**.

Action `Passport_Application__c.Raise_Risk_Flag`, parent field `Passport_Application__c` pre-filled and read-only.

- ☐ Validation rule `Critical_Requires_Description` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISPICKVAL(Severity__c, "Critical"), ISBLANK(Description__c) )`

Expect: save is blocked with "Enter a Description explaining the critical risk."

- ☐ Validation rule `Reviewed_Requires_Reviewer` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( OR( ISPICKVAL(Status__c, "Confirmed"), ISPICKVAL(Status__c, "Dismissed") ), ISBLANK(Reviewed_By__c) )`

Expect: save is blocked with "Set Reviewed By before confirming or dismissing a risk flag."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Page layout *Risk Flag Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

Slot__c Appointment Slot · OWD ControlledByParent · 8 fields · 0 record types · 4 validation rules

- ☐ Create a record from the **Appointment Slot** tab.

Name auto-assigns in the form `SLOT-{0000000}`.

- ☐ Create from the parent's quick action: on a `PSK__c` record, use **New Slot**.

Action `PSK__c.New_Slot`, parent field `PSK_Office__c` pre-filled and read-only.

- ☐ Create from the parent: open a `PSK__c` record and use the *New* action on the **Slots** related list.

The `PSK_Office__c` master-detail is pre-filled and cannot be changed after save.

- ☐ Confirm cascade delete: deleting the parent removes this child.

OWD is `ControlledByParent`, so record access follows the parent — verify with a persona that cannot see the parent.

- ☐ Validation rule `Capacity_Cannot_Drop_Below_Bookings` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Capacity__c)), Capacity__c < Booked_Count__c )`

Expect: save is blocked with "Capacity cannot be lower than the number of appointments already booked. Cancel or move appointments first."

- ☐ Validation rule `Capacity_Must_Be_Positive` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Capacity__c)), Capacity__c <= 0 )`

Expect: save is blocked with "Capacity must be at least 1. To close a slot, uncheck Is Available instead of setting capacity to zero."

- ☐ Validation rule `End_Time_After_Start_Time` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( NOT(ISBLANK(Start_Time__c)), NOT(ISBLANK(End_Time__c)), End_Time__c <= Start_Time__c )`

Expect: save is blocked with "End Time must be later than Start Time."

- ☐ Validation rule `Slot_Date_Not_In_Past` trips as designed.

Input: Construct a record that makes this formula evaluate to TRUE, then save: `AND( ISNEW(), NOT(ISBLANK(Slot_Date__c)), Slot_Date__c < TODAY() )`

Expect: save is blocked with "Slot Date cannot be in the past. Choose today or a future date."

- ☐ Highlights panel falls back to the system default — no compact layout is defined.

Confirm the default is acceptable or author one.

- ☐ Related lists appear with the right columns.

Expect 1: **Appointments** (`Appointment__c.Slot__c`, M-D). Each should show its own Name plus Status and the key date, not just Name.

- ☐ Page layout *Appointment Slot Layout* is assigned and its sections are in a deliberate order.

No field should sit in a section it does not belong to, and nothing should be in a nameless catch-all section. Confirm the lookup to the parent is on the layout and read-only where it should be.

- ☐ List views behave.

No list views deployed; only *Recently Viewed* and *All* will exist. Confirm that is enough.

- ☐ Field history tracking is on.

Change a tracked field and confirm the History related list records old → new value and the user.

05 Lifecycle walkthrough script

This is the single most important test in the pack. It exercises every validation rule, every stage-entry stamp, and the automation that spawns the fulfilment records. Run it end to end in one sitting and note the ARN so the trail can be re-read afterwards.

BEFORE YOU START

- At least one active `PSK__c` office record exists (needed for `Place_of_Issue__c` to resolve on the eventual passport).
- The running user has `PSK_App_Access` — or, for a persona pass, the relevant `PSK_*` persona permission set.
- Note the current record counts for `Passport__c`, `Print_Job__c` and `Dispatch__c` before you start, so you can prove the deltas.

ARN under test: _____ Tester: _____ Date: _____

✓	STAGE	ACTION	EXPECTED
☐	Create	New Passport Application from the tab; pick record type Fresh . Save with only First Name filled in.	Saves. Status defaults to <code>Draft</code> . <code>Is_Draft__c</code> is true. Path shows Draft as the current step with its guidance text.
☐	Draft → Submitted (negative)	Set Status = Submitted while Last Name / DOB / Mobile / Address Line 1 are still blank.	Blocked by <code>Require_Core_Fields_On_Submit</code> : "First Name, Last Name, Date of Birth, Mobile and Address Line 1 are required before submitting."
☐	Draft → Submitted	Fill Last Name, Date of Birth, Mobile, Address Line 1, State and Pincode. Link a <code>Citizen__c</code> and a <code>PSK_Office__c</code> . Set Status = Submitted.	Saves. <code>Submitted_Date__c</code> and <code>Stage_Entered_Date__c</code> are stamped. Fee is populated from <code>Fee_Matrix__mdt</code> for Fresh x booklet pages x validity.
☐	Submitted → Payment Pending	Advance the Path one step.	Saves. <code>Stage_Entered_Date__c</code> re-stamps. <code>Payment_Status__c</code> is Not Paid or Pending.
☐	Payment Pending → Paid	Create a <code>Payment__c</code> child for the full <code>Fee__c</code> with Status = Success, then advance.	Saves. <code>Payment_Status__c</code> becomes Paid and <code>Payment_Date__c</code> is set. The Payments related list shows the child.
☐	Paid → Document Verification	Advance. Work the <code>Document_Checklist_Item__c</code> children to Received / Verified.	Saves. Checklist items appear in their related list. <code>Documents_Verified__c</code> can be ticked once all items verify.
☐	Document Verification → Police Verification	Advance. Confirm a <code>Police_Verification__c</code> child exists with <code>PV_Type__c</code> matching the record type's allowed values (Fresh permits Pre-PV / Post-PV only).	Saves. PV record reachable from the Police Verifications related list. Setting its Status to <code>Adverse</code> should make the record visible to PSK Managers via the <i>Adverse To Managers</i> sharing rule.
☐	Police Verification → Granting (negative)	On a <i>separate</i> application whose <code>Payment_Status__c</code> is not Paid, set Status = Granting.	Blocked by <code>Cannot_Grant_With_Pending_Payment</code> : "Payment must be Paid before the application can move to Granting."
☐	Police Verification → Granting	On the main application, advance to Granting.	Saves — payment is Paid. <code>Granted_Date__c</code> is stamped. Granting Officers gain Edit via the <i>Granting Stage To Granting Officers</i> sharing rule.
☐	Granting → Printing	Advance.	A <code>Passport__c</code> record is created and linked back via <code>Application__c</code> . Its <code>Booklet_Pages__c</code> , <code>Validity_Years__c</code> , <code>ECR_Status__c</code> , <code>Passport_Category__c</code> and <code>Holder_Name__c</code> formulas resolve from the application; <code>Place_of_Issue__c</code> resolves to the PSK office name. A <code>Print_Job__c</code> is created with <code>Status__c</code> queued and <code>Queued_Date__c</code> stamped.
☐	Printing → Dispatch	Mark the print job printed with <code>Quality_Check_Passed__c</code> = true, then advance the application.	<code>Print_Job__c</code> . <code>Turnaround_Hours__c</code> computes. A <code>Dispatch__c</code> is created with a courier partner, a tracking number, an expected delivery date, and <code>Delivery_Address__c</code> resolved by formula from the application address.

✓	STAGE	ACTION	EXPECTED
☐	Dispatch → Delivered	Set the dispatch <code>Delivered_Date__c</code> and <code>Received_By__c</code> , then advance the application to Delivered.	Saves. <code>Dispatch__c.Transit_Days__c</code> computes. <code>Passport__c.Status__c</code> is Active and <code>Days_To_Expiry__c</code> is positive.
☐	Delivered → anything earlier (negative)	Set Status back to Dispatch.	Blocked by <code>No_Backward_Move_Once_Delivered</code> : "A Delivered application cannot be moved back to an earlier stage."

FINAL ASSERTIONS — NOTHING BYPASSED, NOTHING SPURIOUSLY BLOCKING

- ☐ Exactly one `Passport__c`, one `Print_Job__c` and one `Dispatch__c` exist for the ARN — no duplicates from re-saving a stage.
- ☐ No validation rule fired at a stage where it should have been silent (in particular, nothing blocked the Draft save).
- ☐ No validation rule was bypassed: re-run the two negative steps and confirm they still block after the record reached Delivered.
- ☐ Field history on the application shows one `Status__c` transition per advance and no unexplained edits.
- ☐ A `Notification_Log__c` row exists for each stage that is meant to notify, and none exists where `Notification_Consent__c` is false.

PATH STEPS AS DEPLOYED

`PSK_Path_Diplomatic_Official` — record type `Diplomatic_Official`, active, 12 steps: Draft → Submitted → Payment Pending → Paid → Document Verification → Police Verification → Granting → Printing → Dispatch → Delivered → Rejected → Cancelled

`PSK_Path_Lost_Damaged` — record type `Lost_Damaged`, active, 12 steps: Draft → Submitted → Payment Pending → Paid → Document Verification → Police Verification → Granting → Printing → Dispatch → Delivered → Rejected → Cancelled

`Passport_Application_Path` — record type `Fresh`, active, 12 steps: Draft → Submitted → Payment Pending → Paid → Document Verification → Police Verification → Granting → Printing → Dispatch → Delivered → Rejected → Cancelled

`Passport_Application_Path_Minor` — record type `Minor`, active, 12 steps: Draft → Submitted → Payment Pending → Paid → Document Verification → Police Verification → Granting → Printing → Dispatch → Delivered → Rejected → Cancelled

`Passport_Application_Path_Re_Issue` — record type `Re_Issue`, active, 12 steps: Draft → Submitted → Payment Pending → Paid → Document Verification → Police Verification → Granting → Printing → Dispatch → Delivered → Rejected → Cancelled

`Passport_Application_Path_Tatkal` — record type `Tatkal`, active, 12 steps: Draft → Submitted → Payment Pending → Paid → Document Verification → Police Verification → Granting → Printing → Dispatch → Delivered → Rejected → Cancelled

06 Persona access matrix

Personas are expressed as permission sets over a Private org-wide default, layered on a role hierarchy for vertical visibility and criteria-based sharing rules for lateral visibility. The persona set list below is enumerated from `force-app/main/default/permissionsets/PSK_*` at generation time — if a set is missing from the table it has not landed in the tree yet.

OBJECT	PSK APP ACCESS	PSK AUDITOR (READ ONLY)	PSK FULFILMENT OFFICER	PSK GRANTING OFFICER	PSK OFFICE MANAGER	PSK OFFICER	PSK REFERENCE DATA ADMIN	PSK VERIFICATION OFFICER
Appointment__c	CRUD MA	R	—	—	CRUD	CRU	—	—
Citizen__c	CRUD MA	R VA	—	R	CRUD VA	CRU	—	R
Dispatch__c	CRUD MA	R	CRUD	—	CRUD	—	—	—
Document_Checklist_Item__c	CRUD MA	R	—	—	CRUD	CRU	—	RU
Family_Member__c	CRUD MA	R	—	—	CRUD	CRUD	—	—
Notification_Log__c	CRUD MA	R VA	—	—	CRUD VA	CR	—	—
Objection__c	CRUD MA	R	—	RU	CRUD	—	—	CRUD
PSK__c	CRUD MA	R VA	R	—	CRUD VA	R	CRUD	—
Passport_Application__c	CRUD MA	R VA	R	RU	CRUD VA	CRU	—	RU
Passport__c	CRUD MA	R VA	RU	CRU	CRUD VA	—	—	—
Payment__c	CRUD MA	R	—	—	CRUD	CR	—	—
Police_Verification__c	CRUD MA	R VA	—	R	CRUD VA	—	—	CRUD
Print_Job__c	CRUD MA	R	CRUD	—	CRUD	—	—	—
Renewal__c	CRUD MA	R VA	—	—	CRUD VA	—	—	—
Risk_Flag__c	CRUD MA	R VA	—	—	CRUD VA	—	—	CRU
Slot__c	CRUD MA	R	R	—	CRUD	R	CRUD	—
Field permissions declared	211	211	110	112	211	132	21	107

C create · R read · U edit · D delete · VA View All Records · MA Modify All Records · — no object permission declared in that set. Object permissions alone do not grant record access: with OWD Private, a persona also needs the role hierarchy or a sharing rule to see a record it does not own.

Design intent — the seven personas

The seven persona sets landed during this audit. The matrix above is rendered from whatever `PSK_*` permission sets are on disk at generation time — including `PSK_App_Access`, which is the admin catch-all and is expected to be wide. The row shapes below are the design intent; where the matrix disagrees with the intent, the metadata is what shipped and needs a decision.

PERSONA	EXPECTED SET	ROLE	INTENDED SHAPE
Front-line Officer / Data Entry	PSK_Officer	Passport_Processing_Team	Create and edit applications in Draft/Submitted, manage citizens, family members, appointments and slots. No granting, no fulfilment, no risk review. This is the widest-blast-radius set — check its field-level security on <code>Aadhaar-Token__c</code> and <code>Date_of_Birth__c</code> carefully.
Verification Officer (documents + police)	PSK_Verification_Officer	Document_Verification / Police_Verification_Team	Read applications; full control of Document Checklist Items, Objections and Police Verification records. Should not be able to move Status past Police Verification. Reads high-risk applications through <i>High Risk To Verification</i> .

PERSONA	EXPECTED SET	ROLE	INTENDED SHAPE
Granting Officer	PSK_Granteeing_Officer	Granting_Officers	Edit applications at Granting/Printing and create Passport records. Must NOT be able to edit the applicant declaration fields — that is the snapshot, and a granting officer rewriting it would defeat the whole point of §2.1 of PSK.md.
Print & Dispatch	PSK_Fulfilment_Officer	Fulfilment_Team	Full control of Print Jobs and Dispatches; read-only on the application except its Status. Gains Edit on the application at Printing/Dispatch/Delivered via <i>Fulfilment Stage To Fulfilment</i> .
Passport Office Manager / RPO	PSK_Office_Manager	Regional_Passport_Officer / Passport_Office_Manager	Read/edit everything in the office, plus Risk Flags and blacklisted citizens via the manager sharing rules. Also the approver-to-be once an approval process exists (P0-02).
Audit & Compliance	PSK_Auditor_Read_Only	Audit_And_Compliance	Read-only across every PSK object including Notification Logs and field history. No create, edit or delete anywhere — this is the set to test hardest, because a stray <code>allowEdit</code> in it is invisible until an auditor changes something.
Reference Data Admin	PSK_Reference_Data_Admin	CEO_and_Admins	Maintains the reference layer — <code>PSK__c</code> offices and <code>Slot__c</code> capacity — without any access to applicant personal data. The one persona that should fail a read on <code>Citizen__c</code> .

Three permission set groups bundle these for staff who wear two hats: PSK_Front_Office (Officer + Verification Officer), PSK_Back_Office (Granting + Fulfilment) and PSK_Leadership (Office Manager + Auditor). Groups must contain only references to the persona sets — never permissions of their own.

HOW TO VERIFY EACH

- ☐ Assign one persona set at a time to the spare Salesforce Platform user, then open the Application Management Console as that user (see the licence note in Org Limits for why a single user is reused).
- ☐ For each object in the row: attempt Read (open a record from the tab), Create (New from the tab), Edit (change a field), Delete (the Delete action). Record what actually happened, not what the set claims.
- ☐ Cross-check with Setup → Users → the test user → *View Summary* (object and field permissions) and with the record-level *Sharing* button on a sample record.
- ☐ For PII fields — `Date_of_Birth__c`, `Aadhaar_Token__c`, `Aadhaar_Verified__c`, `Mobile__c` — verify field-level security separately from object access. A persona that can open the record must not automatically be able to read the Aadhaar token.
- ☐ Verify queue visibility: each of the work queues should list only the records the persona is meant to work.

Permission set groups

GROUP	BUNDLES	PURPOSE
PSK_Back_Office_PSG PSK Back Office	PSK_Fulfilment_Officer + PSK_Granting_Officer	Granting plus printing/dispatch duties for back-office staff.
PSK_Front_Office_PSG PSK Front Office	PSK_Officer + PSK_Verification_Officer	Counter intake plus verification duties for front-office staff.
PSK_Leadership_PSG PSK Leadership	PSK_Auditor_Read_Only + PSK_Office_Manager	Office management oversight plus audit read-only visibility.

Verify each group: assign it to the test user and confirm the union of its sets is what the user actually gets — a group whose calculation is stale (Setup → Permission Set Groups shows *Outdated*) silently grants the wrong thing.

Record-level layer: criteria-based sharing rules in the tree

RULE	OBJECT	CRITERIA	SHARED TO	ACCESS
Blacklisted_To_Managers	Citizen__c	Is_Blacklisted__c equals true	PSK_Managers (group)	Edit
Tatkal_To_Managers	Passport_Application__c	Tatkal__c equals true	PSK_Managers (group)	Edit

RULE	OBJECT	CRITERIA	SHARED TO	ACCESS
High_Risk_To_Verification	Passport_Application__c	Risk_Score__c greaterThan 70	Police_Verification_Team (roleAndSubordinates)	Read
Diplomatic_To_RPO	Passport_Application__c	Passport_Category__c equals Diplomatic,Official	Regional_Passport_Officer (role)	Edit
Granting_Stage_To_Granteeing_Officers	Passport_Application__c	Status__c equals Granting,Printing	Granting_Officers (role)	Edit
Fulfilment_Stage_To_Fulfilment	Passport_Application__c	Status__c equals Printing,Dispatch,Delivered	Fulfilment_Team (role)	Edit
Expiring_To_Officers	Passport__c	Status__c equals Active,Expired	Passport_Office_Manager (roleAndSubordinates)	Read
Adverse_To_Managers	Police_Verification__c	Status__c equals Adverse	PSK_Managers (group)	Edit
Open_High_Severity_To_Managers	Risk_Flag__c	Severity__c equals High,Critical	PSK_Managers (group)	Edit

Public groups: PSK_All_Staff, PSK_Auditors, PSK_Fulfilment_Team, PSK_Managers, PSK_Verification_Team, PSK_Visa_Team .

Queues: Document_Verification, Granting, Objections, Police_Verification, Printing_And_Dispatch, Risk_Review .

07 Action items

15 open items: 2 P0, 8 P1, 5 P2. Each was verified against the repository or the org before being listed; the verification strip at the end of this section shows what was actually observed.

OPEN ITEMS BY SEVERITY



ID	SEV	AREA	ITEM	OWNER	EFFORT
P0-01	P0	Security	Hardcoded OpenAI API key. <code>classes/OpenAIChatController.cls</code> is documented in CLAUDE.md as containing a hardcoded OpenAI API key in source. The file is no longer present in the repository and does not appear anywhere in git history — it was removed (or never committed) before this audit. The key must still be treated as compromised: rotate it at the provider, and if the class is ever reinstated, move the secret to a Named Credential or protected Custom Metadata. Also remove the stale warning from CLAUDE.md so it stops sending readers after a file that is not there.	Platform / Security	S
P0-02	P0	Automation	No Approval Process exists anywhere in the org. <code>force-app/main/default/approvalProcesses/</code> is absent entirely. Granting a Diplomatic or Official passport — the highest-consequence action in the system — is today a picklist change by any user with edit access on the record. Build at least one: <i>Diplomatic/Official Grant Approval</i> , entry criteria <code>Passport_Category__c IN (Diplomatic, Official) AND Status__c = Granting</code> , approve the Regional Passport Officer role, with field updates locking the record on approval. A second process for high-risk grants (<code>Risk_Score__c > 70</code>) is the obvious follow-up.	Platform	M
P1-01	P1	Sharing	Enterprise Territory Management is not enabled and cannot be enabled by deploy. Confirmed by query: <code>SELECT Id FROM Territory2Model</code> fails with <i>"sObject type 'Territory2Model' is not supported"</i> . ETM is a Setup toggle (Setup → Territory Settings → Enable Enterprise Territory Management) and is irreversible once on; no metadata deployment can flip it. Until someone makes that call, region-based access must be built from public groups plus criteria-based sharing rules — which is what the org does today. Decide explicitly whether to enable it or to commit to the group-based approach, and write the decision down.	Architecture	M
P1-02	P1	Sharing	Region-based sharing needs a real text field on the application. Criteria-based sharing rules cannot traverse a lookup and cannot read a formula field, so no rule can be written against <code>PSK_Office__r.Region__c</code> . The <code>Passport__c</code> sharing rule already carries a comment acknowledging the same limitation for its formula fields. Add a plain <code>Region__c</code> Text or Picklist field to <code>Passport_Application__c</code> , populate it from <code>PSK_Office__r.Region__c</code> in the before-save trigger (and backfill existing rows), then write one criteria-based rule per region sharing to the matching public group.	Platform	M

ID	SE V	AR EA	ITEM	OW NE R	EF FO RT
P1-03	P 1	UI	Per-record-type Lightning record page activation is a manual step. Org-default and app-default page assignments deploy fine, but per-record-type activation is not reliably representable in <code>FlexiPage</code> metadata and must be done in Lightning App Builder. After every deploy that touches record pages, open each page → Activation → App, Record Type and Profile, and assign it. Pages needing activation are listed in the table below this section (enumerated from <code>flexipages/</code> at generation time). At minimum: <code>Passport_Application_Record_Page</code> against all six application record types in the Application Management Console, and <code>App_Home</code> as that app's home page.	UI	S
P1-04	P 1	Re po rti ng	No reports, dashboards or custom report types exist for any PSK object. <code>reportTypes/</code> contains only inherited template types (flow orchestration, partner fund, MDF) and there is no <code>reports/</code> or <code>dashboards/</code> directory at all. Nothing in the org can answer an operational question in aggregate. Build custom report types for Application-with-Payments, Application-with-Police-Verification and Passport-with-Dispatch, then a manager dashboard: applications by stage, ageing against <code>SLA_Config__mdt</code> , Tatkal SLA breach count, PV turnaround, print/dispatch throughput.	Rep orti ng	M
P1-05	P 1	Ch an nel	No Experience Cloud citizen self-service site. The applicant journey is entirely staff-mediated: a citizen cannot start a draft, upload a document, pay a fee or check status without an officer doing it for them. The org does contain an inherited <i>Internal Zone</i> community and the standard self-registration controllers, but those are Service Analytics template leftovers, not a PSK portal — do not mistake them for progress. Building this is the largest single remaining piece of scope.	Pro duct	L
P1-06	P 1	Da ta qu alit y	<code>Citizen_Required_On_Submit</code> ships inactive on purpose and must be activated only after the citizen backfill has run. Activating it before every existing application has a <code>Citizen__c</code> value will make historical records unsaveable — any later edit to an old application would be blocked by a rule about a field that was optional when it was created. Sequence: backfill <code>Citizen__c</code> on all applications, verify zero nulls, then flip <code><active></code> to true and deploy the single rule. The generator reports the rule's live state in the validation-rule appendix; if it is absent from the appendix, it has not been written yet.	Dat a	S
P1-07	P 1	UI	Several PSK objects have no page layout in the tree. <code>layouts/</code> contains layouts for the older objects but none for <code>Citizen__c</code> , <code>Passport__c</code> , <code>Print_Job__c</code> , <code>Dispatch__c</code> or <code>Family_Member__c</code> , which are the newest additions. They will fall back to an auto-generated layout, which puts fields in an arbitrary order and gives testers nothing to check against. Author a layout per object with the same section ordering convention as the application layout. (The generator lists which objects are missing a layout as of generation.)	UI	M
P1-08	P 1	UI	The Path covers only the Fresh record type. <code>pathAssistants/Passport_Application_Path</code> declares <code><recordTypeName>Fresh</recordTypeName></code> , so the other five record types — Re-issue, Tatkal, Lost/Damaged, Minor, Diplomatic/Official — render no stage bar at all. Either add a path assistant per record type (they can share guidance text) or document that the Path is Fresh-only by design.	UI	S
P2-01	P 2	Se cur ity	Shield Platform Encryption is unavailable in Developer Edition, so <code>Aadhaar_Token__c</code> is plain text. This is a platform-edition constraint, not a defect to fix here — but it makes the discipline load-bearing: never populate <code>Aadhaar_Token__c</code> with an Aadhaar number, a hash of one, or anything else that could re-identify a person. It exists to hold an opaque provider reference. The DPDP-driven rule stands: store <code>Aadhaar_Verified__c</code> as the fact and the token as the receipt, never the number. Restrict the field to the manager and auditor personas via FLS, and add a note on the field description saying so.	Sec urity	S
P2-02	P 2	Hy gie ne	Stray metadata to clean up, with the owner's consent before any delete. <code>classes/ABC.cls</code> (21 bytes) and <code>classes/TestSheet.cls</code> (27 bytes) are empty stubs. <code>classes/LeadController.cls</code> is unrelated to PSK. <code>layouts/Lead-Passport_Application%28New%29Layout.layout-meta.xml</code> is an orphan <i>Lead</i> page layout named after this project — confusing precisely because the name looks relevant. And <code>contentassets/</code> holds a large number of near-duplicate <code>_1/_11</code> variants of the same images. None of this breaks anything; all of it costs a reader time. (The generator reports the live counts.)	Plat form	S

ID	SE V	AR EA	ITEM	OW NE R	EF FO RT
P2-03	P2	Localisation	objectTranslations/ are empty en_US stubs. Every bundle is <code><Object>-en_US</code> restating the English label — there is no Hindi and no regional translation, despite <code>Citizen__c.Preferred_Language__c</code> existing to record what language a citizen wants to be dealt with in. A passport office that records a language preference and then cannot honour it is worse than one that does not ask. Either add a real <code>hi</code> translation for the applicant-facing labels and picklist values, or drop <code>Preferred_Language__c</code> until the capability exists.	Product	M
P2-04	P2	Tooling	manifest/package.xml is a wildcard manifest covering nearly 200 metadata types. Every retrieve pulls the whole org, including the Service Analytics / Wave template noise, which is slow and buries PSK changes in unrelated diffs. Add a second, scoped <code>manifest/psk-package.xml</code> listing only the PSK objects, layouts, permission sets, groups, queues, roles, sharing rules, custom metadata, global value sets, flexipages, LWCs, tabs, apps, path assistants and <code>PSK_*</code> Apex, and use it as the day-to-day retrieve target. Keep the full manifest for disaster recovery.	Platform	S
P2-05	P2	Tooling	Apex apiVersion drift. The older <code>PSK_*</code> classes and their tests carry <code>apiVersion</code> 61.0 in their <code>.cls-meta.xml</code> while <code>sfdx-project.json</code> sets <code>sourceApiVersion</code> 67.0. Nothing is broken, but the mismatch means new classes and old classes can behave differently on version-gated platform behaviour. Bump the PSK classes to 67.0 and re-run the test suite in one deliberate change rather than discovering it during a future upgrade.	Platform	S

Effort: **S** under a day · **M** a few days · **L** a sprint or more.

Verification strip — what each item was actually checked against

Recomputed by this generator at 2026-08-03T12:20:56.219Z against commit `5130d7c`. Nothing in the table above is asserted from memory.

PROBE	RESULT AT GENERATION
OpenAIChatController.cls in classes/	absent (also absent from git history)
approvalProcesses/ directory	absent — zero approval processes
Territory2Model queryable	no — ETM not enabled
Real Region__c text field on the application	absent — criteria-based region sharing impossible
RecordPage flexipages needing manual activation	0: none
reports/ · dashboards/ directories	absent · absent
PSK custom report types	none (of 11 inherited types)
Citizen_Required_On_Submit	present and ACTIVE — check the backfill ran
Aadhaar_Token__c encryption	Text, no encryption scheme
Stray/empty Apex	ABC.cls (21 B), TestSheet.cls (27 B), LeadController.cls (308 B)
Orphan Lead layout	Lead-Passport Application (New) Layout.layout-meta.xml
contentassets/ near-duplicates	20 of 86 files match _1/_11 variants
objectTranslations locales	en_US, fr
manifest/package.xml types	199 · scoped psk-package.xml missing
Apex apiVersion drift (project is 67.0)	6 PSK class(es) at 61.0
PSK objects with no page layout	none
PSK objects with no tab	none
Experience Cloud sites	Internal Zone

08 Org limits and storage


Developer Edition gives roughly **5 MB of data storage**. Salesforce bills most records at 2 KB each regardless of how many fields are populated, which puts the practical ceiling at about **2,500 records org-wide** — not per object.

That ceiling is already substantially consumed by metadata inherited with the Service Analytics / CRM Analytics template, which was retrieved into this org before PSK work began. The record-count chart in this section shows where the space has gone.

This is why the demo-data generator targets roughly **1,200–1,500 records at scale 1**. It is not a modesty figure — it is what is left. A generator that produced a "realistic" 10,000 applications would fail partway through with a storage error and leave the org in a half-seeded state that is harder to reason about than an empty one.



RECORDS BY OBJECT (as of capture)

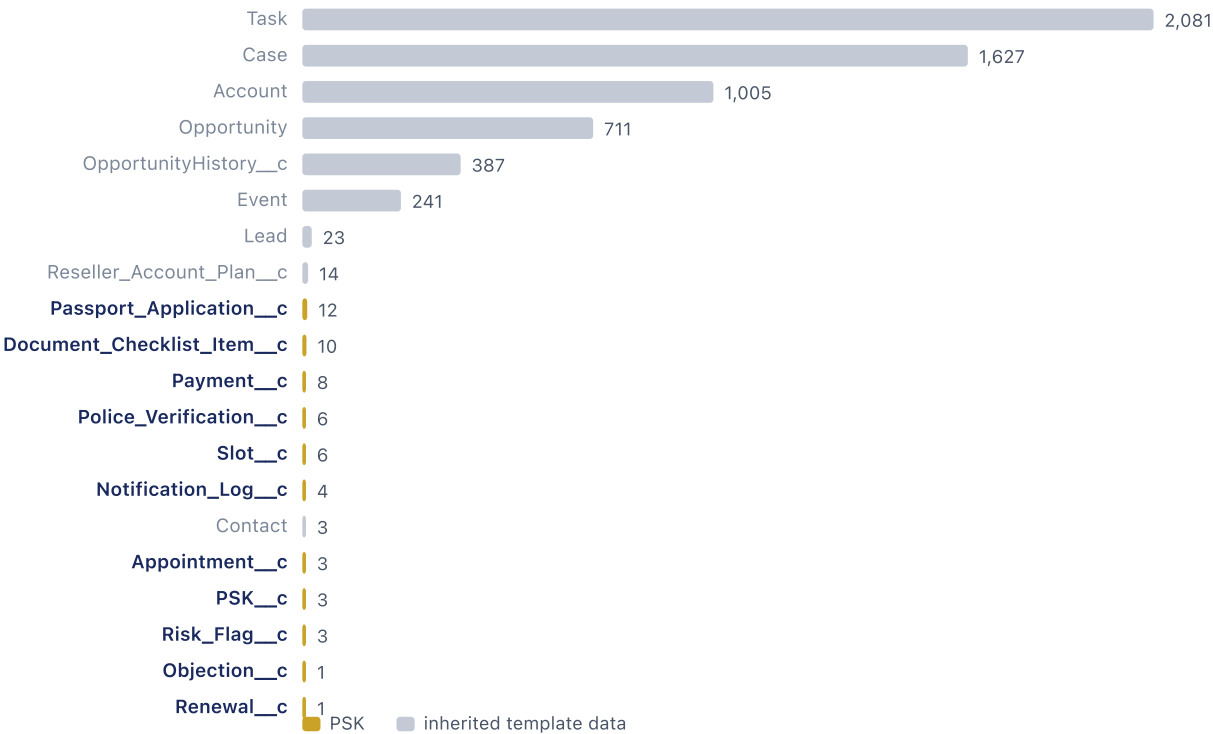

Captured by read-only `sf data query` on 2026-07-30. Read-only ``sf data query`` against psk-dev. Counts move as the demo-data generator runs; treat as as-of-capture.

What to delete first if storage binds

OR DE R	DELETE	WHY IT IS SAFE, AND WHAT IT COSTS
1	Task and Event	The single largest block, and entirely template sample activity data. Nothing in PSK reads it. Deleting these frees more room than everything else combined.
2	Case	Service Analytics sample cases. PSK does not use Case at all.
3	Opportunity and OpportunityHistory__c	Wave dashboard feed data. Deleting it breaks the inherited Service Analytics dashboards — acceptable, since they are not part of PSK. Delete OpportunityHistory__c first to avoid orphan rows.
4	Account (the ~1,000 sample accounts)	The application's legacy Applicant__c lookup points at Account, so check nothing PSK-owned references an Account before deleting. Citizen__c is the intended identity object; Account is only still there for the earlier design.

OR DE R	DELETE	WHY IT IS SAFE, AND WHAT IT COSTS
5	Lead, Reseller_Account_Plan__c, Contact	Small, but free to remove — none are referenced by PSK metadata.
6	Empty the Recycle Bin	Deleted records keep consuming storage until the Recycle Bin is purged. <code>sf data delete bulk</code> plus <i>Empty Recycle Bin</i> , or storage will not appear to move at all.

Licence ceiling — and why persona testing swaps permission sets

USER LICENCE	TOTAL	USED	FREE
Salesforce	3	3	0
Salesforce Platform	3	1	2
Chatter Free	5,000	1	4,999
Cloud Integration User	1	1	0

The org has **3 Salesforce licences, all 3 in use**, and **3 Salesforce Platform licences with 1 in use — 2 free**. There is no room to stand up one user per persona.

Persona testing therefore uses **a single Salesforce Platform user with permission sets swapped between passes**, rather than six or seven dedicated users. Assign one `PSK_*` set, run that persona's rows in the access matrix, remove the set, assign the next.

Two consequences to be honest about. First, a swapped-set user does not prove that *concurrent* personas see the right things — anything that depends on record ownership by a different user (queue assignment, the owner-based half of the role hierarchy) needs a second real user, and there are two Platform licences available for exactly that.

Second, the Salesforce Platform licence itself withholds some objects and features that a full Salesforce licence grants. Do not read a Platform-user access failure as a permission-set bug until the licence has been ruled out.

ENTERPRISE TERRITORY MANAGEMENT

`SELECT Id FROM Territory2Model` returns *sObject type 'Territory2Model' is not supported.*, which is how the platform reports that the feature has never been switched on. It is a Setup toggle, it cannot be enabled by a metadata deploy, and it is irreversible. See action item P1-01.

09 Appendix

A. Deploy, verify and seed command sequence

Run from the repository root. `psk-dev` is the project's default `target-org`, so `--target-org` is optional throughout.

1. VALIDATE BEFORE YOU TOUCH THE ORG

```
sf project deploy start --source-dir force-app --dry-run
```

Full validation, nothing saved. Always do this first.

```
sf project deploy start --source-dir force-app/main/default/objects --dry-run
```

Narrower and much faster while iterating on the data model.

2. DEPLOY, IN DEPENDENCY ORDER

```
sf project deploy start --metadata GlobalValueSet
```

Value sets first — picklist fields reference them.

```
sf project deploy start --source-dir force-app/main/default/objects
```

Objects, fields, record types, validation rules, compact layouts, list views.

```
sf project deploy start --source-dir force-app/main/default/layouts --source-dir force-app/main/default/flexipages
```

Layouts and Lightning pages, once the fields they reference exist.

```
sf project deploy start --metadata Role
```

Roles before groups — groups reference roles.

```
sf project deploy start --metadata Group --metadata Queue
```

Public groups and work queues.

```
sf project deploy start --metadata PermissionSet --metadata PermissionSetGroup
```

Personas. Field-level security lives here.

```
sf project deploy start --metadata SharingRules
```

Sharing rules last — they reference groups, roles and fields.

```
sf project deploy start --metadata CustomMetadata
```

`Fee_Matrix__mdt` and `SLA_Config__mdt` records.

```
sf project deploy start --source-dir force-app/main/default/lwc --source-dir force-app/main/default/classes
```

Apex and LWC.

```
sf project deploy start --metadata CustomApplication --metadata CustomTab --metadata PathAssistant
```

App shell, tabs and the Path.

3. VERIFY

```
sf apex run test --test-level RunLocalTests --result-format human --code-coverage
```

Whole local suite with coverage.

```
sf apex run test --class-names PSK_HomeControllerTest --result-format human
```

A single class while iterating.

```
sf data query -q "SELECT COUNT(Id) FROM Passport_Application__c"
```

Confirm rows are visible to the running user.

```
sf org open --path lightning/app/Application_Management_Console
```

Open the app and eyeball the home page and tab set.

```
sf org open --path lightning/setup/FlexiPageList/home
```

Lightning App Builder — do the manual per-record-type page activations (P1-03).

4. SEED DEMO DATA

```
sf data query -q "SELECT COUNT(Id) FROM Passport_Application__c"
```

Baseline count before seeding, so the delta is provable.

```
sf apex run --file scripts/apex/seed-demo-data.apex
```

Anonymous-Apex seed at scale 1 (~1,200–1,500 records). Check the exact script name in scripts/apex/.

```
sf apex tail log --color
```

Watch it run; a storage failure shows up here, not in the CLI exit code.

```
sf org open --path lightning/setup/CompanyResourceDisk/home
```

Storage usage page — confirm you have not hit the 5 MB ceiling.

5. RETRIEVE BACK

```
sf project retrieve start --manifest manifest/package.xml
```

Full-org retrieve. Slow — nearly 200 wildcard types (see P2-04).

```
sf project retrieve start --metadata CustomObject:Passport_Application__c
```

One object, which is what you usually want.

B. Validation rule reference

All 60 validation rules across every object in the tree, formulas verbatim from the metadata.

RULE	OBJECT	ACTIVE	ERROR CONDITION FORMULA	MESSAGE
Check_Out_After_Check_In	Appointment__c	yes	AND(NOT(ISBLANK(Check_In_Time__c)), NOT(ISBLANK(Check_Out_Time__c)), Check_Out_Time__c <= Check_In_Time__c)	Check Out Time must be later than Check In Time.
Completed_Requires_Check_In	Appointment__c	yes	AND(ISPICKVAL(Status__c, "Completed"), ISBLANK(Check_In_Time__c))	Enter a Check In Time before marking the appointment Completed. If the applicant never arrived, use No Show.
Slot_Not_Overbooked	Appointment__c	yes	AND(ISNEW(), NOT(ISBLANK(Slot__r.Capacity__c)), Slot__r.Booking_Count__c >= Slot__r.Capacity__c)	This slot is full. Choose a slot with remaining capacity.
Blacklist_Requires_Reason	Citizen__c	yes	AND(Is_Blacklisted__c, ISBLANK(Blacklist_Reason__c))	Enter a Blacklist Reason before marking this citizen as blacklisted.
DOB_Not_In_Future	Citizen__c	yes	AND(NOT(ISBLANK(Date_of_Birth__c)), Date_of_Birth__c > TODAY())	Date of Birth cannot be in the future. Enter the citizen's actual date of birth.

RULE	OBJECT	ACTIVE	ERROR CONDITION FORMULA	MESSAGE
Mobile_Format	Citizen__c	yes	AND(NOT(ISBLANK(Mobile__c)), NOT(REGEX(Mobile__c, "[6-9][0-9]{9}\$")))	Enter a 10-digit Indian mobile number starting with 6, 7, 8 or 9 (no spaces, +91 or dashes).
Pincode_Format	Citizen__c	yes	AND(NOT(ISBLANK(Pincode__c)), NOT(REGEX(Pincode__c, "[1-9][0-9]{5}\$")))	Enter a 6-digit pincode that does not start with 0.
Verified_KYC_Requires_Aadhaar	Citizen__c	yes	AND(ISPICKVAL(KYC_Status__c, "Verified"), NOT(Aadhaar_Verified__c))	KYC cannot be set to Verified until Aadhaar Verified is checked. Complete Aadhaar verification first.
Delivered_Requires_Date_And_Received	Dispatch__c	yes	AND(ISPICKVAL(Status__c, "Delivered"), OR(ISBLANK(Delivered_Date__c), ISBLANK(Received_By__c)))	Enter both the Delivered Date and who the passport was Received By before marking the dispatch Delivered.
Expected_Delivery_Not_Before_Dispatch	Dispatch__c	yes	AND(NOT(ISBLANK(Dispatched_Date__c)), NOT(ISBLANK(Expected_Delivery_Date__c)), Expected_Delivery_Date__c < DATEVALUE(Dispatched_Date__c))	Expected Delivery Date cannot be earlier than the Dispatched Date.
In_Transit_Requires_Tracking	Dispatch__c	yes	AND(OR(ISPICKVAL(Status__c, "In Transit"), ISPICKVAL(Status__c, "Out for Delivery")), ISBLANK(Tracking_Number__c))	Enter the courier Tracking Number before moving the dispatch to In Transit or Out for Delivery.
Returned_Requires_Reason	Dispatch__c	yes	AND(ISPICKVAL(Status__c, "Returned"), ISBLANK(TEXT(Return_Reason__c)))	Select a Return Reason when marking the dispatch as Returned.
Received_Requires_Received_Date	Document_Checklist_Item__c	yes	AND(ISPICKVAL(Status__c, "Received"), ISBLANK(Received_Date__c))	Enter the Received Date when marking a document as Received.
Rejected_Requires_Rejection_Reason	Document_Checklist_Item__c	yes	AND(ISPICKVAL(Status__c, "Rejected"), ISBLANK(Rejection_Reason__c))	Enter a Rejection Reason when rejecting a document. The applicant is told this reason.
Verified_Requires_Verified_Date	Document_Checklist_Item__c	yes	AND(ISPICKVAL(Status__c, "Verified"), ISBLANK(Verified_Date__c))	Enter the Verified Date when marking a document as Verified.

RULE	OBJECT	ACTIV E	ERROR CONDITION FORMULA	MESSAGE
Cannot_Relate_To_Self	Family_Member__c	yes	AND(NOT(ISBLANK(Related_Citizen__c)), Related_Citizen__c = Citizen__c)	A citizen cannot be their own family member. Pick a different Related Citizen.
Either_Related_Citizen_Or_Name	Family_Member__c	yes	AND(ISBLANK(Related_Citizen__c), ISBLANK(Member_Name__c))	Either link a Related Citizen or type a Member Name. A family member needs at least one of the two.
Minor_Application_Requires_Guardian_Flag	Family_Member__c	yes	AND(NOT(ISBLANK(Minor_Application__c)), NOT(Is_Guardian__c))	Only a guardian can be linked to a Minor Application. Check Is Guardian, or clear the Minor Application lookup.
Sent_Requires_Date_And_Recipient	Notification_Log__c	yes	AND(OR(ISPICKVAL(Status__c, "Sent"), ISPICKVAL(Status__c, "Delivered")), OR(ISBLANK(Sent_Date__c), ISBLANK(Recipient_Number__c)))	Enter both the Sent Date and the Recipient Number when logging a notification as Sent or Delivered.
Resolved_Date_Not_Before_Raised	Objection__c	yes	AND(NOT(ISBLANK(Raised_Date__c)), NOT(ISBLANK(Resolved_Date__c)), Resolved_Date__c < Raised_Date__c)	Resolved Date cannot be earlier than the Raised Date.
Resolved_Requires_Notes_And_Date	Objection__c	yes	AND(ISPICKVAL(Status__c, "Resolved"), OR(ISBLANK(Resolution_Notes__c), ISBLANK(Resolved_Date__c)))	Enter both Resolution Notes and a Resolved Date before marking the objection Resolved.
Capacity_Per_Day_Must_Be_Positive	PSK__c	yes	AND(NOT(ISBLANK(Capacity_Per_Day__c)), Capacity_Per_Day__c <= 0)	Capacity Per Day must be at least 1. To stop an office taking appointments, uncheck Is Active instead.
Pincode_Format	PSK__c	yes	AND(NOT(ISBLANK(Pincode__c)), NOT(REGEX(Pincode__c, "^[1-9][0-9]{5}\$")))	Enter a 6-digit pincode that does not start with 0.
Cannot_Grant_With_Pending_Payment	Passport_Application__c	yes	AND(ISPICKVAL(Status__c, "Granting"), NOT(ISPICKVAL(Payment_Status__c, "Paid")))	Payment must be Paid before the application can move to Granting.
Citizen_Required_On_Submit	Passport_Application__c	yes	AND(NOT(ISPICKVAL(Status__c, "Draft")), ISBLANK(Citizen__c))	Link the applicant's Citizen record before submitting this application.

RULE	OBJECT	ACTIV E	ERROR CONDITION FORMULA	MESSAGE
Clearance_Level_Only_For_Diplomatic	Passport_Application__c	yes	AND(NOT(ISBLANK(TEXT(Clearance_Level__c))), NOT(ISPICKVAL(Passport_Category__c, "Diplomatic")), NOT(ISPICKVAL(Passport_Category__c, "Official"))))	Clearance Level applies only to Diplomatic and Official passports. Clear it, or change the Passport Category.
Consent_Requires_Alert_Mobile	Passport_Application__c	yes	AND(NOT(ISPICKVAL(Stat us__c, "Draft")), Notification_Conse nt__c, ISBLANK(Mobile_For_Alerts__c))	Enter a Mobile For Alerts number, or uncheck Notification Consent.
Diplomatic_Requires_Clearance_Level	Passport_Application__c	yes	AND(NOT(ISPICKVAL(Stat us__c, "Draft")), OR(ISPICKVAL(Passport_Category__c, "Diplomatic"), ISPICKVAL(Passport_Category__c, "Official")), ISBLANK(TEXT(Clearance_Level__c)))	Select a Clearance Level before submitting a Diplomatic or Official passport application.
Lost_Damaged_Requires_Reason	Passport_Application__c	yes	AND(NOT(ISPICKVAL(Stat us__c, "Draft")), RecordType.Develop erName = "Lost_Damaged", ISBLANK(TEXT(Reason_For_Reissue__c)))	Select a Reason For Reissue (Lost or Damaged) before submitting a Lost/Damaged application.
Minor_Needs_Guardian_Conse nt	Passport_Application__c	yes	AND(Applied_For_Minor__c, NOT(Guardian_Conse nt__c), NOT(ISPICKVAL(Stat us__c, "Draft"))))	Guardian Consent is required for a minor application before submission.
Minor_Validity_Must_Be_5	Passport_Application__c	yes	AND(NOT(ISPICKVAL(Stat us__c, "Draft")), Applied_For_Minor__c, NOT(ISPICKVAL(Validity_Years__c, "5"))))	A minor's passport is valid for 5 years. Set Validity Years to 5.
Mobile_Format	Passport_Application__c	yes	AND(NOT(ISBLANK(Mobile__c)), NOT(REGEX(Mobile__c, "^([6-9])[0-9]{9}\$"))))	Enter a 10-digit Indian mobile number starting with 6, 7, 8 or 9 (no spaces, +91 or dashes).
No_Backward_Move_Once_Delivered	Passport_Application__c	yes	AND(ISPICKVAL(PRIORVALUE(Status__c), "Delivered"), NOT(ISPICKVAL(Stat us__c, "Delivered"))))	A Delivered application cannot be moved back to an earlier stage.

RULE	OBJECT	ACTIV E	ERROR CONDITION FORMULA	MESSAGE
Pincode_Format	Passport_Application__c	yes	AND(NOT(ISBLANK(Pincode__c)), NOT(REGEX(Pincode__c, "^[1-9] [0-9]{5}\$")))	Enter a 6-digit pincode that does not start with 0.
Reissue_Requires_Previous_Passport	Passport_Application__c	yes	AND(NOT(ISPICKVAL(Stat us__c, "Draft")), OR(RecordType.Develop erName = "Re_Issue", RecordType.Develop erName = "Lost_Damaged"), ISBLANK(Previous_P assport_No__c))	Enter the Previous Passport Number before submitting a Re-Issue or Lost/Damaged application.
Require_Core_Fields_On_Submit	Passport_Application__c	yes	AND(NOT(ISPICKVAL(Stat us__c,"Draft")), OR(ISBLANK(First_Name__c), ISBLANK(Last_Name__c), ISBLANK(Date_of_Bi rth__c), ISBLANK(Mobile__c) , ISBLANK(Address_Li ne1__c)))	First Name, Last Name, Date of Birth, Mobile and Address Line 1 are required before submitting.
Active_Requires_Issue_And_Expiry_Dates	Passport__c	yes	AND(ISPICKVAL(Status__c, "Active"), OR(ISBLANK(Date_of_Is sue__c), ISBLANK(Date_of_Ex piry__c)))	An Active passport needs both a Date of Issue and a Date of Expiry.
Cancelled_Requires_Reason	Passport__c	yes	AND(OR(ISPICKVAL(Status__c, "Cancelled"), ISPICKVAL(Status__c, "Lost"), ISPICKVAL(Status__c, "Surrendered")), ISBLANK(TEXT(Cance llation_Reason__c)))	Select a Cancellation Reason when the passport status is Cancelled, Lost or Surrendered.
Expiry_After_Issue	Passport__c	yes	AND(NOT(ISBLANK(Date_o f_Issue__c)), NOT(ISBLANK(Date_o f_Expiry__c)), Date_of_Expiry__c <= Date_of_Issue__c)	Date of Expiry must be after Date of Issue.
External_Id_Must_Mirror_Number	Passport__c	yes	AND(NOT(ISBLANK(Name)) , External_Id__c <> Name)	External Id must be identical to the Passport Number. Copy the passport number into External Id.
Passport_Number_Format	Passport__c	yes	AND(NOT(ISBLANK(Name)) , NOT(REGEX(Name, "^[A-PR-WY] [0-9]{7}\$")))	Enter a valid Indian passport number: one letter (A-Z excluding I, O, Q, X, Z) followed by 7 digits, e.g. K1234567.

RULE	OBJECT	ACTIV E	ERROR CONDITION FORMULA	MESSAGE
Amount_Cannot_Exc eed_Application_Fee	Payment__c	yes	AND(NOT(ISBLANK(Amount __c)), NOT(ISBLANK(Passpo rt_Application__r. Fee__c)), Passport_Applicati on__r.Fee__c > 0, Amount__c > Passport_Applicati on__r.Fee__c)	Payment Amount cannot be more than the application Fee. Check the amount, or correct the Fee on the application.
Amount_Must_Be_Positive	Payment__c	yes	AND(NOT(ISBLANK(Amount __c)), Amount__c <= 0)	Amount must be greater than zero.
Refunded_Requires _Gateway_Response	Payment__c	yes	AND(ISPICKVAL(Status__ c, "Refunded"), ISBLANK(Gateway_Re sponse__c))	Paste the gateway refund response into Gateway Response before marking the payment Refunded.
Success_Requires _Reference	Payment__c	yes	AND(ISPICKVAL(Status__ c, "Success"), ISBLANK(Payment_Re ference__c))	Enter the gateway Payment Reference before marking the payment Successful.
Adverse_Requires _Remarks	Police_Veri fication__c	yes	AND(ISPICKVAL(Status__ c, "Adverse"), ISBLANK(Remarks__c))	Enter Remarks describing the adverse finding before setting the status to Adverse.
Cleared_Requires _Report_Date	Police_Veri fication__c	yes	AND(ISPICKVAL(Status__ c, "Cleared"), ISBLANK(Report_Rec eived_Date__c))	Enter the Report Received Date when marking police verification as Cleared.
Referred_Requires _Station_And_Date	Police_Veri fication__c	yes	AND(NOT(ISPICKVAL(Stat us__c, "Not Initiated")), OR(ISBLANK(Police_Sta tion__c), ISBLANK(Referred_D ate__c)))	Enter the Police Station and the Referred Date before moving police verification past Not Initiated.
Report_Date_Not_B efore_Referral	Police_Veri fication__c	yes	AND(NOT(ISBLANK(Referr ed_Date__c)), NOT(ISBLANK(Report _Received_Date__c)), Report_Received_Da te__c < Referred_Date__c)	Report Received Date cannot be earlier than the Referred Date.
Failed_Requires_R eason	Print_Job__ c	yes	AND(ISPICKVAL(Status__ c, "Failed"), ISBLANK(Failure_Re ason__c))	Enter a Failure Reason when marking the print job as Failed.
Printed_Requires _Date	Print_Job__ c	yes	AND(ISPICKVAL(Status__ c, "Printed"), ISBLANK(Printed_Da te__c))	Enter the Printed Date when marking the print job as Printed.

RULE	OBJECT	ACTIVE	ERROR CONDITION FORMULA	MESSAGE
Printed_Requires_Quality_Check	Print_Job__c	yes	AND(ISPICKVAL(Status__c, "Printed"), NOT(Quality_Check_Passed__c))	A print job cannot be marked Printed until Quality Check Passed is checked. Use Quality Check status while the booklet is being inspected.
Reprint_Requires_Reason	Print_Job__c	yes	AND(ISPICKVAL(Status__c, "Reprint Required"), ISBLANK(TEXT(Reprint_Reason__c)))	Select a Reprint Reason when setting the status to Reprint Required.
Converted_Requires_Converted_Application	Renewal__c	yes	AND(ISPICKVAL(Outreach_Status__c, "Converted"), ISBLANK(Converted_Application__c))	Link the new application in Converted Application before setting Outreach Status to Converted.
Critical_Requires_Description	Risk_Flag__c	yes	AND(ISPICKVAL(Severity__c, "Critical"), ISBLANK(Description__c))	Enter a Description explaining the critical risk.
Reviewed_Requires_Reviewer	Risk_Flag__c	yes	AND(OR(ISPICKVAL(Status__c, "Confirmed"), ISPICKVAL(Status__c, "Dismissed")), ISBLANK(Reviewed_By__c))	Set Reviewed By before confirming or dismissing a risk flag.
Capacity_Cannot_Drop_Below_Bookings	Slot__c	yes	AND(NOT(ISBLANK(Capacity__c)), Capacity__c < Booked_Count__c)	Capacity cannot be lower than the number of appointments already booked. Cancel or move appointments first.
Capacity_Must_Be_Positive	Slot__c	yes	AND(NOT(ISBLANK(Capacity__c)), Capacity__c <= 0)	Capacity must be at least 1. To close a slot, uncheck Is Available instead of setting capacity to zero.
End_Time_After_Start_Time	Slot__c	yes	AND(NOT(ISBLANK(Start_Time__c)), NOT(ISBLANK(End_Time__c)), End_Time__c <= Start_Time__c)	End Time must be later than Start Time.
Slot_Date_Not_In_Past	Slot__c	yes	AND(ISNEW(), NOT(ISBLANK(Slot_Date__c)), Slot_Date__c < TODAY())	Slot Date cannot be in the past. Choose today or a future date.

C. Record type picklist subsetting

PASSPORT_APPLICATION__C

RECORD TYPE	BOOKLET_PAGES__C	CLEARANCE_LEVEL__C	ECR_STATUS__C	PASSPORT_CATEGORY__C	POLICE_VERIFICATION_TYPE__C	VALIDITY_YEARS__C	REASON_FOR_REISSUE__C
Diplomatic / Official	60	Ambassador, Consular, Delegation, Govt Deputation, Minister	ECNR	Diplomatic, Official	No PV	10, 5	—
Fresh	36, 60	—	ECNR, ECR	Ordinary	Post-PV, Pre-PV	10, 5	—

RECORD TYPE	BOOKLET_PAGES__C	CLEARANCE_LEVEL__C	ECR_STATUS__C	PASSPORT_CATEGORY__C	POLICE_VERIFICATION_TYPE__C	VALIDITY_YEARS__C	REASON_FOR_REISSUE__C
Lost / Damaged	36, 60	—	ECNR, ECR	Ordinary	Pre-PV	10, 5	Damaged, Lost
Minor	36	—	ECNR	Ordinary	No PV	5	—
Re-issue	36, 60	—	ECNR, ECR	Ordinary	No PV, Post-PV	10, 5	Change of Details, Expiry, Pages Exhausted
Tatkal	36, 60	—	ECNR, ECR	Ordinary	Post-PV	10, 5	Damaged, Expiry, Lost

Shared vocabularies (State__c , Gender__c , Marital_Status__c , Payment_Mode__c , Payment_Status__c , Status__c) are the same across all record types on this object and are omitted from the table for width; see the Global Value Sets.

PASSPORT__C

RECORD TYPE	CANCELLATION_REASON__C
Diplomatic	Reissued, Lost, Damaged, Surrendered, Revoked, Data%20Error
Official	Reissued, Lost, Damaged, Surrendered, Revoked, Data%20Error
Ordinary	Reissued, Lost, Damaged, Surrendered, Revoked, Data%20Error

Shared vocabularies (State__c , Gender__c , Marital_Status__c , Payment_Mode__c , Payment_Status__c , Status__c) are the same across all record types on this object and are omitted from the table for width; see the Global Value Sets.

D. Fee matrix and SLA configuration records

FEE_MATRIX__MDT — 10 RECORDS

Diplomatic_Official_60_10 · Fresh_36_10 · Fresh_60_10 · Lost_Damaged_36_10 · Lost_Damaged_60_10 · Minor_36_5 · Re_Issue_36_10 · Re_Issue_60_10 · Tatkal_36_10 · Tatkal_60_10

SLA_CONFIG__MDT — 16 RECORDS

Dispatch · Dispatch_Tatkal · Document_Verification · Document_Verification_Tatkal · Granting · Granting_Tatkal · Paid · Paid_Tatkal · Payment_Pending · Payment_Pending_Tatkal · Police_Verification · Police_Verification_Tatkal · Printing · Printing_Tatkal · Submitted · Submitted_Tatkal

E. Apex apiVersion inventory

Project sourceApiVersion is 67.0. 6 PSK class(es) differ — see action item P2-05.

CLASS	APIVERSION
PSK_ApplicationActionsController	61.0
PSK_ApplicationActionsControllerTest	61.0
PSK_ApplicationService	67.0
PSK_ApplicationServiceTest	67.0
PSK_ApplicationSidebarController	61.0
PSK_ApplicationSidebarControllerTest	61.0
PSK_ApplicationTimelineController	67.0
PSK_ApplicationTimelineControllerTest	67.0
PSK_AutomationControl	67.0
PSK_AutomationControlTest	67.0
PSK_Citizen360Controller	67.0
PSK_Citizen360ControllerTest	67.0
PSK_Constants	67.0
PSK_ConstantsTest	67.0

CLASS	APIVERSION
PSK_DemoDataGenerator	67.0
PSK_DemoDataGeneratorTest	67.0
PSK_DocumentChecklistController	67.0
PSK_DocumentChecklistControllerTest	67.0
PSK_FeeService	67.0
PSK_FeeServiceTest	67.0
PSK_HomeController	61.0
PSK_HomeControllerTest	61.0
PSK_MyWorkController	67.0
PSK_MyWorkControllerTest	67.0
PSK_OfficeCapacityController	67.0
PSK_OfficeCapacityControllerTest	67.0
PSK_PassportController	67.0
PSK_PassportControllerTest	67.0
PSK_PassportIssuanceController	67.0
PSK_PassportIssuanceControllerTest	67.0
PSK_SlotBookingController	67.0
PSK_SlotBookingControllerTest	67.0
PSK_TestDataFactory	67.0