

# dog\_app

May 26, 2020

## 1 Data Scientist Nanodegree

### 1.1 Convolutional Neural Networks

### 1.2 Project: Write an Algorithm for a Dog Identification App

This notebook walks you through one of the most popular Udacity projects across machine learning and artificial intelligence nanodegree programs. The goal is to classify images of dogs according to their breed.

If you are looking for a more guided capstone project related to deep learning and convolutional neural networks, this might be just it. Notice that even if you follow the notebook to creating your classifier, you must still create a blog post or deploy an application to fulfill the requirements of the capstone project.

Also notice, you may be able to use only parts of this notebook (for example certain coding portions or the data) without completing all parts and still meet all requirements of the capstone project.

---

In this notebook, some template code has already been provided for you, and you will need to implement additional functionality to successfully complete this project. You will not need to modify the included code beyond what is requested. Sections that begin with '**(IMPLEMENTATION)**' in the header indicate that the following block of code will require additional functionality which you must provide. Instructions will be provided for each section, and the specifics of the implementation are marked in the code block with a 'TODO' statement. Please be sure to read the instructions carefully!

In addition to implementing code, there will be questions that you must answer which relate to the project and your implementation. Each section where you will answer a question is preceded by a '**Question X**' header. Carefully read each question and provide thorough answers in the following text boxes that begin with '**Answer:**'. Your project submission will be evaluated based on your answers to each of the questions and the implementation you provide.

**Note:** Code and Markdown cells can be executed using the **Shift + Enter** keyboard shortcut. Markdown cells can be edited by double-clicking the cell to enter edit mode.

The rubric contains *optional* "Stand Out Suggestions" for enhancing the project beyond the minimum requirements. If you decide to pursue the "Stand Out Suggestions", you should include the code in this IPython notebook.

```
## Step 0: Import Datasets
```

### 1.2.1 Import Dog Dataset

In the code cell below, we import a dataset of dog images. We populate a few variables through the use of the `load_files` function from the scikit-learn library: - `train_files`, `valid_files`, `test_files` - numpy arrays containing file paths to images - `train_targets`, `valid_targets`, `test_targets` - numpy arrays containing onehot-encoded classification labels - `dog_names` - list of string-valued dog breed names for translating labels

```
In [1]: from sklearn.datasets import load_files
        from keras.utils import np_utils
        import numpy as np
        from glob import glob

        # define function to load train, test, and validation datasets
        def load_dataset(path):
            data = load_files(path)
            dog_files = np.array(data['filenames'])
            dog_targets = np_utils.to_categorical(np.array(data['target']), 133)
            return dog_files, dog_targets

        # load train, test, and validation datasets
        train_files, train_targets = load_dataset('../../data/dog_images/train')
        valid_files, valid_targets = load_dataset('../../data/dog_images/valid')
        test_files, test_targets = load_dataset('../../data/dog_images/test')

        # load list of dog names
        dog_names = [item[20:-1] for item in sorted(glob("../../data/dog_images/train/*/*"))]

        # print statistics about the dataset
        print('There are %d total dog categories.' % len(dog_names))
        print('There are %s total dog images.\n' % len(np.hstack([train_files, valid_files, test_files])))
        print('There are %d training dog images.' % len(train_files))
        print('There are %d validation dog images.' % len(valid_files))
        print('There are %d test dog images.' % len(test_files))
```

Using TensorFlow backend.

There are 133 total dog categories.

There are 8351 total dog images.

There are 6680 training dog images.

There are 835 validation dog images.

There are 836 test dog images.

### 1.2.2 Import Human Dataset

In the code cell below, we import a dataset of human images, where the file paths are stored in the numpy array `human_files`.

```
In [2]: import random
        random.seed(8675309)

        # load filenames in shuffled human dataset
        human_files = np.array(glob("../../data/lfw/*/"))
        random.shuffle(human_files)

        # print statistics about the dataset
        print('There are %d total human images.' % len(human_files))
```

There are 13233 total human images.

---

### ## Step 1: Detect Humans

We use OpenCV's implementation of [Haar feature-based cascade classifiers](#) to detect human faces in images. OpenCV provides many pre-trained face detectors, stored as XML files on [github](#). We have downloaded one of these detectors and stored it in the haarcascades directory.

In the next code cell, we demonstrate how to use this detector to find human faces in a sample image.

```
In [3]: import cv2
        import matplotlib.pyplot as plt
        %matplotlib inline

        # extract pre-trained face detector
        face_cascade = cv2.CascadeClassifier('haarcascades/haarcascade_frontalface_alt.xml')

        # load color (BGR) image
        img = cv2.imread(human_files[5])
        # convert BGR image to grayscale
        gray = cv2.cvtColor(img, cv2.COLOR_BGR2GRAY)

        # find faces in image
        faces = face_cascade.detectMultiScale(gray)

        # print number of faces detected in the image
        print('Number of faces detected:', len(faces))


        # get bounding box for each detected face
        for (x,y,w,h) in faces:
            # add bounding box to color image
            cv2.rectangle(img, (x,y), (x+w,y+h), (255,0,0), 2)

        # convert BGR image to RGB for plotting
        cv_rgb = cv2.cvtColor(img, cv2.COLOR_BGR2RGB)

        # display the image, along with bounding box
```

```
plt.imshow(cv_rgb)
plt.show()
```

Number of faces detected: 1

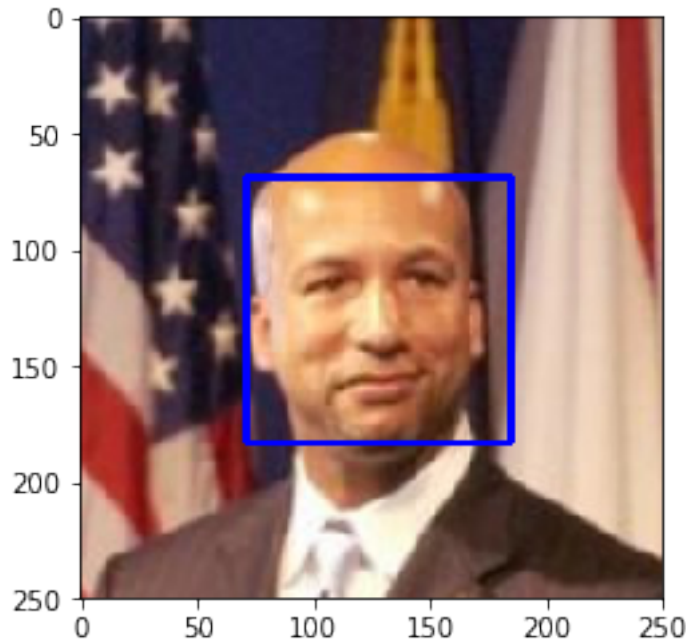

Before using any of the face detectors, it is standard procedure to convert the images to grayscale. The `detectMultiScale` function executes the classifier stored in `face_cascade` and takes the grayscale image as a parameter.

In the above code, `faces` is a numpy array of detected faces, where each row corresponds to a detected face. Each detected face is a 1D array with four entries that specifies the bounding box of the detected face. The first two entries in the array (extracted in the above code as `x` and `y`) specify the horizontal and vertical positions of the top left corner of the bounding box. The last two entries in the array (extracted here as `w` and `h`) specify the width and height of the box.

### 1.2.3 Write a Human Face Detector

We can use this procedure to write a function that returns `True` if a human face is detected in an image and `False` otherwise. This function, aptly named `face_detector`, takes a string-valued file path to an image as input and appears in the code block below.

```
In [4]: # returns "True" if face is detected in image stored at img_path
def face_detector(img_path):
    img = cv2.imread(img_path)
    gray = cv2.cvtColor(img, cv2.COLOR_BGR2GRAY)
    faces = face_cascade.detectMultiScale(gray)
    return len(faces) > 0
```

### 1.2.4 (IMPLEMENTATION) Assess the Human Face Detector

**Question 1:** Use the code cell below to test the performance of the `face_detector` function.

- What percentage of the first 100 images in `human_files` have a detected human face?

- What percentage of the first 100 images in `dog_files` have a detected human face?

Ideally, we would like 100% of human images with a detected face and 0% of dog images with a detected face. You will see that our algorithm falls short of this goal, but still gives acceptable performance. We extract the file paths for the first 100 images from each of the datasets and store them in the numpy arrays `human_files_short` and `dog_files_short`.

**Answer:**

- The percentage of the first 100 images in `human_files` have a detected human faces : 100.0 %
- The percentage of the first 100 images in `dog_files` have a detected human face : 11.0 %

```
In [5]: human_files_short = human_files[:100]
        dog_files_short = train_files[:100]
        # Do NOT modify the code above this line.

        human_faces = 0
        dog_faces = 0

        for imgPath in human_files_short:
            if (face_detector(imgPath)):
                human_faces += 1

        for imgPath in dog_files_short:
            if (face_detector(imgPath)):
                dog_faces +=1

        print("Human faces detected % is : {} %".format((human_faces/len(human_files_short))*100))
        print("Dog faces detected % is : {} %".format((dog_faces/len(dog_files_short))*100))

Human faces detected % is : 100.0 %
Dog faces detected % is : 11.0 %
```

**Question 2:** This algorithmic choice necessitates that we communicate to the user that we accept human images only when they provide a clear view of a face (otherwise, we risk having unnecessarily frustrated users!). In your opinion, is this a reasonable expectation to pose on the user? If not, can you think of a way to detect humans in images that does not necessitate an image with a clearly presented face?

**Answer:**

To detect the objects in the images we have to use a machine learning-based approach with the help of Haar cascade. It helps us to detect the desired objects into the given image. In object detection, we have both positive(with desired faces) and negative images (without desired faces). In our case, the given data have two different objects like dogs and humans. we need to train our model to classify the particular object. The main approach is, if the face is detectable it's human otherwise some other object.