

15.Design a C program to organize the file using two level directory structure.

AIM:

To design a C program to organize the file using two level directory structure

CODE:

```
#include <stdio.h>
```

```
#include <stdlib.h>
```

```
#include <string.h>
```

```
int main()
```

```
{
```

```
    char mainDirectory[] = ".";
```

```
    char subDirectory[] = "os";
```

```
    char fileName[] = "example.txt";
```

```
    char mainDirPath[200];
```

```
    char filePath[200];
```

```
    char command[250];
```

```
    snprintf(mainDirPath, sizeof(mainDirPath),  
             "%s/%s", mainDirectory, subDirectory);
```

```
    snprintf(command, sizeof(command), "mkdir -p %s", mainDirPath);  
    system(command);
```

```
    snprintf(filePath, sizeof(filePath),  
             "%s/%s", mainDirPath, fileName);
```

```
FILE *file = fopen(filePath, "w");

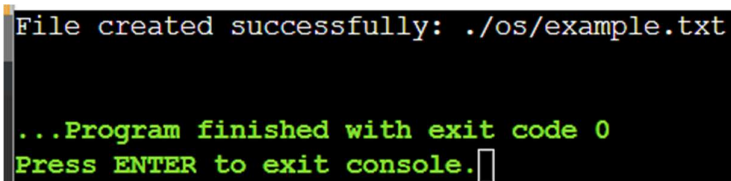
if (file == NULL)
{
    printf("Error creating file.\n");
    return 1;
}

fprintf(file, "This is an example file content.");
fclose(file);

printf("File created successfully: %s\n", filePath);

return 0;
}
```

OUTPUT:

A screenshot of a terminal window with a black background. The first line of output is "File created successfully: ./os/example.txt" in a light blue/cyan monospace font. The second line is "...Program finished with exit code 0" in a green monospace font. The third line is "Press ENTER to exit console." in a green monospace font, followed by a small white cursor icon.

```
File created successfully: ./os/example.txt

...Program finished with exit code 0
Press ENTER to exit console.
```