

11. Illustrate the concept of multithreading using a C program

AIM :

To implement the concept of multithreading using C program

CODE:

```
#include <stdio.h>
```

```
#include <pthread.h>
```

```
void* threadFunction(void* arg)
```

```
{
```

```
    char *message = (char *)arg;
```

```
    printf("%s\n", message);
```

```
    return NULL;
```

```
}
```

```
int main()
```

```
{
```

```
    pthread_t thread1, thread2;
```

```
    char *message1 = "Hello from Thread 1!";
```

```
    char *message2 = "Hello from Thread 2!";
```

```
    // Create threads
```

```
    pthread_create(&thread1, NULL, threadFunction, (void *)message1);
```

```
    pthread_create(&thread2, NULL, threadFunction, (void *)message2);
```

```
    // Wait for threads to complete
```

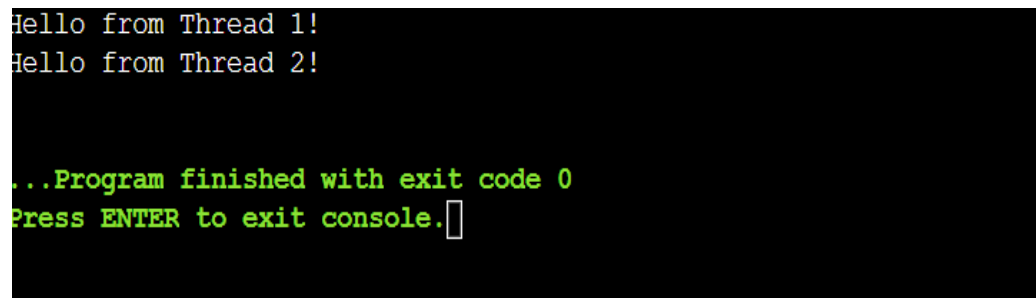
```
    pthread_join(thread1, NULL);
```

```
pthread_join(thread2, NULL);
```

```
return 0;
```

```
}
```

OUTPUT:

A screenshot of a terminal window with a black background. The text is displayed in a monospaced font. The first two lines are "Hello from Thread 1!" and "Hello from Thread 2!". After a blank line, the text "...Program finished with exit code 0" is shown in green. The final line is "Press ENTER to exit console." followed by a small white cursor box.

```
Hello from Thread 1!  
Hello from Thread 2!  
  
...Program finished with exit code 0  
Press ENTER to exit console.█
```