- Redis Tutorial Last Page
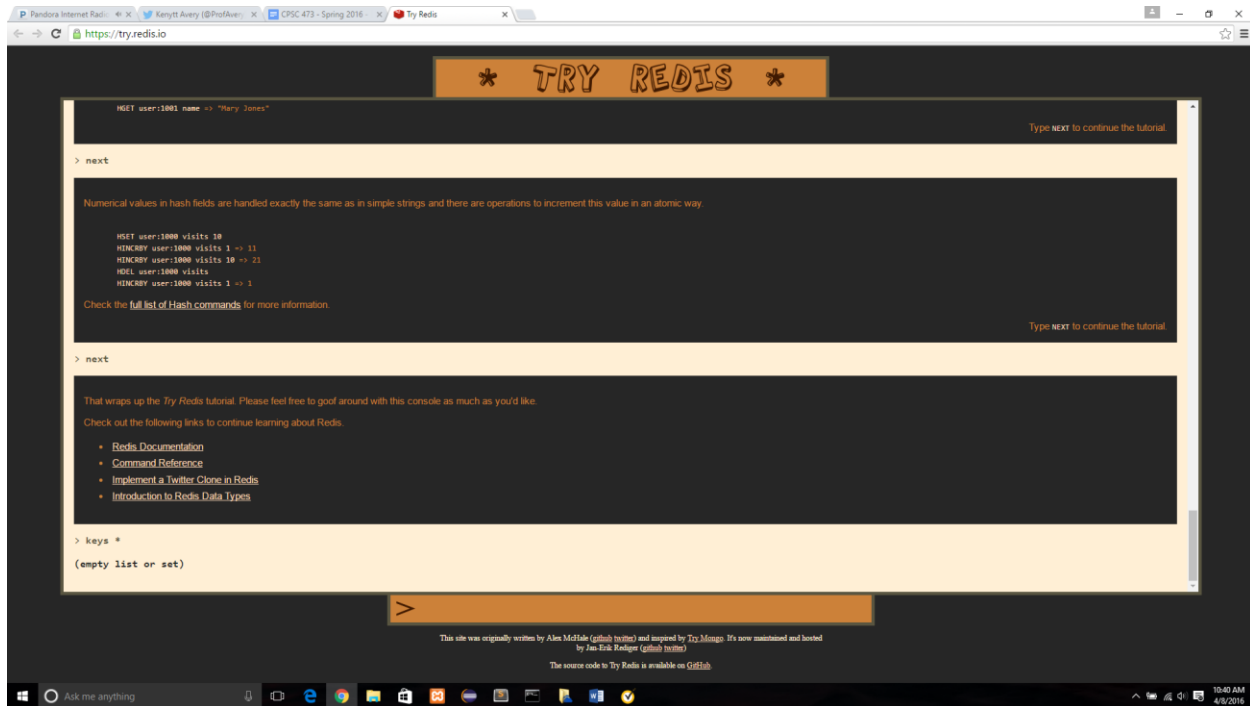


1. cURL to test the API.
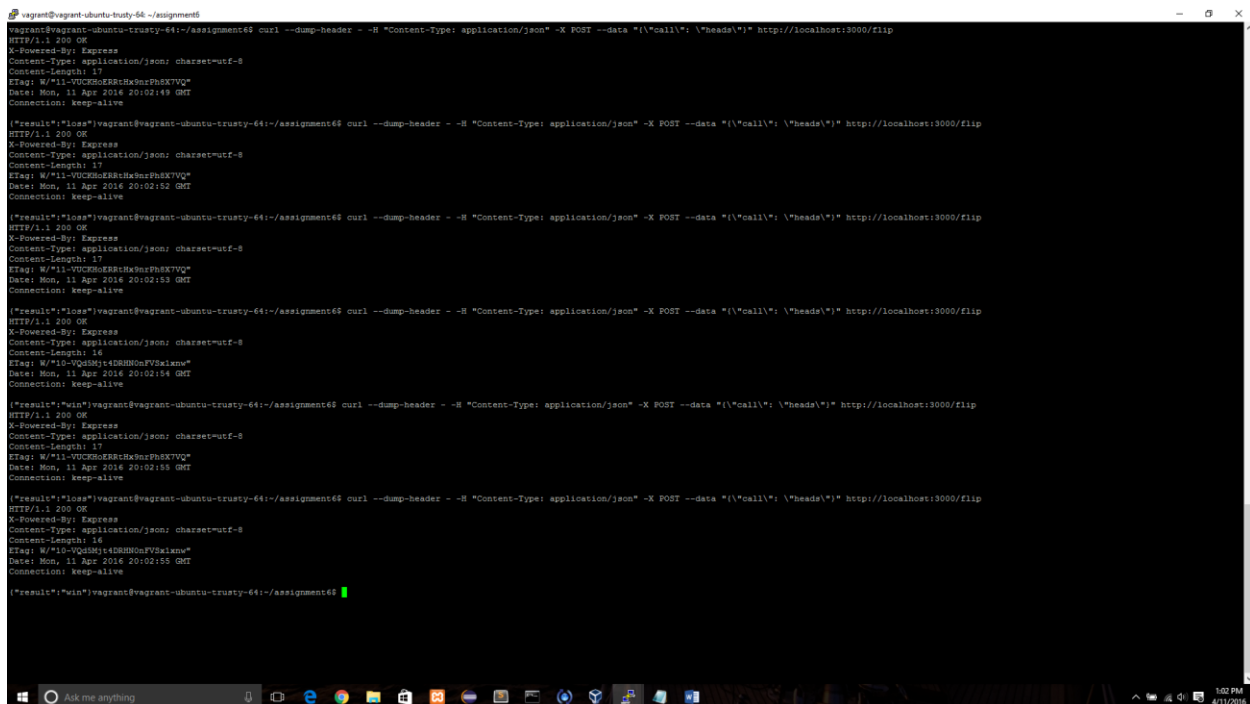
## 2. Statistic of wins and losses



{"wins":"2","losses":"4"}
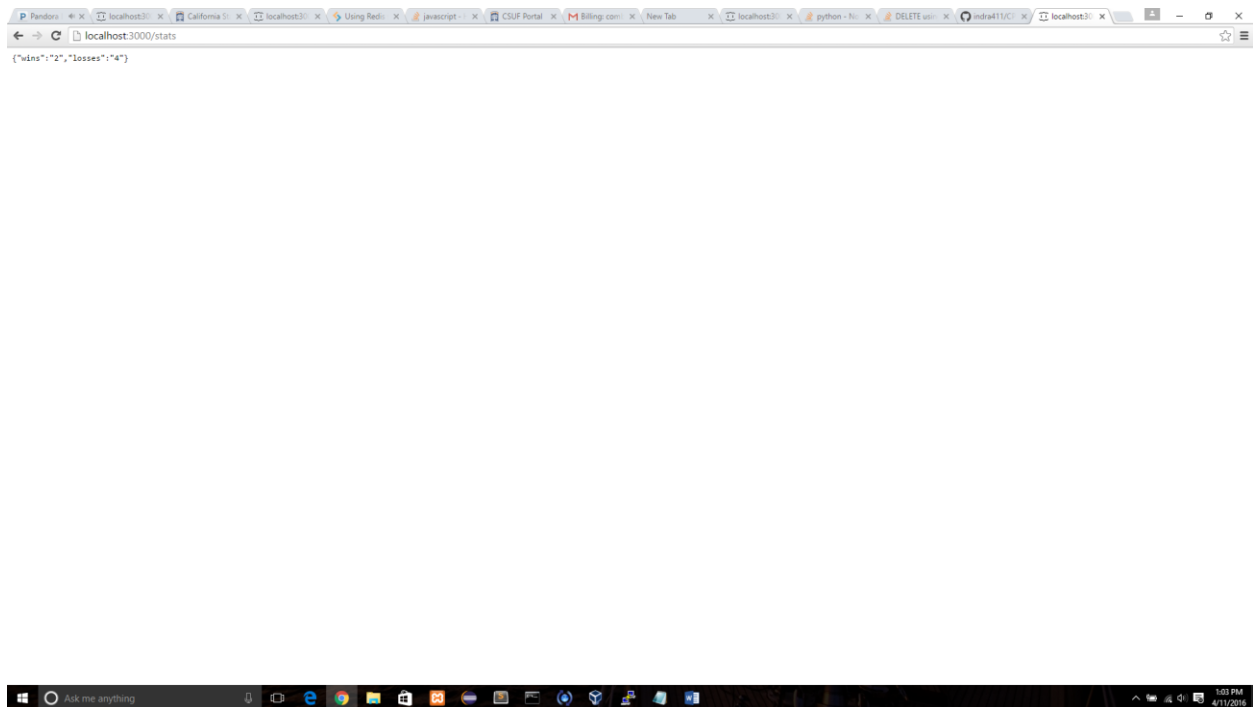
## 3. Redis command to check wins and losses in the database.

```
127.0.0.1:6379> get wins
"2"
127.0.0.1:6379> get losses
"4"
127.0.0.1:6379>
```

4. Sending DELETE "stats" to reset the database.



```
vagrant@vagrant-ubuntu-trusty-64:~/assignment6$ curl -X DELETE "http://localhost:3000/stats"
```

5. Wins and losses reset to 0.

{"wins":"0","losses":"0"}