

WARRANT

No warrant, no action.

Authority attached to the action. Proof attached to the authority.

The one line

Every action an AI agent takes carries a signed, scoped warrant — or it does not run.

Why now

Enterprises ship agents faster than they can govern them. Visibility is solved; authority is not.

THE PROBLEM

3:47

- **03:47** — support-copilot asks to export customer email and PESEL: 12 000 rows.
- **09:15** — the team finds out, from a log they cannot trust and cannot stop.
- The hidden fear is not the breach. It is the **silence after** — sitting in front of a regulator not knowing what your own agent did three minutes ago.
- Not knowing is worse than knowing.

Visibility is not authority

Everyone has monitoring. Almost nobody can **fire** an agent.

A monitor

tells you what already happened. It does not grant authority, and it cannot revoke it. You can watch an agent work and still be unable to stop it.


What is missing

Who authorised this action — and where is the proof?
Having an identity is not the same as being authorised to act.

Four load-bearing bricks

- **Identity, not a key.** Every agent gets a scoped, ephemeral identity — no shared credentials for the whole fleet.
- **Pre-execution enforcement.** allow / deny / require-human is decided on the *parameters of the call*, before the call executes.
- **Kill switch.** Monitoring is not containing. /revoke pulls the warrant and stops the chain mid-flight.
- **Receipt.** Append-only, hash-chained: who, what, why, who authorised, when. The proof layer.

The proxy sits in front of every tool call

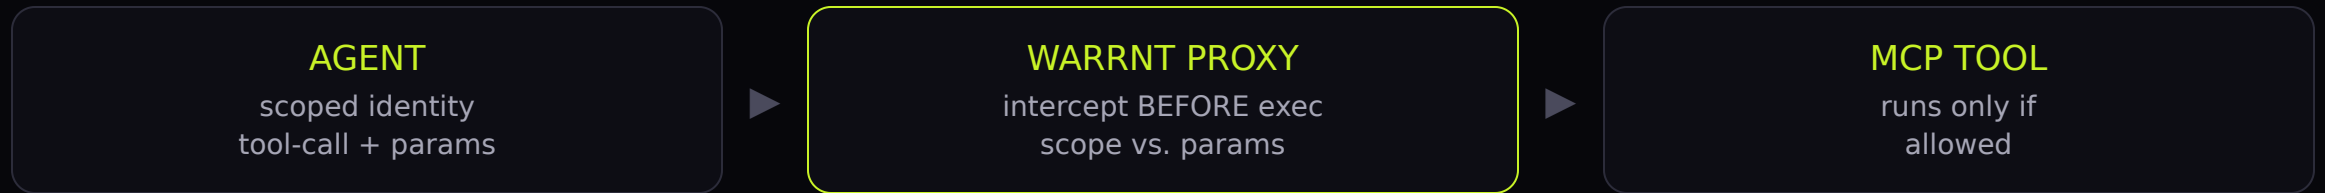

Warrant issuer	scope · TTL · signature of whoever authorised it
Policy engine	per-parameter allow / deny / require-human
Receipt log	hash-chained, append-only; a rejection is written <i>before execution</i> , so the proof exists whether the action happened or not
Console	one screen, four tiles, GET /api/state

The 3:47 moment, end to end

- Three agents run under **three signed warrants**.
- `crm.bulk_export {table:"customers", fields:["email","pesel"], rows:12000}` — the warrant says *read-only, no PII fields*.
- The call is **DENIED before execution**. Zero rows leave the perimeter.
- The denial is written to the hash-chained log, with the authorising order.
- One `/revoke` pulls warrant **W-4419** — the agent halts in **0.8 s**.

Authorised. Recorded. Revocable.

Running, not promised

Working & verified

Console: zero dependencies, no scroll, four tiles — verified in headless Chromium at 1920×1080, 1440×900, 1366×768, 2560×1440.

Two data paths: live GET /api/state every 1.5 s, automatic fallback to the built-in demo feed replaying 3:47.

Demo video: 1920×1080, 25 fps, 40.0 s, rendered deterministically.

Designed, not yet wired

The MCP proxy itself: interception before execution, per-parameter policy, signed warrants with TTL, the append-only receipt store, /revoke.

Until it exists the console replays the demo feed — but the screen already renders exactly the JSON the proxy will emit, so wiring is a matter of serving that contract.

We would rather show a small thing that truly runs than a big thing that only looks finished.

THE SCREEN

One screen, four tiles, no scroll

WARRNT

AI CONTROL LAYER

No warrant, no action — every agent action carries an order, or it does not happen.

DEMO FEED

14:03:30

REVOKED

01 AGENTS

2 running · 1 halted

AGENT	STATE	WARRANT	LAST ACTION	TTL
fin-reconcile Finance	ALLOWED	W-4417	payments.read · allowed	14:53
support-copilot Support	HALTED	W-4419	chain stopped · warrant revoked	stopped
deploy-agent Platform	ALLOWED	W-4421	infra.plan · allowed	02:23

02 WARRANTS

scoped · signed · expiring · 2 live

ORDER	AGENT	SCOPE ON PARAMETERS	STATE	TTL
W-4417	fin-reconcile	payments.read · ≤ 50,000 PLN · read-only	ALLOWED	14:53
W-4419	support-copilot	crm.read · export=false · no PII fields	REVOKED	—
W-4421	deploy-agent	infra.plan · deploy ⇒ require-human	ALLOWED	02:23

03 KILL SWITCH

revoke the order · stop mid-execution

TARGET AGENT

fin-reconcile · W-4417

0.8

TIME TO STOP

1

REVOKED

/REVOKE — STOP AGENT

Press once to arm, press again to revoke the warrant and halt the chain.

04 PROOF — RECEIPTS

append-only · hash-chained · 4 records

14:03:30

/revoke support-copilot → order W-4419 pulled, chain stopped

order W-4419 · latency 0.8s · #860d7aef

REVOKED

14:03:28

crm.bulk_export {table:"customers", fields:["email","pesel"], rows:12000} — scope violation

order W-4419 · DENY before execution · 0 rows left the perimeter · #8850e15b

DENIED

14:03:23

crm.read support-copilot → ticket queue

order W-4419 · policy: read-only · #e32185d2

ALLOWED

14:03:23

payments.read fin-reconcile → 1,240 rows reconciled

order W-4417 · policy: scope ok · #d41e51d1

ALLOWED

WHERE IT GOES NEXT

From demo feed to live enforcement

- Wire the MCP proxy and serve /api/state — the console goes from demo to live.
- Persist the receipt chain and expose verification: recompute the hash chain.
- Real per-agent identity issuance, with warrant scope tied to the identity.

Enterprises will not stop deploying agents.
They will need to stop ours.