


```
/*Create this new database*/
```

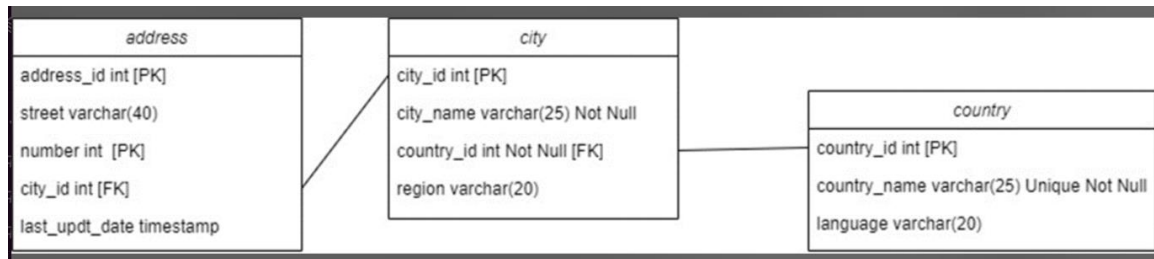

```
create table country(
country_id int
primary key,
country_name varchar(25) unique
not null,
language varchar(20)
);
select * from country;
```

```
create table city(
city_id int
primary key,
city_name varchar(25)
not null,
country_id int not null,
region varchar(20),
foreign key (country_id) references country(country_id)
);
select * from city;
```

```
create table
address(
address_id int,
street varchar(40),
number
int,
city_id int,
last_updt_date timestamp,
foreign key (city_id) references city(city_id)
);
select * from
address;
```

```
alter table address
add constraint pk_address primary key (address_id);
```

```
alter table address
add constraint fk_address_cityId foreign key (city_id) references
city(city_id);
```

```
select * from address;
```