


```
/*Create this new database*/
```

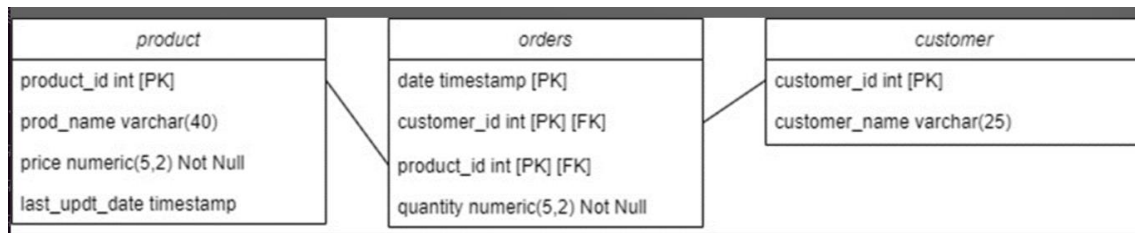

```
create table country(
    country_id int primary key,
    country_name varchar(25) unique not null,
    language varchar(20)
);
```

```
select * from country;
```

```
create table city(
    city_id int primary key,
    city_name varchar(25) not null,
    country_id int not null,
    region varchar(20),
    foreign key (country_id) references country(country_id)
);
```

```
select * from city;
```

```
create table address(
    address_id int,
    street varchar(40),
    number int,
    city_id int,
    last_updt_date timestamp,
    foreign key (city_id) references city(city_id)
);
```

```
select * from address;
```

```
alter table address
add constraint pk_address primary key (address_id);
```

```
alter table address
add constraint fk_address_cityId foreign key (city_id) references
city(city_id);
```

```
select * from address;
```