



CrypTool 2.0

Developer Manual

S. Przybylski, A. Wacker, M Wander and F Enkler
{przybylski|wacker|wander|enkler}@cryptool.org

Version: 0.1
January 3, 2010

Contents

1	Developer Guidelines	4
1.1	Pre-requisites	4
1.2	Accessing Subversion Control (SVN)	4
1.3	Compiling the sources	5
2	Plugin Implementation	7
2.1	New project	7
2.2	Interface selection	8
2.3	Create the classes for the algorithm and for its settings	8
2.3.1	Create the class for the algorithm (Caesar)	8
2.3.2	Create the class for the settings (CaesarSettings)	10
2.3.3	Add namespace for the class Caesar and the place from where to inherit	10
2.3.4	Add the interface functions for the class Caesar	15
2.3.5	Add namespace and interfaces for the class CaesarSettings	17
2.3.6	Add controls for the class CaesarSettings (if needed)	18
2.4	Select and add an image as icon for the class Caesar	27
2.5	Set the attributes for the class Caesar	27
2.6	Set the private variables for the settings in the class Caesar	32
2.7	Define the code of the class Caesar to fit the interface	34
2.8	Complete the actual code for the class Caesar	39
2.9	Perform a clean dispose	42
2.10	Finish implementation	43
2.11	Sign the created plugin	43
2.12	Import the plugin to Cryptool and test it	43
2.13	Source code and source template	45
2.14	Provide a workflow file of your plugin	46



Abstract. This document is intended for plugin developers.



1 Developer Guidelines

CrypTool 2.0 uses state-of-the-art technologies like .NET 3.5 and WPF. In order to make your first steps towards developing something in the context of this project a few things need to be considered. In order to not get stuck, please follow the instructions on this page. If you encounter a problem/error, which is not described here, please let us know, so we can add this information to this guide.

In the following we describe all steps necessary in order to compile CrypTool 2.0 on your own. This is always the first thing you need to do before you go on developing own plugins and extensions. The basic steps are

- Getting all pre-requisites and installing them
- Accessing and downloading the source code with SVN
- Compiling the source-code for the first time

1.1 Pre-requisites

Since CrypTool 2.0 is based on Microsoft .NET 3.5, you first need a Microsoft Windows environment. (Right now no plans exist for porting this project to mono and therefore other platforms.) We successfully tested with **Windows XP** and **Windows Vista**.

Since you're reading the developer guidelines, you probably want to develop something. Hence you need a developer environment. In order to compile our sources you need **Microsoft Visual Studio 2008 Professional**. Please make sure you always install the latest service packs for Visual Studio too. Unfortunately it does not work (smoothly) with the freely available Visual Studio Express (C#) versions. This is due to the fact, that CrypWin uses a commercial component, and is therefore distributed only as binary. The C# Express version unfortunately cannot handle a binary as a start project, hence debugging becomes cumbersome.

Usually the installation of Visual Studio also installs the .NET framework. In order to run/compile our source code you need (at the time of this writing) at least **Microsoft .NET 3.5 with Service Pack 1 (SP1)**. You can get this freely from Microsofts [webpage](#).

After the last step, your development environment should be ready for our source-code. Hence, now you need a way of accessing and downloading the entire sources. In the CrypTool 2.0 project we use SVN (subversion control) for version control, hence you need an **SVN client** of your choice, e.g. **TortoiseSVN** or the **svn commandline from cygwin**. If you never worked with SVN before, we suggest to download and install [TortoiseSVN](#), since it offers a nice windows explorer integration of SVN and any windows user should feel right away at home.

1.2 Accessing Subversion Control (SVN)

This section describes how to access our SVN and the basic settings you need.

SVN URL

Our code repository is accessible under the following url:

<https://www.cryptool.org/svn/CrypTool2/>

If you are a guest and just want to download our source code you can use "anonymous" as the username and an empty password. If you are a registered developer, just use your provided username and password (which is the same as for this wiki).

Accessing the SVN with TortoiseSVN

As already mentioned, in order to use the SVN repository one of the best options is [TortoiseSVN](#). Please install TortoiseSVN (unfortunately it will ask you to reboot, which you need to do) and then create somewhere on your computer a directory (for instance "Cryptool2") for storing the local working files. Right click on this directory and select "SVN Checkout" from the context menu. In the new appearing window you must enter the URL of the repository as given above. The "Checkout directory" should be filled in correctly. After that, just hit ok, accept the certificate (if necessary) and enter your user credentials or "anonymous" for guests. Also mark the checkbox for saving your credentials otherwise you will be asked about them for every single file. Then hit ok, and now the whole CrypTool2 repository should be checked out into the given directory.

Later on, if you just want to update (if there where changes in the repository) you can do this with right click on any directory within the working files and choose "SVN Update" from the context menu. If you changed a file you should choose "SVN Commit" from the context menu in order to upload your changes. Please always provide *meaningfull descriptions* of your updates.

A TortoiseSVN Tutorial can be found [here](#).

Ignore Patterns

In order to checkin only clean code, please use the following **ignore patterns**: *"obj bin debug release *.pdb *.suo *.exe *.dll"*

This basically means that you should never check-in compiled and user-generated files. As an example please do not check-in the entire bin/ and obj/ directories which Visual Studio generates. If you want to submit a component (binary file) despite the ignore patterns you can still add *.dll files by using the context menu and add that file explicitly – but please be absolutely sure, that you know what you are doing.

1.3 Compiling the sources

At this point you should have checked out the entire CrypTool repository. Then compiling is pretty easy, you just go to the directory *trunk/* and open the **CrypTool 2.0.sln** Visual Studio solution. Now Visual Studio should open with all working plugins and all components nicely arranged. In case you started Visual Studio now for the very first time, you must choose a certain settings – just select either "most common" or "C#" – you can change this at any time later. In the right hand you get the project explorer, where you see all the subprojects included in the solution. You have to look for the project **CrypWin.exe** there. When you found it, you need to right-click it and select **"Set as startup-project"** from the context menu. After you have done this, just go to the menu *Build* and select *Build solution* (clearly you can also use the hotkeys if you memorized them). Then go to *Debug* and click *Start debugging* – now CrypTool 2.0 should start for the first time with your own compiled code – clearly you did not change yet anything, however, you have now an own build of all components (with the exception of CrypWin and AnotherEditor, since they are available only as binary). In case it does not compile or start, please consult our [F.A.Q.](#) and let us know if you found a bug.

As a core-developer, hence somebody who can also compile CryWin and AnotherEditor, you should use the **CrypTool 2.0.sln** solution from the *trunk/CoreDeveloper/* directory (this directory is **not** visible to you if you are not a core developer). As a core developer you should know, that when

compiling you **change** the CryWin.exe which is visible to everybody else. Hence, when doing a checkin, please make sure you *really* want to checkin a new binary.



2 Plugin Implementation

In this chapter we provide step-by-step instructions for implementing your own CrypTool 2.0 plugin. The given instructions refer mostly to the usage of MS Visual C# 2008 Express Edition, hence before starting you should have installed your copy of Microsoft Visual Studio 2008 or Microsoft Visual C# 2008 Express Edition.

2.1 New project

Open Visual Studio 2008 or C# 2008 Express Edition and create a new project:

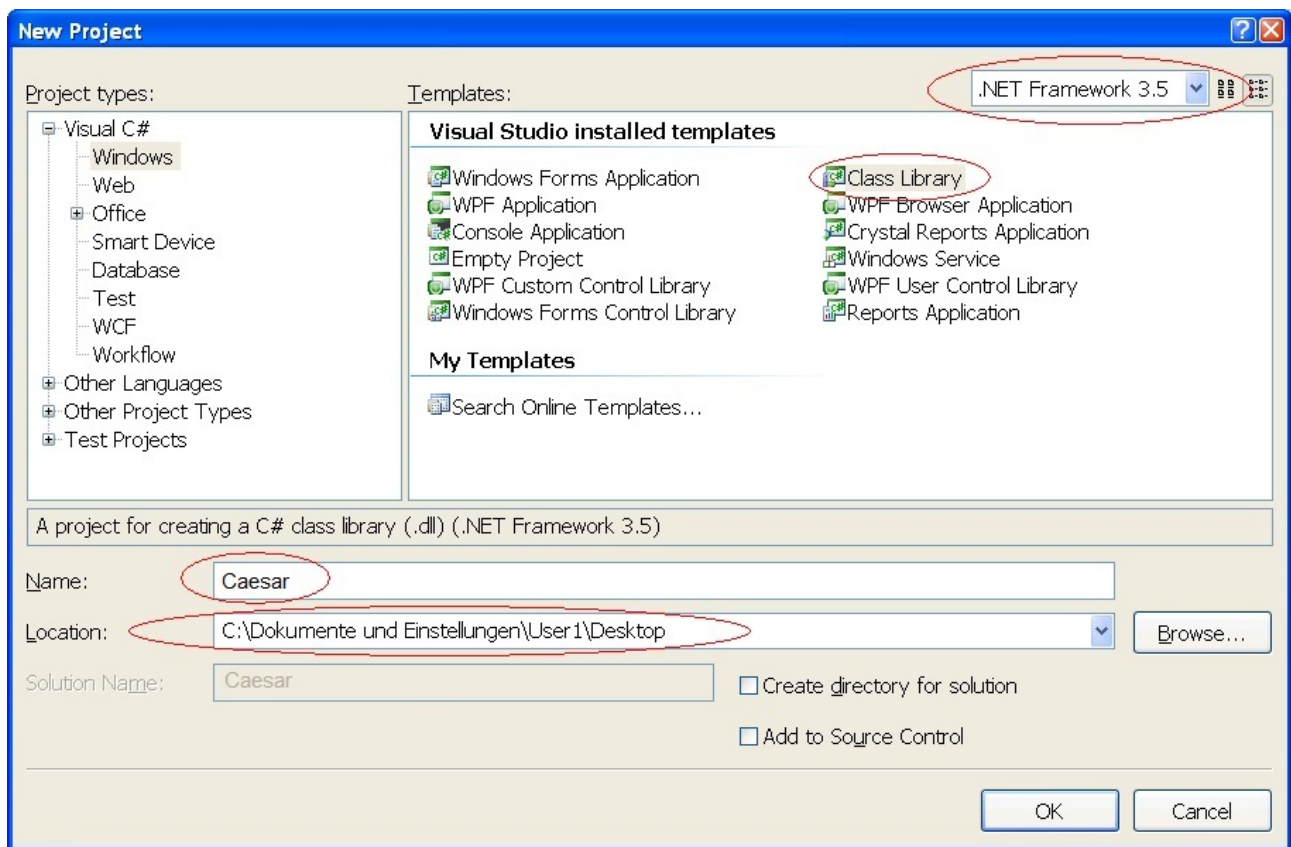


Figure 2.1: Create New Visual Studio/C# Express Project

Select ".NET-Framework 3.5" as the target framework (the Visual Studio Express edition don't provide this selection because it automatically chooses the actual target framework), and "Class Library" as default template to create a DLL file. Give the project a unique and significant name (here: "Caesar"), and choose a location where to save (the Express edition will ask later for a save location when you close your project or your environment). Select the subdirectory "CrypPlugins" from your SVN trunk as location. Finally confirm by pressing the "OK" button.

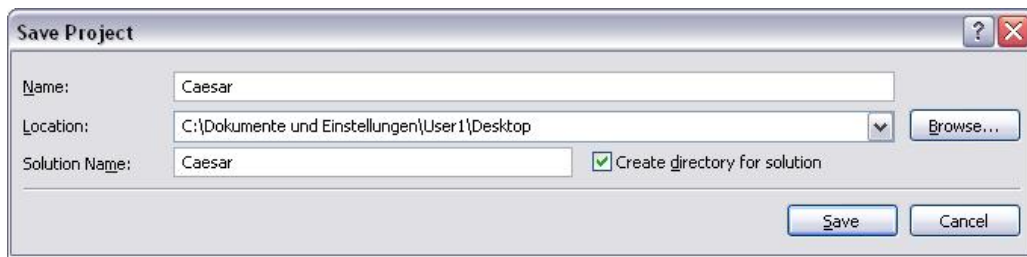


Figure 2.2: Microsoft C# Express Edition save solution dialog

Now your Visual Studio/C# Express solution should look like this:

2.2 Interface selection

First we have to add a reference to the CrypTool library called "CrypPluginBase.dll" where all necessary CrypTool plugin interfaces are declared.

Make a right click in the Solution Explorer on the "Reference" item and choose "Add Reference".

Select the project "CrypPluginBase". If you don't have the CrypPluginBase source code, it's also possible to add a reference to the binary DLL. In this case browse to the path where the library file "CrypPluginBase.dll" is located e.g. "C:\Documents and Settings \<Username> \My Documents\Visual Studio 2008\Projects\CrypPluginBase\bin\Debug") and select the library by double clicking the file or pressing the "OK" button.

Besides the CrypPluginBase you need to add three assembly references (same way like the "CrypPluginBase" before by selecting the ".NET" tab) to provide the necessary "Windows" namespace for your **user control** functions called "Presentation" and "QuickWatchPresentation". Select the following .NET components:

- PresentationCore
- PresentationFramework
- WindowsBase

Afterwards your reference tree view should look like this: If your plugin will be based on further libraries, you have to add them in the same way.

2.3 Create the classes for the algorithm and for its settings

In the next step we have to create two classes. The first class named "Caesar" has to inherit from IEncryption to provide an encryption plugin. If you want to develop a Hash plugin your class has to inherit from IHash. The second class named "CaesarSettings" has to inherit from ISettings.

2.3.1 Create the class for the algorithm (Caesar)

Visual Studio automatically creates a class which has the name "Class1.cs". There are two ways to change the name to "Caesar.cs":

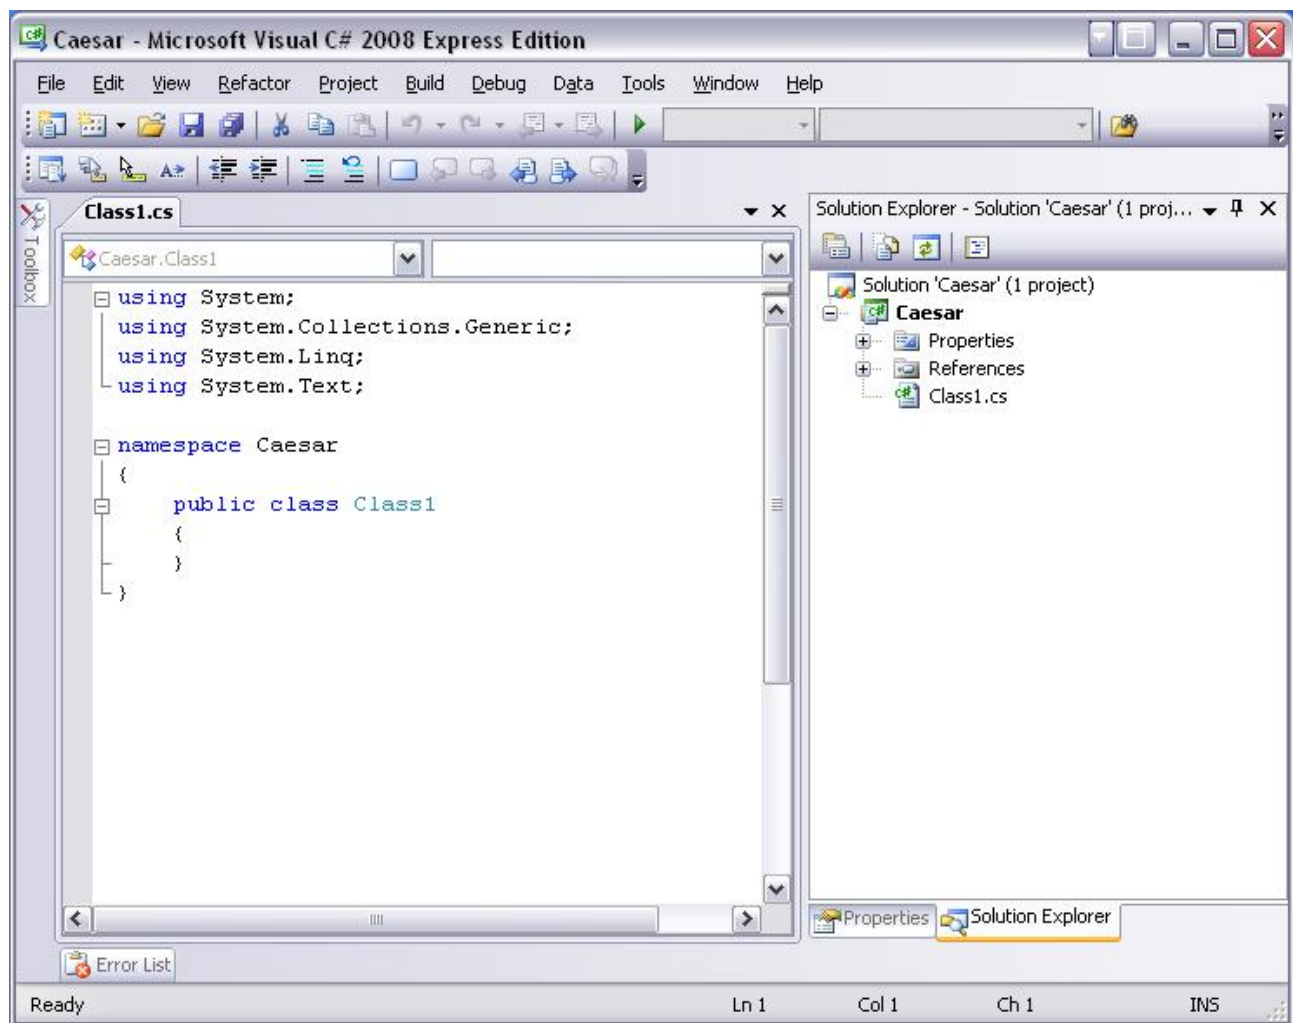


Figure 2.3: Start-Up solution

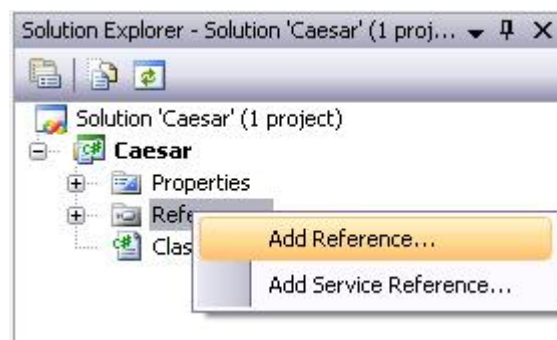


Figure 2.4: Add new reference

- Rename the existent class
- Delete the existent class and create a new one.

Which one you choose is up to you. We choose the second way as you can see in the next screenshot: Now make a right click on the project item "Caesar" and select "Add->Class...": Now give your class a unique name. We call the class as mentioned above "Caesar.cs" and make it

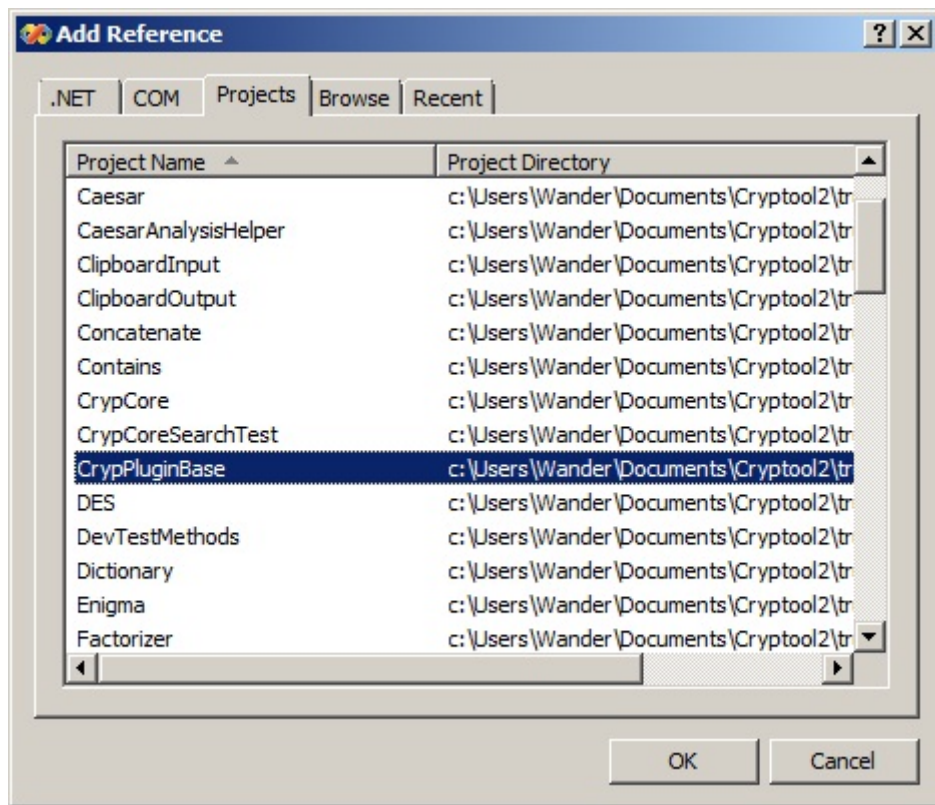


Figure 2.5: Add reference PluginBase source code

public to be available to other classes.

2.3.2 Create the class for the settings (CaesarSettings)

Add a second public class for ISettings in the same way. We call the class "CaesarSettings". The settings class provides the necessary information about controls, captions and descriptions and default parameters for e.g. key settings, alphabets, key length and action to build the **TaskPane** in CrypTool. How a **TaskPane** could look like you can see below for the example of a Caesar encryption.

2.3.3 Add namespace for the class Caesar and the place from where to inherit

Now open the "Caesar.cs" file by double clicking on it at the Solution Explorer and include the necessary namespaces to the class header by typing in the according "using" statement. The CrypTool 2.0 API provides the following namespaces:

- Cryptool.PluginBase = interfaces like IPlugin, IHash, ISettings, attributes, enumerations, delegates and extensions.
- Cryptool.PluginBase.Analysis = interface for the crypto analysis plugins like "Stream Comparator"
- Cryptool.PluginBase.Control = ?

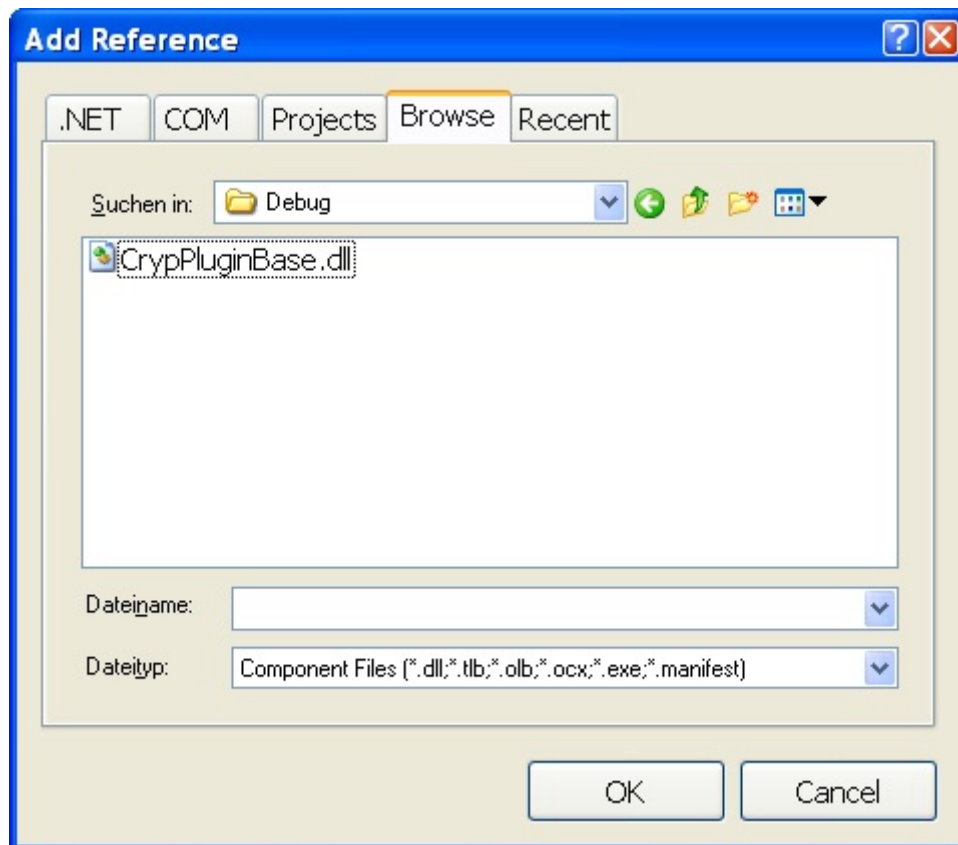


Figure 2.6: Browse reference

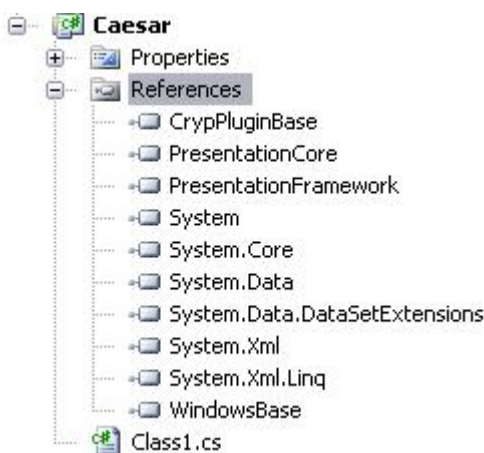


Figure 2.7: Reference tree

- Cryptool.PluginBase.Cryptography = interface for all encryption and hash algorithms like AES, DES or MD5 hash
- Cryptool.PluginBase.Editor = interface for editors you want to implement for CrypTool 2.0 like the default editor
- Cryptool.PluginBase.Generator = interface for generators like the random input generator
- Cryptool.PluginBase.IO = interface for CryptoolStream, input and output plugins like text

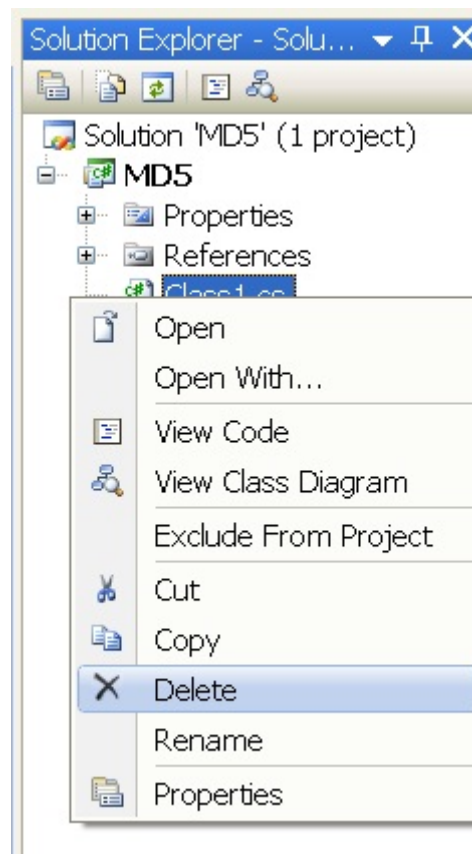


Figure 2.8: Create new class

input, file input, text output and file output

- Cryptool.PluginBase.Miscellaneous = provides all event helper like GuiLogMessage or PropertyChanged
- Cryptool.PluginBase.Resources = ?
- Cryptool.PluginBase.Tool = interface for all foreign tools which CrypTool 2.0 has to provide and which does not exactly support the CrypTool 2.0 API
- Cryptool.PluginBase.Validation = interface which provides method for validation like regular expression

In this case we want to implement a Caesar algorithm which means we need to include the following namespaces:

- "Cryptool.PluginBase" to provide "ISettings" for the CaesarSettings class
- "Cryptool.PluginBase.Cryptography" to provide "IEncryption" for the Caesar class
- "Cryptool.PluginBase.IO" to provide CryptoolStream for the input and output Data
- "Cryptool.PluginBase.Miscellaneous" to use the entire CrypTool event handler

It is important to define a new default namespace of our public class ("Caesar"). In CrypTool the default namespace is presented by "Cryptool.[name of class]". Therefore our namespace has to be defined as follows: "Cryptool.Caesar".

Up to now the source code should look as you can see below:

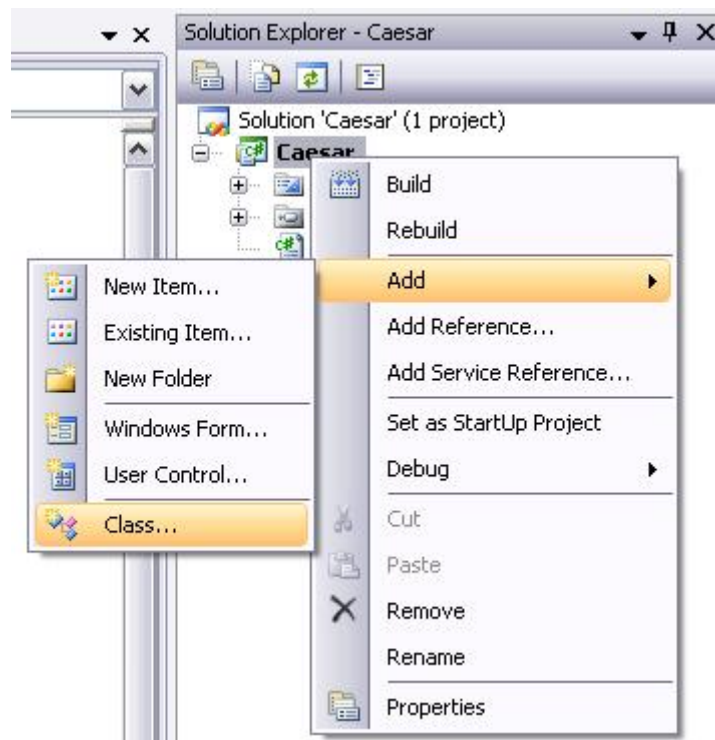


Figure 2.9: Add a new class

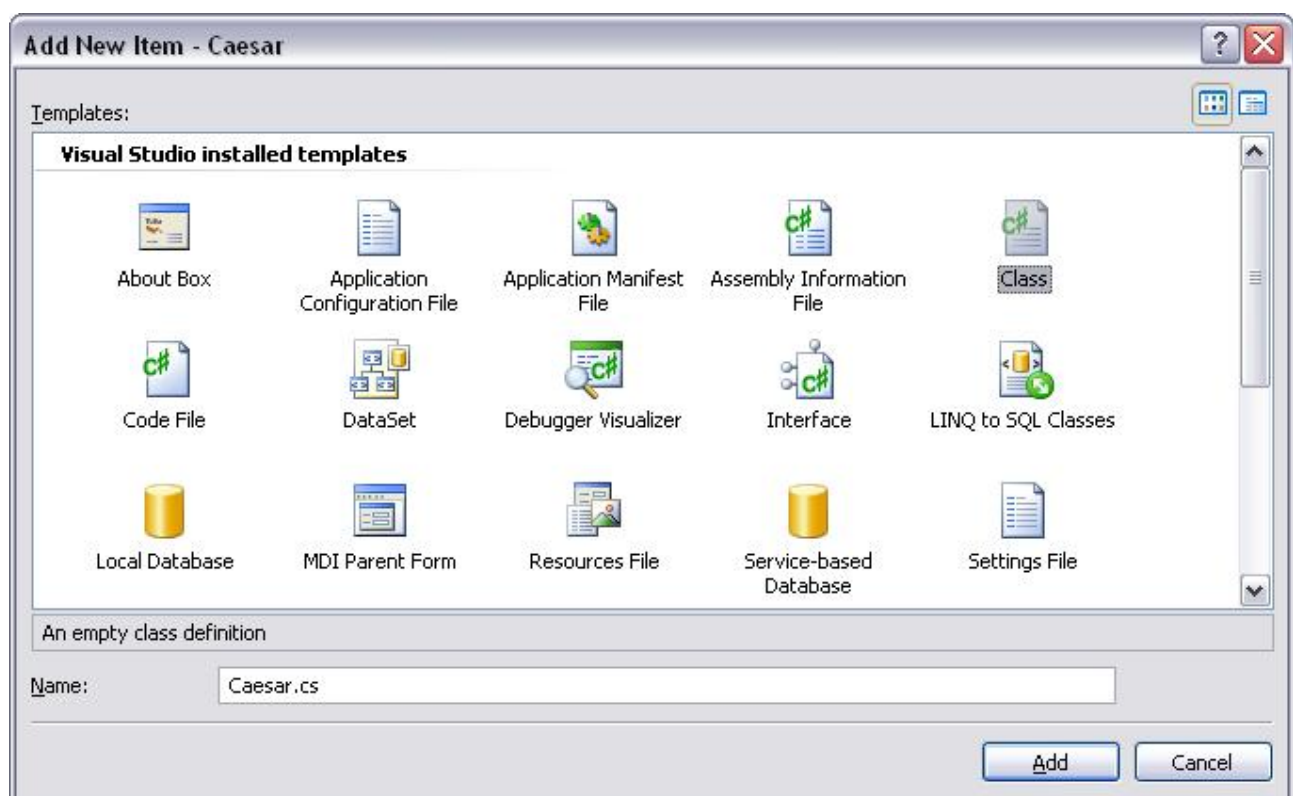


Figure 2.10: Name the new class

```
1 using System;
```

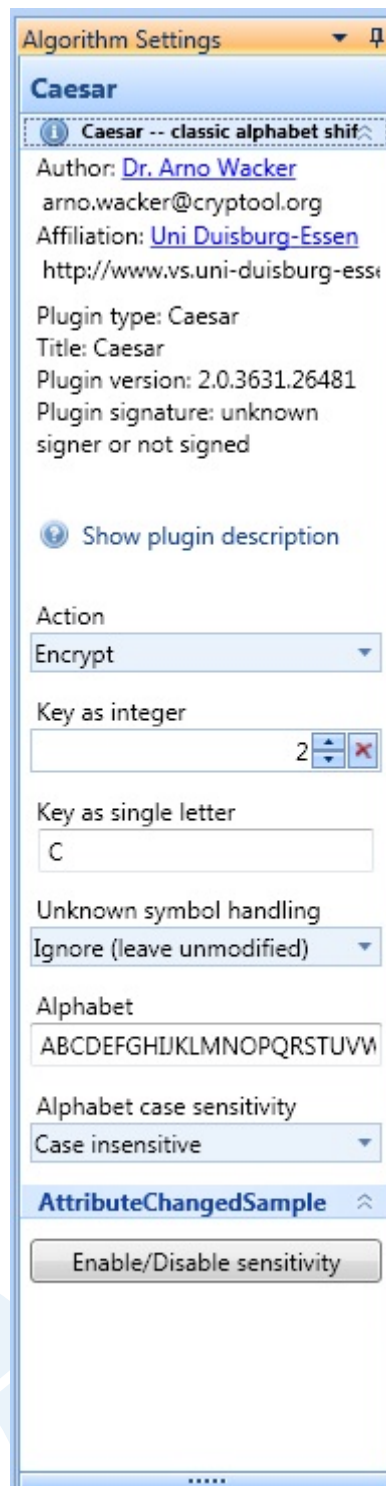


Figure 2.11: TaskPane

```

2 using System.Collections.Generic;
3 using System.Linq;
4 using System.Text;
5
6 //needed CrypTool namespaces

```



```

7 using Cryptool.PluginBase;
8 using Cryptool.PluginBase.Cryptography;
9 using Cryptool.PluginBase.IO;
10 using Cryptool.PluginBase.Miscellaneous;
11
12 namespace Cryptool.Caesar
13 {
14     public class Caesar
15     {
16     }
17 }

```

Next let your class "Caesar" inherit from IEncryption by inserting of the following statement:

```

1 namespace Cryptool.Caesar
2 {
3     public class Caesar: IEncryption
4     {
5     }
6 }

```

2.3.4 Add the interface functions for the class Caesar

There is an underscore at the "I" in IEncryption statement. Move your mouse over it or place the cursor at it and press "Shift+Alt+F10" and you will see the following submenu:

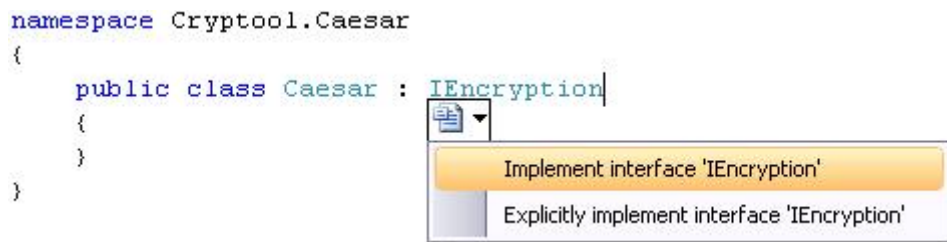


Figure 2.12: Inherit submenu

Choose the item "Implement interface 'IEncryption'". Visual Studio/C# Express will now place all available and needed interface members to interact with the CrypTool core (this saves you also a lot of typing code).

Your code will now look like this:

```

1 using System;
2 using System.Collections.Generic;
3 using System.Linq;
4 using System.Text;
5
6 using Cryptool.PluginBase;
7 using Cryptool.PluginBase.Cryptography;
8 using Cryptool.PluginBase.IO;
9 using Cryptool.PluginBase.Miscellaneous;
10
11 namespace Cryptool.Caesar

```

```

12 {
13     public class Caesar : IEncryption
14     {
15         #region IPlugin Members
16
17         public void Dispose()
18         {
19             throw new NotImplementedException();
20         }
21
22         public void Execute()
23         {
24             throw new NotImplementedException();
25         }
26
27         public void Initialize()
28         {
29             throw new NotImplementedException();
30         }
31
32         public event GuiLogNotificationEventHandler
33             OnGuiLogNotificationOccured;
34
35         public event PluginProgressChangedEventHandler
36             OnPluginProgressChanged;
37
38         public event StatusChangedEventHandler OnPluginStatusChanged;
39
40         public void Pause()
41         {
42             throw new NotImplementedException();
43         }
44
45         public void PostExecution()
46         {
47             throw new NotImplementedException();
48         }
49
50         public void PreExecution()
51         {
52             throw new NotImplementedException();
53         }
54
55         public System.Windows.Controls.UserControl Presentation
56         {
57             get { throw new NotImplementedException(); }
58         }
59
60         public System.Windows.Controls.UserControl
61             QuickWatchPresentation

```



```

59         {
60             get { throw new NotImplementedException(); }
61         }
62
63         public ISettings Settings
64         {
65             get { throw new NotImplementedException(); }
66         }
67
68         public void Stop()
69         {
70             throw new NotImplementedException();
71         }
72
73         #endregion
74
75         #region INotifyPropertyChanged Members
76
77         public event System.ComponentModel.PropertyChangedEventHandler
78             PropertyChanged;
79
80         #endregion
81     }

```

2.3.5 Add namespace and interfaces for the class CaesarSettings

Let's now take a look at the second class "CaesarSettings" by double clicking at the "CaesarSettings.cs" file at the Solution Explorer. First we also have to include the namespace of "Cryptool.PluginBase" to the class header and let the settings class inherit from "ISettings" analogous as seen before at the Caesar class. Visual Studio/C# Express will here also automatically place code from the CrypTool interface if available.

```

1  using System;
2  using System.Collections.Generic;
3  using System.Linq;
4  using System.Text;
5
6  using Cryptool.PluginBase;
7
8  namespace Cryptool.Caesar
9  {
10     public class CaesarSettings : ISettings
11     {
12         #region ISettings Members
13
14         public bool HasChanges
15         {
16             get
17             {

```

```

18         throw new NotImplementedException();
19     }
20     set
21     {
22         throw new NotImplementedException();
23     }
24 }
25
26 #endregion
27
28 #region INotifyPropertyChanged Members
29
30 public event System.ComponentModel.PropertyChangedEventHandler
    PropertyChanged;
31
32 #endregion
33 }
34 }

```

2.3.6 Add controls for the class CaesarSettings (if needed)

Now we have to implement some kind of controls (like button, text box) if we need them in the **CrypTool TaskPane** to modify settings of the algorithm. If you decided to provide an algorithm (e.g. Hash) which do not have any kind of settings you can leave this class now empty. The only part you have to modify is the "HasChanges" property to avoid any "NotImplementedException". How to modify this property you can see in the following code which demonstrate the modifications for the TaskPane for our Caesar algorithm. You can also take a look at the other algorithm source codes which are stored in our subversion how you can provide a TaskPane. The following source code demonstrates how we provide our TaskPane as seen above.

```

1 using System;
2 using System.ComponentModel;
3 using System.Windows;
4 using Cryptool.PluginBase;
5 using System.Windows.Controls;
6
7 namespace Cryptool.Caesar
8 {
9     public class CaesarSettings : ISettings
10     {
11         #region Public Caesar specific interface
12
13         /// <summary>
14         /// We use this delegate to send log messages from the
15         /// settings class to the Caesar plugin
16         /// </summary>
17         public delegate void CaesarLogMessage(string msg,
18             NotificationLevel loglevel);
19
20         /// <summary>

```

```

19      /// An enumeration for the different modes of dealing with
        unknown characters
20      /// </summary>
21      public enum UnknownSymbolHandlingMode { Ignore = 0, Remove =
        1, Replace = 2 };
22
23      /// <summary>
24      /// Fire if a new status message was send
25      /// </summary>
26      public event CaesarLogMessage LogMessage;
27
28      public delegate void CaesarReExecute();
29
30      public event CaesarReExecute ReExecute;
31
32      /// <summary>
33      /// Retrieves the current shift value of Caesar (i.e. the key)
        , or sets it
34      /// </summary>
35      [PropertySaveOrder(0)]
36      public int ShiftKey
37      {
38          get { return shiftValue; }
39          set
40          {
41              setKeyByValue(value);
42          }
43      }
44
45      /// <summary>
46      /// Retrieves the current setting whether the alphabet should
        be treated as case sensitive or not
47      /// </summary>
48      [PropertySaveOrder(1)]
49      public bool CaseSensitiveAlphabet
50      {
51          get
52          {
53              if (caseSensitiveAlphabet == 0)
54              { return false; }
55              else
56              { return true; }
57          }
58          set {} // readonly, because there are some problems if we
        omit the set part.
59      }
60
61
62      /// <summary>
63      /// Returns true if some settings have been changed. This

```

```

        value should be set externally to false e.g.
64  /// when a project was saved.
65  /// </summary>
66  [PropertySaveOrder(3)]
67  public bool HasChanges
68  {
69      get { return hasChanges; }
70      set { hasChanges = value; }
71  }
72
73  #endregion
74
75  #region Private variables
76  private bool hasChanges;
77  private int selectedAction = 0;
78  private string upperAlphabet = 'ABCDEFGHIJKLMNOPQRSTUVWXYZ';
79  private string lowerAlphabet = 'abcdefghijklmnopqrstuvwxyz';
80  private string alphabet = 'ABCDEFGHIJKLMNOPQRSTUVWXYZ';
81  private char shiftChar = 'C';
82  private int shiftValue = 2;
83  // private int shiftValue = 2;
84  private UnknownSymbolHandlingMode unknownSymbolHandling =
    UnknownSymbolHandlingMode.Ignore;
85  private int caseSensitiveAlphabet = 0; // 0 = case insensitive,
    1 = case sensitive
86  private bool sensitivityEnabled = true;
87  #endregion
88
89  #region Private methods
90
91  private string removeEqualChars(string value)
92  {
93      int length = value.Length;
94
95      for (int i = 0; i < length; i++)
96      {
97          for (int j = i + 1; j < length; j++)
98          {
99              if ((value[i] == value[j]) || (!
                CaseSensitiveAlphabet & (char.ToUpper(value[i])
                == char.ToUpper(value[j]))))
100              {
101                  LogMessage(''Removing duplicate letter: \'' +
                    value[j] + '\\' from alphabet!'',
                    NotificationLevel.Warning);
102                  value = value.Remove(j,1);
103                  j--;
104                  length--;
105              }
106      }

```

```

107         }
108
109         return value;
110     }
111
112     /// <summary>
113     /// Set the new shiftValue and the new shiftCharacter to
114     /// offset % alphabet.Length
115     /// </summary>
116     private void setKeyByValue(int offset)
117     {
118         HasChanges = true;
119
120         // making sure the shift value lies within the alphabet
121         // range
122         offset = offset % alphabet.Length;
123
124         // set the new shiftChar
125         shiftChar = alphabet[offset];
126
127         // set the new shiftValue
128         shiftValue = offset;
129
130         // Anounnce this to the settings pane
131         OnPropertyChanged(''ShiftValue'');
132         OnPropertyChanged(''ShiftChar'');
133
134         // print some info in the log.
135         LogMessage(''Accepted new shift value '' + offset + ''! (
136             Adjusted shift character to \'' + shiftChar + '\')'',
137             NotificationLevel.Info);
138     }
139
140     private void setKeyByCharacter(string value)
141     {
142         try
143         {
144             int offset;
145             if (this.CaseSensitiveAlphabet)
146             {
147                 offset = alphabet.IndexOf(value[0]);
148             }
149             else
150             {
151                 offset = alphabet.ToUpper().IndexOf(char.ToUpper(
152                     value[0]));
153             }
154
155             if (offset >= 0)
156             {

```

```

152         HasChanges = true;
153         shiftValue = offset;
154         shiftChar = alphabet[shiftValue];
155         LogMessage('Accepted new shift character \'' +
                    shiftChar + '\'! (Adjusted shift value to \'' +
                    shiftValue + '\')', NotificationLevel.Info);
156         OnPropertyChanged('ShiftValue');
157         OnPropertyChanged('ShiftChar');
158     }
159     else
160     {
161         LogMessage('Bad input \'' + value + '\'! (
                    Character not in alphabet!) Reverting to \'' +
                    shiftChar.ToString() + '\', NotificationLevel
                    .Error);
162     }
163 }
164 catch (Exception e)
165 {
166     LogMessage('Bad input \'' + value + '\'! (' + e.
                Message + ') Reverting to \'' + shiftChar.ToString
                () + '\', NotificationLevel.Error);
167 }
168 }
169
170 #endregion
171
172 #region Algorithm settings properties (visible in the Settings
    pane)
173
174 [PropertySaveOrder(4)]
175 [ContextMenu('Action', 'Select the Algorithm action', 1,
    DisplayLevel.Beginner, ContextMenuControlType.ComboBox, new
    int[] { 1, 2 }, 'Encrypt', 'Decrypt')]
176 [TaskPane('Action', 'setAlgorithmActionDescription', null,
    1, true, DisplayLevel.Beginner, ControlType.ComboBox, new
    string[] { 'Encrypt', 'Decrypt' })]
177 public int Action
178 {
179     get
180     {
181         return this.selectedAction;
182     }
183     set
184     {
185         if (value != selectedAction) HasChanges = true;
186         this.selectedAction = value;
187         OnPropertyChanged('Action');
188
189         if (ReExecute != null) ReExecute();

```

```

190     }
191 }
192
193 [PropertySaveOrder(5)]
194 [TaskPane(''Key as integer'', ''Enter the number of letters to
    shift. For instance a value of 1 means that the plaintext
    character a gets mapped to the ciphertext character B, b to
    C and so on.'', null, 2, true, DisplayLevel.Beginner,
    ControlType.NumericUpDown, ValidationType.RangeInteger, 0,
    100)]
195 public int ShiftValue
196 {
197     get { return shiftValue; }
198     set
199     {
200         setKeyByValue(value);
201         if (ReExecute != null) ReExecute();
202     }
203 }
204
205
206 [PropertySaveOrder(6)]
207 [TaskPaneAttribute(''Key as single letter'', ''Enter a single
    letter as the key. This letter is mapped to an integer
    stating the position in the alphabet. The values for ''Key
    as integer'' and ''Key as single letter are always
    synchronized.'', null, 3, true, DisplayLevel.Beginner,
    ControlType.TextBox, ValidationType.RegEx, ''^([A-Z]|[a-z])
    {1,1}''')]
208 public string ShiftChar
209 {
210     get { return this.shiftChar.ToString(); }
211     set
212     {
213         setKeyByCharacter(value);
214         if (ReExecute != null) ReExecute();
215     }
216 }
217
218 [PropertySaveOrder(7)]
219 [ContextMenu(''Unknown symbol handling'', ''What should be
    done with encountered characters at the input which are not
    in the alphabet?'', 4, DisplayLevel.Expert,
    ContextMenuControlType.ComboBox, null, new string[] { ''
    Ignore (leave unmodified)'', ''Remove'', ''Replace with
    \'?\'''' })]
220 [TaskPane(''Unknown symbol handling'', ''What should be done
    with encountered characters at the input which are not in
    the alphabet?'', null, 4, true, DisplayLevel.Expert,
    ControlType.ComboBox, new string[] { ''Ignore (leave

```

```

unmodified)', 'Remove', 'Replace with \'?\'' }]]
221 public int UnknownSymbolHandling
222 {
223     get { return (int)this.unknownSymbolHandling; }
224     set
225     {
226         if ((UnknownSymbolHandlingMode)value !=
227             unknownSymbolHandling) HasChanges = true;
228         this.unknownSymbolHandling = (
229             UnknownSymbolHandlingMode)value;
230         OnPropertyChanged('UnknownSymbolHandling');
231         if (ReExecute != null) ReExecute();
232     }
233 }
234 [SettingsFormat(0, 'Normal', 'Normal', 'Black', 'White
    ', Orientation.Vertical)]
235 [PropertySaveOrder(9)]
236 [TaskPane('Alphabet', 'This is the used alphabet.', null,
    6, true, DisplayLevel.Expert, ControlType.TextBox, '')]
237 public string AlphabetSymbols
238 {
239     get { return this.alphabet; }
240     set
241     {
242         string a = removeEqualChars(value);
243         if (a.Length == 0) // cannot accept empty alphabets
244         {
245             LogMessage('Ignoring empty alphabet from user! Using
                previous alphabet: \'' + alphabet + '\' (' +
                alphabet.Length.ToString() + ' Symbols)',
                NotificationLevel.Info);
246         }
247         else if (!alphabet.Equals(a))
248         {
249             HasChanges = true;
250             this.alphabet = a;
251             setKeyByValue(shiftValue); //re-evaluate if the
                shiftvalue is still within the range
252             LogMessage('Accepted new alphabet from user: \'' +
                alphabet + '\' (' + alphabet.Length.ToString() +
                ' Symbols)', NotificationLevel.Info);
253             OnPropertyChanged('AlphabetSymbols');
254             if (ReExecute != null) ReExecute();
255         }
256     }
257 }
258 }
259

```



```

260     /// <summary>
261     /// Visible setting how to deal with alphabet case. 0 = case
        insensitive, 1 = case sensitive
262     /// </summary>
263     ///[SettingsFormat(1, 'Normal')]
264     [PropertySaveOrder(8)]
265     [ContextMenu('Alphabet case sensitivity', 'Should upper and
        lower case be treated differently? (Should a == A)', 7,
        DisplayLevel.Expert, ContextMenuControlType.ComboBox, null,
        new string[] { 'Case insensitive', 'Case sensitive' })]
    ]
266     [TaskPane('Alphabet case sensitivity', 'Should upper and
        lower case be treated differently? (Should a == A)', null,
        7, true, DisplayLevel.Expert, ControlType.ComboBox, new
        string[] { 'Case insensitive', 'Case sensitive' })]
267     public int AlphabetCase
268     {
269         get { return this.caseSensitiveAlphabet; }
270         set
271         {
272             if (value != caseSensitiveAlphabet) HasChanges = true;
273             this.caseSensitiveAlphabet = value;
274             if (value == 0)
275             {
276                 if (alphabet == (upperAlphabet + lowerAlphabet))
277                 {
278                     alphabet = upperAlphabet;
279                     LogMessage('Changing alphabet to: \'' +
                        alphabet + '\\\' (' + alphabet.Length.
                        ToString() + ' Symbols)',
                        NotificationLevel.Info);
280                     OnPropertyChanged('AlphabetSymbols');
281                     // re-set also the key (shiftvalue/shiftChar
                        to be in the range of the new alphabet
                        setKeyByValue(shiftValue);
282                 }
283             }
284             else
285             {
286                 if (alphabet == upperAlphabet)
287                 {
288                     alphabet = upperAlphabet + lowerAlphabet;
289                     LogMessage('Changing alphabet to: \'' +
                        alphabet + '\\\' (' + alphabet.Length.
                        ToString() + ' Symbols)',
                        NotificationLevel.Info);
290                     OnPropertyChanged('AlphabetSymbols');
291                 }
292             }
293         }
294     }

```

```

295         // remove equal characters from the current alphabet
296         string a = alphabet;
297         alphabet = removeEqualChars(alphabet);
298
299         if (a != alphabet)
300         {
301             OnPropertyChanged('AlphabetSymbols');
302             LogMessage('Changing alphabet to: \'' +
303                 alphabet + '\', (' + alphabet.Length.ToString
304                     () + ' Symbols)', NotificationLevel.Info);
305         }
306
307         OnPropertyChanged('AlphabetCase');
308         if (ReExecute != null) ReExecute();
309     }
310 }
311
312 #endregion
313
314 #region INotifyPropertyChanged Members
315
316 public event PropertyChangedEventHandler PropertyChanged;
317
318 protected void OnPropertyChanged(string name)
319 {
320     if (PropertyChanged != null)
321     {
322         PropertyChanged(this, new PropertyChangedEventArgs(name));
323     }
324 }
325
326 #endregion
327
328 #region TaskPaneAttributeChanged-Sample
329 /// <summary>
330 /// This event is just used here for sample reasons
331 /// </summary>
332 public event TaskPaneAttributeChangedHandler
333     TaskPaneAttributeChanged;
334
335 [TaskPane('Enable/Disable sensitivity', 'This setting is
336     just a sample and shows how to enable / disable a setting
337     .', 'AttributeChangedSample', 8, false, DisplayLevel.
338     Beginner, ControlType.Button)]
339 public void EnableDisableSensitivity()
340 {
341     if (TaskPaneAttributeChanged != null)
342     {
343         sensitivityEnabled = !sensitivityEnabled;
344         if (sensitivityEnabled)

```

```

339         {
340             TaskPaneAttributeChanged(this, new
                TaskPaneAttributeChangedEventArgs(new
                    TaskPaneAttributeContainer('AlphabetCase',
                        Visibility.Visible)));
341         }
342         else
343         {
344             TaskPaneAttributeChanged(this, new
                TaskPaneAttributeChangedEventArgs(new
                    TaskPaneAttributeContainer('AlphabetCase',
                        Visibility.Collapsed)));
345         }
346     }
347 }
348 #endregion TaskPaneAttributeChanged-Sample
349 }
350 }

```

2.4 Select and add an image as icon for the class Caesar

Before we go back to the code of the Caesar class, we have to add an icon image to our project, which will be shown in the CrypTool **ribbon bar** or/and **navigation pane**. As there is no default, using an icon image is mandatory.

Note: This will be changed in future. A default icon will be used if no icon image has been provided.

For testing purposes you may create a simple black and white PNG image with MS Paint or Paint.NET. As image size you can use 40x40 pixels for example, but as the image will be scaled when required, any size should do it. Place the image file in your project directory or in a subdirectory. Then make a right click on the project item "Caesar" or any subdirectory within the Solution Explorer, and select "Add->Existing Item...":

As you can see, in our solution we create a new folder named "Images" (make a right click on the project item "Caesar" and select "Add->New Folder") and placed there the new icon by clicking right on the folder as mentioned above. Then select "Image Files" as file type, and choose the icon for your plugin:

Finally we have to set the icon as a "Resource" to avoid providing the icon as a separate file. Make a right click on the icon and select the item "Properties":

In the "Properties" panel you have to set the "Build Action" to "Resource" (not embedded resource):

2.5 Set the attributes for the class Caesar

Now let's go back to the code of the Caesar class ("Caesar.cs" file). First we have to set the necessary attributes for our class. These attributes are used to provide additional information for the CrypTool 2.0 environment. If not set, your plugin won't show up in the GUI, even if everything else is implemented correctly.

Attributes are used for **declarative** programming and provide meta data, that can be attached to the

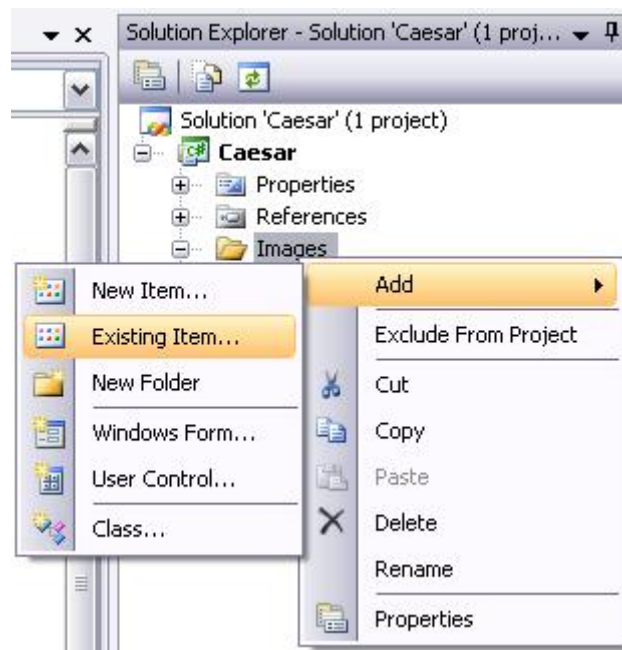


Figure 2.13: Add existing item

existing .NET meta data , like classes and properties. Cryptool provides a set of custom attributes, that are used to mark the different parts of your plugin.

[Author]

The first attribute called "Author" is optional, which means we are not forced to define this attribute. It provides the additional information about the plugin developer. This informations you can see for example in the TaskPane as shown on a screenshot above. We set this attribute to demonstrate how it has to look in case you want to provide this attribute.

As we can see above the author attribute takes four elements of type string. These elements are:

- Author = name of the plugin developer
- Email = email of the plugin developer if he wants to be contact
- Institute = current employment of the developer like University or Company
- Url = the website or homepage of the developer

All this elements are also optional. The developer decides what he wants to publish. Unused elements shall be set to null or a zero-length string ("").

Our author attribute should look now as you can see below:

[PluginInfo]

The second attribute called "PluginInfo" provides the necessary information about the plugin like caption and tool tip. This attribute is mandatory. The attribute has the definition as you can see below:

This attribute expects the following elements:

- resourceFile = Defines if resource files will be provided and where to find them. E.g. to provide the plugin multilingual you can store the labels in such a resource file. This element is optional.

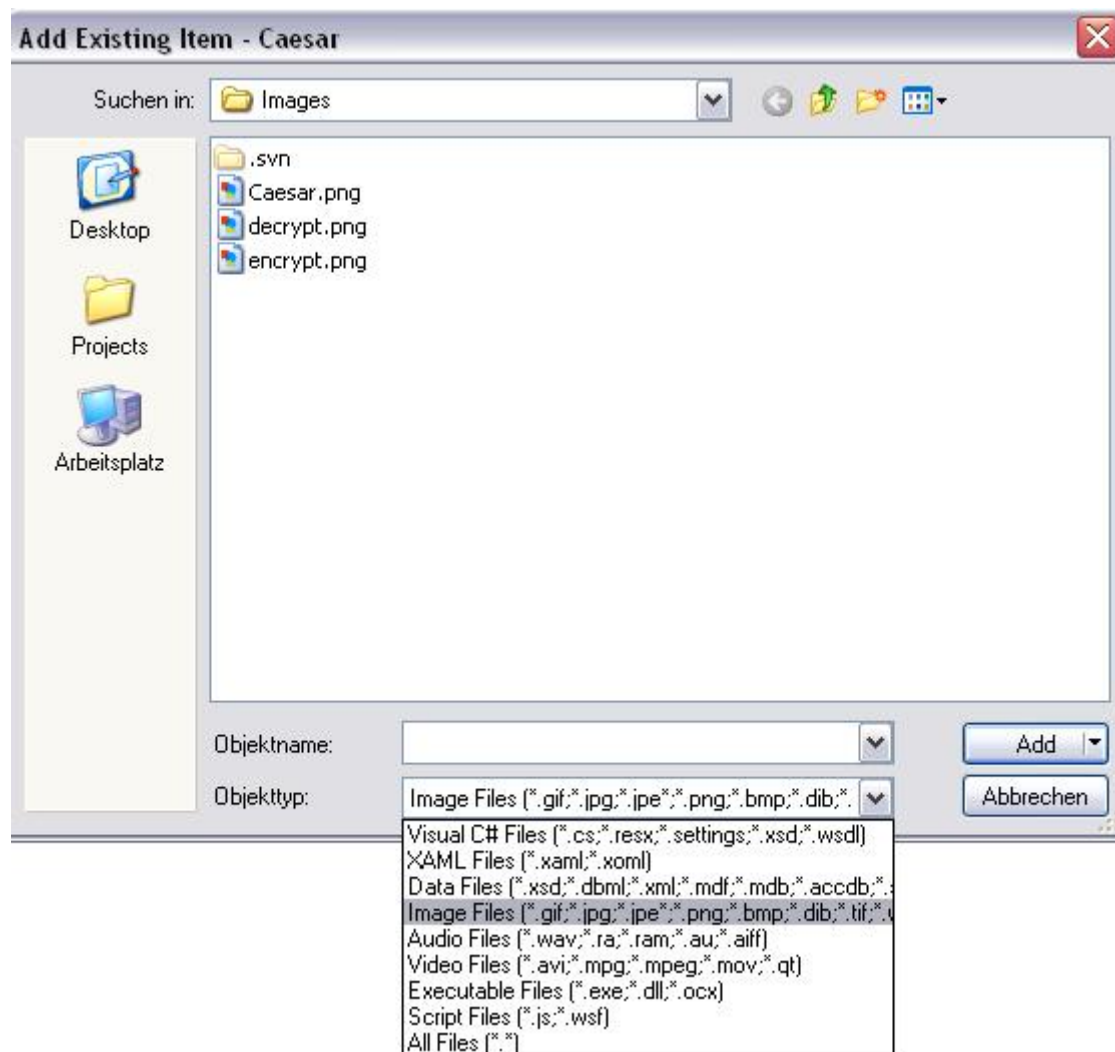


Figure 2.14: Choose the right icon

- startable = Set this flag to true only if your plugin is some kind of input or generator plugin (probably if your plugin just has outputs and no inputs). In all other cases use false here. This flag is important. Setting this flag to true for a non input/generator plugin will result in unpredictable chain runs. This element is mandatory.
- caption = from type string, the name of the plugin or the resource field name if you provide the caption in a resource file (e.g. to provide the button content). This element is mandatory.
- toolTip = from type string, description of the plugin or the resource field name if you provide the toolTip in a resource file (e.g. to provide the button tool tip). This element is optional.
- descriptionUrl = from type string, define where to find the whole description files (e.g. XAML files). This element is optional.
- icons = from type string array, which provides all necessary icon paths you want to use in the plugin (e.g. the plugin icon as seen above). This element is mandatory.

Unused optional elements shall be set to null or a zero-length string ("").

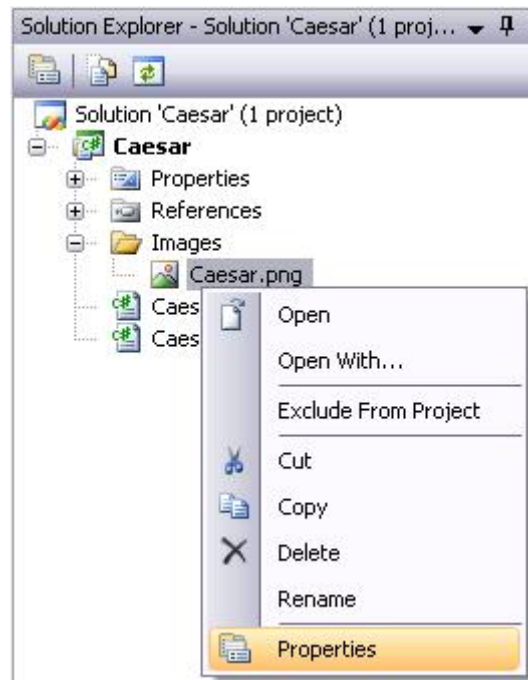


Figure 2.15: Icon properties

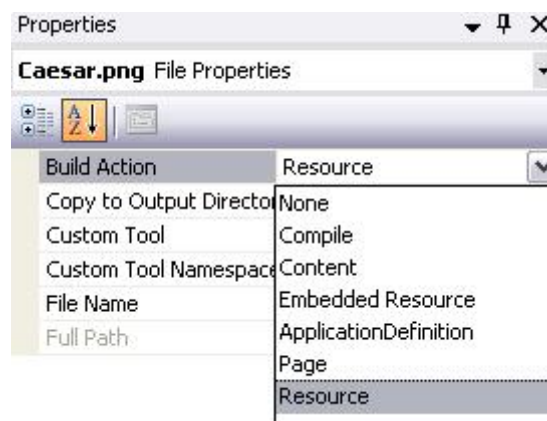


Figure 2.16: Icon build action

```
[Author (
1 of 2 AuthorAttribute.AuthorAttribute (string author, string email, string institute, string url)
{
```

Figure 2.17: Attribute author

```
[Author("CrypTool Team", "developer@cryptool.org", "Uni Duisburg-Essen", "http://www.vs.uni-d
public class Caesar : IEncryption
{
```

Figure 2.18: Filled author attribute

Note 1: It is possible to use the plugin without setting a caption though it is not recommended. This will be changed in future and the plugin will fail to load without a caption.


```
[Author("CrypTool Team", "developer@cryptool.org", "Uni Duisburg-Essen", "http://www.vs.uni-d
[PluginInfo {
4 of 4 PluginInfoAttribute.PluginInfoAttribute (string resourceFile, bool startable, string caption, string toolTip, string descriptionUrl, param
{
Named Parameters...)
```

Figure 2.19: Attribute PluginInfo

Note 2: Currently a zero-length toolTip string appears as empty box. This will be changed in future.

Note 3: Tooltip and description currently do not support internationalization and localization. This will be changed in future.

In our example the first parameter called "resourceFile" has to be set to "Cryptool.Caesar.Resource.res" because we want to provide the plugin multilingual and want to store the labels and caption in a resource file. Otherwise ignore this element.

```
[PluginInfo("Cryptool.Caesar.Resources.res",
4 of 4 PluginInfoAttribute.PluginInfoAttribute (string resourceFile, bool startable, string caption, string toolTip, string descriptionUrl, params string[] icons,
{
Named Parameters...)
```

Figure 2.20: Attribute PluginInfo element resourceFile

The second parameter called "startable" has to be set to "false", because our encryption algorithm is neither an input nor generator plugin.

```
[PluginInfo("Cryptool.Caesar.Resources.res", false,
4 of 4 PluginInfoAttribute.PluginInfoAttribute (string resourceFile, bool startable, string caption, string toolTip, string descriptionUrl, params string[] icons,
{
Named Parameters...)
```

Figure 2.21: Attribute PluginInfo startable

The next two parameters are needed to define the plugin's name and its description. Now that we decided to provide a resource file we have to place here the both resource field names which contains the description and captions. Otherwise just write here a simple string text:

```
[PluginInfo("Cryptool.Caesar.Resources.res", false, "pluginName", "pluginToolTip",
4 of 4 PluginInfoAttribute.PluginInfoAttribute (string resourceFile, bool startable, string caption, string toolTip, string descriptionUrl, params string[] icons,
{
Named Parameters...)
```

Figure 2.22: Attribute PluginInfo name and description

The next element defines the location path of the description file. The parameter is made up by <Assembly name>/<filename> or <Assembly name>/<Path>/<file name> if you want to store your description files in a separate folder (as seen on the icon). The description file has to be of type XAML. In our case we create a folder called "DetailedDescription" and store our XAML file there with the necessary images if needed. How you manage the files and folders is up to you. This folder could now look as you can see below:

Accordingly the attribute parameter has to be set to:

The detailed description could now look like this in CrypTool (right click plugin icon on workspace and select "Show description"):

The last parameter tells CrypTool the names of the provided icons. This parameter is made up by

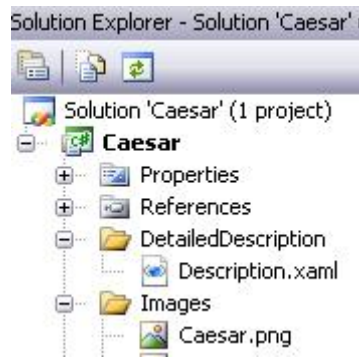


Figure 2.23: Attribute PluginInfo icon path

```
[PluginInfo("Cryptool.Caesar.Resources.res", false, "pluginName", "pluginToolTip", "Caesar/
4 of 4 PluginInfoAttribute.PluginInfoAttribute (string resourceFile, bool startable, string caption, string toolTip, string descriptionUrl, params
{
    Named Parameters...)
```

Figure 2.24: Attribute PluginInfo icon

<Assembly name>/<file name> or <Assembly name>/<Path>/<file name>.

The most important icon is the plugin icon, which will be shown in CrypTool in the ribbon bar or navigation pane (This is the first icon in list, so you have to provide at least one icon for a plugin). As named above how to add an icon to the solution accordingly we have to tell CrypTool where to find the icon by setting this parameter as you can see below:

You can define further icon paths if needed, by adding the path string separated by a comma. We just add here two further icons (don't forget to add the icons to your solution) to provide them for the context menu in the CrypTool workspace.

[EncryptionType]

The third and last attribute called "EncryptionType" is needed to tell CrypTool which type of plugin we want to provide. CrypTool is now able to place the plugin in the right group at the navigation pane or/and ribbon bar. Therefore Caesar is a classical algorithm so we have to set the following attribute:

The "EncryptionType" attribute can also be set as the following types:

- Asymmetric = for asymmetric encryption algorithms like RSA
- Classic = for classic encryption or hash algorithms like Caesar or MD5
- Hybrid = for a combination of several algorithm where the data is encrypted symmetric and the encryption key asymmetric
- SymmetricBlock = for all block cipher algorithms like DES, AES or Twofish
- SymmetricStream = for all stream cipher algorithms like RC4, Rabbit or SEAL

2.6 Set the private variables for the settings in the class Caesar

The next step is to define some private variables needed for the settings, input and output data which could look like this:

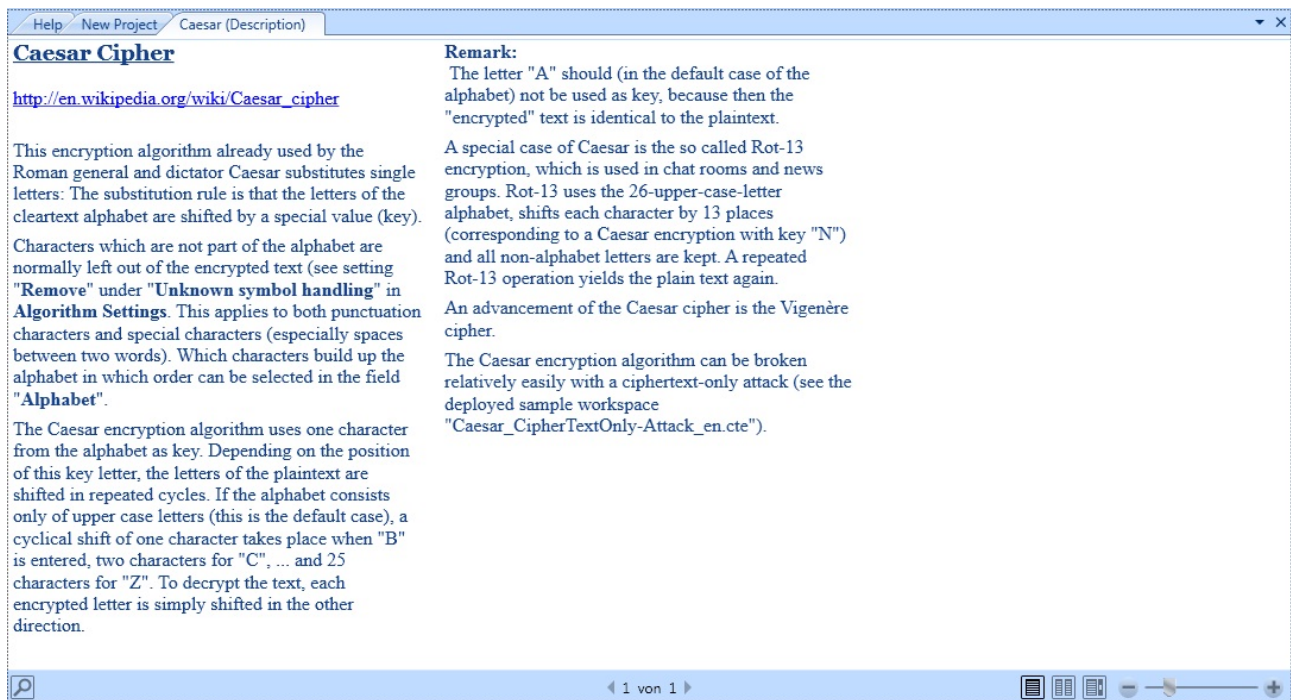


Figure 2.25: XAML detailed description

```
[PluginInfo("Cryptool.Caesar.Resources.res",false, "pluginName", "pluginToolTip", "Caesar/
"Caesar/Images/Caesar.png", "Caesar/Images/encrypt.png", "Caesar/Images/decrypt.png")]
public class Caesar : IEncryption
```

Figure 2.26: Attribute PluginInfo icons

```
1 public class Caesar : IEncryption
2 {
3     #region Private variables
4     private CaesarSettings settings;
5     private string inputString;
6     private string outputString;
7     private enum CaesarMode { encrypt, decrypt };
8     private List<CryptoolStream> listCryptoolStreamsOut = new List<
        CryptoolStream>();
9     #endregion
```

Please notice if there is a sinuous line at the code you type for example at the "CryptoolStream" type of the variable listCryptoolStreamsOut. "CryptoolStream" is a data type for input and output between plugins and is able to handle large data amounts. To use the CrypTool own stream type, include the namespace "Cryptool.PluginBase.IO" with a "using" statement as explained in chapter 3.3. Check the other code entries while typing and update the missing namespaces.

The following private variables are being used in this example:

- CaesarSettings settings: required to implement the IPlugin interface properly
- string inputString: sting to read the input data from
- string outputString: string to save the output data

```
[Author("Cryptool Team","developer@cryptool.org","Uni Duisburg-Essen","http://www.vs.uni-duisburg-essen.de")]
[PluginInfo("Cryptool.Caesar.Resources.res",false, "pluginName", "pluginToolTip", "Caesar/DetailedDescription/Description.xml",
    "Caesar/Images/Caesar.png", "Caesar/Images/encrypt.png", "Caesar/Images/decrypt.png")]
[EncryptionType(EncryptionType.Classic)]
public class Caesar : IEncryption
{
```

Figure 2.27: Attribute encryption type

- enum CaesarMode: our own definition how to select between an encryption or decryption. It's up to you how to solve your algorithm
- List<CryptoolStream> listCryptoolStreamsOut: list of all streams being created by Caesar plugin, required to perform a clean dispose

2.7 Define the code of the class Caesar to fit the interface

Next we have to complete our code to correctly serve the interface.

First we add a constructor to our class where we can create an instance of our settings class and a function to handle events:

```
1 public class Caesar : IEncryption
2 {
3     #region Private variables
4     private CaesarSettings settings;
5     private string inputString;
6     private string outputString;
7     private enum CaesarMode { encrypt, decrypt };
8     private List<CryptoolStream> listCryptoolStreamsOut = new List<
        CryptoolStream>();
9     #endregion
10
11     public Caesar()
12     {
13         this.settings = new CaesarSettings();
14         this.settings.LogMessage += Caesar_LogMessage;
15     }
```

Secondly, we have to implement the property "Settings" defined in the interface:

```
1 public ISettings Settings
2 {
3     get { return (ISettings)this.settings; }
4     set { this.settings = (CaesarSettings)value; }
5 }
```

Thirdly we have to define five properties with their according attributes. This step is necessary to tell Cryptool that these properties are input/output properties used for data exchange with other plugins or to provide our plugin with external data.

The attribute is named "PropertyInfo" and consists of the following elements:

- direction = defines whether this property is an input or output property, i.e. whether it reads input data or writes output data
 - Direction.Input

- Direction.Output
- caption = caption of the property (e.g. shown at the input on the dropped icon in the editor), see below:

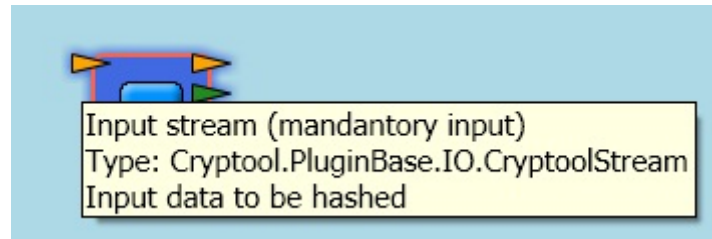


Figure 2.28: Possible property caption

- tooltip = tooltip of the property (e.g. shown at the input arrow on the dropped icon in the editor), see above
- descriptionUrl = not used right now
- mandatory = this flag defines whether an input is required to be connected by the user. If set to true, there has to be an input connection that provides data. If no input data is provided for mandatory input, your plugin will not be executed in the workflow chain. If set to false, connecting the input is optional. This only applies to input properties. If using Direction.Output, this flag is ignored.
- hasDefaultValue = if this flag is set to true, CrypTool treats this plugin as though the input has already input data.
- DisplayLevel = define in which display levels your property will be shown in CrypTool. CrypTool provides the following display levels:
 - DisplayLevel.Beginner
 - DisplayLevel.Experienced
 - DisplayLevel.Expert
 - DisplayLevel.Professional
- QuickWatchFormat = defines how the content of the property will be shown in the quick watch. CrypTool accepts the following quick watch formats:
 - QuickWatchFormat.Base64
 - QuickWatchFormat.Hex
 - QuickWatchFormat.None
 - QuickWatchFormat.Text

A quick watch in Hex could look like this:
- quickWatchConversionMethod = this string points to a conversion method; most plugins can use a "null" value here, because no conversion is necessary. The QuickWatch function uses system "default" encoding to display data. So only if your data is in some other format, like Unicode or UTF8, you have to provide the name of a conversion method as string. The method header has to look like this:

```
1 object YourMethodName(string PropertyNameToConvert)
```

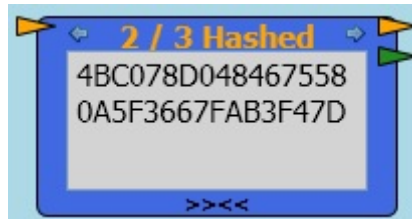


Figure 2.29: Possible quick watch

First we define the "InputString" property getter and setter which is needed to provide our plugin with data which has to be encrypted or decrypted:

```

1 [PropertyInfo(Direction.InputData, ''Text input'', ''Input a string to
   be processed by the Caesar cipher'', ''', true, false,
   DisplayLevel.Beginner, QuickWatchFormat.Text, null)]
2 public string InputString
3 {
4     get { return this.inputString; }
5     set
6     {
7         if (value != inputString)
8         {
9             this.inputString = value;
10            OnPropertyChanged(''InputString'');
11        }
12    }
13 }

```

In the getter we return the value of the input data.

*Note 1: It is currently not possible to read directly from the input data stream without creating an intermediate *CryptoolStream*.*

*Note 2: The naming may be confusing. The new *CryptoolStream* is not an output stream, but it is added to the list of output streams to enable a clean dispose afterwards. See chapter 9 below.*

The setter checks if the input value has changed and sets the new input data and announces the data to the CryptTool 2.0 environment by using the expression "OnPropertyChanged(<Property name>)". For input properties this step is necessary to update the quick watch view.

The output data property (which provides the encrypted or decrypted input data) could look like this:

```

1 [PropertyInfo(Direction.OutputData, ''Text output'', ''The string
   after processing with the Caesar cipher'', ''', false, false,
   DisplayLevel.Beginner, QuickWatchFormat.Text, null)]
2 public string OutputString
3 {
4     get { return this.outputString; }
5     set
6     {
7         outputString = value;
8         OnPropertyChanged(''OutputString'');

```

```

9     }
10  }

```

CrypTool does not require implementing output setters, as they will never be called from outside of the plugin. Nevertheless in this example our plugin accesses the property itself, therefore we chose to implement the setter.

You can also provide additional output data types if you like. For example we provide also an output data of type `CryptoolStream`, an input data for external alphabets and an input data for the shift value of our Caesar algorithm:

```

1 [PropertyInfo(Direction.OutputData, ''propStreamOutputToolTip'', ''
    propStreamOutputDescription'', ''', false, false, DisplayLevel.
    Beginner, QuickWatchFormat.Text, null)]
2 public CryptoolStream OutputData
3 {
4     get
5     {
6         if (outputString != null)
7         {
8             CryptoolStream cs = new CryptoolStream();
9             listCryptoolStreamsOut.Add(cs);
10            cs.OpenRead(Encoding.Default.GetBytes(outputString.ToCharArray()
11                ));
12            return cs;
13        }
14        else
15        {
16            return null;
17        }
18    }
19    set { }
20 }
21 [PropertyInfo(Direction.InputData, ''External alphabet input'', ''
    Input a string containing the alphabet which should be used by
    Caesar.\nIf no alphabet is provided on this input, the internal
    alphabet will be used.'', ''', false, false, DisplayLevel.Expert,
    QuickWatchFormat.Text, null)]
22 public string InputAlphabet
23 {
24     get { return ((CaesarSettings)this.settings).AlphabetSymbols; }
25     set
26     {
27         if (value != null && value != settings.AlphabetSymbols)
28         {
29             ((CaesarSettings)this.settings).AlphabetSymbols = value;
30             OnPropertyChanged(''InputAlphabet '');
31         }
32     }
33 }
34

```

```

35 [PropertyInfo(Direction.InputData, ''Shift value (integer)'', ''Same
    setting as Shift value in Settings-Pane but as dynamic input.'',
    '', false, false, DisplayLevel.Expert, QuickWatchFormat.Text,
    null)]
36 public int ShiftKey
37 {
38     get { return settings.ShiftKey; }
39     set
40     {
41         if (value != settings.ShiftKey)
42         {
43             settings.ShiftKey = value;
44         }
45     }
46 }

```

This property's setter is not called and therefore not implemented.

The CrypTool-API provides two methods to send messages to the CrypTool. The method "GuiLogMessage" is used to send messages to the CrypTool status bar. This is a nice feature to inform the user what your plugin is currently doing.

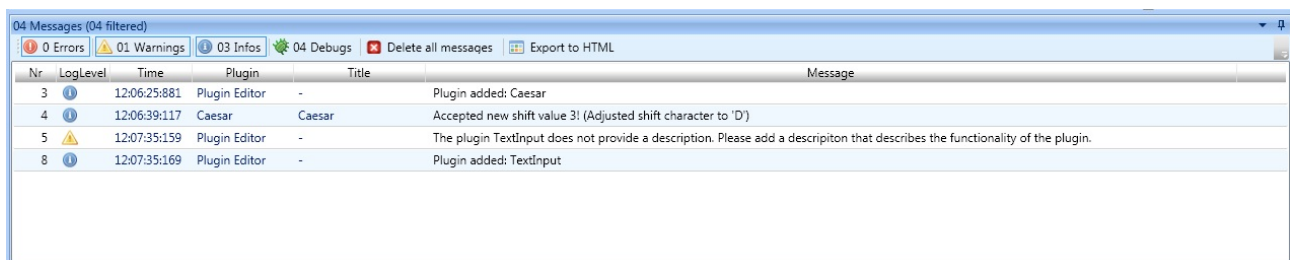


Figure 2.30: Status Bar

The method takes two parameters which are:

- Message = will be shown in the status bar and is of type string
- NotificationLevel = to group the messages to their alert level
 - NotificationLevel.Error
 - NotificationLevel.Warning
 - NotificationLevel.Info
 - NotificationLevel.Debug

As we can recognize we have two methods named "OnPropertyChanged" and "GuiLogMessage" which are not defined. So we have to define these two methods as you can see below:

```

1 public event GuiLogNotificationEventHandler
    OnGuiLogNotificationOccured;
2 private void GuiLogMessage(string message, NotificationLevel logLevel)
3 {
4     EventsHelper.GuiLogMessage(OnGuiLogNotificationOccured, this, new
        GuiLogEventArgs(message, this, logLevel));
5 }

```



```

6
7 public event PropertyChangedEventHandler PropertyChanged;
8
9 public void OnPropertyChanged(String name)
10 {
11     EventsHelper.PropertyChanged(PropertyChanged, this, new
        PropertyChangedEventArgs(name));
12 }

```

To use the "PropertyChangedEventHandler" you have to include the namespace "System.ComponentModel". Our whole included namespaces looks now like this:

```

1 using System.Collections.Generic;
2 using System.Text;
3 using System.ComponentModel;
4 using System.Windows.Controls;
5
6 using Cryptool.PluginBase;
7 using Cryptool.PluginBase.Cryptography;
8 using Cryptool.PluginBase.IO;
9 using Cryptool.PluginBase.Miscellaneous;

```

2.8 Complete the actual code for the class Caesar

Up to now, the plugin is ready for the CrypTool base application to be accepted and been shown correctly in the CrypTool menu. What we need now, is the implementation of the actual algorithm in the function "Execute()" which is up to you as the plugin developer. CrypTool will always call first the Execute() function. If you place the whole algorithm in this function or split in other as needed is also up to you.

We decided to split our algorithm encryption and decryption in two separate functions, which finally call the function ProcessCaesar.

Let us demonstrate the Execute() function, too:

```

1 private void ProcessCaesar(CaesarMode mode)
2 {
3     CaesarSettings cfg = (CaesarSettings)this.settings;
4     StringBuilder output = new StringBuilder('');
5     string alphabet = cfg.AlphabetSymbols;
6
7     // in case we want don't consider case in the alphabet, we use only
        capital letters, hence transform
8     // the whole alphabet to uppercase
9     if (!cfg.CaseSensitiveAlphabet)
10    {
11        alphabet = cfg.AlphabetSymbols.ToUpper(); ;
12    }
13
14    if (inputString != null)
15    {
16        for (int i = 0; i < inputString.Length; i++)
17        {

```

```

18     // get plaintext char which is currently processed
19     char currentchar = inputString[i];
20
21     // remember if it is upper case (otherwise lowercase is assumed)
22     bool uppercase = char.IsUpper(currentchar);
23
24     // get the position of the plaintext character in the alphabet
25     int ppos = 0;
26     if (cfg.CaseSensitiveAlphabet)
27     {
28         ppos = alphabet.IndexOf(currentchar);
29     }
30     else
31     {
32         ppos = alphabet.IndexOf(char.ToUpper(currentchar));
33     }
34
35     if (ppos >= 0)
36     {
37         // we found the plaintext character in the alphabet, hence we
38         // do the shifting
39         int cpos = 0; ;
40         switch (mode)
41         {
42             case CaesarMode.encrypt:
43                 cpos = (ppos + cfg.ShiftKey) % alphabet.Length;
44                 break;
45             case CaesarMode.decrypt:
46                 cpos = (ppos - cfg.ShiftKey + alphabet.Length) % alphabet.
47                     Length;
48                 break;
49         }
50
51         // we have the position of the ciphertext character, hence
52         // just output it in the correct case
53         if (cfg.CaseSensitiveAlphabet)
54         {
55             output.Append(alphabet[cpos]);
56         }
57         else
58         {
59             if (uppercase)
60             {
61                 output.Append(char.ToUpper(alphabet[cpos]));
62             }
63             else
64             {
65                 output.Append(char.ToLower(alphabet[cpos]));
66             }
67         }
68     }

```



```

65     }
66     else
67     {
68         // the plaintext character was not found in the alphabet,
69         // hence proceed with handling unknown characters
70         switch ((CaesarSettings.UnknownSymbolHandlingMode)cfg.
71             UnknownSymbolHandling)
72         {
73             case CaesarSettings.UnknownSymbolHandlingMode.Ignore:
74                 output.Append(inputString[i]);
75                 break;
76             case CaesarSettings.UnknownSymbolHandlingMode.Replace:
77                 output.Append('?');
78                 break;
79         }
80     }
81
82     //show the progress
83     if (OnPluginProgressChanged != null)
84     {
85         OnPluginProgressChanged(this, new PluginProgressEventArgs(i,
86             inputString.Length - 1));
87     }
88
89     outputString = output.ToString();
90     OnPropertyChanged(''OutputString '');
91     OnPropertyChanged(''OutputData '');
92 }
93
94 public void Encrypt()
95 {
96     ProcessCaesar(CaesarMode.encrypt);
97 }
98
99 public void Decrypt()
100 {
101     ProcessCaesar(CaesarMode.decrypt);
102 }
103
104 public void Execute()
105 {
106     switch (settings.Action)
107     {
108         case 0:
109             Caesar_LogMessage(''encrypting'', NotificationLevel.Debug);
110             Encrypt();
111             break;
112         case 1:
113             Decrypt();

```

```

112         break;
113     default:
114         break;
115 }
116 }

```

It is important to make sure that all changes of output properties will be announced to the CrypTool environment. In this example this happens by calling the setter of `OutputData` which in turn calls `"OnPropertyChanged"` for both output properties `"OutputData"` and `"OutputDataStream"`. Instead of calling the property's setter you can as well call `"OnPropertyChanged"` directly within the `"Execute()"` method.

Certainly you have seen the unknown method `"ProgressChanged"` which you can use to show the current algorithm process as a progress on the plugin icon. To use this method you also have to declare this method to afford a successful compilation:

```

1 public event PluginProgressChangedEventHandler OnPluginProgressChanged
    ;
2 private void ProgressChanged(double value, double max)
3 {
4     EventsHelper.ProgressChanged(OnPluginProgressChanged, this, new
        PluginProgressEventArgs(value, max));
5 }

```

2.9 Perform a clean dispose

Be sure you have closed and cleaned all your streams after execution and when CrypTool decides to dispose the plugin instance. Though not required, we run the dispose code before execution as well:

```

1 public void Dispose()
2 {
3     foreach(CryptoolStream stream in listCryptoolStreamOut)
4     {
5         stream.Close();
6     }
7     listCryptoolStreamOut.Clear();
8 }
9
10 public void PostExecution()
11 {
12     Dispose();
13 }
14
15 public void PreExecution()
16 {
17     Dispose();
18 }

```

2.10 Finish implementation

When adding plugin instances to the CrypTool workspace, CrypTool checks whether the plugin runs without any exception. If any IPlugin method throws an exception, CrypTool will show an error and prohibit using the plugin. Therefore we have to remove the "NotImplementedException" from the methods "Initialize()", "Pause()" and "Stop()". In our example it's sufficient to provide empty implementations.

```

1 public void Initialize()
2 {
3 }
4
5 public void Pause()
6 {
7 }
8
9 public void Stop()
10 {
11 }

```

The methods "Presentation()" and "QuickWatchPresentation()" can be used if a plugin developer wants to provide an own visualization of the plugin algorithm which will be shown in CrypTool. Take a look at the PRESENT plugin to see how a custom visualization can be realized. For our Caesar example we don't want to implement a custom visualization, therefore we return "null":

```

1 public UserControl Presentation
2 {
3     get { return null; }
4 }
5
6 public UserControl QuickWatchPresentation
7 {
8     get { return null; }
9 }

```

Your plugin should compile without errors at this point.

2.11 Sign the created plugin

2.12 Import the plugin to Cryptool and test it

After you have built the plugin, you need to move the newly created plugin DLL to a location, where CrypTool can find it. To do this, there are the following ways:

- Copy your plugin DLL file in the folder "CrypPlugins" which has to be in the same folder as the CrypTool executable, called "CrypWin.exe". If necessary, create the folder "CrypPlugins". This folder is called "Global storage" in the CrypTool architecture. Changes in this folder will take effect for all users on a multi user Windows. Finally restart CrypTool.
- Copy your plugin DLL file in the folder "CrypPlugins" which is located in your home path in the folder "ApplicationData" and restart CrypTool. This home folder path is called "Custom

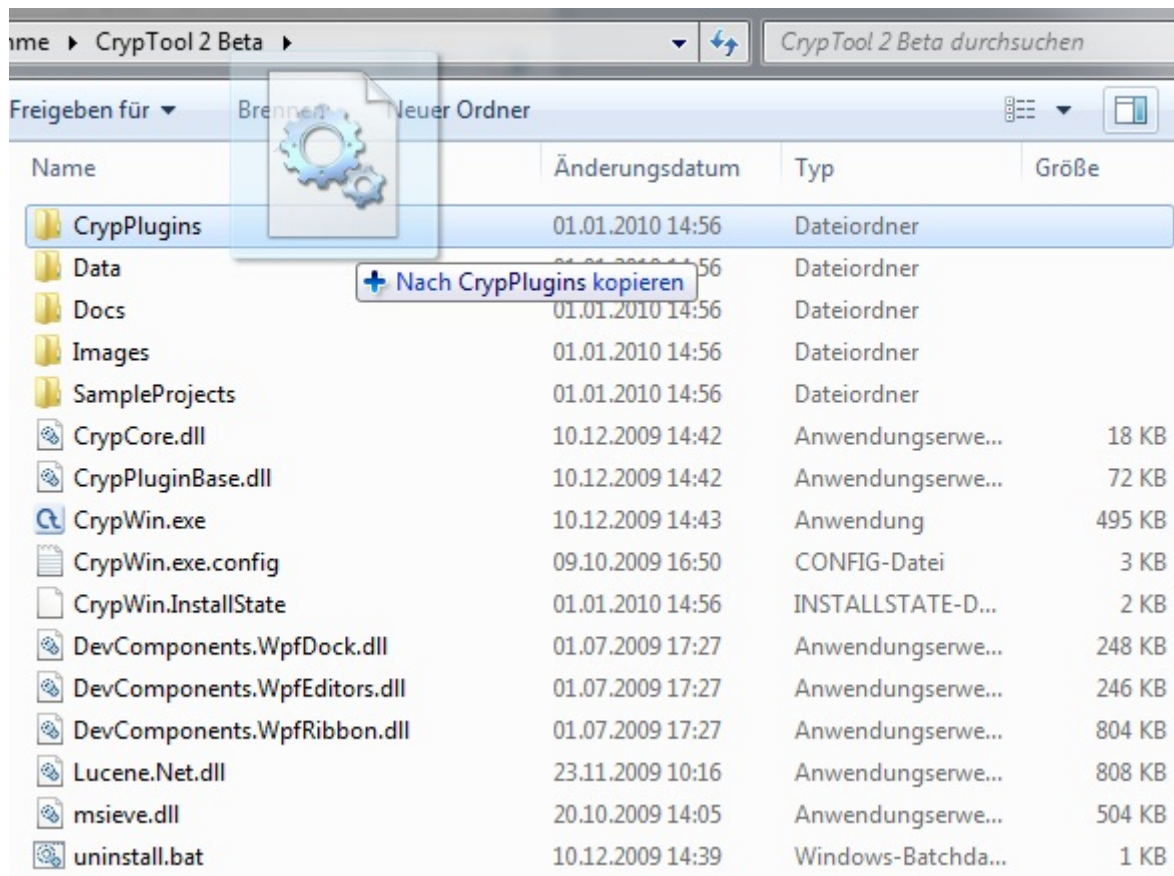


Figure 2.31: Copy plugin to global storage

storage” in the CrypTool architecture. Changes in this folder will only take effect for current user. On a German Windows XP the home folder path could look like: ”C:\Dokumente und Einstellungen\<User>\Anwendungsdaten\CrypPlugins” and in Vista/Windows7 the path will look like ”C:\Users\<user>\Application Data\CrypPlugins”.

- You can also import new plugins directly from the CrypTool interface. Just execute CrypWin.exe and select the ”Download Plugins” button. An ”Open File Dialog” will open and ask where the new plugin is located. After selecting the new plugin, CrypTool will automatically import the new plugin in the custom storage folder. With this option you will not have to restart CrypTool. All according menu entries will be updated automatically. Notice, that this plugin importing function only accepts **signed** plugins.


Note: This option is a temporary solution for importing new plugins. In the future this will be done online by a web service.

- Use post-build in your project properties to copy the DLL automatically after building it in Visual Studio with other plugins. Right-click on your plugin project and select ”Properties”:

Select ”Build Events”:

Enter the following text snippet into ”Post-build event command line”:

```
cd "$(ProjectDir)"
cd ..\..\CrypWin$(OutDir)
if not exist ".\CrypPlugins" mkdir ".\CrypPlugins"
del /F /S /Q /s /q "Caesar *.*"
copy "$(TargetDir)Caesar *.*" ".\CrypPlugins"
```

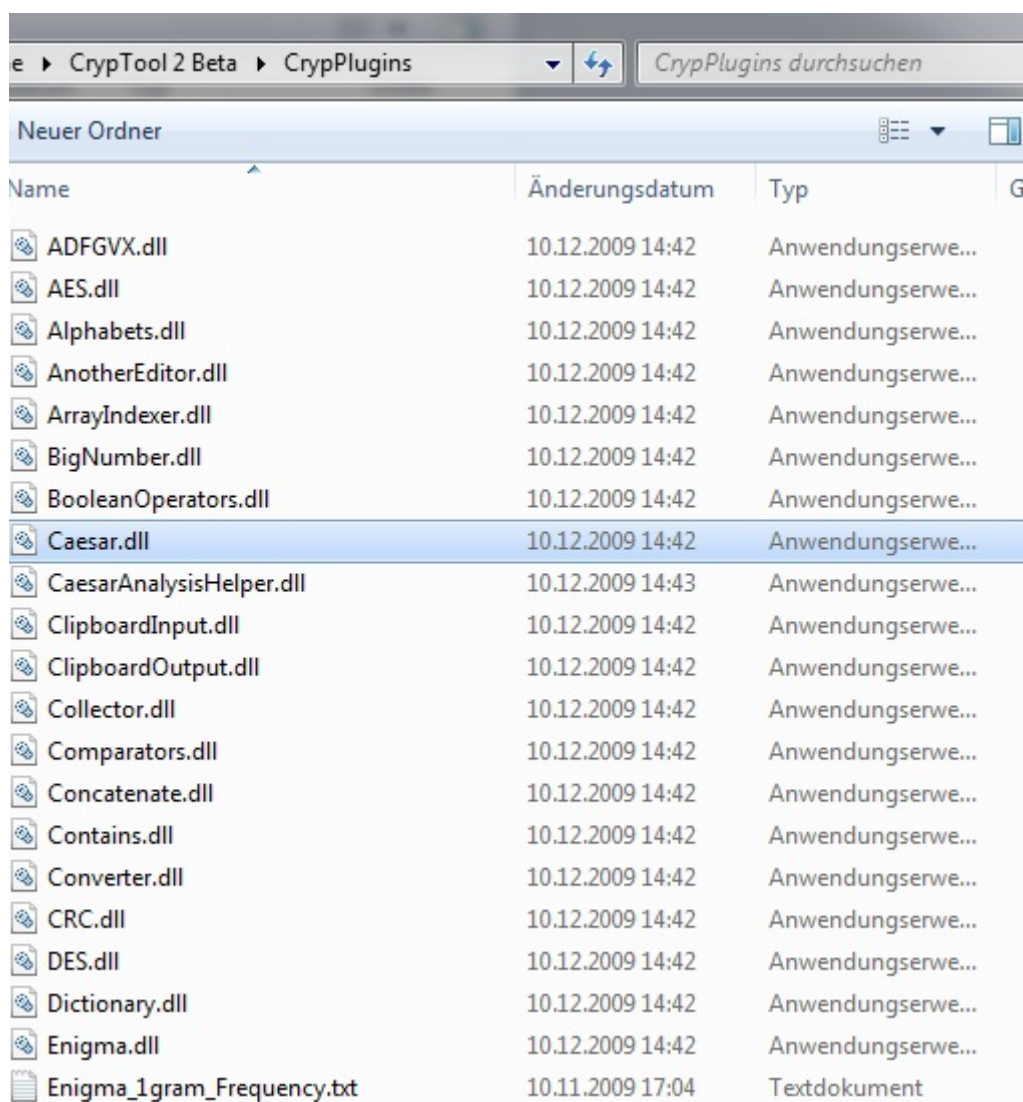

Name	Änderungsdatum	Typ	G
ADFGVX.dll	10.12.2009 14:42	Anwendungserwe...	
AES.dll	10.12.2009 14:42	Anwendungserwe...	
Alphabets.dll	10.12.2009 14:42	Anwendungserwe...	
AnotherEditor.dll	10.12.2009 14:42	Anwendungserwe...	
ArrayIndexer.dll	10.12.2009 14:42	Anwendungserwe...	
BigNumber.dll	10.12.2009 14:42	Anwendungserwe...	
BooleanOperators.dll	10.12.2009 14:42	Anwendungserwe...	
Caesar.dll	10.12.2009 14:42	Anwendungserwe...	
CaesarAnalysisHelper.dll	10.12.2009 14:43	Anwendungserwe...	
ClipboardInput.dll	10.12.2009 14:42	Anwendungserwe...	
ClipboardOutput.dll	10.12.2009 14:42	Anwendungserwe...	
Collector.dll	10.12.2009 14:42	Anwendungserwe...	
Comparators.dll	10.12.2009 14:42	Anwendungserwe...	
Concatenate.dll	10.12.2009 14:42	Anwendungserwe...	
Contains.dll	10.12.2009 14:42	Anwendungserwe...	
Converter.dll	10.12.2009 14:42	Anwendungserwe...	
CRC.dll	10.12.2009 14:42	Anwendungserwe...	
DES.dll	10.12.2009 14:42	Anwendungserwe...	
Dictionary.dll	10.12.2009 14:42	Anwendungserwe...	
Enigma.dll	10.12.2009 14:42	Anwendungserwe...	
Enigma_1gram_Frequency.txt	10.11.2009 17:04	Textdokument	

Figure 2.32: Plugins global storage

You need to adapt the yellow marked field to your actual project name.

2.13 Source code and source template

Here you can download the whole source code which was presented in this "Howto" as a Visual Studio **solution**:

username: anonymous

password: not required

<https://www.cryptool.org/svn/CrypTool2/trunk/CrypPlugins/Caesar/>

Here you can download the Visual Studio plugin **template** to begin with the development of a new CrypTool plugin:

<http://cryptool2.vs.uni-due.de/downloads/template/encryptionplugin.zip>

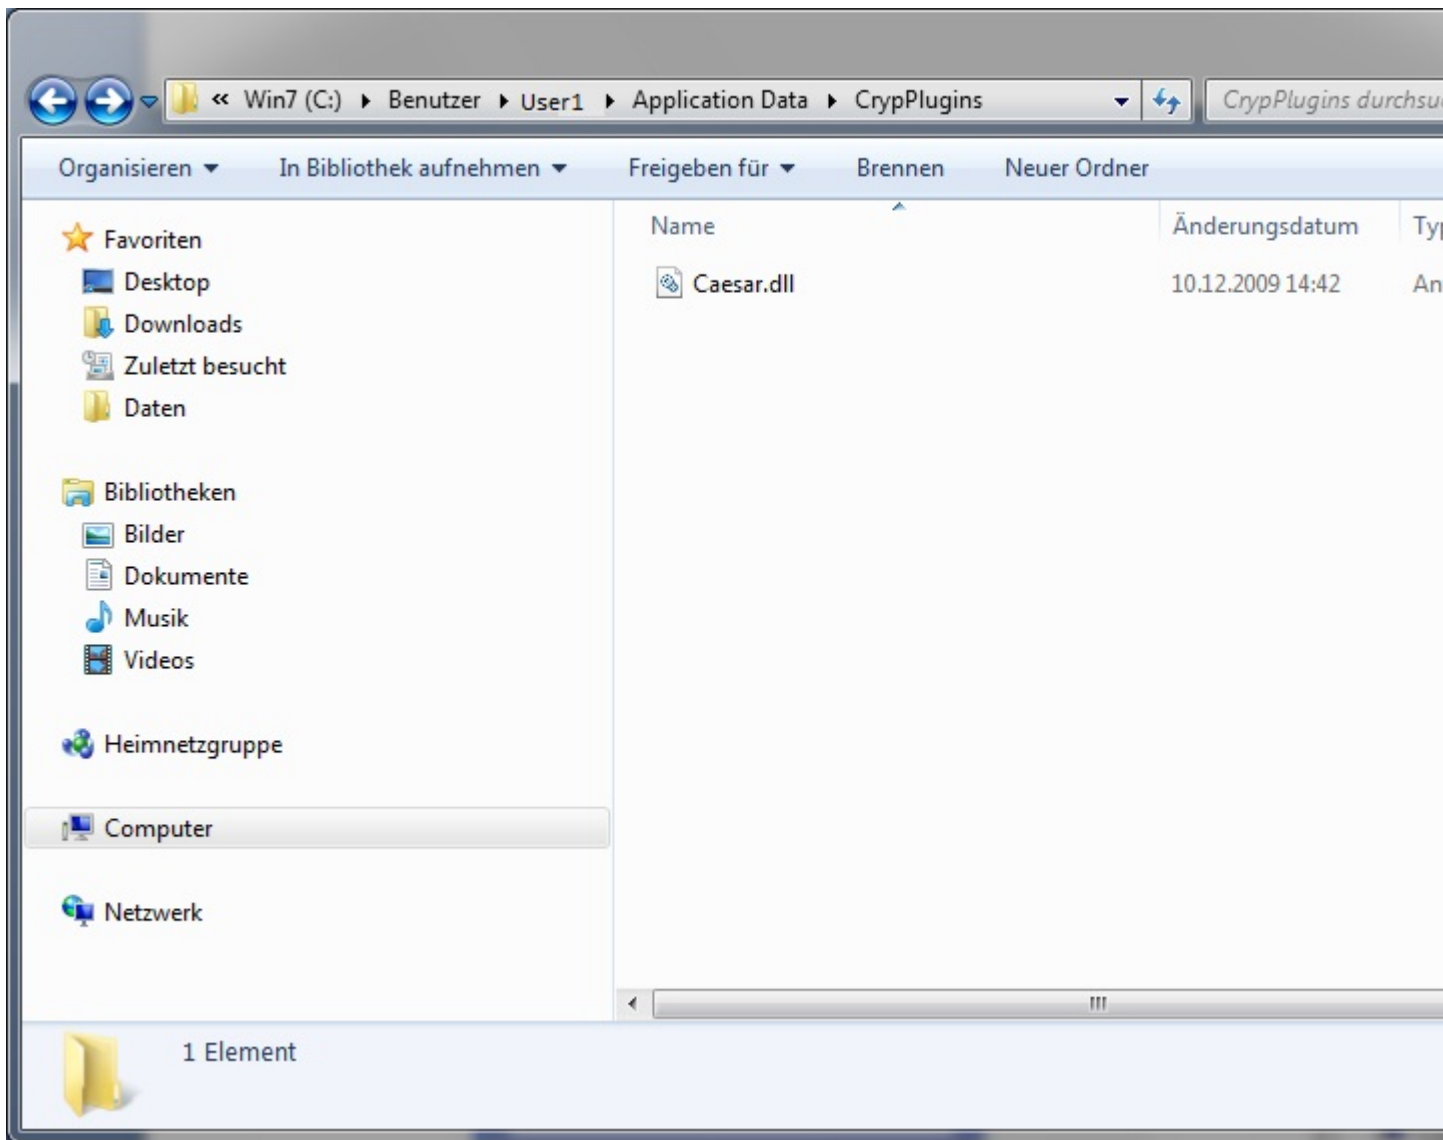


Figure 2.33: Plugins custom storage

2.14 Provide a workflow file of your plugin

Every plugin developer should provide a workflow file which shows his algorithm working in CrypTool2. You will automatically create a workflow file by saving your project which was created on CrypTool2 work space. Here is an example how a workflow could look like:

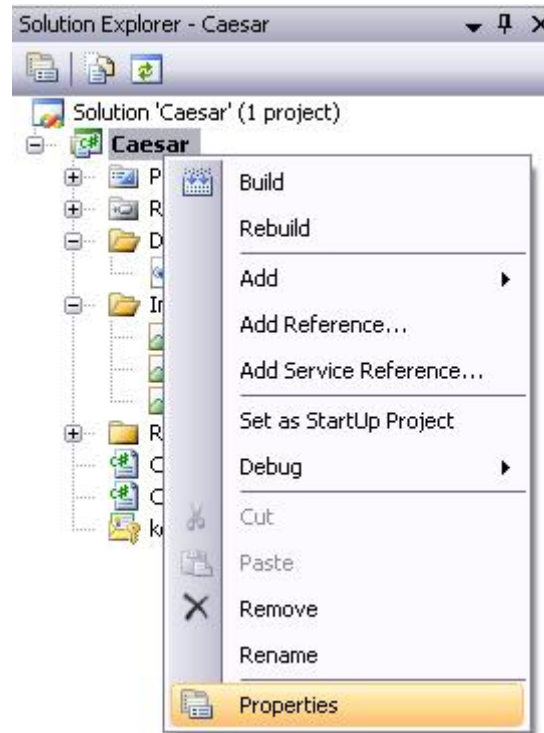


Figure 2.34: Solution Properties

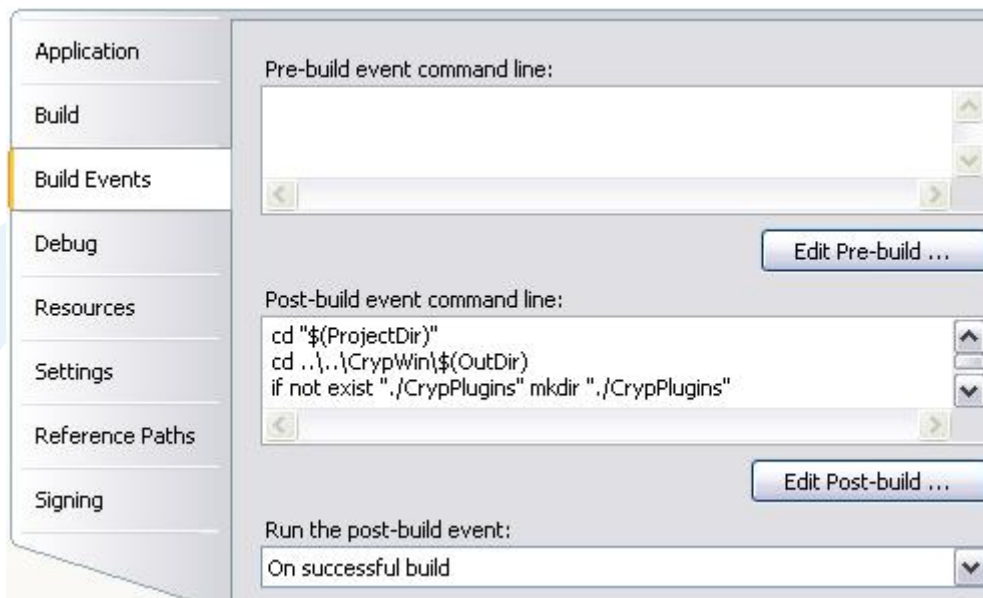


Figure 2.35: Build Events

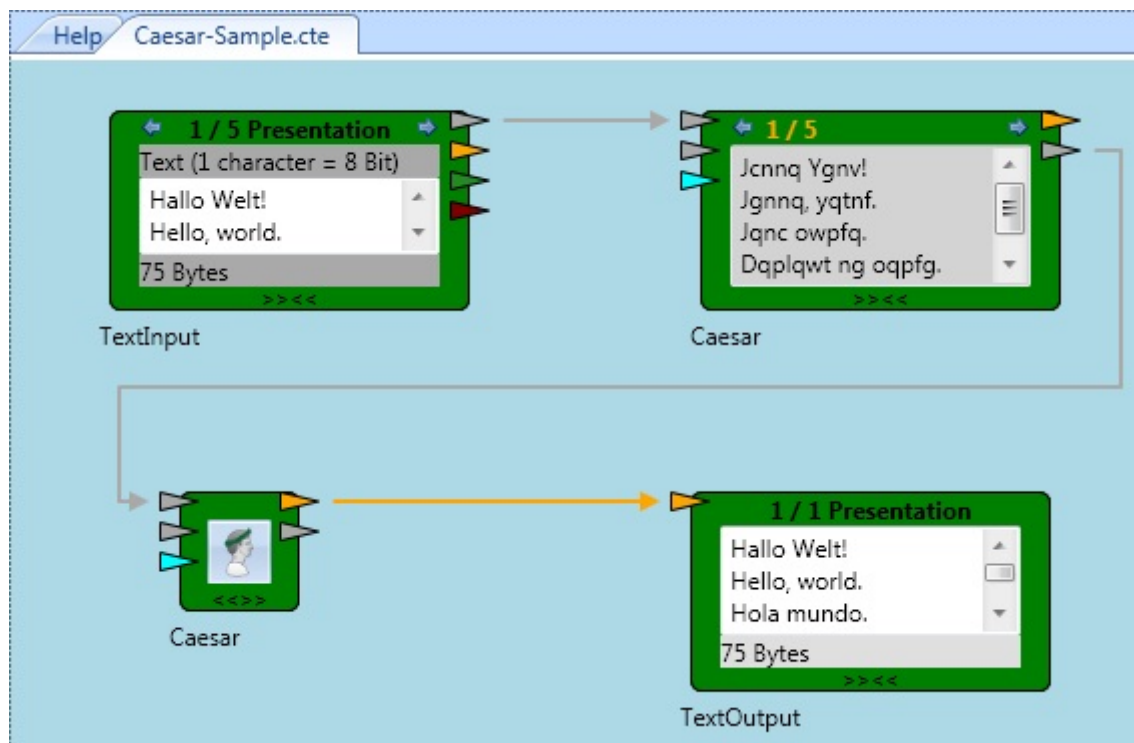


Figure 2.36: Plugin sample