

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

CHAPTER – XII

APPENDIX

12.1 – Source Code

App.py

```
from flask import Flask, render_template

app = Flask(__name__)

@app.route('/')
def index():
    return render_template('index.html')


@app.route('/about')
def about():
    return render_template('about.html')

@app.route('/dashboard01')
def dashboard01():
    return render_template('dashboard01.html')

@app.route('/dashboard02')
def dashboard02():
    return render_template('dashboard02.html')

@app.route('/story')
def story():
    return render_template('story.html')

if __name__ == '__main__':
    # debug=True automatically restarts the server when you make changes
    app.run(debug=True)
```

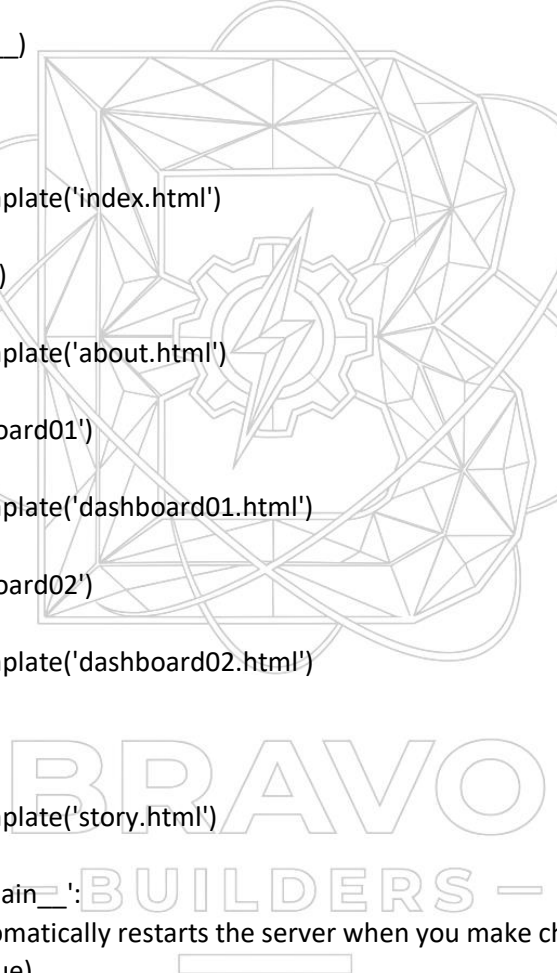

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

Navbar.html

```
<nav class="navbar navbar-expand-lg navbar-dark bg-dark mb-4 shadow">
  <div class="container">
    <a class="navbar-brand fw-bold" href="{{ url_for('index') }}">Heritage Treasures</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-
target="#navbarNav">
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarNav">
      <ul class="navbar-nav ms-auto">
        <li class="nav-item"><a class="nav-link" href="{{ url_for('index') }}">Home</a></li>
        <li class="nav-item"><a class="nav-link" href="{{ url_for('dashboard01') }}">Dashboard
01</a></li>
        <li class="nav-item"><a class="nav-link" href="{{ url_for('dashboard02') }}">Dashboard
02</a></li>
        <li class="nav-item"><a class="nav-link" href="{{ url_for('story') }}">Data Story</a></li>
        <li class="nav-item"><a class="nav-link" href="{{ url_for('about') }}">About</a></li>
      </ul>
    </div>
  </div>
</nav>
```

Index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Heritage Treasures | Home</title>
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstrap.min.css"
rel="stylesheet">
  <style>body { background-color: #f8f9fa; }</style>
</head>
<body>
  {% include 'navbar.html' %}
```

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

```
<div class="container mt-5">
  <div class="p-5 text-center bg-white rounded-3 shadow-sm border">
    <h1 class="display-4 fw-bold text-dark">Heritage Treasures</h1>
    <p class="lead text-secondary mt-3">An In-Depth Analysis of World Heritage Sites in
Tableau</p>
    <hr class="my-4">
    <p>Explore the cultural, natural, and mixed wonders of the world through interactive
data visualizations.</p>
    <div class="mt-4">
      <a class="btn btn-dark btn-lg px-4 me-2" href="{{ url_for('dashboard01') }}">View
Dashboards</a>
      <a class="btn btn-outline-secondary btn-lg px-4" href="{{ url_for('about') }}">Learn
More</a>
    </div>
  </div>
</div>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js"></script>
</body>
</html>
```

Dashboard 01

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Heritage Treasures | Dashboard 01</title>
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstrap.min.css"
rel="stylesheet">
  <style>
    body {
      background-color: #f8f9fa;
    }
    /* Forces a stable container block so the Tableau JS engine doesn't read 0px width */
    .tableau-responsive-container {
```

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

```

width: 100%;
max-width: 1000px;
margin: 0 auto;
overflow-x: auto;
-webkit-overflow-scrolling: touch;
}
</style>
</head>
<body>
{% include 'navbar.html' %}

<div class="container my-4">
  <div class="mb-4">
    <h2 class="fw-bold text-dark mb-1">Dashboard 01: Global Distribution</h2>
    <p class="text-muted text-capitalize">Heritage treasures: an in-depth analysis of UNESCO
world heritage sites in tableau</p>
  </div>

  <div class="card shadow-sm border-0">
    <div class="card-body p-3 bg-white rounded">
      <div class="tableau-responsive-container">

        <div class='tableauPlaceholder' id='viz1782282524358' style='position: relative;
width: 100%;'>
          <noscript>
            <a href='#'>
              <img alt='Heritage treasures: an in-depth analysis of UNESCO world heritage
sites in tableau '
src='https://public.tableau.com/static/images/DA/DASHBOARD1-
Heritagetreasuresanin-
depthanalysisofUNESCOWorldheritagesitesintableau/Dashboard1/1_rss.png'
style='border: none' />
            </a>
          </noscript>
          <object class='tableauViz' style='display:none;'>
            <param name='host_url' value='https%3A%2F%2Fpublic.tableau.com%2F' />
            <param name='embed_code_version' value='3' />
            <param name='site_root' value='' />
            <param name='name' value='DASHBOARD1-Heritagetreasuresanin-
depthanalysisofUNESCOWorldheritagesitesintableau/Dashboard1' />
            <param name='tabs' value='no' />
            <param name='toolbar' value='yes' />
            <param name='static_image'

```

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

value='https://public.tableau.com/static/images/DA/DASHBOARD1-HeritageTreasuresAnIn-

depthanalysisofUNESCOWorldHeritageSitesInTableau/Dashboard1/1.png' />

<param name='animate_transition' value='yes' />

<param name='display_static_image' value='yes' />

<param name='display_spinner' value='yes' />

<param name='display_overlay' value='yes' />

<param name='display_count' value='yes' />

<param name='language' value='en-US' />

</object>

</div>

<script type='text/javascript'>

// Wrapping inside window.onload prevents layout calculation errors

window.onload = function() {

var divElement = document.getElementById('viz1782282524358');

var vizElement = divElement.getElementsByTagName('object')[0];

// Safety check: if offsetWidth is 0, fall back to window width or a default 1000px

var calculatedWidth = divElement.offsetWidth || window.innerWidth || 1000;

if (calculatedWidth > 800) {

vizElement.style.width='1000px';

vizElement.style.height='827px';

} else if (calculatedWidth > 500) {

vizElement.style.width='1000px';

vizElement.style.height='827px';

} else {

vizElement.style.width='100%';

vizElement.style.height='1577px';

}

var scriptElement = document.createElement('script');

scriptElement.src = 'https://public.tableau.com/javascripts/api/viz_v1.js';

vizElement.parentNode.insertBefore(scriptElement, vizElement);

};

</script>

</div>

</div>

</div>

</div>

<script

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

```
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js"></script>
</body>
</html>
```

Dashboard 02

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Heritage Treasures | Dashboard 02</title>
  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstrap.min.css"
rel="stylesheet">
  <style>
    body {
      background-color: #f8f9fa;
    }
    /* Forces a stable container block so the Tableau JS engine doesn't read 0px width */
    .tableau-responsive-container {
      width: 100%;
      max-width: 1000px;
      margin: 0 auto;
      overflow-x: auto;
      -webkit-overflow-scrolling: touch;
    }
  </style>
</head>
<body>
  {% include 'navbar.html' %}

  <div class="container my-4">
    <div class="mb-4">
      <h2 class="fw-bold text-dark mb-1">Dashboard 02: Detailed Analysis</h2>
      <p class="text-muted text-capitalize">Heritage treasures: an in-depth analysis of UNESCO
world heritage sites in tableau</p>
    </div>

    <div class="card shadow-sm border-0">
```

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

```

<div class="card-body p-3 bg-white rounded">
  <div class="tableau-responsive-container">

    <div class='tableauPlaceholder' id='viz1782282637003' style='position: relative;
width: 100%;'>
      <noscript>
        <a href='#'>
          <img alt='Heritage treasures: an in-depth analysis of UNESCO world heritage
sites in tableau '
src='https://public.tableau.com/static/images/DA/DASHBOARD2-
HeritageTreasuresAnIn-
depthAnalysisOfUNESCOWorldHeritageSitesInTableau/Dashboard2/1_rss.png'
style='border: none' />
        </a>
      </noscript>
      <object class='tableauViz' style='display:none;'>
        <param name='host_url' value='https%3A%2F%2Fpublic.tableau.com%2F' />
        <param name='embed_code_version' value='3' />
        <param name='site_root' value='' />
        <param name='name' value='DASHBOARD2-HeritageTreasuresAnIn-
depthAnalysisOfUNESCOWorldHeritageSitesInTableau/Dashboard2' />
        <param name='tabs' value='no' />
        <param name='toolbar' value='yes' />
        <param name='static_image'
value='https://public.tableau.com/static/images/DA/DASHBOAR
D2-HeritageTreasuresAnIn-
depthAnalysisOfUNESCOWorldHeritageSitesInTableau/Dashboard2/1.png' />
        <param name='animate_transition' value='yes' />
        <param name='display_static_image' value='yes' />
        <param name='display_spinner' value='yes' />
        <param name='display_overlay' value='yes' />
        <param name='display_count' value='yes' />
        <param name='language' value='en-US' />
      </object>
    </div>

    <script type='text/javascript'>
      // Wrapping inside window.onload prevents layout calculation errors
      window.onload = function() {
        var divElement = document.getElementById('viz1782282637003');
        var vizElement = divElement.getElementsByTagName('object')[0];

        // Safety check: if offsetWidth is 0, fall back to window width or a default 1000px

```

Heritage Treasures: An In-Depth Analysis of


UNESCO World Heritage Sites in Tableau

```
var calculatedWidth = divElement.offsetWidth || window.innerWidth || 1000;

if ( calculatedWidth > 800 ) {
    vizElement.style.width='1000px';
    vizElement.style.height='827px';
} else if ( calculatedWidth > 500 ) {
    vizElement.style.width='1000px';
    vizElement.style.height='827px';
} else {
    vizElement.style.width='100%';
    vizElement.style.height='977px';
}

var scriptElement = document.createElement('script');
scriptElement.src = 'https://public.tableau.com/javascripts/api/viz_v1.js';
vizElement.parentNode.insertBefore(scriptElement, vizElement);
};
</script>
</div>
</div>
</div>

<script
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js"></script>
</body>
</html>
```

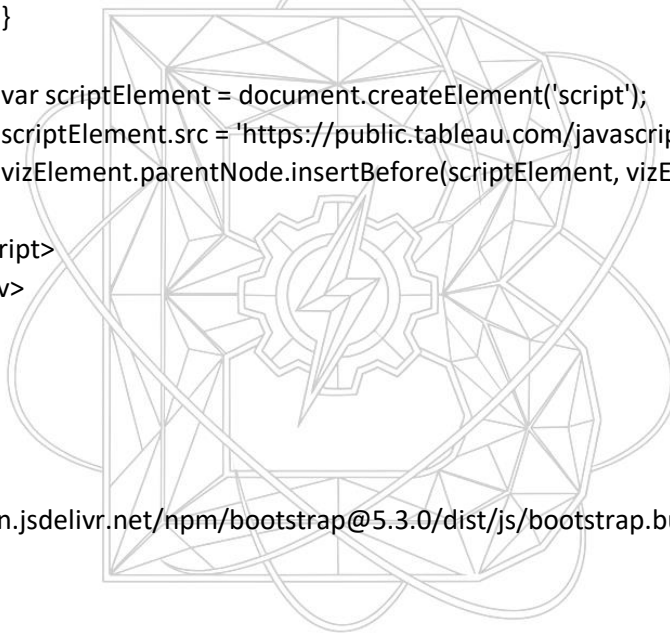

Story.html

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Heritage Treasures | Data Story</title>
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstrap.min.css"
rel="stylesheet">
    <style>
        body {
```



Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

```
background-color: #f8f9fa;
}
/* Forces a stable container block so the Tableau JS engine doesn't read 0px width */
.tableau-responsive-container {
width: 100%;
max-width: 1016px; /* Configured to match the story layout width */
margin: 0 auto;
overflow-x: auto;
-webkit-overflow-scrolling: touch;
}
</style>
</head>
<body>
{% include 'navbar.html' %}

<div class="container my-4">
  <!-- Page Header -->
  <div class="mb-4">
    <h2 class="fw-bold text-dark mb-1">Data Story: Interactive Narrative</h2>
    <p class="text-muted text-capitalize">Heritage treasures: an in-depth analysis of UNESCO
world heritage sites in tableau</p>
  </div>

  <!-- Interactive Visualization Card Container -->
  <div class="card shadow-sm border-0">
    <div class="card-body p-3 bg-white rounded">
      <div class="tableau-responsive-container">

        <!-- Tableau Embed Section Start -->
        <div class='tableauPlaceholder' id='viz1782282706944' style='position: relative;
width: 100%;'>
          <noscript>
            <a href='#'>
              <img alt='Heritage treasures: an in-depth analysis of UNESCO world heritage
sites in tableau '
src='https://public.tableau.com/static/images/ST/STORY-
HeritageTreasuresAnIn-
depthAnalysisOfUNESCOWorldHeritageSitesInTableau/Story1/1_rss.png' style='border:
none' />
            </a>
          </noscript>
          <object class='tableauViz' style='display:none;'>
            <param name='host_url' value='https://public.tableau.com/' />
```

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

```
<param name='embed_code_version' value='3' />
<param name='site_root' value='' />
<param name='name' value='STORY-Heritagetreasuresanin-
depthanalysisofUNESCOworldheritagesitesintableau&#47;Story1' />
<param name='tabs' value='no' />
<param name='toolbar' value='yes' />
<param name='static_image'
value='https:&#47;&#47;public.tableau.com&#47;static&#47;images&#47;ST&#47;STORY-
Heritagetreasuresanin-
depthanalysisofUNESCOworldheritagesitesintableau&#47;Story1&#47;1.png' />
<param name='animate_transition' value='yes' />
<param name='display_static_image' value='yes' />
<param name='display_spinner' value='yes' />
<param name='display_overlay' value='yes' />
<param name='display_count' value='yes' />
<param name='language' value='en-US' />
</object>
</div>

<script type='text/javascript'>
// Wrapping inside window.onload prevents layout calculation errors
window.onload = function() {
    var divElement = document.getElementById('viz1782282706944');
    var vizElement = divElement.getElementsByTagName('object')[0];

    // Sets dimensions safely after the browser finishes painting the card layout
    vizElement.style.width='1016px';
    vizElement.style.height='991px';

    var scriptElement = document.createElement('script');
    scriptElement.src = 'https://public.tableau.com/javascripts/api/viz_v1.js';
    vizElement.parentNode.insertBefore(scriptElement, vizElement);
};
</script>
<!-- Tableau Embed Section End -->

</div>
</div>
</div>
</div>

<!-- Bootstrap JS Bundle -->
<script
```

Heritage Treasures: An In-Depth Analysis of

UNESCO World Heritage Sites in Tableau

```
src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js"></script>
</body>
</html>
```

Style.css

```
body{
  background:#f5f5f5;
  font-family:Arial, Helvetica, sans-serif;
}
```

```
.hero{
  padding:100px 20px;
  background:white;
  text-align:center;
}
```


```
.hero h1{
  color:#198754;
}
```

```
.hero h4{
  color:#555;
}
```

```
footer{
  margin-top:60px;
}
```

```
iframe{
  border:none;
  width:100%;
  height:100%;
  border-radius:10px;
  box-shadow:0 0 10px rgba(0,0,0,.15);
}
```

```
.container{
```

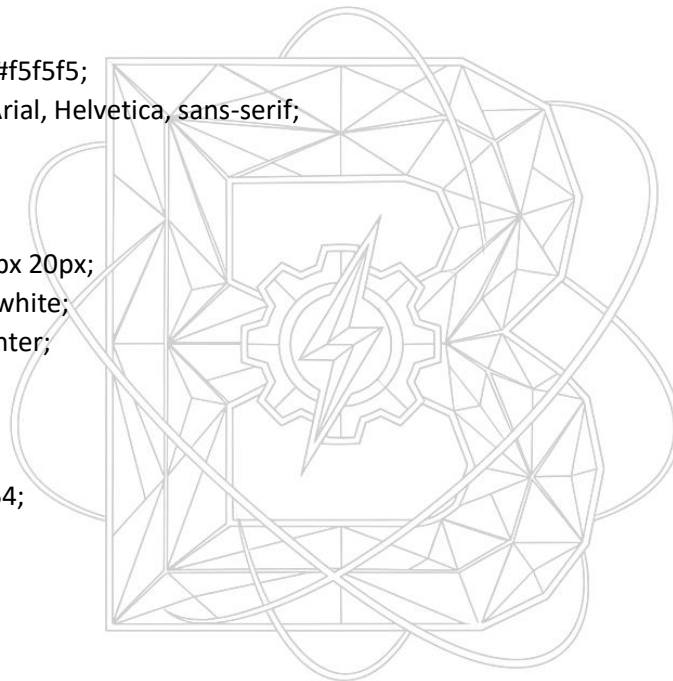


BRAVO
— BUILDERS —
—



Heritage Treasures: An In-Depth Analysis of UNESCO World Heritage Sites in Tableau

```
max-width:1200px;  
}
```

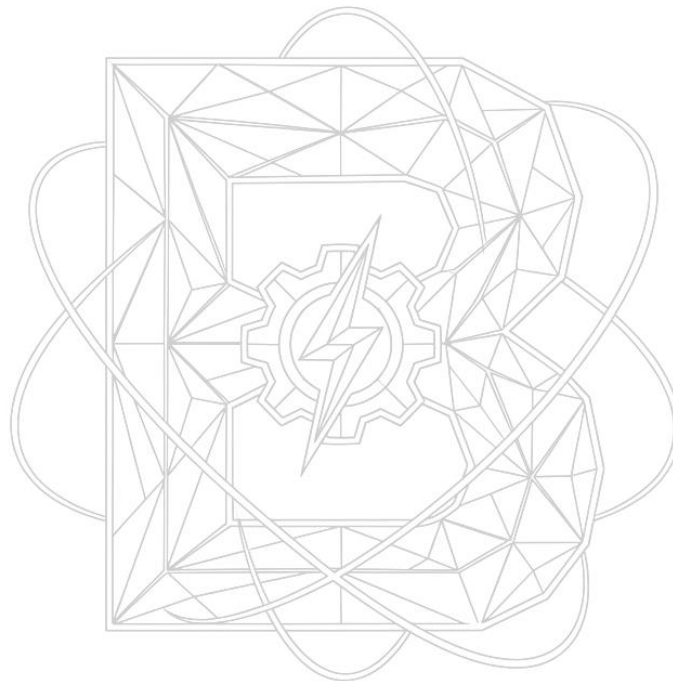

BRAVO
— BUILDERS —
—

