Document For running any Application example Pizza Store

Npm -v


Node -v

Npm init -y

Npm install express mongoose bcryptjs

Turn on Compass and connect. After this turn off internet go to offline mode

Folder structure

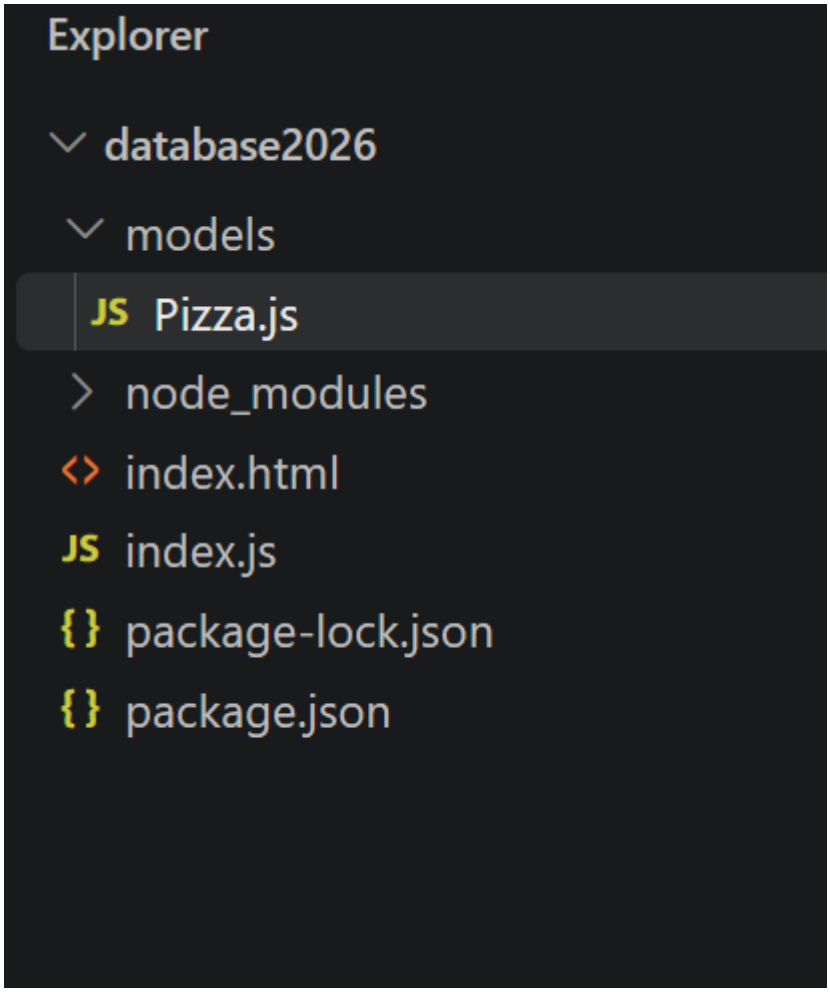

Three Files content is provided

HTML FORM (index.html)

```
<!DOCTYPE html>
<html>
<head>
  <title>Pizza Details</title>
</head>
<body>

<h2>Pizza Details Management</h2>

<form action="/add" method="post">

  <input name="name" placeholder="Pizza Name" required><br><br>

  <input name="category" placeholder="Category" required><br><br>

  <select name="size" required>
    <option value="">Select Size</option>
    <option>Small</option>
```

```
    <option>Medium</option>
    <option>Large</option>
  </select><br><br>

  <input name="cost" type="number"
placeholder="Cost" required><br><br>

  <button type="submit">Add Pizza</button>

</form>

</body>
</html>
```

Index.js (DB Connection)

```
const express = require("express");
const mongoose = require("mongoose");
const path = require("path");
const Pizza = require("./models/Pizza");

const app = express();

app.use(express.urlencoded({ extended: true }));
```

```
mongoose.connect("mongodb://127.0.0.1:27017/pizzajob")
  .then(() => console.log("MongoDB connected"));

app.get("/", (req, res) =>
  res.sendFile(path.join(__dirname, "index.html"))
);

app.post("/add", async (req, res) => {

  const { name, category, size, cost } = req.body;

  await new Pizza({
    name,
    category,
    size,
    cost
  }).save();

  res.send("Pizza details saved successfully!");
});

app.listen(3000, () =>
```

```
  console.log("http://localhost:3000")
);
```


Mongoose connection(Pizza.js)

```
const mongoose = require("mongoose");

const pizzaSchema = new mongoose.Schema({
  name: String,
  category: String,
  size: String,
  cost: Number
});

module.exports = mongoose.model("Pizza", pizzaSchema, "login");
```

finally run this using node index.js

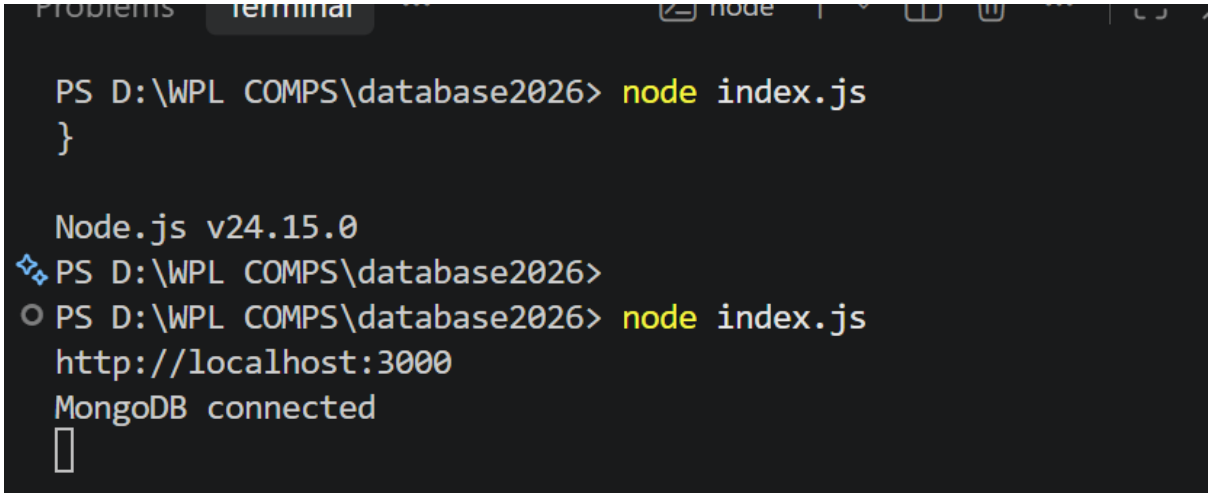

Fill the form at http://localhost:3000/

Pizza Details Management


Pizza Name

Category

Select Size

Cost

Add Pizza

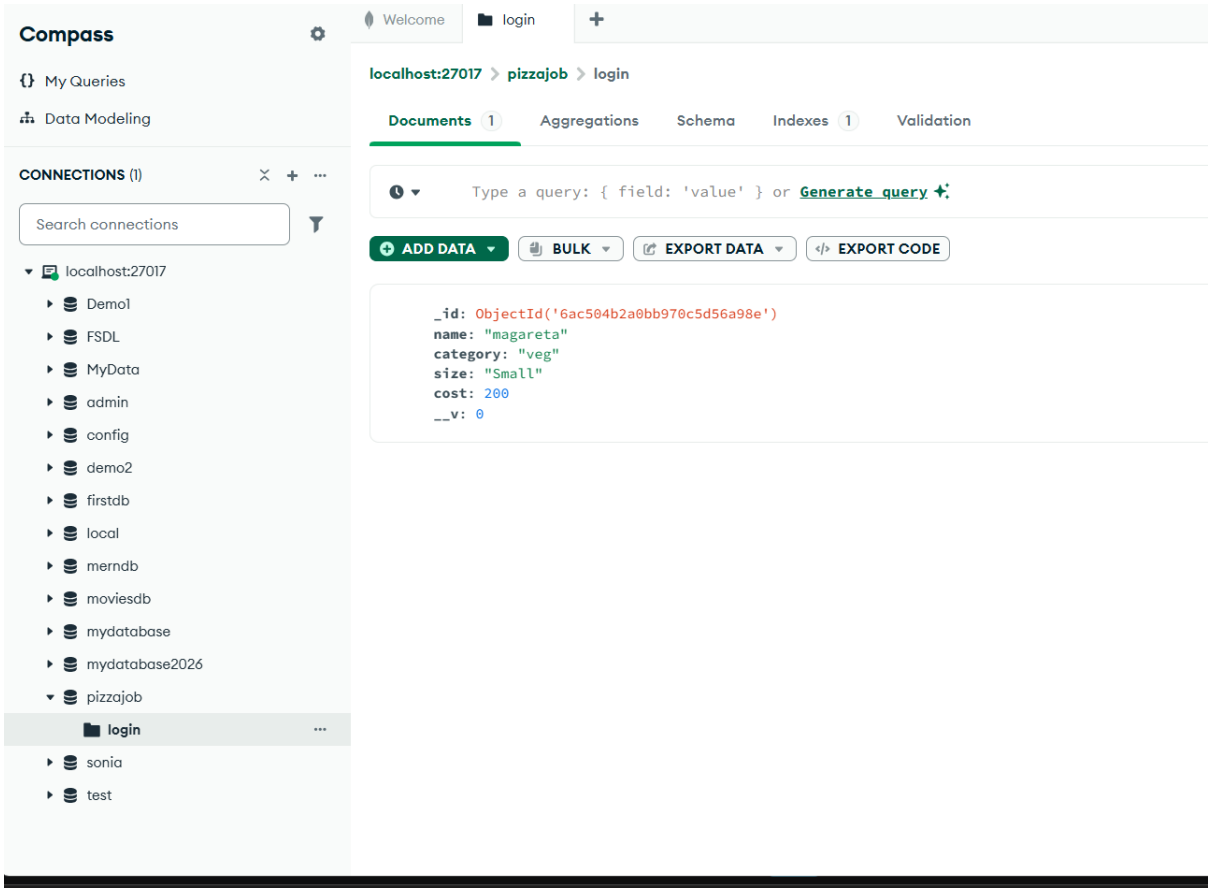
Compass
My Queries
Data Modeling
CONNECTIONS (1)
Search connections
localhost:27017
Demo1
FSDL
MyData
admin
config
demo2
firstdb
local
merndb
moviesdb
mydatabase
mydatabase2026
pizzajob
login
sonia
test
Welcome
login
localhost:27017 > pizzajob > login
Documents 1
Aggregations
Schema
Indexes 1
Validation
Type a query: { field: 'value' } or Generate query
ADD DATA
BULK
EXPORT DATA
EXPORT CODE
_id: ObjectId('6ac504b2a0bb970c5d56a98e')
name: "magareta"
category: "veg"
size: "Small"
cost: 200
__v: 0