

Overture – Open-source Tools for Formal Modelling TR-2009-02
December 2009

User Guide for the Overture VDM Tool Support

by

Peter Gorm Larsen, Kenneth Lausdahl, Augusto Reibero and Sune Wolff
Engineering College of Aarhus
Dalgas Avenue 2, DK-8000 Århus C, Denmark

Nick Battle
Fujitsu Services
Lovelace Road, Bracknell,
Berkshire. RG12 8SN, UK



Contents

1	Introduction	1
2	Getting Hold of the Software	2
3	Using the Overture Perspective	2
3.1	Getting into the Eclipse Terminology	2
3.2	Additional Eclipse Features Applicable in Overture	4
4	Managing Overture Projects	4
4.1	Importing Overture Projects	4
4.2	Creating a New Overture Project	4
4.3	Creating Files	5
4.4	Setting Project Options	6
5	Editing VDM models	6
6	Interpretation and Debugging in Overture	6
6.1	Debug configuration	6
6.2	Debug Perspective	6
6.2.1	Debug View	7
6.2.2	Variables View	7
6.2.3	Breakpoints View	9
6.2.4	Expressions View	9
6.2.5	Interactive Console View	9
6.2.6	Conditional breakpoints	9
7	Collecting Test Coverage Information	10
8	Pretty Printing to L^AT_EX	10
9	Managing Proof Obligations	10
10	Combinatorial Testing	11
10.1	The Use of the Trace Definition Syntax	11
10.2	Using the Combinatorial Testing GUI	13
11	Mapping VDM++ back and forth to UML	14
12	Moving from VDM++ to VDM-RT	14
13	Analysing and Displaying Logs from VDM-RT Executions	15

14 A Command-Line Interface to VDMJ	16
14.1 Starting VDMJ	17
14.2 Parsing, Type Checking, and Proof Obligations	20
14.3 The Interpreter	20
References	27
A Internal Errors	28
B Lexical Errors	31
C Syntactic Errors	32
D Type Errors and Warnings	44
E Run-Time Errors	57
F Categories of Proof Obligations	63

ABSTRACT

This document is a user manual for the Overture Integrated Development Environment (IDE) open source tool for VDM. It can serve as a reference for anybody wishing to make use of this tool with one of the VDM dialects (VDM-SL, VDM++ and VDM-RT). This tool support is build of top of the Eclipse platform. The objective of the Overture open source initiative is to enable a platform that both can be used for experimentation of new subsets or supersets of VDM dialects as well as new features analysing such VDM models in different ways. The tool is entirely open source so anybody can join the development team and influence the future developments. The long term target is also to ensure that stable versions of the tool suite can be used for large scale industrial applications of the VDM technology.

1 Introduction

The Vienna Development Method (VDM) is one of the longest established model-oriented formal methods for the development of computer-based systems and software [Bjørner&78a, Jones90, Fitzgerald&08a]. It consists of a group of mathematically well-founded languages for expressing system models during early design stages, before expensive implementation commitments are made. The construction and analysis of the model using Overture help to identify areas of incompleteness or ambiguity in informal system specifications, and provide some level of confidence that a valid implementation will have key properties, especially those of safety or security. VDM has a strong record of industrial application, in many cases by practitioners who are not specialists in the underlying formalism or logic [Larsen&95, Clement&99, Kurita&09]. Experience with the method suggests that the effort expended on formal modeling and analysis can be recovered in reduced rework costs arising from design errors.

VDM models are expressed in a specification language (VDM-SL) that supports the description of data and functionality [ISOVDM96, Fitzgerald&98, Fitzgerald&09]. Data are defined by means of types built using constructors that define structured data and collections such as sets, sequences and mappings from basic values such as Booleans and numbers. These types are very abstract, allowing the user to add any relevant constraints as data type invariants. Functionality is defined in terms of operations over these data types. Operations can be defined implicitly by preconditions and postconditions that characterize their behavior, or explicitly by means of specific algorithms. An extension of VDM-SL, called VDM++, supports object-oriented structuring of models and permits direct modeling of concurrency [Fitzgerald&05]. An additional extension to VDM++ is called VDM Real Time (VDM-RT) (formerly called VDM In a Constrained Environment (VICE)) [Mukherjee&00, Verhoef&06]. All these different dialects are supported by the unified tool called Overture.

Since the VDM modeling languages have a formal mathematical semantics, a wide range of analyses can be performed on models, both to check internal consistency and to confirm that models have emergent properties. Analyses may be performed by inspection, static analysis, testing or mathematical proof. To assist in this process, Overture supply tool support for building models in collaboration with other modeling tools, to execute and test models and to carry out different forms of static analysis [Larsen&10]. It can be seen as an open source version of the commercial tool called VDMTools [Elmstrøm&94, Fitzgerald&08b] although that also have features to generate executable code in high-level programming languages which are not yet available in Overture.

This guide explains how to use the Overture IDE for developing models for different VDM dialects. This user manual starts with explanation about how to get hold of the software in Section 2. This is followed in Section 3 with an introduction to the concepts used in the different Overture perspectives based on Eclipse terminology. In Section 4 it is explained how projects are managed in the Overture IDE. In Section 5 the features supported when editing VDM models are explained. This is followed in Section 6 with an explanation of the interpretation and debugging capabilities in the Overture IDE. Section 7 then illustrates how test coverage information can be gathered when models are interpreted. Afterwards Section 8 shows how models with and without test coverage information can be generated to the text processing system \LaTeX and automatically

converted to pdf format if one have `pdflatex` installed on the computer. Afterwards from Section 9 to Section 13 different VDM specific features are explained. In Section 9 the use of the notion for proof obligations and its support in Overture is explained. In Section 10 a notion of combinatorial testing and the automation support for that in Overture is presented. In Section 11 support for mapping between object-oriented VDM models to and from UML models is presented. In Section 12 it is illustrated how one can move from a VDM++ project to a new VDM-RT project. In Section 13 it is shown how support to analysing and displaying logs from executing such VDM-RT models. After these sections the main part of the user manual is completed in Section 14 with an explanantion of the features from Overture that also is available from a command-line interface. Finally in Appendix ?? an index of significant terms used in this user manual can be found.

2 Getting Hold of the Software

The Overture project is managed on SourceForge. The best way to run Overture is to download a special version of Eclipse with the Overture functionality already pre-installed. If you go to:

```
http://sourceforge.net/projects/overture/files/
```

you can find pre-installed versions of Overture for Windows, Linux and Mac. At a later stage it will also be possible to use an update site to install it from directly in Eclipse. However, at the moment only stand-alone versions are distributed because the risk of version problems and dependencies with other plug-ins is much smaller this way.

Zip files with a large collection of existing VDM-SL, VDM++ and VDM-RT projects can be downloaded from

```
http://sourceforge.net/projects/overture/files/Examples/
```

Such existing projects can be imported as described in subsection 4.1.

3 Using the Overture Perspective

3.1 Getting into the Eclipse Terminology

Eclipse is an open source platform based around a *workbench* that provides a common look and feel to a large collection of extension products. Thus if a user is familiar with one Eclipse product, it will generally be easy to start using a different product on the same workbench. The Eclipse workbench consists of several panels known as *views*, such as the Script Explorer view at the top left of Figure 1. A collection of panels is called a *perspective*, for example Figure 1 shows the standard Overture perspective. This consists of a set of views for managing Overture projects and viewing and editing files in a project. Different perspectives are available in Overture as will be described later, but for the moment think about a perspective as a useful composition of views for conducting a particular task.

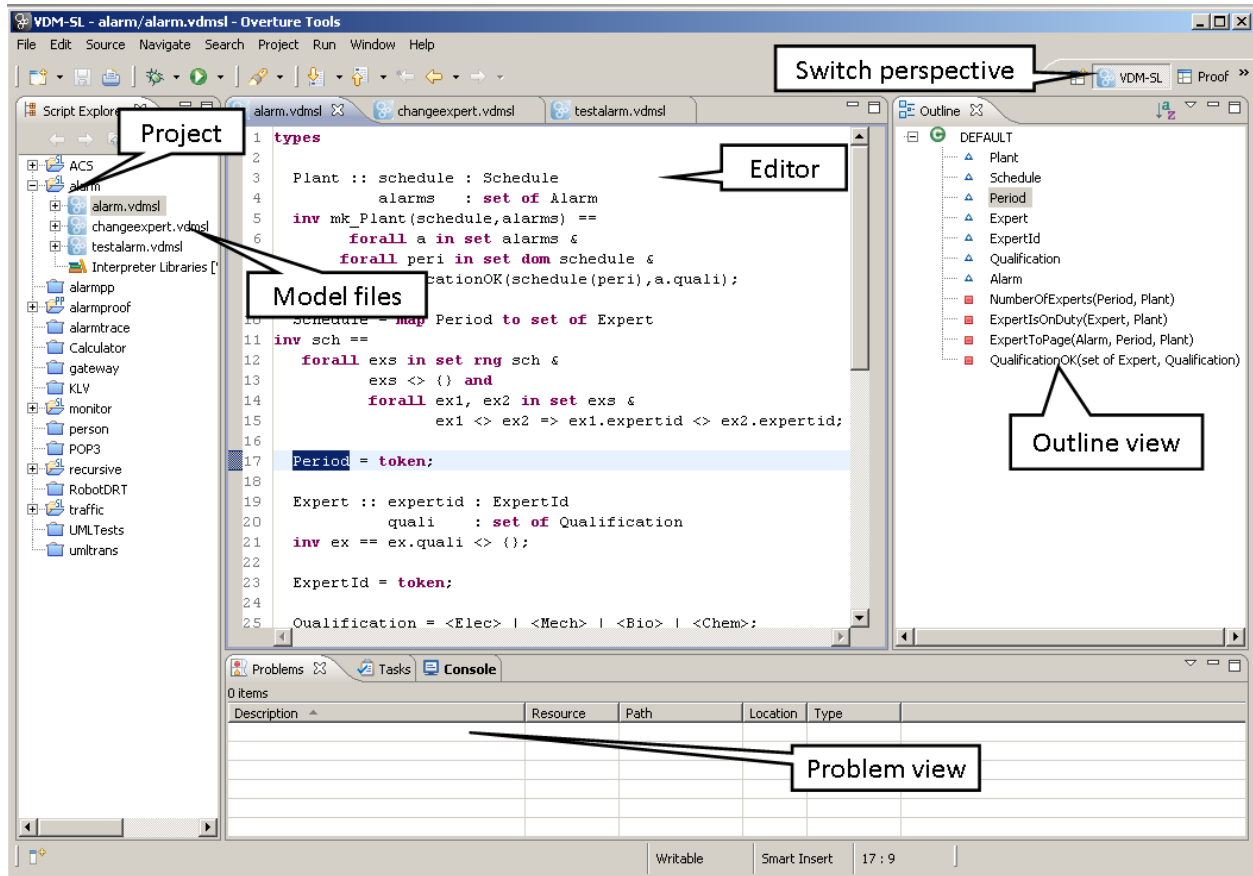


Figure 1: The Overture Perspective

The *Script Explorer* view lets you create, select, and delete Overture projects and navigate between the files in these projects.

Depending upon the dialect of VDM used in a given project, a corresponding Overture editor will be available here. A new VDM-SL project is created choosing the *File* → *New* → *Project*. Then Figure 2 will appear and *Next* can be used and then a name needs to be given to the project.

The *Outline view*, to the right of the editor (see Figure 3), presents an outline of the file selected in the editor. The outline displays any declared VDM-SL modules, as well as their state components, values, types, functions and operations. In case of a flat VDM-SL model the module is called *DEFAULT*. Figure 1 shows the outline view on the right hand side. Clicking on an operation or function will move the cursor in the editor to the definition of the operation. At the top of the outline view there is a button to optionally sort what is displayed in the outline view, for instance it is possible to hide variables.

The *Problems view* gathers information messages about the projects you are working on. This includes information generated by Overture, such as warnings and errors.

Most of the other features of the workbench, such as the menus and toolbars, are similar to

Figure 2: Creating a New VDM-SL Project


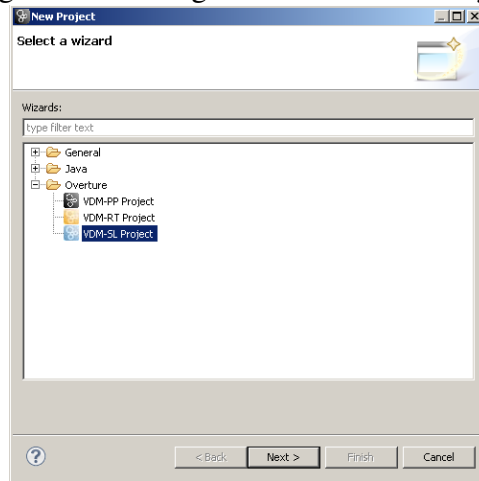


Figure 3: The Outline View

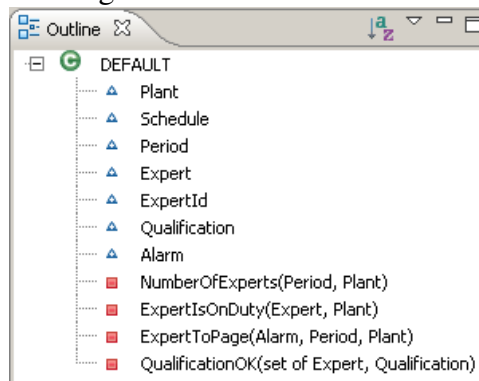

other Eclipse applications, though note that there is a special menu with Overture specific functionality. One convenient feature is a toolbar of shortcuts to switch between different perspectives that appears on the right side of the screen; these vary dynamically according to context and history.

3.2 Additional Eclipse Features Applicable in Overture

4 Managing Overture Projects

4.1 Importing Overture Projects

4.2 Creating a New Overture Project

1. Create a new project by choosing *File* → *New* → *Project* → *Overture*;

2. Select the VDM dialect you wish to use (VDM-SL, VDM-PP or VDM-RT);
3. Type in a project name
4. Chose whether you would like the contents of the new project to be in your workspace or outside from existing source files and
5. click the finish button (see 4).

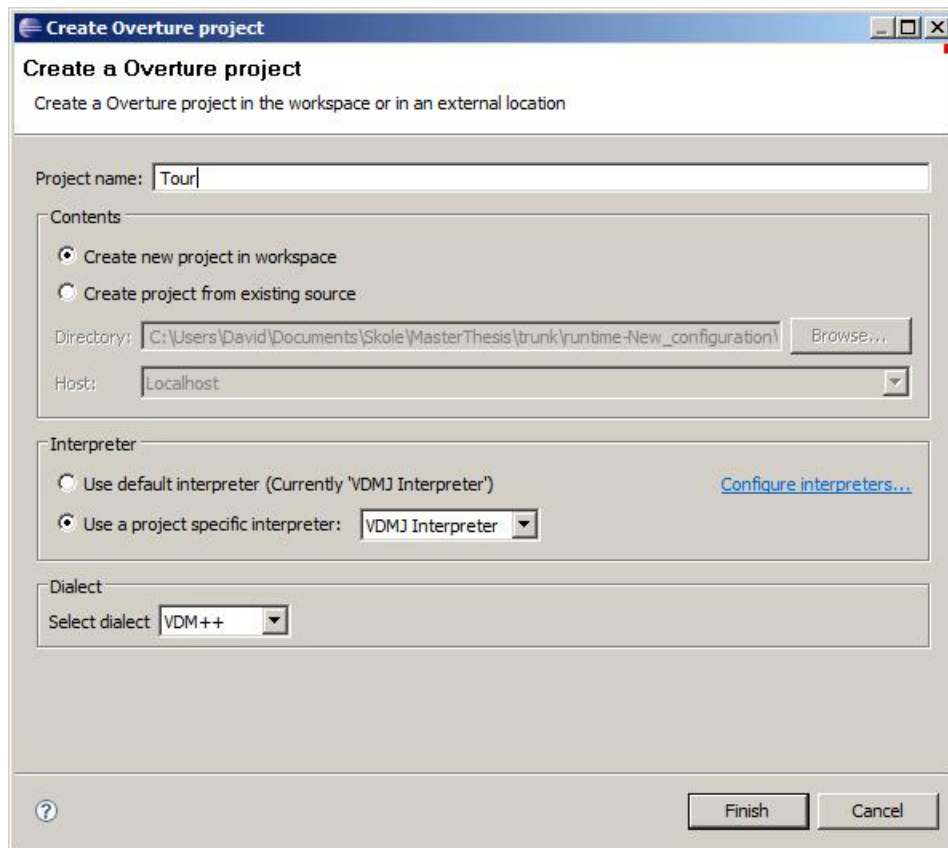


Figure 4: Create Project Wizard

4.3 Creating Files

Switching to the Overture perspective will change the layout of the user interface to focus on the VDM development. To change perspective go to the menu window → open perspective → other... and choose the Overture perspective. When the developer is in the Overture Perspective the user can create files using one of the following methods:

1. Choose *File* → *New* → *VDM-SL Module* or *VDM-PP Class* or *VDM-RT Class* or
2. Right click on the Overture project where you would like to add a new file and then choose *New* → → *VDM-SL Module* or *VDM-PP Class* or *VDM-RT Class*.

In both cases one needs to choose a file name and optionally choose a directory if one does not want to place the file in the directory for the chosen Overture project. Then a new file with the appropriate file extension according to the chosen dialect (`vdmsl`, `vdmpp` or `vdmrtd`) can be created in the selected directory. This file will use the appropriate module/class template to get the user started with defining the module/class meant to be placed in this new file. Naturally keywords for kinds of definitions that will not be used can be deleted.

4.4 Setting Project Options

5 Editing VDM models

6 Interpretation and Debugging in Overture

This section describes how to debug a model using the Overture IDE.

6.1 Debug configuration

Debugging the model under development is done by creating a debug configuration from the menu *Run* → *Debug configuration . . .* The debug configuration dialog requires the following information as input to start the debugger: the project name, the class, the starting operation/function and the file containing the starting operation/function. Figure 5 shows a debug configuration, clicking one of the browse buttons will open a dialog which give the user a list of choices. The class and operation/function are chosen from the dialog with the list of expandable classes, if the operation or function have arguments these must be typed in manually.

6.2 Debug Perspective

The Debug Perspective contains the views needed for debugging in VDM. Breakpoints can easily be set at desired places in the model, by double clicking in left margin. When the debugger reaches the location of the breakpoint, the user can inspect the values of different identifiers and step through the VDM model line by line.

The debug perspective shows the VDM model in an editor as the one used in the Overture Perspective, but in this perspective there are also views useful during debugging. The features provided in the debug perspective are described below. The Debug Perspective is illustrated on figure 6

The *Debug view* is located in the upper left corner in the Debug perspective. The Debug view shows all running models and the call stacks belonging to them. It also shows whether a given

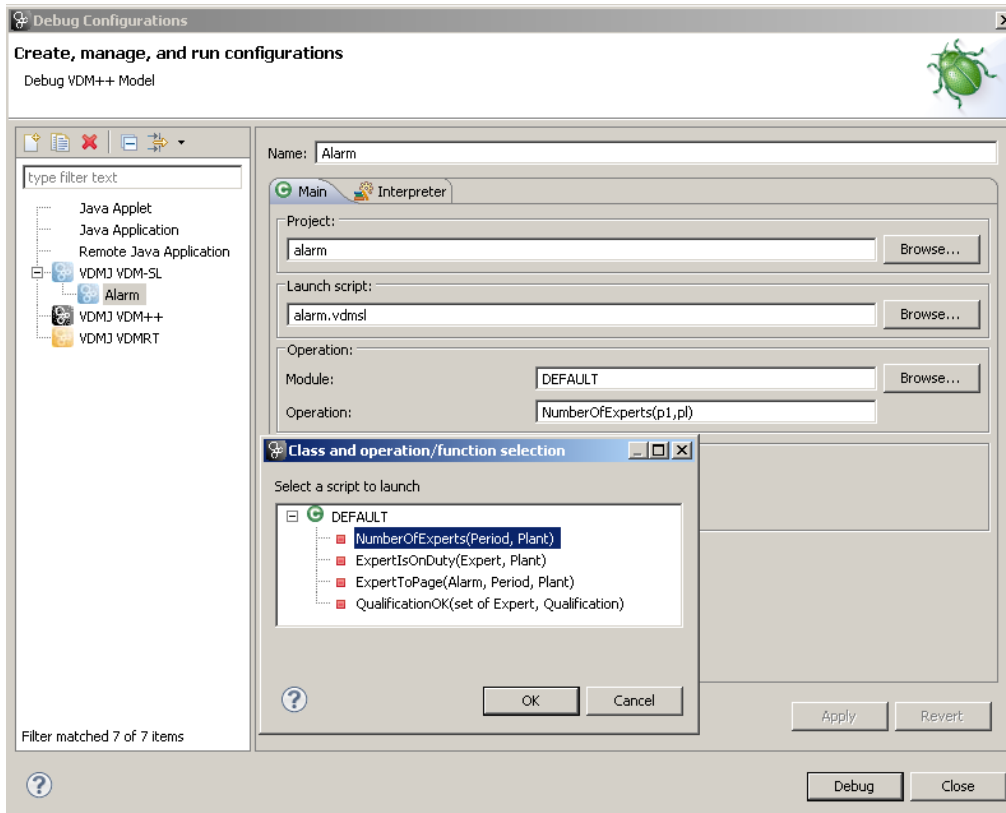


Figure 5: The debug configuration dialog

model is stopped, suspended or running. All threads are also shown, along with their running status. It is possible to switch between threads from the Debug view.

At the top of the view are buttons for controlling debugging such as; stop, step into, step over and resume. These are standard Eclipse debugging buttons (see Table 1).

6.2.1 Debug View

The debug View is located in the upper left corner in the Debug Perspective - see figure 6. The debug view shows all running models and the call stack belonging to them. It also displays whether a given model is stopped, suspended or running. In the top of the view buttons for debugging such as; stop, step into, step over, resume, etc. are located. All threads are also shown, along with their running status. It is possible to switch between threads from the Debug View.

6.2.2 Variables View

This view shows all the variables in a given context, when a breakpoint is reached. The variables and their values displayed are automatically updated when stepping through a model. The variables

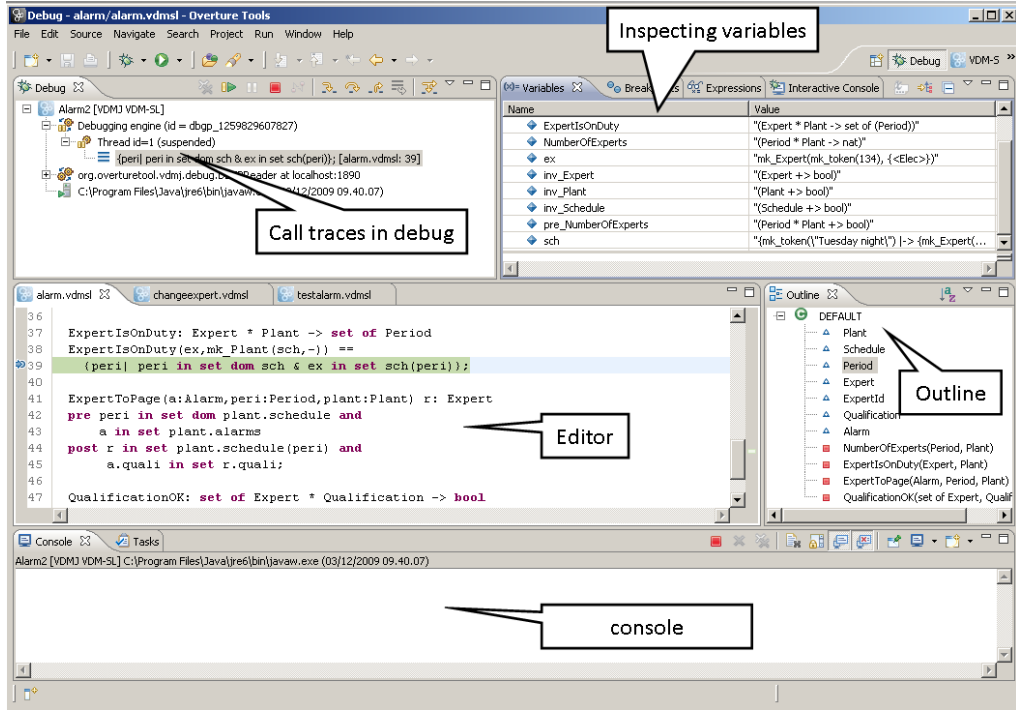


Figure 6: Debugging perspective

Table 1: Overture debugging buttons

Button	Explanation
	Resume debugging
	Suspend debugging
	Terminate debugging
	Step into
	Step over
	Step return
	Use step filters

view is by default located in the upper right hand corner in the Debug Perspective. It is also possible to inspect complex variables, expanding nested arrays and so forth.

6.2.3 Breakpoints View

Breakpoints can be added both from the edit perspective and the debug perspective from the editor view. In the debug perspective however, there is a breakpoints view that shows all breakpoints. From the breakpoints view the user can easily navigate to the location of a given breakpoint, disable, delete or set the hit count or a break condition. In figure 6 the Breakpoints View is hidden behind the Variables View in the upper right hand corner in a tabbed notebook. Section 6.2.6 explains how to use conditional breakpoints.

6.2.4 Expressions View

The expressions view allows the user to write expressions, as for the variables view, the expressions are automatically updated when stepping. Watch expressions can be added manually or created by selecting 'create watch expression' from the variables view. It is of course possible to edit existing expressions. Like the Breakpoints View this view is hidden in the upper right hand corner.

6.2.5 Interactive Console View

While the Expressions View allows to easily inspect values, the functionality is somewhat limited compared with the functionality provided by VDMTools. For more thorough inspections the Interactive Console View is more suited. Here commands can be executed on the given context, i.e. where the debugger is at a breakpoint. The Interactive console keeps a command history, so that already executed commands can be run again without actually typing in the command all over. Figure 7 shows the interactive console.

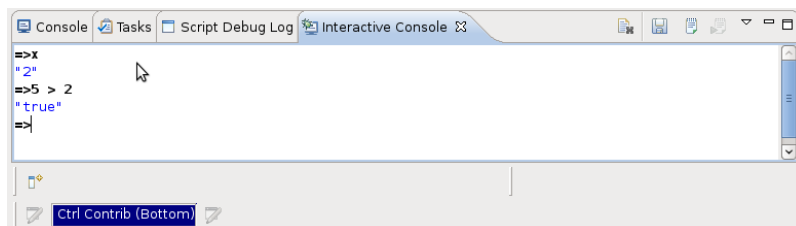


Figure 7: The interactive console

6.2.6 Conditional breakpoints

Conditional breakpoints can also be defined. These are a powerful tool for the developer since it allows specifying a condition for one or more variables which has to be true in order for the debugger to stop at the given breakpoint. Apart from specifying a break condition depending on

variables, a hit count can also be defined. A conditional breakpoint with a hit count lets the user specify a given number of calls to a particular place at which the debugger should break.

Making a breakpoint conditional is done by right clicking on the breakpoint mark in the left margin and select the option Breakpoint properties... This opens a dialog like the one shown in figure 8. It is possible to choose between two different conditional breakpoints, a hit count condition and one based on an expression defined by the user.

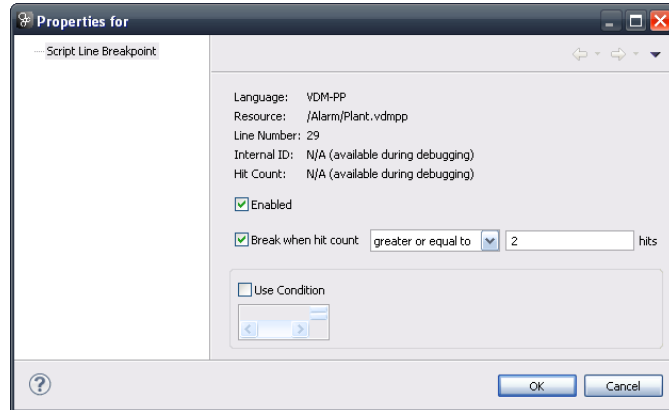


Figure 8: Conditional breakpoint options

7 Collecting Test Coverage Information

Include `overture.tex` which among other things makes use of the `times.cls` and `listings.cls` style classes. This enables the use of the standard `lstlisting` environment for type setting source text and display it in a tele-type proportional font where all keyword are typeset in a bold font.

8 Pretty Printing to L^AT_EX

9 Managing Proof Obligations

In the different VDM dialects it is possible to identify places where run-time errors potentially could occur if the model was to be executed. In essence these can be considered as additional to the existing type checking performed. Just like almost all other computer based languages it is not possible to automatically statically check if such places indeed could result in a run-time error or not. Thus Overture provides

socalled ``proof obligations`` for all places where such run-time errors ``could`` occur. Each *Proof Obligation* (PO) is formulated as a predicate that must hold on a particular place of the VDM model and thus it may have particular context information associated with it. These POs can be considered as constraints that will gurantee the internal integrity of the VDM models if they are all correct. In the long term it will be possible to prove these constraints by a proof component in Overture but this is not yet working as well as we wish.

It takes a little time for newcomers to VDM to get used to the form of these so it may be worthwhile to elaborate a bit on the form of the proof obligations. Theses can be divided into different categories depending upon their nature. These can be found in Appendix F along with a small explanation for each of them.

The proof obligation generator is invoked either on a VDM project (and then POs for all the VDM model files will be generated) or for a selected VDM file one can right click in the *Explorer* view and then select the *Proof Obligations* → *Generate Proof Obligations* menu item. Overture will then change into a special *Proof Obligations Perspective* as shown in Figure 9.

Figure 9: The Proof Obligation perspective

10 Combinatorial Testing

In order to automate parts of the testing process a notion of *traces* have been introduced into VDM++ (note that this is not yet available for VDM-SL models). Such traces conceptually correspond to regular expressions that can be expanded to a collection of test cases. Each such test case is then composed as a sequence of operation calls. If a user defines such traces it is possible to make use of a special combinatorial testing perspective that enables the automatic unfolding of the traces and automatic execution of each of the test cases. Subsequent the results of running all these can be inspected and test cases that have detected errors in the VDM++ model can easily be found and the user can then fix the problem and reuse the same traces definitions.

10.1 The Use of the Trace Definition Syntax

The syntax for trace definitions are defined as:

```
traces definitions = 'traces', { named trace } ;
```

```
named trace = identifier, { '/', identifier }, ':', trace definition
```

The naming of trace definitions (with the `''/'` separator) is used for indicating the paths that are used for generated argument files for test cases (`.arg`) and the corresponding result files (`.res`)¹.

```
trace definition list = trace definition term, { ';', trace definition
```

So the `'';'` operator is used for indicating a sequencing relationship between its *trace definition term*'s.

```
trace definition term = trace definition
                       | trace definition term, '|', trace definition
```

So the `''|'` operator is used for indicating alternative choices between trace definitions.

```
trace definition = trace core definition
                  | trace bindings, trace core definition
                  | trace core definition, trace repeat pattern
                  | trace bindings, trace core definition, trace repeat pattern
```

Trace definitions can have different forms and combinations:

- Core definitions which includes application of operations and bracketed trace expressions.
- Trace bindings where identifiers can be bound to values and in case of looseness (**let** *bind* **in** **set** *setexpr* **in** *expr*) this will give raise to multiple test cases generated.
- Trace repeat patterns which are used whenever repetition is desired.

```
trace core definition = trace apply expression
                       | trace bracketed expression ;
```

```
trace apply expression = identifier, '.', identifier, '(', expression
```

¹Currently the full path names are however not supported in an Overture context but this is envisaged in the future.

Trace apply expressions are the most basic element in trace definitions. The identifier before the ``.`` indicate an object for with the operation (listed after the ``.``) is to be applied with a list of arguments (the expression list inside the brackets). Note that with the current syntax for trace definitions apply expressions are limited to this form `instid.opid(args)` so it is for example not at the moment possible to call an operation in the same class directly as `opid(args)`. Nor is it possible with the current syntax to make use of a particular operation in a superclass in case of multiple possible ones which in VDM++ is would be written as `instid.clid`opid(args)`. In the current version it is also not allowed to call functions here directly, although that may be changed at some stage in the future.

```
trace repeat pattern = `*'  
                      | `+'  
                      | `?'  
                      | `{', numeric literal, `}'  
                      | `{', numeric literal, `,' numeric literal,
```


The different kinds of repeat patterns have the following meanings:

- ``*'` means 0 to n occurrences (n is tool specific).
- ``+'` means 1 to n occurrences (n is tool specific).
- ``?'` means 0 or 1 occurrences.`
- ``{', n, `}'` means n occurrences.`
- ``{', n, `,' m `}'` means between n and m occurrences.`

```
trace bracketed expression = `(', trace definition list, `)' ;  
  
trace bindings = trace binding, { trace binding } ;  
  
trace binding = `let', local definitions, { `,' local definition },  
               | `let', bind, `in'  
               | `let', bind, `be', `st', expression, `in' ;
```

10.2 Using the Combinatorial Testing GUI

Different icons are used to illustrate the verdict in a test case. These are:

: This icon is used to indicate that the test case has not yet been executed.

- ✓: This icon is used to indicate that the test case has a pass verdict.
- i: This icon is used to indicate that the test case has an inconclusive verdict.
- ✗: This icon is used to indicate that the test case has a fail verdict.
- ▶ S4 (2800 skipped 120): If test cases result in a run-time error other test cases with the same prefix will be filtered away and thereby skipped by in the test execution. The number of skipped test cases is indicated after number of test cases for the trace definition name.

11 Mapping VDM++ back and forth to UML

For VDM++ projects (and later on also for VDM-RT projects) it is possible automatically to move back and forth between a VDM++ model and its corresponding UML model. Essentially these can be considered as different views of the same model. The UML model is typically used as a graphical overview of the model using class diagrams and the sequence diagrams can be used to indicate the desired test scenarios that a user would like to perform. The VDM++ model is typically used as the model where the details for each definition can be found and used for detailed semantic analysis. The exchange between VDM++ and UML is done using the XML formal called XMI. At the moment only the UML tool Enterprise Architect is supported.

Mapping back and forth between a VDM++ model and a UML model is in practice done from the *Explorer* view where right-clicking on the project will result in a menu popping up. In this menu there is an entry for *UML transformation*. If this is selected it is either possible to *Import XMI* if one wish to import UML definitions from UML or to *Export XMI* if one wish to go from VDM++ to UML.

12 Moving from VDM++ to VDM-RT

In the methodology for the development of distributed real-time embedded systems using the VDM technology there is a step where one moves from a VDM++ model to a VDM-RT model [Larsen&09]. This step is supported by the Overture tool suite where it is possible to copy a VDM++ project into the starting point for a VDM-RT project. This is done by right clicking on the VDM++ project to be converted in this fashion in the Project Explorer view. In the menu that comes up one then need to select the *Overture Utility* → *Create Real Time Project*. As a consequence

a new VDM-RT project is created. It will be called exactly the same as the VDM++ project with RT appended to the project name. Inside the project all the vdmpp files will instead have the vdmrt extension. The original VDM++ project is not changed at all. Thus this is simply an easy way to fast get the starting point for a VDM-RT model developed. One then manually need to create a **system** with appropriate declarations of CPUs and BUSses.

13 Analysing and Displaying Logs from VDM-RT Executions

When a VDM-RT model is being executed a textual logfile is created in a `''logs/debugconfig''` folder with the `.logrt` extension. The file name for the logfile indicates the time at which it has been written so it is possible to store multiple of these. This logfile can be viewed in the build-in RealTime Log Viewer, by double-clicking the file in the project view. The viewer enables the user to explore system execution in various perspectives. In Figure 10 the architectural overview of the system is given, describing the distributed nature of the model.

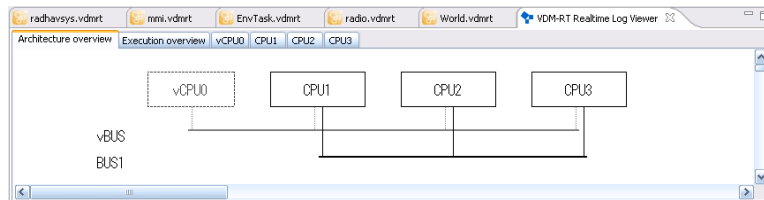


Figure 10: Architectural overview

The RealTime Log Viewer also enables the user to get an overview of the model execution on a system level -- this can be seen in Figure 11. This view shows how the different CPUs communicate via the BUSES of the system.

Since the complete execution of the model cannot be shown in a normal sized window, the user has the option of jumping to a certain time using the *Go to time* button. It is also possible to export all the generated views to *JPG* format using the *Export Image* button. All the generated pictures will be placed in the `''logs''` folder.

In addition to the execution overview, the RealTime Log Viewer can also give an overview of all executions on a single CPU. This view gives a detailed description of all operations and functions invoked

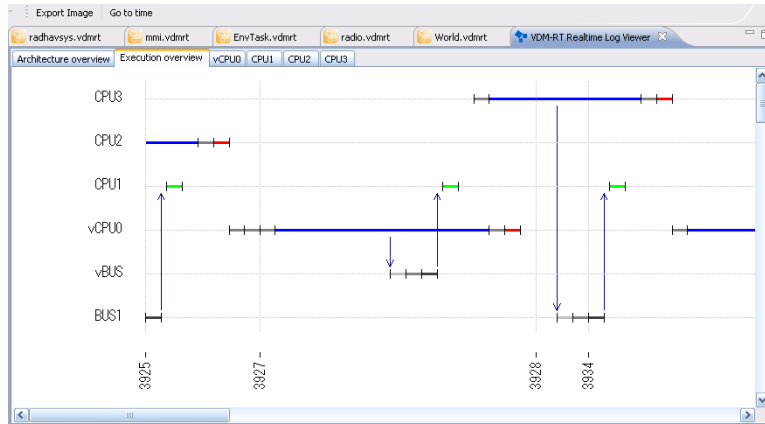


Figure 11: Execution overview

on the CPU as well as the scheduling of concurrent processes. This can be seen in Figure 12.

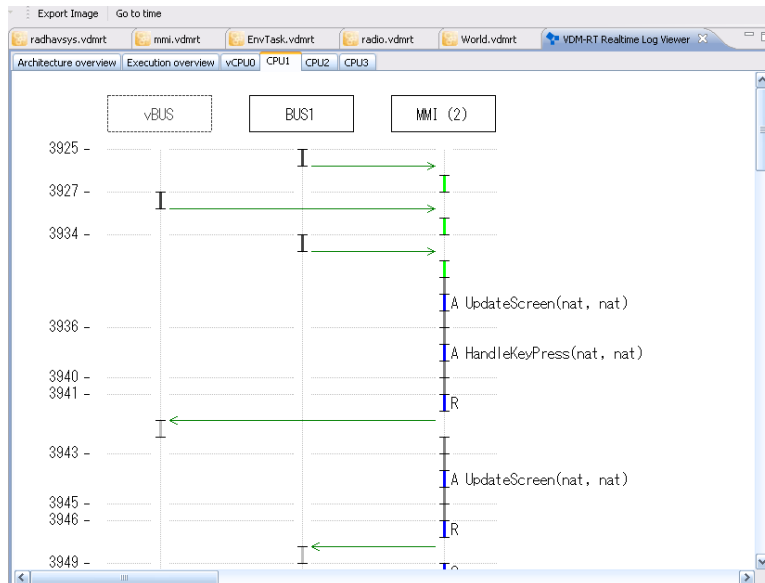


Figure 12: Execution on single CPU

14 A Command-Line Interface to VDMJ

A central part of the Overture tool is gathered in a java application called VDMJ that enables a command-line interface that may be valuable

for users outside the Eclipse interface of Overture.

14.1 Starting VDMJ

VDMJ is contained entirely within one jar file. The jar file contains a MANIFEST that identifies the main class to start the tool, so the minimum command line invocation is as follows:

```
$ java -jar vdmj-2.0.0.jar
VDMJ: You must specify either -vdmsl, -vdmpp or -vdmrt
Usage: VDMJ <-vdmsl | -vdmpp | -vdmrt > [<options>] [<files>]
-vdmsl: parse files as VDM-SL
-vdmpp: parse files as VDM++
-vdmrt: parse files as VICE
-w: suppress warning messages
-q: suppress information messages
-i: run the interpreter if successfully type checked
-p: generate proof obligations and stop
-e <exp>: evaluate <exp> and stop
-c <charset>: select a file charset
-t <charset>: select a console charset
-o <filename>: saved type checked specification
-pre: disable precondition checks
-post: disable postcondition checks
-inv: disable type/state invariant checks
-dtc: disable all dynamic type checking
-log: enable real-time event logging
```

Notice that the error indicates that the tool must be invoked with either the -vdmsl, -vdmpp or -vdmrt option to indicate the VDM dialect and parser required.

Normally, a specification will be loaded by identifying all of the VDM source files to include. At least one source file must be specified unless the -i option is used, in which case the interpreter can be started with no specification.

If no -i option is given, the tool will parse and type check the specification files only, giving any errors and warnings on standard output, then stop. Warnings can be suppressed with the -w option. The -q option can be used to suppress the various information messages printed (this does not include errors and warnings).

The -p option will run the proof obligation generator and then stop, assuming the specification has no type checking errors. For batch execution, the -e option can be used to identify a single expression

to evaluate in the context of the loaded specification, assuming the specification has no type checking errors.

The `-c` and `-t` options allow the file and console character sets to be defined, respectively. This is to allow a specification written in languages other than the default for your system to be used (see section 3).

The `-o` option allows a parsed and type checked specification to be saved to a file. Such files are effectively libraries, and can be re-loaded without the parsing/checking overhead. The `-pre`, `-post`, `-inv` and `-dte` options can be used to disable precondition, postcondition, invariant and dynamic type checking, respectively. By default, all these checks are performed. The `-log` option is for use with `-vdmrt`, and causes real-time events from the model to be written to the file name given. These are useful with the Overture Eclipse GUI, which has a plugin to display timing diagrams [8].

If `flat.vdmsl` contains a simple VDM-SL specification of the factorial function, called `'fac'`, the following illustrate ways to test the specification, with user input shown in bold:

functions

```
fac: int -> int
fac(a) == if a < 2 then 1 else a * fac(a-1)
pre a > 0
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl flat.vdmsl
Parsed 1 module in 0.202 secs. No syntax errors
Warning 5012: Recursive function has no measure in (flat.vdmsl) at
line 3:1
Type checked 1 module in 0.016 secs. No type errors and 1 warning
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -q -w flat.vdmsl
<quiet>
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -w -e "fac(10)" flat.vdmsl
Parsed 1 module in 0.28 secs. No syntax errors
Type checked 1 module in 0.031 secs. No type errors,
suppressed 1 warning
Initialized 1 module in 0.031 secs.
3628800
Bye
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -e "fac(10)" -q -w flat.vdmsl
3628800
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -i -w flat.vdmsl
Parsed 1 module in 0.202 secs. No syntax errors
Type checked 1 module in 0.016 secs. No type errors,
suppressed 1 warning
Initialized 1 module in 0.031 secs.
Interpreter started
> print fac(10)
= 3628800
Executed in 0.0 secs.
> quit
Bye
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -p -w flat.vdmsl
Parsed 1 module in 0.218 secs. No syntax errors
Type checked 1 module in 0.015 secs. No type errors,
suppressed 1 warning
Generated 1 proof obligation:
Proof Obligation 1:
fac: function apply obligation in 'DEFAULT1' (flat.vdmsl) at
line 4:38
(forall a:int & (a > 0) =>
(not (a < 2) =>
pre_f((a - 1))))
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -w -e "fac(0)" -w flat.vdmsl
Parsed 1 module in 0.203 secs. No syntax errors
Type checked 1 module in 0.015 secs. No type errors,
suppressed 1 warning
Initialized 1 module in 0.016 secs.
Execution: Error 4055: Precondition failure: pre_f in (flat.vdmsl)
at line 5:11
    a = 0
    fac = (int -> int)
    pre_fac = (int +> bool)
In root context of fac(a) in 'DEFAULT1' (console) at line 1:1
In root context of interpreter in 'DEFAULT1' (flat.vdmsl) at
line 3:1
In root context of global environment
Bye
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -w -pre -e "fac(0)" -w flat.vdmsl
```

```
Parsed 1 module in 0.218 secs. No syntax errors
Type checked 1 module in 0.016 secs. No type errors,
suppressed 1 warning
Initialized 1 module in 0.015 secs.
1
Bye
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl -w -o flat.lib flat.vdmsl
Parsed 1 module in 0.203 secs. No syntax errors
Type checked 1 module in 0.016 secs. No type errors,
suppressed 1 warning
Saved 1 module to flat.lib in 0.093 secs.
```

```
$ java -jar vdmj-2.0.0.jar -vdmsl flat.lib -e "fac(10)"
Loaded 1 module from flat.lib in 0.187 secs
Initialized 1 module in 0.0 secs.
3628800
Bye
```

14.2 Parsing, Type Checking, and Proof Obligations

All specification files loaded by VDMJ are parsed and type checked automatically. There are no type checking options; the type checker always uses ‘possible’ semantics. If a specification does not parse and type check cleanly, the interpreter cannot be started and proof obligations cannot be generated (though warnings are allowed).

All warnings and error messages are printed on standard output, even with the `-q` option. A source file may contain VDM embedded in a LaTeX file; the markup is ignored by the parser, though reported line numbers will be correct.

The Java program will return with an exit code of zero if the specification is clean (ignoring warnings). Parser or type checking errors result in an exit code of 1. The interpreter and PO generator always exit with a code of zero.

14.3 The Interpreter

Assuming a specification does not contain any parse or type checking errors, the interpreter can be started by using the `-i` command line option. The interpreter is an interactive command line tool that allows

expressions to be evaluated in the context of the specification loaded. The interpreter prompt is ``>``. The following illustrates some of the interactive interpreter commands (explanation below. The shmem source model is in Appendix A):

```
$ java -jar vdmj-2.0.0.jar -vdms1 -i shmem.vdms1
Parsed 1 module in 0.266 secs. No syntax errors
Type checked in 0.047 secs. No type errors
Interpreter started
```

```
> help
modules - list the loaded module names
default <module> - set the default module name
state - show the default module state
print <expression> - evaluate expression
assert <file> - run assertions from a file
init - re-initialize the global environment
env - list the global symbols in the default environment
pog - generate a list of proof obligations
break [<file>:]<line#> [<condition>] - create a breakpoint
break <function/operation> [<condition>] - create a breakpoint
trace [<file>:]<line#> [<exp>] - create a tracepoint
trace <function/operation> [<exp>] - create a tracepoint
remove <breakpoint#> - remove a trace/breakpoint
list - list breakpoints
coverage [<file>|clear] - display/clear file line coverage
latex|latexdoc [<files>] - generate LaTeX line coverage files
files - list files in the current specification
reload - reload the current specification files
load <files> - replace current loaded specification files
quit - leave the interpreter
```

```
> modules
M (default)
```

```
> state
M`Q4 = [mk_M(<FREE>, 0, 9999)]
M`rseed = 87654321
M`Memory = mk_Memory(87654321, [mk_M(<FREE>, 0, 9999)],
                               [mk_M(<FREE>, 0, 9999)])
M`Q3 = [mk_M(<FREE>, 0, 9999)]
```

```
> print rand(100)
= 71
Executed in 0.0 secs.
```

```
> print rand(100)
= 44
Executed in 0.0 secs.
```

```
> state
M`Q4 = [mk_M(<FREE>, 0, 9999)]
M`rseed = 566044643
M`Memory = mk_Memory(566044643, [mk_M(<FREE>, 0, 9999)],
                                [mk_M(<FREE>, 0, 9999)])
M`Q3 = [mk_M(<FREE>, 0, 9999)]
```

```
> init
Global context initialized
```

```
> state
M`Q4 = [mk_M(<FREE>, 0, 9999)]
M`rseed = 87654321
M`Memory = mk_Memory(87654321, [mk_M(<FREE>, 0, 9999)],
                                [mk_M(<FREE>, 0, 9999)])
M`Q3 = [mk_M(<FREE>, 0, 9999)]
```

```
> print rand(100)
= 71
Executed in 0.0 secs.
```

```
> print rand(100)
= 44
Executed in 0.0 secs.
```

```
> env
M`fragments = (M`Quadrant -> nat)
M`combine = (M`Quadrant -> M`Quadrant)
M`tryBest = (nat ==> nat)
M`seed = (nat1 ==> ())
M`reset = (() ==> ())
M`bestfit = (nat1 * M`Quadrant -> nat1)
M`add = (nat1 * nat1 * M`Quadrant -> M`Quadrant)
```

```
M`firstFit = (nat1 ==> bool)
M`rand = (nat1 ==> nat1)
M`tryFirst = (nat ==> nat)
M`main = (nat1 * nat1 ==> seq of (<SAME> | <BEST> | <FIRST>))
M`MAXMEM = 10000
M`delete = (M`M * M`Quadrant -> M`Quadrant)
M`inv_M = (M`M +> bool)
M`CHUNK = 100
M`bestFit = (nat1 ==> bool)
M`least = (nat1 * nat1 -> nat1)
M`fits = (nat1 * M`Quadrant -> nat1)
M`init_Memory = (M`Memory +> bool)
M`pre_add = (nat1 * nat1 * M`Quadrant +> bool)
```

```
> pog
Generated 36 proof obligations:
Proof Obligation 1:
M`fits: cases exhaustive obligation in 'M' (shmem.vdm) at
line 40:5
(forall size:nat1, Q:Quadrant &
Q = [] or Q = [h] ^ tail)
...
Proof Obligation 35:
M`tryBest: sequence apply obligation in 'M' (shmem.vdm) at
line 176:27
rand((len Q4)) in set inds Q4
Proof Obligation 36:
M`tryBest: subtype obligation in 'M' (shmem.vdm) at line 166:1
RESULT >= 0
```

This example shows a VDM-SL specification called `shmem.vdmsl` being loaded. The `help` command lists the interpreter commands available. Note that several of them regard the setting of breakpoints, which is covered in the next section.

The `modules` command lists the names of the modules loaded from the specification. In this example there is only one, called ```M```. One of the modules is identified as the default; names in the default module do not need to be qualified (so you can say `print xyz` rather than `print M`xyz`). The default module can be changed with the `default` command.

The `state` command lists the content of the default module's state. This can be changed by operations, as can be seen by the two calls to `rand` which change the `rseed` value in the state (a pseudo-random

number generator). The **init** command will re-initialize the state to its original value, illustrated by the fact that two subsequent calls to `rand` return the same results as the first two did.

The **print** command can be used to evaluate any expression. The **env** command lists all the values in the global environment of the default module. This shows the functions, operations and constant values defined in the module. Note that it includes invariant, initialization and pre/postcondition functions. The **pog** command (proof obligation generator) generates a list of proof obligations for the specification.

The `assert` command (illustrated below) can take a list of assertions from a file, and execute each of them in turn, raising an error for any assertion which is false. The assertions in the file must be simple boolean expressions, one per line:

References

- [Bjørner&78a] D. Bjørner and C.B. Jones, editors. *The Vienna Development Method: The Meta-Language*. Volume 61 of *Lecture Notes in Computer Science*, Springer-Verlag, 1978.
- This was the first monograph on *Meta-IV*. See also entries: [Bjørner78b], [Bjørner78c], [Lucas78], [Jones78a], [Jones78b], [Henhapl&78]
- [Bjørner78b] D. Bjørner. Programming in the Meta-Language: A Tutorial. *The Vienna Development Method: The Meta-Language*, 24--217, 1978.
- An informal introduction to *Meta-IV*
- [Bjørner78c] D. Bjørner. Software Abstraction Principles: Tutorial Examples of an Operating System Command Language Specification and a PL/I-like On-Condition Language Definition. *The Vienna Development Method: The Meta-Language*, 337--374, 1978.
- Exemplifies so called **exit** semantics uses of *Meta-IV* to slightly non-trivial examples.
- [Clement&99] Tim Clement and Ian Cottam and Peter Froome and Claire Jones. The Development of a Commercial ``Shrink-Wrapped Application'' to Safety Integrity Level 2: the DUST-EXPERT Story. In *Safecomp'99*, Springer Verlag, Toulouse, France, September 1999. LNCS 1698, ISBN 3-540-66488-2.
- [Elmstrøm&94] René Elmstrøm and Peter Gorm Larsen and Poul Bøgh Lassen. The IFAD VDM-SL Toolbox: A Practical Approach to Formal Specifications. *ACM Sigplan Notices*, 29(9):77--80, September 1994. 4 pages.
- [Fitzgerald&05] John Fitzgerald and Peter Gorm Larsen and Paul Mukherjee and Nico Plat and Marcel Verhoef. *Validated Designs for Object-oriented Systems*. Springer, New York, 2005.
- [Fitzgerald&08a] J. S. Fitzgerald and P. G. Larsen and M. Verhoef. Vienna Development Method. *Wiley Encyclopedia of Computer Science and Engineering*, 2008. 11 pages. edited by Benjamin Wah, John Wiley & Sons, Inc.

- [Fitzgerald&08b] John Fitzgerald and Peter Gorm Larsen and Shin Sahara. VDMTools: Advances in Support for Formal Modeling in VDM. *Sigplan Notices*, 43(2):3--11, February 2008. 8 pages.
- [Fitzgerald&09] John Fitzgerald and Peter Gorm Larsen. *Modelling Systems – Practical Tools and Techniques in Software Development*. Cambridge University Press, The Edinburgh Building, Cambridge CB2 2RU, UK, Second edition, 2009. ISBN 0-521-62348-0.
- [Fitzgerald&98] John Fitzgerald and Peter Gorm Larsen. *Modelling Systems – Practical Tools and Techniques in Software Development*. Cambridge University Press, The Edinburgh Building, Cambridge CB2 2RU, UK, 1998. ISBN 0-521-62348-0.
- [Henhapl&78] W. Henhapl, C.B. Jones. A Formal Definition of ALGOL 60 as described in the 1975 modified Report. In *The Vienna Development Method: The Meta-Language*, pages 305--336, Springer-Verlag, 1978.
One of several examples of ALGOL 60 descriptions.
- [ISOVDM96] Information technology -- Programming languages, their environments and system software interfaces -- Vienna Development Method -- Specification Language -- Part 1: Base language. December 1996.
- [Jones78a] C.B. Jones. The Meta-Language: A Reference Manual. In *The Vienna Development Method: The Meta-Language*, pages 218--277, Springer-Verlag, 1978.
- [Jones78b] C.B. Jones. The Vienna Development Method: Examples of Compiler Development. In Amirchachy and Neel, editors, *Le Point sur la Compilation*, INRIA Publ. Paris, 1979.
- [Jones90] Cliff B. Jones. *Systematic Software Development Using VDM*. Prentice-Hall International, Englewood Cliffs, New Jersey, second edition, 1990. 333 pages. ISBN 0-13-880733-
This book deals with the Vienna Development Method. The approach explains formal (functional) specifications and verified design with an emphasis on the study of proofs in the development process.

- [Kurita&09] T. Kurita and Y. Nakatsugawa. The Application of VDM++ to the Development of Firmware for a Smart Card IC Chip. *Intl. Journal of Software and Informatics*, 3(2-3), October 2009.
- [Larsen&09] Peter Gorm Larsen and John Fitzgerald and Sune Wolff. Methods for the Developing Distributed Real-Time Systems using VDM. *International Journal of Software and Informatics*, 3(2-3), October 2009.
- [Larsen&10] Peter Gorm Larsen and Nick Battle and Miguel Ferreira and John Fitzgerald and Kenneth Lausdahl and Marcel Verhoef. The Overture Initiative -- Integrating Tools for VDM. *ACM Software Engineering Notes*, 35(1):, January 2010. 6 pages.
- [Larsen&95] Peter Gorm Larsen and Bo Stig Hansen. Semantics for Underdetermined Expressions. *Accepted for "Formal Aspects of Computing"*, 7(??):??, January 1995. 14 pages.
- [Lucas78] P. Lucas. On the Formalization of Programming Languages: Early History and Main Approaches. In *The Systematic Development of Compiling Algorithm*, INRIA Publ. Paris, 1978.
- An historic overview of the (VDL and other) background for VDM.
- [Mukherjee&00] Paul Mukherjee and Fabien Bousquet and Jérôme Delabre and Stephen Paynter and Peter Gorm Larsen. Exploring Timing Properties Using VDM++ on an Industrial Application. In J.C. Bicarregui and J.S. Fitzgerald, editors, *Proceedings of the Second VDM Workshop*, September 2000. Available at www.vdmportal.org.
- [Verhoef&06] Marcel Verhoef and Peter Gorm Larsen and Jozef Hooman. Modeling and Validating Distributed Embedded Real-Time Systems with VDM++. In Jayadev Misra and Tobias Nipkow and Emil Sekerinski, editors, *FM 2006: Formal Methods*, pages 147--162, Lecture Notes in Computer Science 4085, 2006.

A Internal Errors

This appendix provide a list of the internal errors used in Overture and an explanantion for each of them the circumstances under which the internal error can be expected. However, most of these errors should never be seen by an ordinary user, so if they appear please report it to the SourceForge bug reporting utility (https://sourceforge.net/tracker/?group_id=141350&atid=749152).

- 0000:** File IO errors, e.g. File not found. This typically occur if the file to be read from a specific directory is no longer present there.
- 0001:** Mark/reset not supported - use push/pop
- 0002:** Cannot change type qualifier: <name><qualifiers> to <qualifiers>
- 0003:** PatternBind passed <class name>
- 0004:** Cannot get bind values for type <type>
- 0005:** Illegal clone
- 0006:** Constructor for <class> can't find <member>
- 0007:** Cannot write to IO file <name>
- 0009:** Too many syntax errors. This error typically occurs if one have included a file that is in a non VDM format and by mistake have given it a vdm file extension (vdmsl, vdmp or vdmrt).
- 0010:** Too many type checking errors
- 0011:** CPU or BUS creation failure
- 0012:** Document has no specifications?
- 0013:** Document has no expression?
- 0014:** Unexpected type in definition block
- 0015:** Unexpected type definition shape: <type>
- 0016:** Typeless functions not supported
- 0017:** Unexpected function shape: <shape>
- 0018:** Unknown function body type

- 0019:** Unexpected operation shape: <shape>
- 0020:** Unknown operation body type
- 0021:** Unknown instance variable type
- 0022:** Unknown sync predicate type
- 0023:** Expecting integer periodic argument
- 0024:** Sporadic threads not implemented. In the PhD thesis from Marcel Verhoef a notion of sporadic threads are included. However these are not (yet) incorporated into Overture.
- 0025:** Unknown thread specification type
- 0026:** Let binding expects value definition
- 0027:** Bare Dcl statement encountered
- 0028:** Unknown trace specification type
- 0029:** DBGP: <reason>. This error is related to the protocol used between the GUI part of the debugger inside Eclipse and the underlying interpreter implementation inside VDMJ.
- 0030:** Statement type unsupported: <type>
- 0031:** Expected object state designator type
- 0032:** Expected object state designator type
- 0033:** Expected state designator type
- 0034:** Native library error
- 0035:** Expression type unsupported: <type>
- 0036:** Unexpected pattern/bind type
- 0037:** Unexpected pattern/bind type
- 0038:** Unexpected pattern/bind type
- 0039:** Unexpected bind type
- 0040:** Unexpected bind type
- 0041:** Expected set bind type

- 0042:** Expected set bind type
- 0043:** Operator type unsupported: <type>
- 0044:** Tuple field select is not a number
- 0045:** Unexpected expression type: <type>
- 0046:** Unexpected literal expression
- 0047:** Class instantiation not supported
- 0048:** Unexpected type expression
- 0049:** Unexpected literal pattern type
- 0050:** Unexpected pattern type
- 0051:** Unexpected scope value
- 0052:** Cannot set default name at breakpoint

B Lexical Errors

1000: Malformed quoted character

1001: Invalid char <ch> in base <n> number

1002: Expecting ' |->'

1003: Expecting '...'

1004: Expecting '<-:'

1005: Expecting close double quote

1006: Expecting close quote after character

1007: Unexpected tag after '#'

1008: Malformed module `name

1009: Unexpected character 'c'

1010: Expecting <digits>[.<digits>][e<+><digits>]

1011: Unterminated block comment

C Syntatic Errors

- 2000:** Expecting 'in set' after pattern in set binding
- 2001:** Expecting 'in set' in set bind
- 2002:** Expecting ':' in type bind
- 2003:** Expecting 'in set' after pattern in binding
- 2004:** Expecting 'in set' or ':' after patterns
- 2005:** Expecting list of 'class' or 'system' definitions
- 2006:** Found tokens after class definitions
- 2007:** Expecting 'end <class>'
- 2008:** Class does not start with 'class'
- 2009:** Can't have instance variables in VDM-SL
- 2010:** Can't have a thread clause in VDM-SL
- 2011:** Only one thread clause permitted per class
- 2012:** Can't have a sync clause in VDM-SL
- 2013:** Expected 'operations', 'state', 'functions', 'types' or 'values'
- 2014:** Recursive type declaration
- 2015:** Expecting =<type> or ::<field list>
- 2016:** Function name cannot start with 'mk_'
- 2017:** Expecting ':' or '(' after name in function definition
- 2018:** Function type is not a -> or +> function
- 2019:** Expecting identifier <name> after type in definition
- 2020:** Expecting '(' after function name
- 2021:** Expecting ':' or '(' after name in operation definition
- 2022:** Expecting name <name> after type in definition
- 2023:** Expecting '(' after operation name

- 2024:** Expecting external declarations after 'ext'
- 2025:** Expecting <name>: exp->exp in errs clause
- 2026:** Expecting 'rd' or 'wr' after 'ext'
- 2027:** Expecting +ive number in periodic statement
- 2028:** Expecting 'per' or 'mutex'
- 2029:** Expecting <set bind> = <expression>
- 2030:** Expecting simple field identifier
- 2031:** Expecting field number after .#
- 2032:** Expecting field name
- 2033:** Expected 'is not specified' or 'is subclass responsibility'
- 2034:** Unexpected token in expression
- 2035:** Tuple must have >1 argument
- 2036:** Expecting mk_<type>
- 2037:** Malformed mk_<type> name <name>
- 2038:** Expecting is_<type>
- 2039:** Expecting maplet in map enumeration
- 2040:** Expecting 'else' in 'if' expression
- 2041:** Expecting two arguments for 'isofbase'
- 2042:** Expecting (<class>,<exp>) arguments for 'isofbase'
- 2043:** Expecting two arguments for 'isofclass'
- 2044:** Expecting (<class>,<exp>) arguments for 'isofclass'
- 2045:** Expecting two expressions in 'samebaseclass'
- 2046:** Expecting two expressions in 'sameclass'
- 2047:** Can't use history expression here
- 2048:** Expecting #act, #active, #fin, #req or #waiting

- 2049:** Expecting 'end <module>'
- 2050:** Expecting library name after 'uselib'
- 2051:** Expecting 'end <module>'
- 2052:** Expecting 'all', 'types', 'values', 'functions' or 'operations'
- 2053:** Exported function is not a function type
- 2054:** Expecting types, values, functions or operations
- 2055:** Imported function is not a function type
- 2056:** Cannot use module'id name in patterns
- 2057:** Unexpected token in pattern
- 2058:** Expecting identifier
- 2059:** Expecting a name
- 2060:** Found qualified name <name>. Expecting an identifier
- 2061:** Expecting a name
- 2062:** Expected 'is not specified' or 'is subclass responsibility'
- 2063:** Unexpected token in statement
- 2064:** Expecting <object>.identifier(args) or name(args)
- 2065:** Expecting <object>.name(args) or name(args)
- 2066:** Expecting object field name
- 2067:** Expecting 'self', 'new' or name in object designator
- 2068:** Expecting field identifier
- 2069:** Expecting <identifier>:<type> := <expression>
- 2070:** Function type cannot return void type
- 2071:** Expecting field identifier before ':'
- 2072:** Expecting field name before ':-'
- 2073:** Duplicate field names in record type

- 2074:** Unexpected token in type expression
- 2075:** Expecting 'is subclass of'
- 2076:** Expecting 'is subclass of'
- 2077:** Expecting 'end' after class members
- 2078:** Missing ';' after type definition
- 2079:** Missing ';' after function definition
- 2080:** Missing ';' after state definition
- 2081:** Missing ';' after value definition
- 2082:** Missing ';' after operation definition
- 2083:** Expecting 'instance variables'
- 2084:** Missing ';' after instance variable definition
- 2085:** Missing ';' after thread definition
- 2086:** Missing ';' after sync definition
- 2087:** Expecting '==' after pattern in invariant
- 2088:** Expecting '@' before type parameter
- 2089:** Expecting '@' before type parameter
- 2090:** Expecting ']' after type parameters
- 2091:** Expecting ')' after function parameters
- 2092:** Expecting '==' after parameters
- 2093:** Missing colon after pattern/type parameter
- 2094:** Missing colon in identifier/type return value
- 2095:** Implicit function must have post condition
- 2096:** Expecting <pattern>[:<type>]=<exp>
- 2097:** Expecting 'of' after state name
- 2098:** Expecting '==' after pattern in invariant

- 2099:** Expecting '=' after pattern in initializer
- 2100:** Expecting 'end' after state definition
- 2101:** Expecting ')' after operation parameters
- 2102:** Expecting '=' after parameters
- 2103:** Missing colon after pattern/type parameter
- 2104:** Missing colon in identifier/type return value
- 2105:** Implicit operation must define a post condition
- 2106:** Expecting ':' after name in errs clause
- 2107:** Expecting '->' in errs clause
- 2108:** Expecting <pattern>=<exp>
- 2109:** Expecting <type bind>=<exp>
- 2110:** Expecting <pattern> in set <set exp>
- 2111:** Expecting <pattern> in set <set exp>
- 2112:** Expecting '(' after periodic
- 2113:** Expecting ')' after period arguments
- 2114:** Expecting '(' after periodic(...)
- 2115:** Expecting (name) after periodic(...)
- 2116:** Expecting <name> => <exp>
- 2117:** Expecting '(' after mutex
- 2118:** Expecting ')' after 'all'
- 2119:** Expecting ')'
- 2120:** Expecting 'e1,...,e2' in subsequence
- 2121:** Expecting ')' after subsequence
- 2122:** Expecting ')' after function args
- 2123:** Expecting ']' after function instantiation

- 2124:** Expecting `)'`
- 2125:** Expecting `'is not yet specified`
- 2126:** Expecting `'is not yet specified`
- 2127:** Expecting `'is subclass responsibility'`
- 2128:** Expecting comma separated record modifiers
- 2129:** Expecting `<identifier> |-> <expression>`
- 2130:** Expecting `)'` after `mu maplets`
- 2131:** Expecting `)'` after `mk_ tuple`
- 2132:** Expecting `is_(expression, type)`
- 2133:** Expecting `)'` after `is_ expression`
- 2134:** Expecting `pre_(function [,args])`
- 2135:** Expecting `'}'` in empty map
- 2136:** Expecting `'}'` after set comprehension
- 2137:** Expecting `'e1,...,e2'` in set range
- 2138:** Expecting `'}'` after set range
- 2139:** Expecting `'}'` after set enumeration
- 2140:** Expecting `'}'` after map comprehension
- 2141:** Expecting `'}'` after map enumeration
- 2142:** Expecting `']'` after list comprehension
- 2143:** Expecting `']'` after list enumeration
- 2144:** Missing `'then'`
- 2145:** Missing `'then'` after `'elseif'`
- 2146:** Expecting `':'` after cases expression
- 2147:** Expecting `'->'` after others
- 2148:** Expecting `'end'` after cases

- 2149:** Expecting `'->'` after case pattern list
- 2150:** Expecting `'in'` after local definitions
- 2151:** Expecting `'st'` after `'be'` in let expression
- 2152:** Expecting `'in'` after bind in let expression
- 2153:** Expecting `'&'` after bind list in forall
- 2154:** Expecting `'&'` after bind list in exists
- 2155:** Expecting `'&'` after single bind in exists1
- 2156:** Expecting `'&'` after single bind in iota
- 2157:** Expecting `'&'` after bind list in lambda
- 2158:** Expecting `'in'` after equals definitions
- 2159:** Expecting `'('` after new class name
- 2160:** Expecting `'('` after `'isofbase'`
- 2161:** Expecting `)'` after `'isofbase'` args
- 2162:** Expecting `'('` after `'isofclass'`
- 2163:** Expecting `)'` after `'isofclass'` args
- 2164:** Expecting `'('` after `'samebaseclass'`
- 2165:** Expecting `)'` after `'samebaseclass'` args
- 2166:** Expecting `'('` after `'sameclass'`
- 2167:** Expecting `)'` after `'sameclass'` args
- 2168:** Expecting `<#op>(name(s))`
- 2169:** Expecting `<#op>(name(s))`
- 2170:** Expecting `'module'` at module start
- 2171:** Expecting `'end'` after module definitions
- 2172:** Expecting `'dlmodule'` at module start
- 2173:** Expecting `'end'` after dlmodule definitions

- 2174:** Malformed imports? Expecting 'exports' section
- 2175:** Expecting ':' after export name
- 2176:** Expecting ':' after export name
- 2177:** Expecting ':' after export name
- 2178:** Expecting 'imports'
- 2179:** Expecting 'from' in import definition
- 2180:** Mismatched brackets in pattern
- 2181:** Mismatched braces in pattern
- 2182:** Mismatched square brackets in pattern
- 2183:** Expecting '(' after mk_tuple
- 2184:** Expecting ')' after mk_tuple
- 2185:** Expecting '(' after <type> record
- 2186:** Expecting ')' after <type> record
- 2187:** Expecting 'is not yet specified
- 2188:** Expecting 'is not yet specified
- 2189:** Expecting 'is subclass responsibility'
- 2190:** Expecting 'exit'
- 2191:** Expecting 'tixe'
- 2192:** Expecting '{' after 'tixe'
- 2193:** Expecting '|->' after pattern bind
- 2194:** Expecting 'in' after tixe traps
- 2195:** Expecting 'trap'
- 2196:** Expecting 'with' in trap statement
- 2197:** Expecting 'in' in trap statement
- 2198:** Expecting 'always'

- 2199:** Expecting 'in' after 'always' statement
- 2200:** Expecting '||'
- 2201:** Expecting '(' after '||'
- 2202:** Expecting ')' at end of '||' block
- 2203:** Expecting 'atomic'
- 2204:** Expecting '(' after 'atomic'
- 2205:** Expecting ')' after atomic assignments
- 2206:** Expecting '(' after call operation name
- 2207:** Expecting '(' after new class name
- 2208:** Expecting 'while'
- 2209:** Expecting 'do' after while expression
- 2210:** Expecting 'for'
- 2211:** Expecting 'in set' after 'for all'
- 2212:** Expecting 'in set' after 'for all'
- 2213:** Expecting 'do' after for all expression
- 2214:** Expecting 'in' after pattern bind
- 2215:** Expecting 'do' before loop statement
- 2216:** Expecting '=' after for variable
- 2217:** Expecting 'to' after from expression
- 2218:** Expecting 'do' before loop statement
- 2219:** Missing 'then'
- 2220:** Missing 'then' after 'elseif' expression
- 2221:** Expecting ':=' in object assignment statement
- 2222:** Expecting ':=' in state assignment statement
- 2223:** Expecting ')' after map/seq reference

- 2224:** Expecting statement block
- 2225:** Expecting ';' after statement
- 2226:** Expecting ')' at end of statement block
- 2227:** Expecting ';' after declarations
- 2228:** Expecting name:type in declaration
- 2229:** Expecting 'return'
- 2230:** Expecting 'let'
- 2231:** Expecting 'in' after local definitions
- 2232:** Expecting 'st' after 'be' in let statement
- 2233:** Expecting 'in' after bind in let statement
- 2234:** Expecting 'cases'
- 2235:** Expecting ':' after cases expression
- 2236:** Expecting '->' after case pattern list
- 2237:** Expecting '->' after others
- 2238:** Expecting 'end' after cases
- 2239:** Expecting 'def'
- 2240:** Expecting 'in' after equals definitions
- 2241:** Expecting '['
- 2242:** Expecting ']' after specification statement
- 2243:** Expecting 'start'
- 2244:** Expecting 'start('
- 2245:** Expecting ')' after start object
- 2246:** Expecting 'startlist'
- 2247:** Expecting 'startlist('
- 2248:** Expecting ')' after startlist objects

- 2249:** Missing 'of' in compose type
- 2250:** Missing 'end' in compose type
- 2251:** Expecting 'to' in map type
- 2252:** Expecting 'to' in inmap type
- 2253:** Expecting 'of' after set
- 2254:** Expecting 'of' after seq
- 2255:** Expecting 'of' after seq1
- 2256:** Bracket mismatch
- 2257:** Missing close bracket after optional type
- 2258:** Expecting '==>' in explicit operation type
- 2259:** Operations cannot have [T] type parameters
- 2260:** Module starts with 'class' instead of 'module'
- 2261:** Missing comma between return types?
- 2262:** Can't have traces in VDM-SL
- 2263:** Missing ';' after named trace definition
- 2264:** Expecting ':' after trace name
- 2265:** Expecting '{n1, n2}' after trace definition
- 2266:** Expecting '{n}' or '{n1, n2}' after trace definition
- 2267:** Expecting 'id.id(args)' or '(trace definitions)'
- 2268:** Expecting 'id.id(args)'
- 2269:** Expecting '(trace definitions)'
- 2270:** Only value definitions allowed in traces
- 2271:** Expecting 'duration'
- 2272:** Expecting 'duration('
- 2273:** Expecting ')' after duration

2274: Expecting 'cycles'

2275: Expecting 'cycles('

2276: Expecting ')' after cycles 2277, -

2278: Async only permitted for operations

2279: Invalid breakpoint hit condition

2280: System class cannot be a subclass

2290: System class can only define instance variables and a constructor

2291: 'reverse' not available in VDM classic

D Type Errors and Warnings

- 3000:** Expression does not match declared type
- 3001:** Class inherits thread definition from multiple supertypes
- 3002:** Circular class hierarchy detected: <name>
- 3003:** Undefined superclass: <supername>
- 3004:** Superclass name is not a class: <supername>
- 3005:** Overriding a superclass member of a different kind: <member>
- 3006:** Overriding definition narrows scope
- 3007:** Overriding member incompatible type: <member>
- 3008:** Overloaded members indistinguishable: <member>
- 3009:** Circular class hierarchy detected: <class>
- 3010:** Name <name> is ambiguous
- 3011:** Name <name> is multiply defined in class
- 3012:** Type <name> is multiply defined in class
- 3013:** Class invariant is not a boolean expression
- 3014:** Expression is not compatible with type bind
- 3015:** Set bind is not a set type?
- 3016:** Expression is not compatible with set bind
- 3017:** Duplicate definitions for <name>
- 3018:** Function returns unexpected type
- 3019:** Function type narrows function
- 3020:** Too many parameter patterns
- 3021:** Too few parameter patterns
- 3022:** Too many curried parameters
- 3023:** Too many parameter patterns

- 3024:** Too few parameter patterns
- 3025:** Constructor operation must have return type <class>
- 3026:** Constructor operation must have return type <class>
- 3027:** Operation returns unexpected type
- 3028:** Operation type narrows operation
- 3029:** Function returns unexpected type
- 3030:** Function type narrows function
- 3031:** Unknown state variable <name>
- 3032:** State variable <name> is not this type 3033, - 3034, -
- 3035:** Operation returns unexpected type
- 3036:** Operation type narrows operation
- 3037:** Static instance variable is not initialized: <name>
- 3038:** <name> is not an explicit operation
- 3039:** <name> is not in scope
- 3040:** Cannot put mutex on a constructor
- 3041:** Duplicate mutex name
- 3042:** <name> is not an explicit operation
- 3043:** <name> is not in scope
- 3044:** Duplicate permission guard found for <name>
- 3045:** Cannot put guard on a constructor
- 3046:** Guard is not a boolean expression
- 3047:** Only one state definition allowed per module 3048, -
- 3049:** Thread statement/operation must not return a value
- 3050:** Type <name> is infinite
- 3051:** Expression does not match declared type

- 3052:** Type narrows definition's scope
- 3053:** Argument of 'abs' is not numeric
- 3054:** Type <name> cannot be applied
- 3055:** Sequence selector must have one argument
- 3056:** Sequence application argument must be numeric
- 3057:** Map application must have one argument
- 3058:** Map application argument is incompatible type
- 3059:** Too many arguments
- 3060:** Too few arguments
- 3061:** Inappropriate type for argument <n>
- 3062:** Too many arguments
- 3063:** Too few arguments
- 3064:** Inappropriate type for argument <n>
- 3065:** Left hand of <operator> is not <type>
- 3066:** Right hand of <operator> is not <type>
- 3067:** Argument of 'card' is not a set
- 3068:** Right hand of map 'comp' is not a map
- 3069:** Domain of left should equal range of right in map 'comp'
- 3070:** Right hand of function 'comp' is not a function
- 3071:** Left hand function must have a single parameter
- 3072:** Right hand function must have a single parameter
- 3073:** Parameter of left should equal result of right in function 'comp'
- 3074:** Left hand of 'comp' is neither a map nor a function
- 3075:** Argument of 'conc' is not a seq of seq
- 3076:** Argument of 'dinter' is not a set of sets

- 3077:** Merge argument is not a set of maps
- 3078:** dunion argument is not a set of sets
- 3079:** Left of '<-: ' is not a set
- 3080:** Right of '<-: ' is not a map
- 3081:** Restriction of map should be set of <type>
- 3082:** Left of '<: ' is not a set
- 3083:** Right of '<: ' is not a map
- 3084:** Restriction of map should be set of <type>
- 3085:** Argument of 'elems' is not a sequence
- 3086:** Else clause is not a boolean
- 3087:** Left and right of '=' are incompatible types
- 3088:** Predicate is not boolean
- 3089:** Predicate is not boolean
- 3090:** Unknown field <name> in record <type>
- 3091:** Unknown member <member> of class <class>
- 3092:** Inaccessible member <member> of class <class>
- 3093:** Field <name> applied to non-aggregate type
- 3094:** Field #<n> applied to non-tuple type
- 3095:** Field number does not match tuple size
- 3096:** Argument to floor is not numeric
- 3097:** Predicate is not boolean
- 3098:** Function value is not polymorphic
- 3099:** Polymorphic function is not in scope
- 3100:** Function has no type parameters
- 3101:** Expecting <n> type parameters

- 3102:** Parameter name <name> not defined
- 3103:** Function instantiation does not yield a function
- 3104:** Argument to 'hd' is not a sequence
- 3105:** <operation> is not an explicit operation
- 3106:** <operation> is not in scope
- 3107:** Cannot use history of a constructor
- 3108:** If expression is not a boolean
- 3109:** Argument to 'inds' is not a sequence
- 3110:** Argument of 'in set' is not a set
- 3111:** Argument to 'inverse' is not a map
- 3112:** Iota set bind is not a set
- 3113:** Unknown type name <name>
- 3114:** Undefined base class type: <class>
- 3115:** Undefined class type: <class>
- 3116:** Argument to 'len' is not a sequence
- 3117:** Such that clause is not boolean
- 3118:** Predicate is not boolean
- 3119:** Map composition is not a maplet
- 3120:** Argument to 'dom' is not a map
- 3121:** Element is not of maplet type
- 3122:** Argument to 'rng' is not a map
- 3123:** Left hand of 'munion' is not a map
- 3124:** Right hand of 'munion' is not a map
- 3125:** Argument of mk-<type> is the wrong type
- 3126:** Unknown type <type> in constructor

- 3127:** Type `<type>` is not a record type
- 3128:** Record and constructor do not have same number of fields
- 3129:** Constructor field `<n>` is of wrong type
- 3130:** Modifier for `<tag>` should be `<type>`
- 3131:** Modifier `<tag>` not found in record
- 3132:** mu operation on non-record type
- 3133:** Class name `<name>` not in scope
- 3134:** Class has no constructor with these parameter types
- 3135:** Class has no constructor with these parameter types
- 3136:** Left and right of `'< >'` different types
- 3137:** Not expression is not a boolean
- 3138:** Argument of `'not in set'` is not a set
- 3139:** Left hand of `<operator>` is not numeric
- 3140:** Right hand of `<operator>` is not numeric
- 3141:** Right hand of `'++'` is not a map
- 3142:** Right hand of `'++'` is not a map
- 3143:** Domain of right hand of `'++'` must be `nat1`
- 3144:** Left of `'++'` is neither a map nor a sequence
- 3145:** Argument to `'power'` is not a set
- 3146:** Left hand of `<operator>` is not a set
- 3147:** Right hand of `<operator>` is not a set
- 3148:** Left of `':->'` is not a map
- 3149:** Right of `':->'` is not a set
- 3150:** Restriction of map should be set of `<type>`
- 3151:** Left of `'>'` is not a map

- 3152:** Right of `'>'` is not a set
- 3153:** Restriction of map should be set of `<type>`
- 3154:** `<name>` not in scope
- 3155:** List comprehension must define one numeric bind variable
- 3156:** Predicate is not boolean
- 3157:** Left hand of `'^'` is not a sequence
- 3158:** Right hand of `'^'` is not a sequence
- 3159:** Predicate is not boolean
- 3160:** Left hand of `'\'` is not a set
- 3161:** Right hand of `'\'` is not a set
- 3162:** Left and right of `'\'` are different types
- 3163:** Left hand of `<operator>` is not a set
- 3164:** Right hand of `<operator>` is not a set
- 3165:** Left and right of intersect are different types
- 3166:** Set range type must be an number
- 3167:** Set range type must be an number
- 3168:** Left hand of `<operator>` is not a set
- 3169:** Right hand of `<operator>` is not a set
- 3170:** Map iterator expects nat as right hand arg
- 3171:** Function iterator expects nat as right hand arg
- 3172:** `'**'` expects number as right hand arg
- 3173:** First arg of `'**'` must be a map, function or number
- 3174:** Subsequence is not of a sequence type
- 3175:** Subsequence range start is not a number
- 3176:** Subsequence range end is not a number

- 3177:** Left hand of <operator> is not a set
- 3178:** Right hand of <operator> is not a set
- 3179:** Argument to 'tl' is not a sequence
- 3180:** Inaccessible member <name> of class <name>
- 3181:** Cannot access <name> from a static context
- 3182:** Name <name> is not in scope
- 3183:** Exported function <name> not defined in module
- 3184:** Exported <name> function type incorrect
- 3185:** Exported operation <name> not defined in module
- 3186:** Exported operation type does not match actual type
- 3187:** Exported type <type> not defined in module
- 3188:** Exported value <name> not defined in module
- 3189:** Exported type does not match actual type
- 3190:** Import all from module with no exports?
- 3191:** No export declared for import of type <type> from <module>
- 3192:** Type import of <name> does not match export from <module>
- 3193:** No export declared for import of value <name> from <module>
- 3194:** Type of value import <name> does not match export from <module>
- 3195:** Cannot import from self
- 3196:** No such module as <module>
- 3197:** Expression matching set bind is not a set
- 3198:** Type bind not compatible with expression
- 3199:** Set bind not compatible with expression
- 3200:** Mk_ expression is not a record type
- 3201:** Matching expression is not a compatible record type

- 3202:** Record pattern argument/field count mismatch
- 3203:** Sequence pattern is matched against <type>
- 3204:** Set pattern is not matched against set type
- 3205:** Matching expression is not a product of cardinality <n>
- 3206:** Matching expression is not a set type
- 3207:** Object designator is not an object type
- 3208:** Object designator is not an object type
- 3209:** Member <field> is not in scope
- 3210:** Object member is neither a function nor an operation
- 3211:** Expecting <n> arguments
- 3212:** Unexpected type for argument <n>
- 3213:** Operation <name> is not in scope
- 3214:** Cannot call <name> from static context
- 3215:** <name> is not an operation
- 3216:** Expecting <n> arguments
- 3217:** Unexpected type for argument <n>
- 3218:** Expression is not boolean
- 3219:** For all statement does not contain a set type
- 3220:** From type is not numeric
- 3221:** To type is not numeric
- 3222:** By type is not numeric
- 3223:** Expecting sequence type after 'in'
- 3224:** If expression is not boolean
- 3225:** Such that clause is not boolean
- 3226:** Incompatible types in object assignment

- 3228:** <name> is not in scope
- 3229:** <name> should have no parameters or return type
- 3230:** <name> is implicit
- 3231:** <name> should have no parameters or return type
- 3232:** <name> is not an operation name
- 3233:** Precondition is not a boolean expression
- 3234:** Postcondition is not a boolean expression
- 3235:** Expression is not a set of object references
- 3236:** Class does not define a thread
- 3237:** Class does not define a thread
- 3238:** Expression is not an object reference or set of object references
- 3239:** Incompatible types in assignment
- 3241:** Body of trap statement does not throw exceptions
- 3242:** Map element assignment of wrong type
- 3243:** Seq element assignment is not numeric
- 3244:** Expecting a map or a sequence
- 3245:** Field assignment is not of a record type
- 3246:** Unknown field name, <name>
- 3247:** Unknown state variable <name> in assignment
- 3248:** Cannot assign to 'ext rd' state <name>
- 3249:** Object designator is not a map, sequence, function or operation
- 3250:** Map application must have one argument
- 3251:** Map application argument is incompatible type
- 3252:** Sequence application must have one argument
- 3253:** Sequence argument is not numeric

- 3254:** Too many arguments
- 3255:** Too few arguments
- 3256:** Inappropriate type for argument <n>
- 3257:** Too many arguments
- 3258:** Too few arguments
- 3259:** Inappropriate type for argument <n>
- 3260:** Unknown class member name, <name>
- 3261:** Unknown field name, <name>
- 3262:** Field assignment is not of a class or record type
- 3263:** Cannot reference 'self' from here
- 3264:** At least one bind cannot match set
- 3265:** At least one bind cannot match this type
- 3266:** Argument is not an object
- 3267:** Empty map cannot be applied
- 3268:** Empty sequence cannot be applied
- 3269:** Ambiguous function/operation name: <name>
- 3270:** Measure <name> is not in scope
- 3271:** Measure <name> is not an explicit function
- 3272:** Measure result type is not a nat, or a nat tuple
- 3273:** Measure not allowed for an implicit function
- 3274:** External variable is not in scope: <name>
- 3275:** Error clause must be a boolean
- 3276:** Ambiguous names inherited by <name>
- 3277:** Trace repeat illegal values
- 3278:** Cannot inherit from system class <name>

- 3279:** Cannot instantiate system class <name>
- 3280:** Argument to deploy must be an object
- 3281:** Arguments to duration must be integer >= 0
- 3282:** Arguments to cycles must be integer >= 0
- 3283:** System class constructor cannot be implicit
- 3284:** System class can only define instance variables and a constructor
- 3285:** System class can only define a default constructor
- 3286:** Constructor cannot be 'async'
- 3287:** Periodic thread must have <n> argument(s)
- 3288:** Period argument must be non-zero
- 3289:** Delay argument must be less than the period
- 3290:** Argument to setPriority must be an operation
- 3291:** Argument to setPriority cannot be a constructor
- 3292:** Constructor is not accessible
- 3293:** Asynchronous operation <name> cannot return a value
- 3294:** Only one system class permitted
- 3295:** Argument to 'reverse' is not a sequence
- 3296:** Cannot use <typename> outside system class
- 3297:** Cannot use default constructor for this class
- 3298:** Cannot inherit from CPU
- 3299:** Cannot inherit from BUS
- 3300:** Operation <type> cannot be called from a function
- 3301:** Variable <name> in scope is not updatable
- 3302:** Variable <name> cannot be accessed from this context

Warnings from the type checker include:

- 5000:** Definition <name> not used
- 5001:** Instance variable is not initialized: <name>
- 5002:** Mutex of overloaded operation
- 5003:** Permission guard of overloaded operation
- 5004:** History expression of overloaded operation
- 5005:** Should access member <member> from a static context
- 5006:** Statement will not be reached
- 5007:** Duplicate definition: <name>
- 5008:** <name/location> hides <name/location>
- 5009:** Empty set used in bind
- 5010:** State init expression cannot be executed 5011, -
- 5012:** Recursive function has no measure 5013, -
- 5014:** Uninitialized BUS ignored. This warning appears if one has defined a BUS that is not used.
- 5015:** LaTeX source should start with %comment, \document, \section or \subsection

E Run-Time Errors

- 4000:** Cannot instantiate abstract class <class>
- 4002:** Expression value is not in set bind
- 4003:** Value <value> cannot be applied
- 4004:** No cases apply for <value>
- 4005:** Duplicate map keys have different values
- 4006:** Type <type> has no field <field>
- 4007:** No such field in tuple: #<n>
- 4008:** No such type parameter @<name> in scope
- 4009:** Type parameter/local variable name clash, @<name>
- 4010:** Cannot take head of empty sequence
- 4011:** Illegal history operator: <#op>
- 4012:** Cannot invert non-injective map
- 4013:** Iota selects more than one result
- 4014:** Iota does not select a result
- 4015:** Let be st found no applicable bindings
- 4016:** Duplicate map keys have different values: <domain>
- 4017:** Duplicate map keys have different values: <domain>
- 4018:** Maplet cannot be evaluated
- 4019:** Sequence cannot extend to key: <index>
- 4020:** State value is neither a <type> nor a <type>
- 4021:** Duplicate map keys have different values: <key>
- 4022:** mk_ type argument is not <type>
- 4023:** Mu type conflict? No field tag <tag>
- 4024:** 'not yet specified' expression reached

- 4025: Map key not within sequence index range: <key>
- 4026: Cannot create post_op environment
- 4027: Cannot create pre_op environment
- 4028: Sequence comprehension pattern has multiple variables
- 4029: Sequence comprehension bindings must be numeric
- 4030: Duplicate map keys have different values: <key>
- 4031: First arg of '**' must be a map, function or number
- 4032: 'is subclass responsibility' expression reached
- 4033: Tail sequence is empty
- 4034: Name <name> not in scope
- 4035: Object has no field: <name>
- 4036: ERROR statement reached
- 4037: No such field: <name>
- 4038: Loop, from <value> to <value> by <value> will never terminate
- 4039: Set bind does not contain value <value>
- 4040: Let be st found no applicable bindings
- 4041: 'is not yet specified' statement reached
- 4042: Sequence does not contain key: <key>
- 4043: Object designator is not a map, sequence, operation or function
- 4045: Object does not contain value for field: <name>
- 4046: No such field: <name>
- 4047: Cannot execute specification statement
- 4048: 'is subclass responsibility' statement reached
- 4049: Value <value> is not in set bind
- 4050: Value <value> is not in set bind

- 4051: Cannot apply implicit function: <name>
- 4052: Wrong number of arguments passed to <name>
- 4053: Parameter patterns do not match arguments
- 4055: Precondition failure: <pre_name>
- 4056: Postcondition failure: <post_name>
- 4057: Curried function return type is not a function
- 4058: Value <value> is not a nat1
- 4059: Value <value> is not a nat
- 4060: Type invariant violated for <type>
- 4061: No such key value in map: <key>
- 4062: Cannot convert non-injective map to an inmap
- 4063: Duplicate map keys have different values: <domain>
- 4064: Value <value> is not a nat1 number
- 4065: Value <value> is not a nat
- 4066: Cannot call implicit operation: <name>
- 4067: Deadlock detected
- 4068: Wrong number of arguments passed to <name>
- 4069: Parameter patterns do not match arguments
- 4071: Precondition failure: <pre_name>
- 4072: Postcondition failure: <post_name>
- 4073: Cannot convert type parameter value to <type>
- 4074: Cannot convert <value> to <type>
- 4075: Value <value> is not an integer
- 4076: Value <value> is not a nat1
- 4077: Value <value> is not a nat

- 4078: Wrong number of fields for <type>
- 4079: Type invariant violated by mk_ arguments
- 4080: Wrong number of fields for <type>
- 4081: Field not defined: <tag>
- 4082: Type invariant violated by mk_ arguments
- 4083: Sequence index out of range: <index>
- 4084: Cannot convert empty sequence to seq1
- 4085: Cannot convert tuple to <type>
- 4086: Value of type parameter is not a type
- 4087: Cannot convert <value> (<kind>) to <type>
- 4088: Set not permitted for <kind>
- 4089: Can't get real value of <kind>
- 4090: Can't get rat value of <kind>
- 4091: Can't get int value of <kind>
- 4092: Can't get nat value of <kind>
- 4093: Can't get nat1 value of <kind>
- 4094: Can't get bool value of <kind>
- 4095: Can't get char value of <kind>
- 4096: Can't get tuple value of <kind>
- 4097: Can't get record value of <kind>
- 4098: Can't get quote value of <kind>
- 4099: Can't get sequence value of <kind>
- 4100: Can't get set value of <kind>
- 4101: Can't get string value of <kind>
- 4102: Can't get map value of <kind>

- 4103:** Can't get function value of <kind>
- 4104:** Can't get operation value of <kind>
- 4105:** Can't get object value of <kind>
- 4106:** Boolean pattern match failed
- 4107:** Character pattern match failed
- 4108:** Sequence concatenation pattern does not match expression
- 4109:** Values do not match concatenation pattern
- 4110:** Expression pattern match failed
- 4111:** Integer pattern match failed
- 4112:** Quote pattern match failed
- 4113:** Real pattern match failed
- 4114:** Record type does not match pattern
- 4115:** Record expression does not match pattern
- 4116:** Values do not match record pattern
- 4117:** Wrong number of elements for sequence pattern
- 4118:** Values do not match sequence pattern
- 4119:** Wrong number of elements for set pattern
- 4120:** Values do not match set pattern
- 4121:** Cannot match set pattern
- 4122:** String pattern match failed
- 4123:** Tuple expression does not match pattern
- 4124:** Values do not match tuple pattern
- 4125:** Set union pattern does not match expression
- 4126:** Values do not match union pattern
- 4127:** Cannot match set pattern

- 4129:** Exit <value>
- 4130:** Instance invariant violated: <inv_op>
- 4131:** State invariant violated: <inv_op>
- 4132:** Using undefined value
- 4133:** Map range is not a subset of its domain: <key>
- 4134:** Infinite or NaN trouble
- 4135:** Cannot instantiate a system class
- 4136:** Cannot deploy to CPU
- 4137:** Cannot set operation priority on CPU
- 4138:** Cannot set CPU priority for operation
- 4139:** Multiple BUS routes between CPUs <name> and <name>
- 4140:** No BUS between CPUs <name> and <name>
- 4141:** CPU policy does not allow priorities
- 4142:** Value already updated by thread <n>
- 4143:** No such test number: <n>
- 4144:** State init expression cannot be executed
- 4145:** Time: <n> is not a nat1

F Catecores of Proof Obligations

This appendix provide a list of the different proof obligation categories used in Overture and an explanantion for each of them the circumstances under which the PO category can be expected.

map apply: Whenever a map application is used it needs to be ensured that the argument is indeed in the domain of the mapping.

function apply: Whenever a function application is used it needs to be ensured that the list of arguments to the function are all of the types expected by the function signature as well as satisfy the pre-condition of the function in case such a predicate is present.

sequence apply: Whenever a sequence application is used it needs to be ensured that the argument is indeed in the indices of the sequence.

post condition:

function satisfiability:

function parameter patterns:

let be st existence:

unique existence binding:

function iteration:

map iteration:

function compose:

map compose:

non-empty set:

non-empty sequence:

non-zero:

finite map:

finite set:

map compatible:

map sequence compatible:

map set compatible:

sequence modification:

tuple selection:

value binding:

subtype:

cases exhaustive:

type invariant:

recursive function:

state invariant:

while loop termination:

operation post condition:

operation parameter patterns:

operation satisfiability:

Index

- architecture overview, 15
- assert, 24
- BUS, 15
- CPU, 15
- create
 - VDM-RT project, 15
- create real time project, 14
- creating
 - VDM++ class, 6
 - VDM-RT class, 6
 - VDM-SL module, 6
- debug configuration, 6
- debug perspective, 6
- DEFAULT, 3
- env, 24
- explorer, 3
- export image button, 15
- Export XMI, 14
- Enterprise Architect, 14
- Go to time button, 15
- icon
 - fail verdict, 14
 - inconclusive verdict, 14
 - not yet executed, 13
 - pass verdict, 14
 - resume debugging, 8
 - skipped test case, 14
 - step into, 8
 - step over, 8
 - step return, 8
 - suspend debugging, 8
 - terminate debugging, 8
 - use step filters, 8
- import XMI, 14
- model execution overview, 15
- named trace, 12
- outline, 3
- perspective, 2
- print, 24
- problems, 3
- proof obligation, 11
 - perspective, 11
- proof obligation
 - categories, 11
- RealTime Log viewer, 15
- single CPU overview, 16
- trace apply expression, 12
- trace binding, 13
- trace bindings, 13
- trace bracketed expression, 13
- trace core definition, 12
- trace definition, 12
- trace definition list, 12
- trace definition term, 12
- trace repeat pattern, 13
- traces definitions, 12
- UML transformation, 14
- VDM dialect, 5
- vdm file extension, 6, 28
- VDMJ, 17
- view, 2
- workbench, 2
- XMI, 14