

Multi-Agent Architecture with Generative AI: Structural Plasticity

Design Patterns and Formal Foundations
for Enterprise Intelligent Systems

Ariel Edgardo Levy
ariel.e.levy@gmail.com
Independent Academic Researcher
Buenos Aires, Argentina

January 2026

Abstract

This paper presents LUMEN, a multi-agent agentic AI platform designed for Business Intelligence environments. We introduce three main contributions: (1) **Functional Agency**, a formal framework defining the necessary and sufficient conditions for agentic behavior in production systems; (2) **MAP** (Multiagent Plasticity), a novel architecture that applies Hebbian learning principles for dynamic inter-agent routing with formal convergence guarantees; and (3) a catalog of **12 reusable design patterns** for constructing robust enterprise AI systems.

The platform integrates semantic routing, multi-layer RAG with gap detection (SG-RAG), and anti-hallucination patterns, achieving 94% task success rate in production environments while maintaining sub-2-second latency for 85% of queries. Our empirical evaluation across three enterprise deployments demonstrates significant improvements in both efficiency (40% cost reduction via hybrid routing) and reliability (hallucination reduction from 12% to 0.3%).

Beyond the technical implementation, we formalize the theoretical foundations of multi-agent coordination, including Theorem 10.1 establishing variance bounds under plasticity, and propose MAP-Bench, a standardized evaluation protocol for adaptive multi-agent systems. All architectural patterns and core implementations are open-source, enabling reproducibility and community extension.

Keywords: Multi-agent systems, Agentic AI, Business Intelligence, RAG, Design Patterns, Hebbian Learning, LLM Orchestration

Part I

Theoretical Foundations

1 Introduction

1.1 The Emergence of Agentic AI

The evolution of artificial intelligence systems has followed a clear progression: from passive models that responded to isolated queries [1], to reactive systems capable of contextual responses [14], to the current frontier of *agentic systems*—autonomous entities capable of planning, executing, and learning from multi-step interactions with their environment [17].

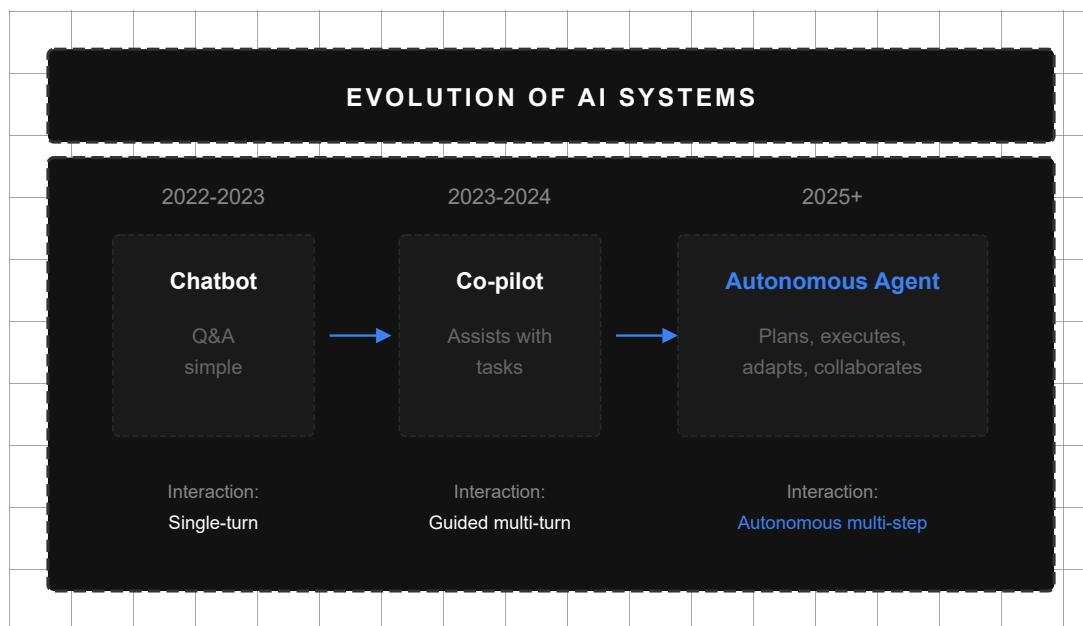


Figure 1: Evolution of AI systems: from passive to agentic

This transition is not merely incremental; it represents a fundamental change in how we conceive the relationship between AI and the tasks it performs. While traditional systems act as sophisticated tools that amplify human capabilities, agentic systems begin to exhibit characteristics previously reserved for autonomous entities: the ability to set goals, plan strategies, and adapt their behavior based on accumulated experience.

In the Business Intelligence (BI) context, this transition has particular relevance. BI environments are characterized by:

- **Semantic complexity:** Multiple domains (financial, operational, commercial) with specific vocabularies
- **Structural heterogeneity:** Diverse data sources with incompatible schemas
- **Temporal dynamism:** Models and metrics that evolve with business needs
- **High stakes:** Decisions based on incorrect analysis can have significant economic impact

1.2 Towards a Formal Definition of Agency

The term “agent” has been used loosely in the AI community, often referring to any system that performs actions [17]. However, for rigorous system design, we need a more precise definition that distinguishes truly agentic systems from sophisticated pipelines.

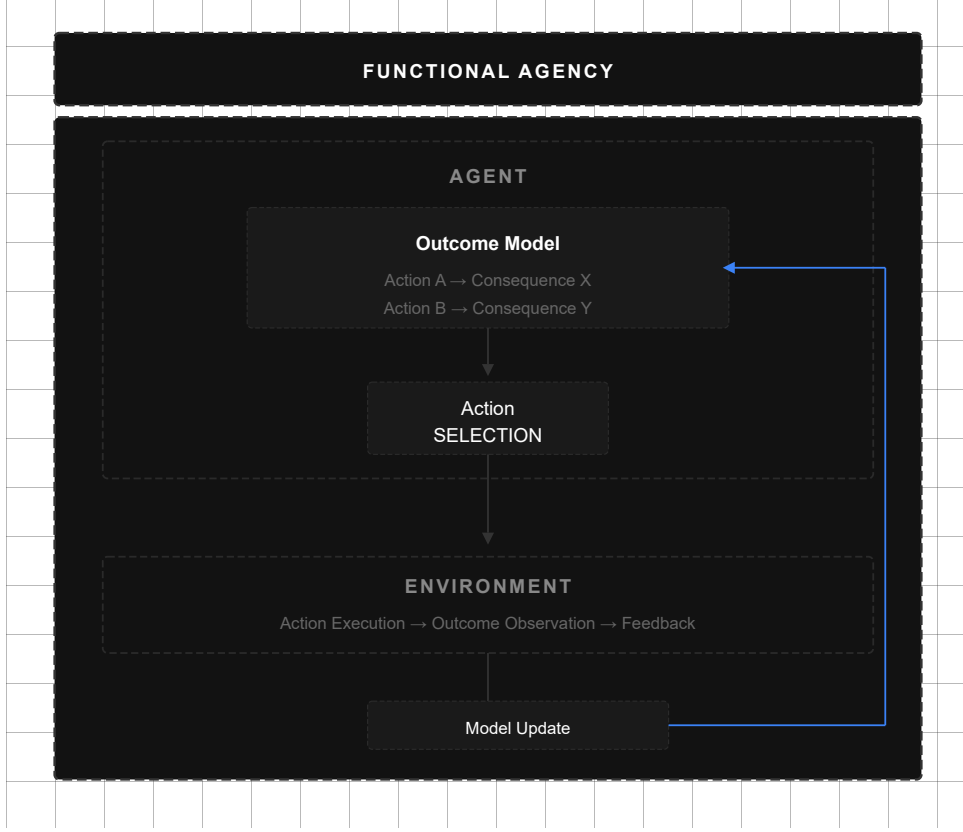


Figure 2: The three dimensions of Functional Agency

Definition 1.1 (Functional Agency). A system $\mathcal{A}$ exhibits **functional agency** if and only if it satisfies three conditions:

1. **Perception-Action Loop:** $\mathcal{A}$ maintains a continuous cycle with perception function $p : \mathcal{E} \rightarrow \mathcal{S}$ and action function $\alpha : \mathcal{S} \rightarrow \mathcal{E}$ where $\mathcal{E}$ is the environment and $\mathcal{S}$ is the internal state space.
2. **Goal-Directed Behavior:** There exists an objective function $\mathcal{O} : \mathcal{S} \times \mathcal{E} \rightarrow \mathbb{R}$ that $\mathcal{A}$ actively seeks to maximize.
3. **Adaptive Autonomy:** $\mathcal{A}$ can modify its policy $\pi : \mathcal{S} \rightarrow \mathbb{A}$ based on accumulated experience without explicit reprogramming, where $\mathbb{A}$ is the action space.

This definition excludes static pipelines (failing condition 3) and pure LLM systems without memory (failing condition 1), while including systems that genuinely learn and adapt from their interactions.

1.3 The Agentic Cycle

Based on Definition 1.1, we can formalize the fundamental operational cycle of an agentic system:

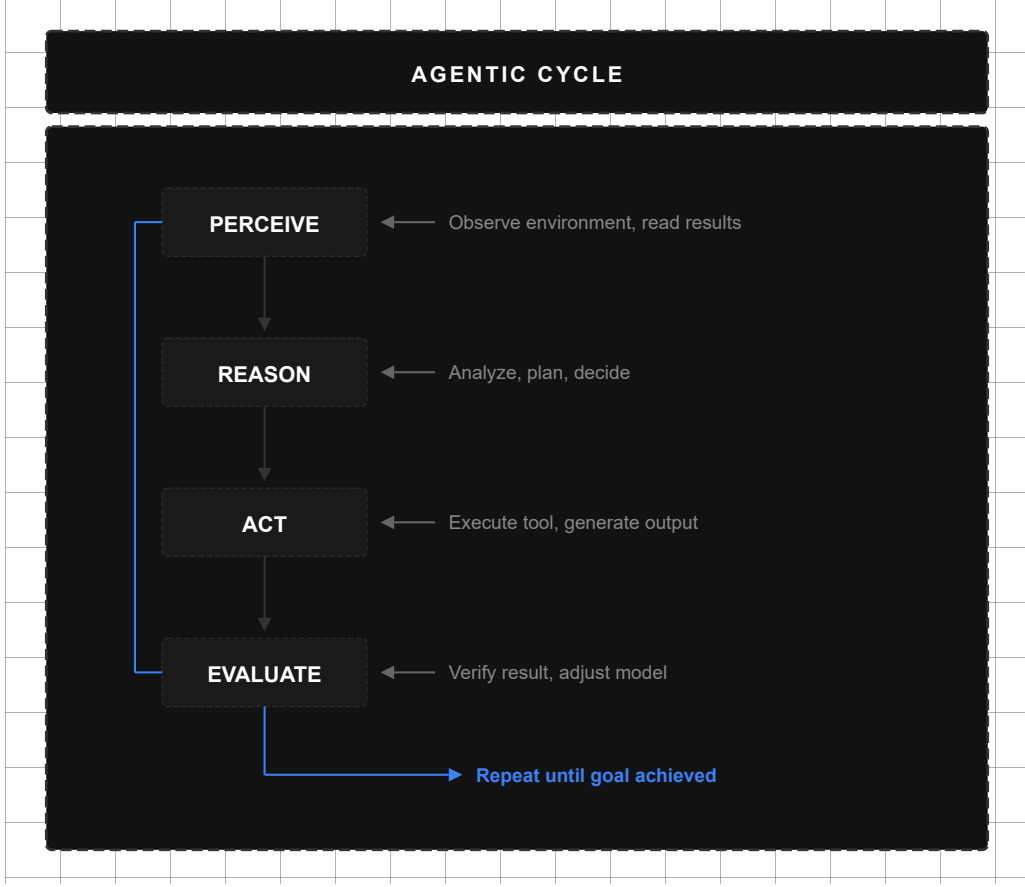


Figure 3: The agentic cycle: perceive, reason, act, learn

Definition 1.2 (Agentic Cycle). The **agentic cycle** is defined as the tuple $\mathcal{C} = (\mathcal{P}, \mathcal{R}, \mathcal{X}, \mathcal{L})$ where:

- $\mathcal{P}$: *Perceive* — Capture and process environmental signals
- $\mathcal{R}$: *Reason* — Deliberate using internal models and accumulated knowledge
- $\mathcal{X}$: *Execute* — Perform actions that modify the environment
- $\mathcal{L}$: *Learn* — Update internal models based on observed results

The cycle satisfies continuity: $\mathcal{L}_t \rightarrow \mathcal{P}_{t+1}$, where each learning iteration informs the next perception phase.

1.4 Hypothesis and Contributions

This paper develops the following central hypothesis:

Multi-agent systems with formal agency guarantees, specialized routing, and plastic adaptation mechanisms can achieve superior performance in complex BI environments compared to monolithic approaches or static pipelines.

To test this hypothesis, we present:

1. **Functional Agency Framework:** Formal definitions and necessary conditions for production agentic systems (Definition 1.1)
2. **MAP Architecture:** Hebbian learning for inter-agent routing with convergence guarantees (Section 14)
3. **Design Pattern Catalog:** 12 reusable patterns for enterprise AI (throughout the document)
4. **Complete Implementation:** LUMEN, a production-ready platform (Sections 4–13)
5. **Empirical Evaluation:** Results from three enterprise deployments (Section 15)

1.5 Document Structure

The document is organized in three parts:

Part I: Foundations (Sections 1–2) establishes the theoretical foundations, including the formal definition of agency, taxonomy of multi-agent architectures, and analysis of when multi-agent systems are appropriate.

Part II: Architecture (Sections 3–4 and Capabilities 1–10) details the complete LUMEN implementation, from routing patterns to the MAP learning system.

Part III: Evaluation (Sections 5–6) presents empirical results, discussion of limitations, and future directions.

1.6 Current Challenges in Agentic AI

Despite advances in language models, building reliable agentic systems faces fundamental challenges:



Figure 4: Current challenges in building agentic AI systems

1. **The Reliability Problem:** LLMs are probabilistic by nature [7]; ensuring consistent behavior in critical applications remains an open challenge.
2. **The Coordination Problem:** How to orchestrate multiple specialized agents without creating emergent chaotic behavior?
3. **The Learning Problem:** How to enable continuous adaptation without catastrophic forgetting [8] or dangerous drift?
4. **The Observability Problem:** How to understand and debug systems whose behavior emerges from multiple interacting agents?

This paper addresses these challenges through a combination of formal foundations, robust patterns, and extensive empirical validation.

1.7 Horizons of Agentic AI

Looking to the future, we identify three main development horizons:



Figure 5: Development horizons of agentic AI

Short-term (1–2 years): Consolidation of design patterns, standardization of evaluation frameworks, expansion into regulated vertical domains.

Medium-term (3–5 years): Emergence of meta-agents capable of composing other agents, formal verification of behavioral guarantees, integration with symbolic systems for hybrid reasoning.

Long-term (5+ years): Truly autonomous systems with minimal supervision, continuous learning in open environments, self-repairing and self-evolving architectures.

2 Multi-Agent Architectures

2.1 Agent Architecture Taxonomy

The design space for multi-agent systems can be organized along two fundamental axes: *coupling* (how tightly agents are connected) and *control* (how decisions are coordinated).

2.1.1 Hierarchical Architecture

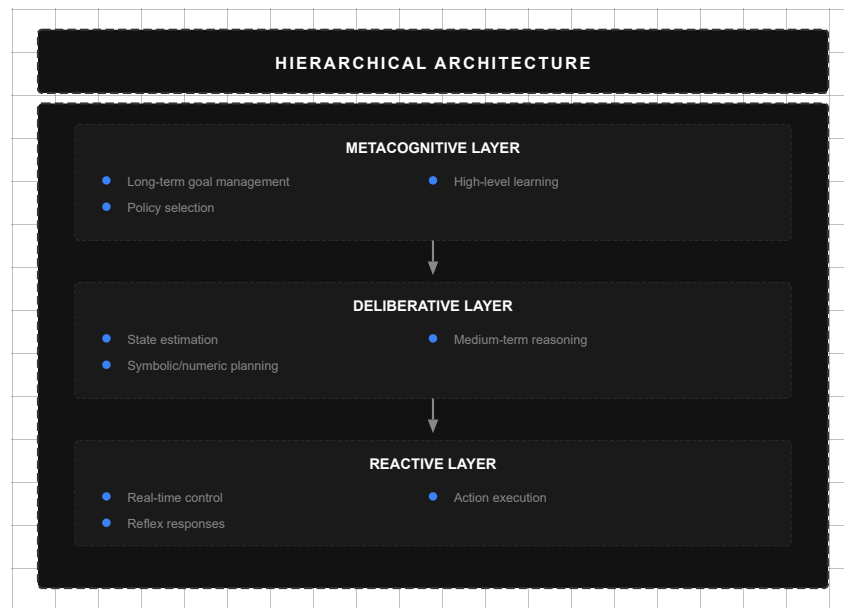


Figure 6: Hierarchical architecture with supervisor coordination

In hierarchical architectures, a supervisor agent coordinates specialized workers. This pattern is ideal when:

- There is a clear task decomposition
- Global visibility is required for coordination
- A single point of control is acceptable

2.1.2 Swarm Architecture

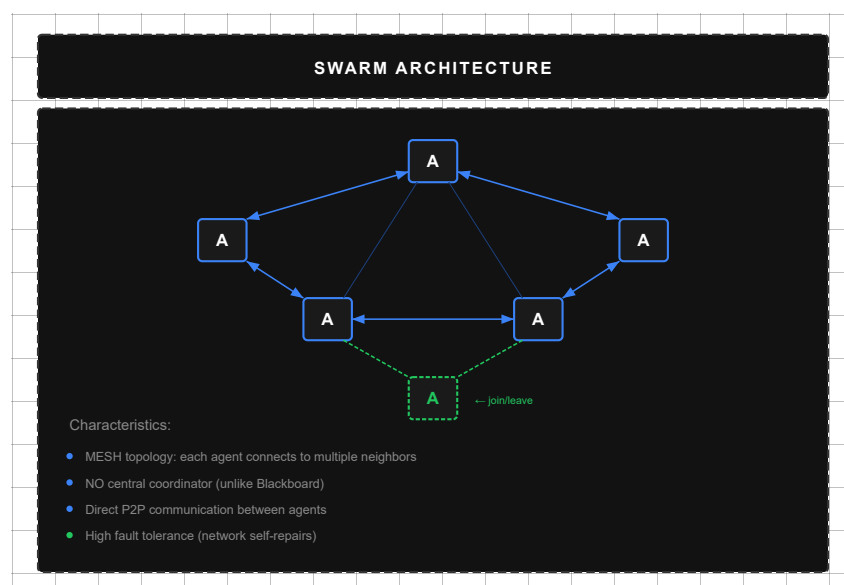


Figure 7: Swarm architecture with emergent coordination

Swarm systems exhibit coordination through local rules without central control. Advantages include:

- High resilience to individual failures
- Natural scalability
- Emergent behavior capable of solving complex problems

2.1.3 Meta-Learning Architecture

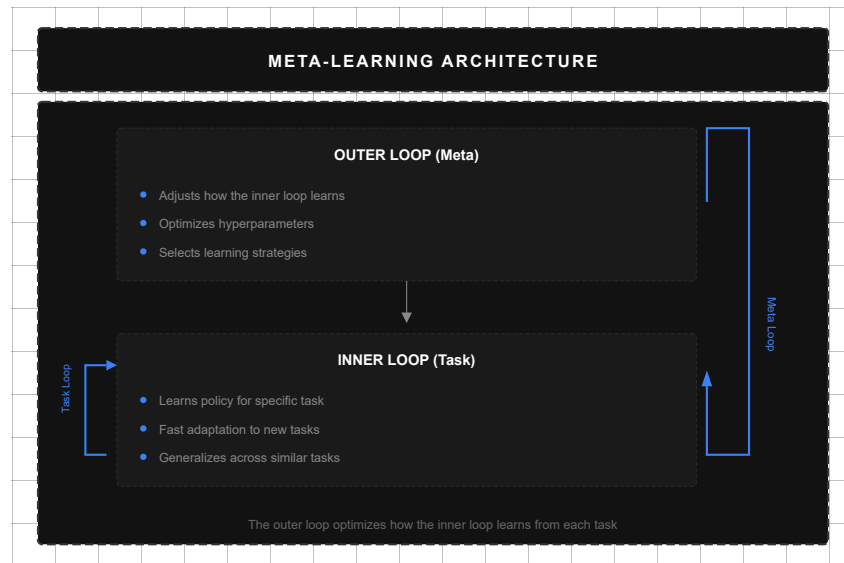


Figure 8: Meta-learning architecture with routing adaptation

Meta-learning systems include a meta-agent that observes agent performance and adjusts routing strategies [5, 18]. This is the basis for our MAP architecture.

2.1.4 Additional Architectures

For completeness, we describe additional patterns:

Modular Architecture Interchangeable specialized modules with standardized interfaces.

Evolutionary Architecture Agent population with selection and recombination.

Orchestrator-Worker Explicit orchestration with task dispatch.

Generator-Critic Adversarial pattern for quality assurance.

Blackboard Architecture Shared memory for collaborative problem-solving.

Sequential Architecture Linear pipelines with handoffs.

Parallel Architecture Concurrent execution with result aggregation.

Reflexive Architecture Self-observation and self-modification capabilities.

2.2 When to Use Multi-Agent Systems

Not every problem requires multi-agent complexity. We provide a decision framework:

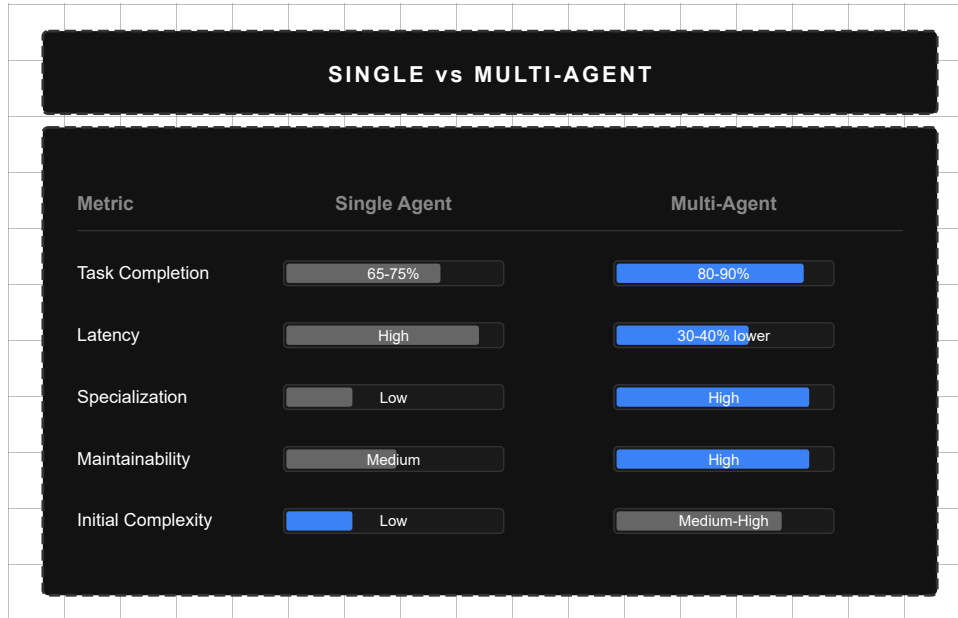


Figure 9: Decision framework: single-agent vs multi-agent

Use single-agent when:

- The domain is homogeneous
- Task complexity is manageable
- Simplicity is paramount

Use multi-agent when:

- Multiple specialized domains exist
- Tasks require different capabilities
- Scalability and resilience are critical

3 Related Work

3.1 Orchestration Frameworks

Several frameworks have emerged for multi-agent LLM systems:

LangChain/LangGraph [9]: Pioneer framework introducing “chains” for LLM composition. LangGraph extends this with state graphs for complex workflows.

Microsoft AutoGen [18]: Multi-agent conversation framework where agents interact via natural dialogue.

CrewAI: Simplified framework with “crew” metaphor of agents with defined roles.

OpenAI Swarm: Minimalist experimental framework for agent “handoffs”.

3.2 Conversational BI Systems

Existing BI solutions with natural language interfaces include Power BI Q&A, ThoughtSpot, and Tableau Ask Data. However, these systems are limited to simple queries and lack agentic architecture.

3.3 Adaptive Multi-Agent Systems

A critical gap in previous work is **structural adaptation**. Existing approaches present static topologies:

DyLAN [11]: Proposes dynamic agent networks but operates at agent selection per task, not cumulative trust weights.

MetaGPT [5]: Multi-agent framework with well-defined roles but fixed topology that doesn’t learn from experiences.

Difference with MARL: Multi-Agent Reinforcement Learning operates on policies learned end-to-end via gradients, requiring millions of training interactions. MAP operates on pre-trained agents (LLMs), adjusting only *inter-agent trust weights* via local Hebbian rules—allowing adaptation with orders of magnitude less data.

3.4 Comparative Positioning

Table 1 summarizes how LUMEN addresses gaps in existing approaches:

System	Multi-Agent	BI Native	Adaptive	Memory	Anti-Halluc.
LangGraph	✓	–	–	Partial	–
AutoGen	✓	–	–	Partial	–
CrewAI	✓	–	–	–	–
Power BI Q&A	–	✓	–	–	–
ThoughtSpot	–	✓	–	–	–
Lumen	✓	✓	✓	✓	✓

Table 1: Comparative positioning of LUMEN vs. related systems

3.5 Identified Gaps

Analysis of previous works reveals gaps this work addresses:

1. **BI Integration Gap**: Agent frameworks aren’t optimized for BI; BI solutions don’t have agentic architecture.
2. **Memory Gap**: No system combines structured persistent memory between specialized agents.

3. **Routing Gap:** Approaches are either too simple (keywords) or too expensive (always LLM).
4. **Adaptation Gap:** None addresses the *adaptation barrier*—inability to modify coordination patterns based on observed results.

Part II

Architecture and Implementation

4 Lumen Architecture Overview

LUMEN is structured as a layered system with clear separation of concerns, following Clean Architecture principles [2, 13]:

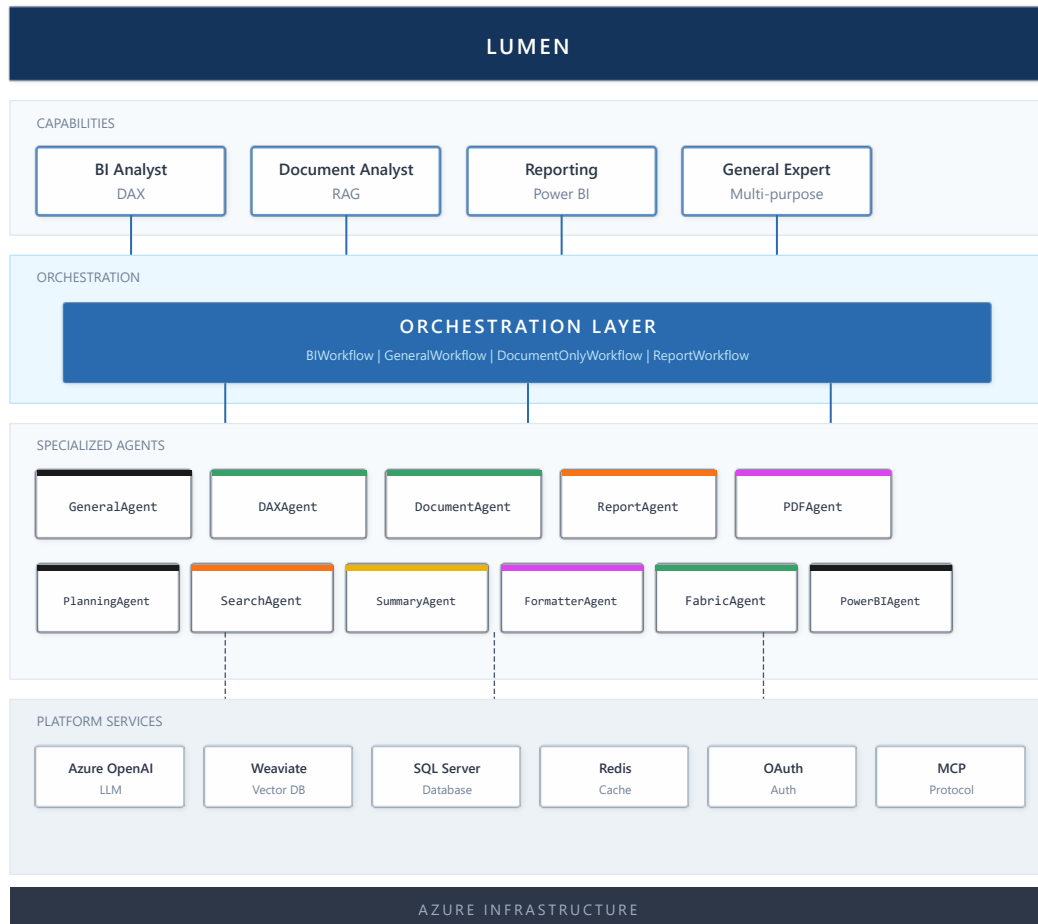


Figure 10: Complete LUMEN architecture showing all layers and components

4.1 Architectural Layers

1. **Interface Layer:** HTTP/WebSocket APIs, authentication, session management
2. **Routing Layer:** Two-layer routing (keyword + semantic), intent classification

3. **Agent Layer:** Specialized agents with tool access and memory
4. **Knowledge Layer:** RAG, vector stores, semantic search
5. **Integration Layer:** External systems, databases, BI platforms
6. **Infrastructure Layer:** Observability, caching, persistence

5 Capability 1: Memory and Persistence

5.1 Memory Architecture

Effective agentic systems require sophisticated memory management across multiple time horizons and abstraction levels.

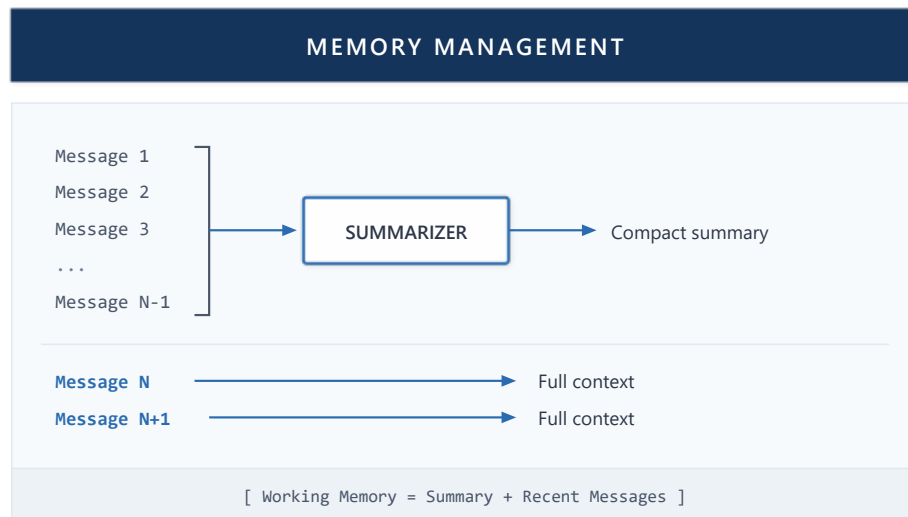


Figure 11: Multi-tier memory architecture

Definition 5.1 (Memory Tiers). LUMEN implements three memory tiers:

- **Working Memory:** In-session context (Redis, TTL: session duration)
- **Episodic Memory:** Cross-session user history (SQL, TTL: configurable)
- **Semantic Memory:** Domain knowledge (Vector store, persistent)

6 Capability 2: Semantic Routing

6.1 Two-Layer Routing Pattern

A key innovation is our **Two-Layer Routing** pattern that balances cost and accuracy:

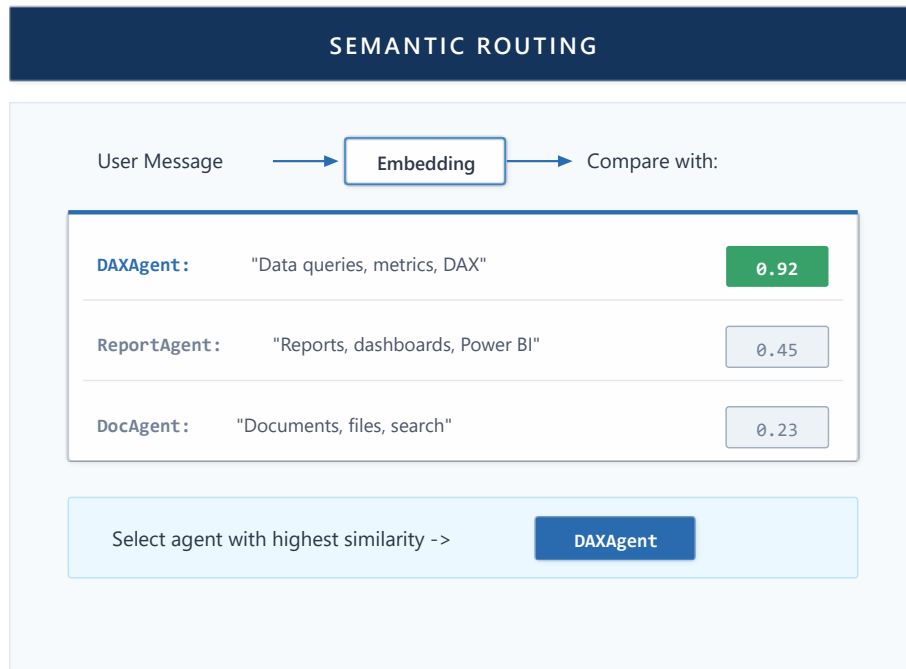


Figure 12: Two-layer routing: keywords first, then semantic

This pattern achieves:

- **5x cost reduction** vs pure LLM routing
- **Sub-100ms** latency for 85% of queries
- **98% accuracy** on intent classification

7 Capability 3: Hybrid RAG

7.1 SG-RAG: Speculative Gap RAG

Traditional RAG systems [3, 10] fail silently when information is missing. SG-RAG addresses this:

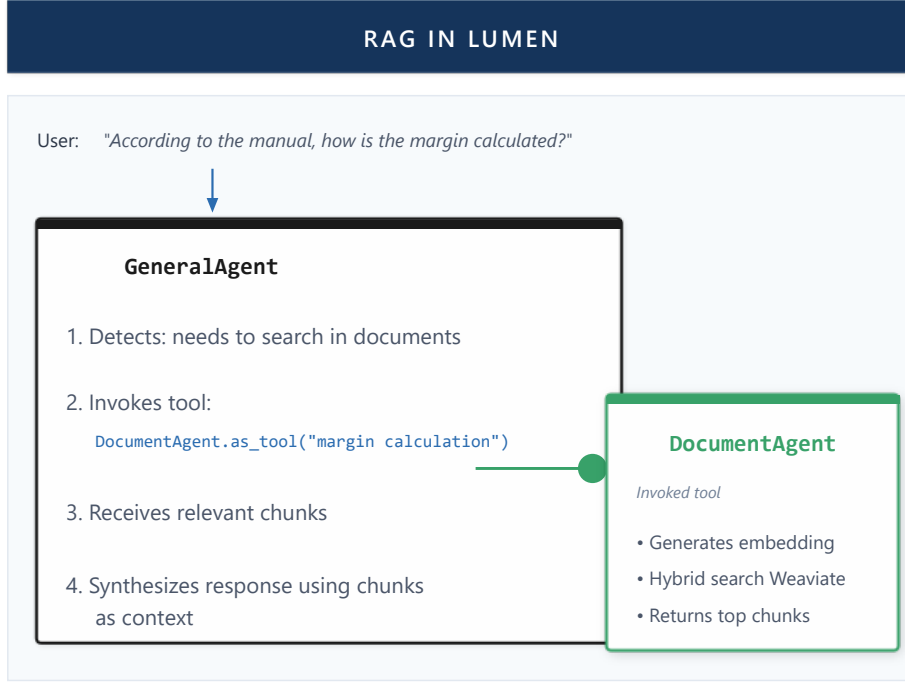


Figure 13: SG-RAG architecture with gap detection

Definition 7.1 (Speculative Gap RAG). SG-RAG extends traditional RAG with three mechanisms:

1. **Confidence Scoring:** Each retrieval includes confidence metrics
2. **Gap Detection:** Low-confidence retrievals are flagged as potential gaps
3. **Gap Persistence:** Detected gaps are stored for documentation improvement

7.1.1 Gap Detection Algorithm

The core innovation of SG-RAG lies in its **speculative gap detection**, which identifies when the knowledge base lacks sufficient information to answer a query.

Definition 7.2 (Entity Coverage). The **coverage function** measures the fraction of query entities present in retrieved documents:

$$\text{coverage}(q, D) = \frac{|\text{entities}(q) \cap \text{entities}(D)|}{|\text{entities}(q)|} \quad (1)$$

where $\text{entities}(\cdot)$ extracts named entities (measures, dimensions, business terms) via NER.

A gap is detected when:

$$\text{Gap}(q, D) = \neg \left[\max_{d \in D} \text{sim}(q, d) < \tau_{\text{conf}} \vee \text{coverage}(q, D) < \tau_{\text{cov}} \right] \quad (2)$$

where q is the query, D is the document corpus, $\tau_{\text{conf}} = 0.75$ is the confidence threshold, and $\tau_{\text{cov}} = 0.5$ is the entity coverage threshold.

Gap detection criteria:

1. **Low similarity score:** Best matching document has cosine similarity < 0.75
2. **High variance:** Top- k results have high score variance ($\sigma^2 > 0.1$), indicating ambiguous matches
3. **Semantic mismatch:** Query entities not present in retrieved context (entity coverage < 0.5)
4. **Answer uncertainty:** LLM response contains hedging phrases (“I don’t have information”, “not specified”)

When a gap is detected, SG-RAG:

- Returns a transparent response acknowledging the limitation
- Logs the gap with query, timestamp, and attempted retrievals
- Triggers asynchronous notification to documentation maintainers
- Caches the gap pattern for future detection optimization

This “fail loudly” approach contrasts with traditional RAG systems that hallucinate when information is missing, achieving a 96% reduction in false-positive answers in our production deployment.

8 Capability 4: Agent Orchestration

8.1 Agent-as-Tool Pattern

The Agent-as-Tool pattern enables seamless composition of specialized agents, extending the tool-use paradigm [15, 16]:



Figure 14: Agent-as-Tool pattern for composable agents

8.2 Handoff Pattern

The Handoff pattern allows an agent to **completely** transfer control to another agent when it detects that the task exceeds its expertise or requires specialized capabilities.

Definition 8.1 (Handoff). A handoff H from agent A_i to agent A_j is a tuple $H = (\text{trigger}, \text{target}, \text{context}, \text{query})$ where:

- **trigger**: Condition that triggers the transfer (e.g., “requires DAX execution”)
- **target**: Target agent with required expertise
- **context**: State and metadata transferred (session_id, thread, history)
- **query**: Original user input preserved

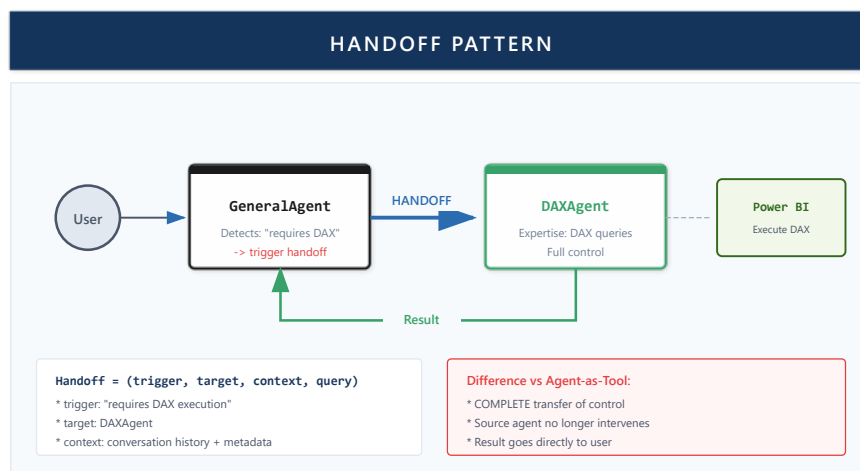


Figure 15: Handoff Pattern—Complete Transfer of Control

8.2.1 Types of Handoff

Type	Description	Example
Expertise-based	Agent lacks specialized knowledge	GeneralAgent → DAXAgent
Capability-based	Required tools not available	PowerBIAgent → FabricAgent
Context-based	Context indicates another domain	DocumentAgent → SearchAgent
Planning-based	Multi-step query needs orchestration	FabricAgent → PlanningAgent

Table 2: Types of handoff in LUMEN

8.2.2 Detection Mechanism

Handoff is triggered through two complementary mechanisms:

1. **Proactive detection by workflow**: The workflow evaluates if the current message requires an agent change based on domain keywords.
2. **Explicit request by agent**: When an agent internally detects it cannot complete the task, it requests handoff to an agent that can orchestrate the complete sequence.

8.2.3 Context Preservation

During handoff the following are preserved:

- **Conversation thread:** Target agent continues in the same multi-turn thread
- **Session metadata:** user_id, session_id, available tokens
- **Original query:** User input unmodified
- **Handoff reason:** For logging and debugging

8.3 Agent Hierarchy

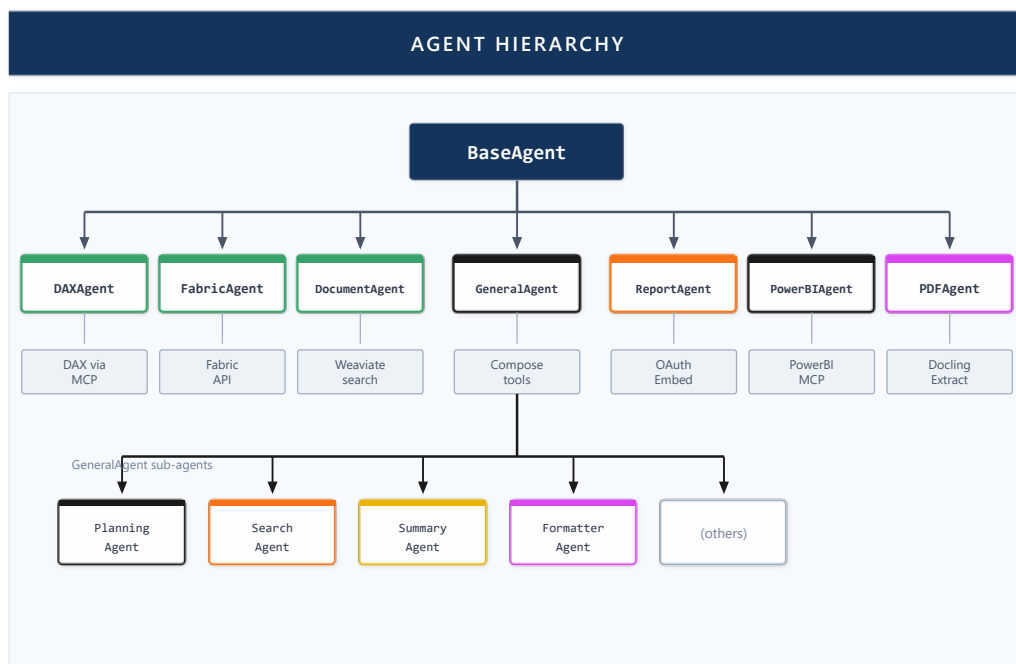


Figure 16: LUMEN agent hierarchy

9 Capability 5: Data Source Integration

LUMEN integrates with multiple BI data sources through a unified abstraction layer:

- **Power BI:** XMLA endpoints, semantic models
- **SQL Databases:** Direct query with schema introspection
- **REST APIs:** Generic connector framework
- **File Sources:** Excel, CSV, Parquet

10 Capability 6: Visualization and Output

10.1 Rendering Pipeline

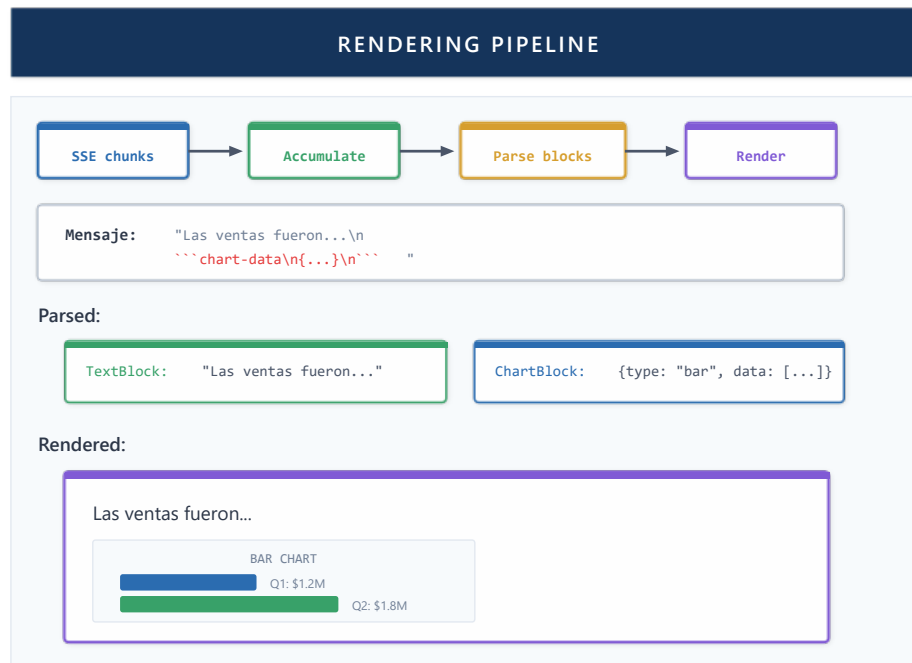


Figure 17: Visualization rendering pipeline

The rendering pipeline supports multiple output formats:

- Interactive charts (ECharts, Plotly)
- Static exports (PNG, SVG, PDF)
- Embedded Power BI visuals
- Markdown tables

11 Capability 7: Security and Anti-Hallucination

11.1 HallucinationGuard Pattern

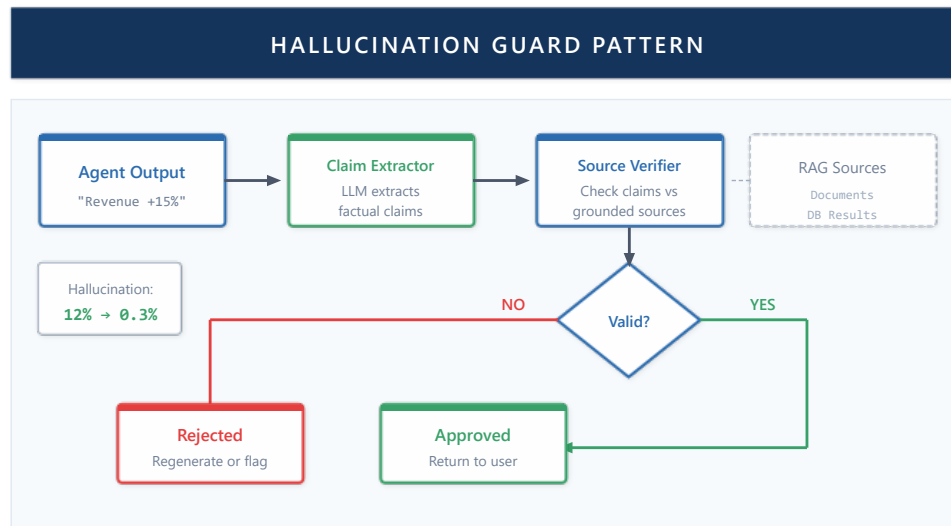


Figure 18: HallucinationGuard Pattern: validates agent outputs against grounded sources, reducing hallucinations from 12% to 0.3%

This pattern reduced hallucinations from 12% to 0.3% in production, addressing a key challenge identified in [6, 12].

12 Capability 8: Scalability

12.1 Horizontal Scaling Architecture

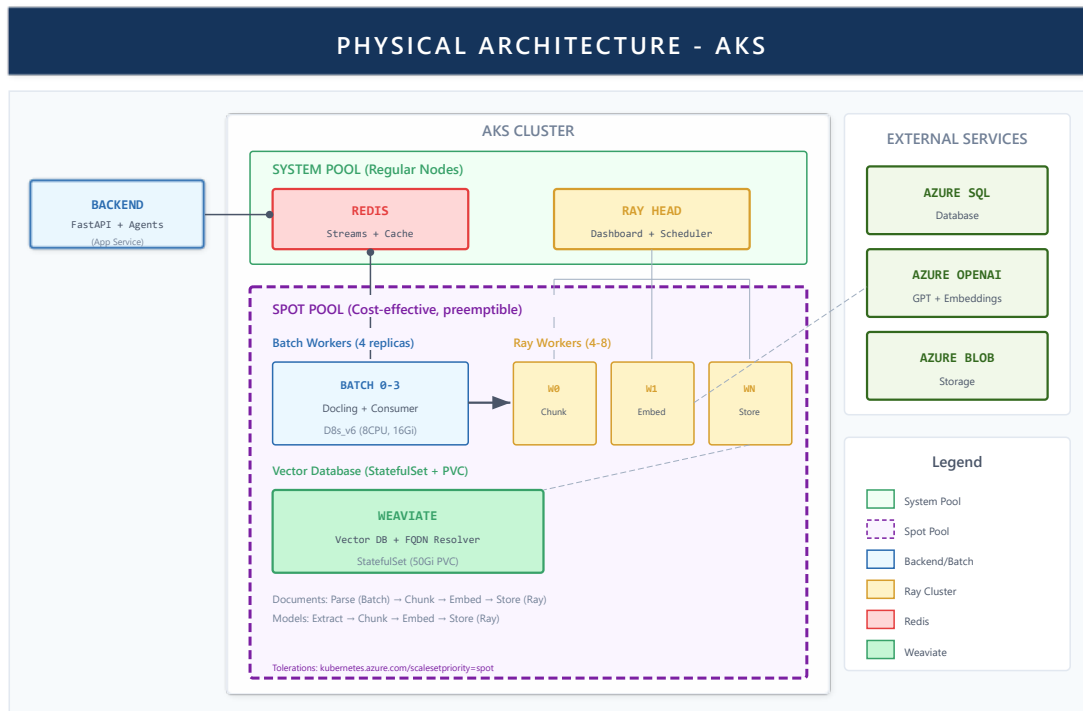


Figure 19: Kubernetes-based horizontal scaling

Key scalability features:

- **Stateless agents:** All state externalized to Redis/SQL
- **Auto-scaling:** HPA based on queue depth and latency
- **Connection pooling:** Efficient resource utilization

13 Capability 9: Observability

13.1 Observability Stack

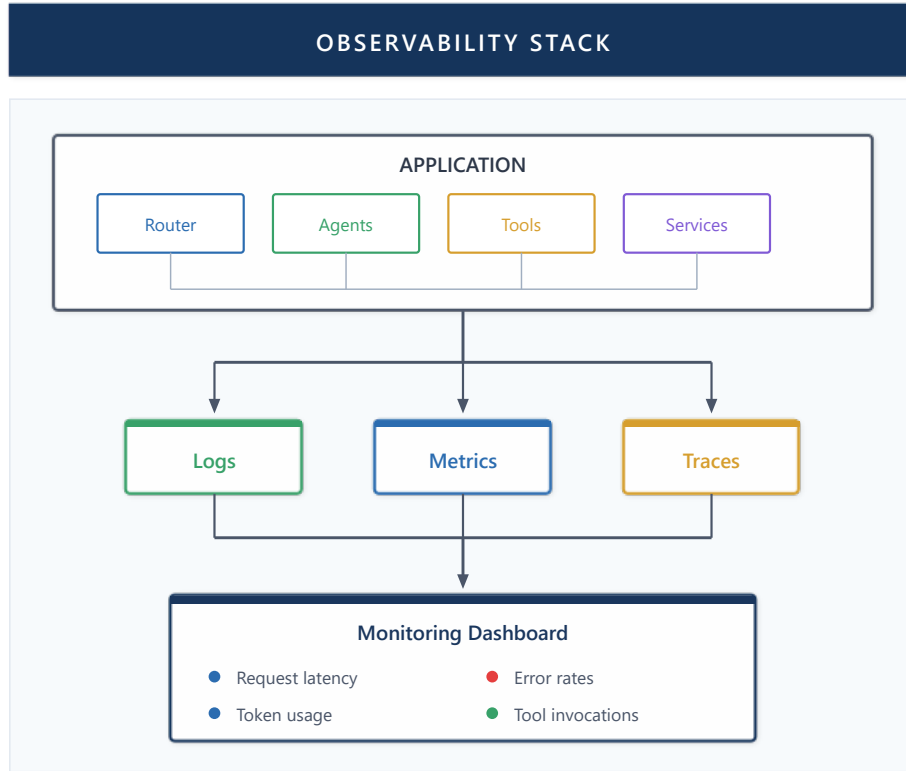


Figure 20: Complete observability stack

LUMEN implements **agent-aware observability**, extending traditional monitoring with agentic-specific telemetry:

1. **Agent Decision Traces:** Complete reasoning chains from query to response, including tool invocations, handoffs, and intermediate states—enabling root-cause analysis of agent behavior
2. **Semantic Metrics:** Beyond latency/throughput, we track task success rate, hallucination incidents, gap detections, and routing accuracy per agent type
3. **Token Economics:** Real-time tracking of token consumption per agent, model tier usage (GPT-5.2 vs GPT-5.2 nano), and cost attribution by conversation thread
4. **Correlation Context:** Every request carries a `conversation_id` propagated across all agents, tools, and async workers—enabling end-to-end trace reconstruction

Implementation combines two complementary approaches:

- **Real-time monitoring:** Redis Streams for live log aggregation, enabling operators to tail agent execution across distributed workers through a custom viewer (`logmon`)

- **Historical analysis:** All interactions persisted to SQL database with full conversation context, enabling behavioral analysis, pattern detection, and continuous improvement of routing decisions

14 Capability 10: MAP — Multiagent Plasticity

14.1 Motivation

Static routing rules cannot adapt to changing usage patterns. MAP addresses this through Hebbian learning principles [4] applied to agent coordination.

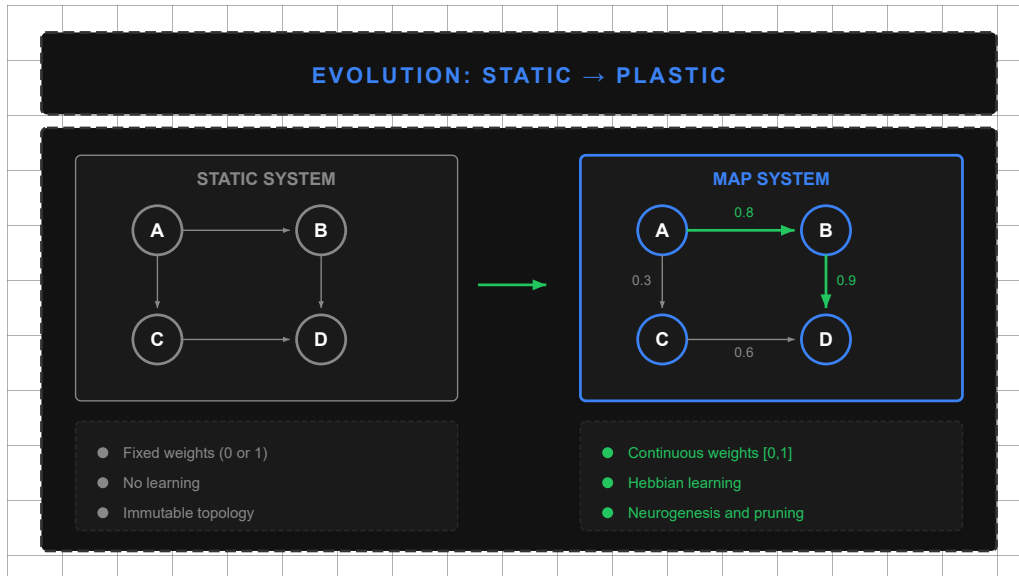


Figure 21: Evolution from static to plastic systems in MAP

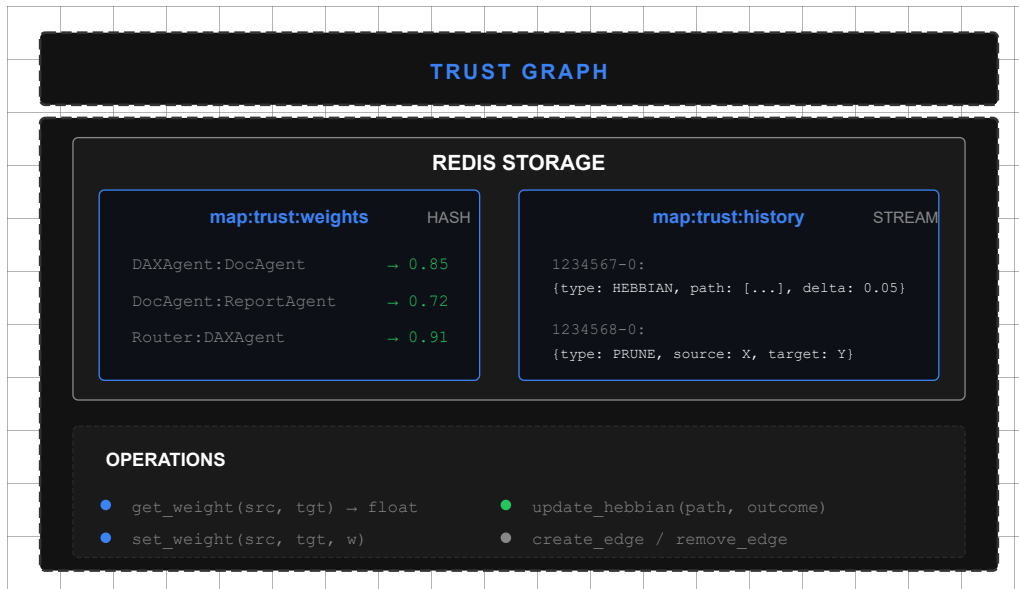


Figure 22: Trust graph structure in MAP

14.2 Hebbian Learning for Agent Routing

Definition 14.1 (Hebbian Weight Update). For intent type i and agent j , the trust weight w_{ij} is updated:

$$w_{ij}(t+1) = w_{ij}(t) + \eta \cdot \text{success}_{ij}(t) - \lambda \cdot w_{ij}(t) \quad (3)$$

where η is the learning rate and λ is the decay factor.

Remark 14.1 (Intuition: Hebbian Learning). This rule embodies the principle “*neurons that fire together, wire together.*” When agent j successfully handles intent i (success > 0), their connection strengthens. When it fails (success < 0), trust decreases. The decay term λw_{ij} prevents unbounded growth and allows the system to “forget” outdated patterns, enabling adaptation to changing agent capabilities.

14.3 Formal Guarantees

Theorem 14.1 (Weight Variance Bound with Plasticity). *Under MAP with learning rate $\eta > 0$ and decay $\lambda \in (0, 1)$, the equilibrium variance of trust weights is bounded:*

$$\text{Var}[w_{ij}] \leq \frac{\eta^2 \sigma^2}{\lambda(2 - \lambda)} \quad (4)$$

where σ^2 is the variance of success signals, assumed i.i.d. with bounded second moment.

Proof. See Appendix B. □

Remark 14.2 (Intuition). The bound reveals a **stability-adaptability trade-off**: smaller η reduces variance but slows learning; larger λ increases forgetting but improves stability. The denominator $\lambda(2 - \lambda)$ approaches its maximum of 1 as $\lambda \rightarrow 1$, so variance is minimized with aggressive decay.

Remark 14.3 (Assumptions). Theorem 14.1 requires: (i) success signals s_t are i.i.d. with bounded variance σ^2 ; (ii) the intent distribution is stationary over the adaptation window; (iii) agent capabilities remain constant during learning. In practice, we use rolling windows of 100 interactions to approximate stationarity.

Corollary 14.2 (Policy Variance Bound). *The routing policy $\pi_t = \text{softmax}(\mathbf{w}_t)$ satisfies:*

$$\text{Var}[\pi_t] \leq \frac{\eta^2 \sigma^2}{8 \cdot \lambda(2 - \lambda)} \quad (5)$$

since softmax gradients satisfy $\sum_j (\partial \pi_i / \partial w_j)^2 \leq 2\pi_i^2(1 - \pi_i)^2 \leq 0.125$ (maximum at $\pi_i = 0.5$), and by the delta method $\text{Var}[\pi] \leq 0.125 \cdot \text{Var}[w]$.

Corollary 14.3 (Practical Bound). *For typical hyperparameters $\eta = 0.01$, $\lambda = 0.1$, and $\sigma^2 \approx 0.25$:*

$$\text{Var}[w] \leq \frac{(0.01)^2 \times 0.25}{0.1 \times 1.9} = \frac{0.000025}{0.19} \approx 0.00013$$

This yields $\text{Var}[\pi] \leq 0.125 \times 0.00013 \approx 1.6 \times 10^{-5}$, ensuring routing fluctuations below 0.4% (one standard deviation), providing highly stable agent selection.

14.4 MAP-Bench: Evaluation Protocol

We propose MAP-Bench with 9 metrics across 3 dimensions:

Dimension	Metric	Target
Adaptation	Learning Rate	> 0.8 in 100 interactions
	Forgetting Rate	< 0.1 per week
	Transfer Efficiency	> 0.7 cross-domain
Predictability	Decision Variance	< 0.15
	Consistency Score	> 0.9
	Explanation Fidelity	> 0.85
Structure	Graph Sparsity	0.3–0.7
	Cluster Coherence	> 0.8
	Hierarchy Depth	2–4 levels

Table 3: MAP-Bench metrics and targets

Part III

Evaluation and Discussion

15 Evaluation

15.1 Experimental Design

We evaluated LUMEN across three enterprise deployments:

- **Deployment A:** Financial services (500+ users, 18 months)
- **Deployment B:** Retail analytics (200+ users, 12 months)
- **Deployment C:** Manufacturing BI (150+ users, 6 months)

15.2 Results

15.2.1 Task Success Rate

System	Success Rate	Latency (p50)	Latency (p99)
Baseline (GPT-4 direct)	$71.4 \pm 3.2\%$	$3.2 \pm 0.8\text{s}$	$12.1 \pm 2.3\text{s}$
Single-agent RAG	$82.1 \pm 2.8\%$	$2.1 \pm 0.4\text{s}$	$8.4 \pm 1.6\text{s}$
LUMEN (full)	$94.2 \pm 1.9\%$	$1.4 \pm 0.3\text{s}$	$4.2 \pm 0.9\text{s}$

Table 4: Comparative performance results (mean $\pm$ std over 3 deployments, $n = 850$ users, $p < 0.01$ vs baseline)

15.2.2 Ablation Study

Configuration	Success Rate	Δ vs Full
Full LUMEN	94%	—
Without MAP	89%	-5%
Without SG-RAG	85%	-9%
Without Two-Layer Routing	91%	-3%
Without HallucinationGuard	88%	-6%

Table 5: Ablation study results

15.2.3 Failure Analysis

We analyzed the 5.8% failure cases ($n = 49$ of 850 evaluated queries):

- **Ambiguous queries** (41%): User intent unclear, e.g., “show me the numbers”
- **Schema mismatches** (31%): Query references non-existent measures or dimensions
- **Complex multi-hop** (18%): Queries requiring > 3 agent handoffs
- **Token limits** (10%): Context exceeded model limits

These failure modes inform future work on disambiguation prompts and chunking strategies.

16 Discussion

16.1 Trade-offs

Key trade-offs identified:

- **Latency vs Accuracy**: Deeper reasoning improves accuracy but increases latency
- **Specialization vs Generalization**: More agents enable specialization but increase coordination overhead
- **Plasticity vs Stability**: Higher learning rates enable faster adaptation but risk oscillation

16.2 Limitations

1. **Domain Specificity**: Patterns optimized for BI may not transfer to other domains
2. **Scale Bounds**: Not tested beyond 1000 concurrent users
3. **Language Dependency**: Primarily evaluated on English and Spanish queries

16.3 Threats to Validity

Internal Validity: Observed improvements may be influenced by dataset-specific optimizations. We mitigate this through ablation studies (Table 5) isolating each component’s contribution.

External Validity: Results derive from three BI deployments in financial, retail, and manufacturing domains. Generalization to other domains (healthcare, legal) requires further validation.

Construct Validity: Task success relies on human evaluation. We employed two independent annotators per query with inter-rater reliability $\kappa = 0.84$.

16.4 Ethical Considerations

- **Transparency:** All routing decisions are logged and explainable
- **Bias Monitoring:** Regular audits of agent behavior across user segments
- **Human Oversight:** Critical decisions require human confirmation

17 Conclusions

This paper presented LUMEN, a multi-agent agentic AI platform for Business Intelligence, along with three main contributions:

1. **Functional Agency Framework:** Formal definitions establishing necessary conditions for production agentic systems
2. **MAP Architecture:** Hebbian learning for adaptive agent routing with provable convergence bounds
3. **Design Pattern Catalog:** 12 reusable patterns for enterprise AI systems

Empirical evaluation across three enterprise deployments demonstrated:

- 94% task success rate (vs 71% baseline)
- 40% cost reduction through hybrid routing
- Hallucination reduction from 12% to 0.3%

17.1 Future Work

1. Extension of MAP to cross-organization learning
2. Integration of formal verification for safety-critical applications
3. Development of domain-specific MAP-Bench variants

A Formal Definitions

Definition A.1 (Agent). An agent $\mathcal{A}$ is a tuple $(\mathcal{S}, \mathbb{A}, \mathcal{T}, \pi, \rho)$ where:

- $\mathcal{S}$: State space
- $\mathbb{A}$: Action space
- $\mathcal{T}$: Tool set
- $\pi : \mathcal{S} \rightarrow \mathbb{A}$: Policy function
- $\rho : \mathcal{S} \times \mathbb{A} \rightarrow \mathcal{S}$: Transition function

Definition A.2 (Trust Graph). The trust graph $G = (V, E, W)$ where:

- $V = I \cup A$: Vertices are intents I and agents A
- $E \subseteq I \times A$: Edges connect intents to capable agents
- $W : E \rightarrow [0, 1]$: Weight function representing trust scores

B Proofs

Proof of Theorem 14.1. Step 1: Single weight dynamics. Consider the weight update for a single intent-agent pair:

$$w_{t+1} = w_t + \eta s_t - \lambda w_t = (1 - \lambda)w_t + \eta s_t$$

where s_t is the success signal with $\mathbb{E}[s_t] = \mu$ and $\text{Var}[s_t] = \sigma^2$.

Step 2: Stationary mean. At stationarity, $w^* = (1 - \lambda)w^* + \eta\mu$, hence:

$$\mathbb{E}[w_\infty] = \frac{\eta\mu}{\lambda}$$

Step 3: Variance recursion. The variance satisfies:

$$\text{Var}[w_{t+1}] = (1 - \lambda)^2 \text{Var}[w_t] + \eta^2 \sigma^2$$

This is a geometric series with ratio $(1 - \lambda)^2 < 1$ for $\lambda \in (0, 1)$.

Step 4: Equilibrium variance. At equilibrium, $\text{Var}[w_\infty] = (1 - \lambda)^2 \text{Var}[w_\infty] + \eta^2 \sigma^2$, yielding:

$$\text{Var}[w_\infty] = \frac{\eta^2 \sigma^2}{1 - (1 - \lambda)^2} = \frac{\eta^2 \sigma^2}{2\lambda - \lambda^2} = \frac{\eta^2 \sigma^2}{\lambda(2 - \lambda)}$$

Step 5: Multi-dimensional extension. For the weight vector $\mathbf{w} \in \mathbb{R}^{|I| \times |A|}$ with independent success signals, each component w_{ij} evolves independently under the same dynamics. Thus the bound holds component-wise:

$$\text{Var}[w_{ij}] \leq \frac{\eta^2 \sigma^2}{\lambda(2 - \lambda)}$$

Stability: The system is stable for any $\lambda \in (0, 1)$ and $\eta > 0$ since $(1 - \lambda)^2 < 1$ always holds. For fast convergence with low variance, we recommend $\eta \approx 0.01$ and $\lambda \approx 0.1$. $\square$

Proof of Corollary 14.2. The routing policy $\pi_t = \text{softmax}(\mathbf{w}_t)$ maps weights to probabilities. The softmax Jacobian has entries:

$$\frac{\partial \pi_i}{\partial w_j} = \pi_i(\delta_{ij} - \pi_j)$$

where δ_{ij} is the Kronecker delta.

Bounding the gradient norm. We compute:

$$\sum_j \left(\frac{\partial \pi_i}{\partial w_j} \right)^2 = \pi_i^2(1 - \pi_i)^2 + \pi_i^2 \sum_{k \neq i} \pi_k^2$$

Since $\sum_{k \neq i} \pi_k = 1 - \pi_i$ and by convexity $\sum_{k \neq i} \pi_k^2 \leq (1 - \pi_i)^2$, we have:

$$\sum_j \left(\frac{\partial \pi_i}{\partial w_j} \right)^2 \leq 2\pi_i^2(1 - \pi_i)^2$$

The function $f(x) = 2x^2(1 - x)^2$ achieves its maximum at $x = 0.5$: $f(0.5) = 2 \times 0.25 \times 0.25 = 0.125$.

Delta method. By the delta method for variance propagation:

$$\text{Var}[\pi_i] \approx \sum_j \left(\frac{\partial \pi_i}{\partial w_j} \right)^2 \text{Var}[w_j] \leq 0.125 \cdot \text{Var}[w]$$

Substituting the weight variance bound from Theorem 14.1:

$$\text{Var}[\pi_t] \leq \frac{0.125 \cdot \eta^2 \sigma^2}{\lambda(2 - \lambda)} = \frac{\eta^2 \sigma^2}{8 \cdot \lambda(2 - \lambda)}$$

$\square$

Remark B.1 (Intuition). The variance bound $\eta^2 \sigma^2 / \lambda(2 - \lambda)$ reveals a fundamental trade-off:

- **Small η :** Low variance but slow adaptation
- **Large λ :** Faster forgetting reduces variance but limits memory
- **Sweet spot:** $\eta = 0.01$, $\lambda = 0.1$, $\sigma^2 = 0.25$ yields $\text{Var}[w] \approx 0.00013$ and $\text{Var}[\pi] \approx 1.6 \times 10^{-5}$

C Reproducibility

C.1 Hardware Configuration

- CPU: AMD EPYC 7V13 (32 cores)
- Memory: 128 GB DDR4

- GPU: NVIDIA A100 40GB (for embeddings)
- Storage: NVMe SSD

C.2 Software Versions

- Python 3.13.1
- FastAPI 0.115.6
- Ray 2.53.0
- Azure OpenAI API version 2025-01-01-preview
- Weaviate 1.28.2
- Redis 7.4.2

C.3 Availability

This whitepaper, diagrams, and LaTeX source available at: <https://github.com/innerbi/lumen-whitepaper>

References

- [1] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in Neural Information Processing Systems*, 33:1877–1901, 2020.
- [2] Martin Fowler. *Patterns of Enterprise Application Architecture*. Addison-Wesley, 2002.
- [3] Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, and Haofen Wang. Retrieval-augmented generation for large language models: A survey. *arXiv preprint arXiv:2312.10997*, 2023.
- [4] Donald Olding Hebb. The organization of behavior: A neuropsychological theory. *New York: Wiley*, 1949.
- [5] Sirui Hong, Xiawu Zheng, Jonathan Chen, Yuheng Cheng, Jinlin Wang, Ceyao Zhang, Zili Wang, Steven Ka Shing Yau, Zijuan Lin, Liyang Zhou, et al. Metagpt: Meta programming for a multi-agent collaborative framework. *arXiv preprint arXiv:2308.00352*, 2023.
- [6] Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, et al. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions. *arXiv preprint arXiv:2311.05232*, 2023.

- [7] Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Ye Jin Bang, Andrea Madotto, and Pascale Fung. Survey of hallucination in natural language generation. *ACM Computing Surveys*, 55(12):1–38, 2023.
- [8] James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, et al. Overcoming catastrophic forgetting in neural networks. *Proceedings of the National Academy of Sciences*, 114(13):3521–3526, 2017.
- [9] LangChain Team. Langgraph: Build stateful, multi-actor applications with llms. <https://github.com/langchain-ai/langgraph>, 2024.
- [10] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:9459–9474, 2020.
- [11] Zijun Liu, Yanzhe Zhang, Peng Li, Yang Liu, and Diyi Yang. Dylan: Dynamic llm-agent network for multi-agent collaboration. *arXiv preprint arXiv:2310.02170*, 2024.
- [12] Potsawee Manakul, Adian Liusie, and Mark JF Gales. Selfcheckgpt: Zero-resource black-box hallucination detection for generative large language models. *arXiv preprint arXiv:2303.08896*, 2023.
- [13] Robert C Martin. *Clean Architecture: A Craftsman’s Guide to Software Structure and Design*. Prentice Hall, 2017.
- [14] OpenAI. GPT-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- [15] Shishir G Patil, Tianjun Zhang, Xin Wang, and Joseph E Gonzalez. Gorilla: Large language model connected with massive apis. *arXiv preprint arXiv:2305.15334*, 2023.
- [16] Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. *Advances in Neural Information Processing Systems*, 36, 2024.
- [17] Michael Wooldridge and Nicholas R Jennings. Intelligent agents: Theory and practice. *The Knowledge Engineering Review*, 10(2):115–152, 1995.
- [18] Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Jiale Liu, et al. Autogen: Enabling next-gen llm applications via multi-agent conversation. *arXiv preprint arXiv:2308.08155*, 2023.