

Kubernetes Monitoring and Init Containers

Task 1:

1.3 Here are the main components:

Prometheus: This is the core component. It's a time-series database that collects metrics from monitored targets by scraping metrics HTTP endpoints on these targets.

Alertmanager: This component handles alerts sent by Prometheus server and takes care of deduplicating, grouping, and routing them to the correct receiver (like email, PagerDuty, etc.). It also silences and inhibition of alerts.

Node Exporter: This is a Prometheus exporter for hardware and OS metrics with pluggable metric collectors. It allows you to measure various machine resources such as memory, disk I/O, CPU, network, etc.

kube-state-metrics: This service listens to the Kubernetes API server and generates metrics about the state of the objects in the cluster (like deployments, pods, nodes, etc.).

Grafana: A visualization tool that provides charts, graphs, and alerts for the web when connected to supported data sources (like Prometheus). It allows you to create dashboards for your data.

Prometheus Operator: This component simplifies the deployment and configuration of Prometheus, Alertmanager, and related monitoring components. It defines custom resources to manage the lifecycle of these components.

1.4 Install Helm Charts:

```
helm repo add prometheus-community https://prometheus-community.github.io/helm-charts
helm repo update
helm install kube-prometheus-stack prometheus-community/kube-prometheus-stack -
-version 57.2.0 --set-string kubePrometheusStack.appVersion=v0.72.0
```

```
NAME: kube-prometheus-stack
LAST DEPLOYED: Tue May  7 18:50:48 2024
NAMESPACE: default
STATUS: deployed
REVISION: 1
NOTES:
kube-prometheus-stack has been installed. Check its status by running:
  kubectl --namespace default get pods -l "release=kube-prometheus-stack"

Visit https://github.com/prometheus-operator/kube-prometheus for instructions
```

on how to create & configure Alertmanager and Prometheus instances using the Operator.

1.5 Output of `kubectl get po,sts,svc,pvc,cm`:

```
PS D:\Innopolis\3\2\devops\S24-core-course-labs\k8s> kubectl get
po,sts,svc,pvc,cm
NAME                                READY   STATUS
RESTARTS   AGE
pod/alertmanager-kube-prometheus-stack-alertmanager-0      2/2     Running
0           58m
pod/app-javascript-helm-0                                    1/1     Running
0           26m
pod/app-javascript-helm-1                                    1/1     Running
0           20m
pod/app-python-helm-0                                        1/1     Running
0           8m2s
pod/app-python-helm-1                                        1/1     Running
0           8m2s
pod/kube-prometheus-stack-grafana-7664d8545c-whmd8          3/3     Running
0           58m
pod/kube-prometheus-stack-kube-state-metrics-5c6549bfd5-hh8zk 1/1     Running
0           58m
pod/kube-prometheus-stack-operator-76bf64f57d-5hwn6         1/1     Running
0           58m
pod/kube-prometheus-stack-prometheus-node-exporter-rqr84    1/1     Running
0           58m
pod/post-install-sleep-job-hm27p                             0/1
Completed    0           26m
pod/pre-install-sleep-job-x468n                             0/1
Completed    0           26m
pod/prometheus-kube-prometheus-stack-prometheus-0          2/2     Running
0           58m
pod/python-post-install-sleep-job-xlztt                     0/1
Completed    0           8m2s
pod/python-pre-install-sleep-job-k2l9f                      0/1
Completed    0           8m2s

NAME                                READY   AGE
statefulset.apps/alertmanager-kube-prometheus-stack-alertmanager 1/1     58m
statefulset.apps/app-javascript-helm                             2/2     26m
statefulset.apps/app-python-helm                                2/2     8m2s
statefulset.apps/prometheus-kube-prometheus-stack-prometheus      1/1     58m

NAME                                TYPE
CLUSTER-IP      EXTERNAL-IP  PORT(S)      AGE
service/alertmanager-operated      ClusterIP    None
<none>          9093/TCP,9094/TCP,9094/UDP  147m
service/app-javascript-helm        LoadBalancer
10.107.91.255    <pending>   5000:31114/TCP 26m
```

service/app-python-helm			LoadBalancer	
10.100.220.173	<pending>	5000:32311/TCP	8m2s	
service/kube-prometheus-stack-alertmanager			ClusterIP	
10.105.232.221	<none>	9093/TCP,8080/TCP	58m	
service/kube-prometheus-stack-grafana			ClusterIP	
10.108.49.243	<none>	80/TCP	58m	
service/kube-prometheus-stack-kube-state-metrics			ClusterIP	
10.98.146.11	<none>	8080/TCP	58m	
service/kube-prometheus-stack-operator			ClusterIP	
10.99.10.36	<none>	443/TCP	58m	
service/kube-prometheus-stack-prometheus			ClusterIP	
10.103.84.9	<none>	9090/TCP,8080/TCP	58m	
service/kube-prometheus-stack-prometheus-node-exporter			ClusterIP	
10.101.68.63	<none>	9100/TCP	58m	
service/kubernetes			ClusterIP	
10.96.0.1	<none>	443/TCP	158m	
service/prometheus-operated			ClusterIP	None
<none>	9090/TCP	147m		


NAME	DATA
AGE	
configmap/app-javascript-helm-configmap	3
26m	
configmap/app-python-helm-configmap	3
8m2s	
configmap/kube-prometheus-stack-57.2-alertmanager-overview	1
150m	
configmap/kube-prometheus-stack-57.2-apiserver	1
150m	
configmap/kube-prometheus-stack-57.2-cluster-total	1
150m	
configmap/kube-prometheus-stack-57.2-controller-manager	1
150m	
configmap/kube-prometheus-stack-57.2-etcd	1
150m	
configmap/kube-prometheus-stack-57.2-grafana-datasource	1
150m	
configmap/kube-prometheus-stack-57.2-grafana-overview	1
150m	
configmap/kube-prometheus-stack-57.2-k8s-coredns	1
150m	
configmap/kube-prometheus-stack-57.2-k8s-resources-cluster	1
150m	
configmap/kube-prometheus-stack-57.2-k8s-resources-multicluster	1
150m	
configmap/kube-prometheus-stack-57.2-k8s-resources-namespace	1
150m	
configmap/kube-prometheus-stack-57.2-k8s-resources-node	1
150m	
configmap/kube-prometheus-stack-57.2-k8s-resources-pod	1
150m	
configmap/kube-prometheus-stack-57.2-k8s-resources-workload	1
150m	

configmap/kube-prometheus-stack-57.2-k8s-resources-workloads-namespace 150m	1
configmap/kube-prometheus-stack-57.2-kubelet 150m	1
configmap/kube-prometheus-stack-57.2-namespace-by-pod 150m	1
configmap/kube-prometheus-stack-57.2-namespace-by-workload 150m	1
configmap/kube-prometheus-stack-57.2-node-cluster-rsrc-use 150m	1
configmap/kube-prometheus-stack-57.2-node-rsrc-use 150m	1
configmap/kube-prometheus-stack-57.2-nodes 150m	1
configmap/kube-prometheus-stack-57.2-nodes-darwin 150m	1
configmap/kube-prometheus-stack-57.2-persistentvolumesusage 150m	1
configmap/kube-prometheus-stack-57.2-pod-total 150m	1
configmap/kube-prometheus-stack-57.2-prometheus 150m	1
configmap/kube-prometheus-stack-57.2-proxy 150m	1
configmap/kube-prometheus-stack-57.2-scheduler 150m	1
configmap/kube-prometheus-stack-57.2-workload-total 150m	1
configmap/kube-prometheus-stack-57.2.0-grafana 150m	1
configmap/kube-prometheus-stack-57.2.0-grafana-config-dashboards 150m	1
configmap/kube-prometheus-stack-alertmanager-overview 58m	1
configmap/kube-prometheus-stack-apiserver 58m	1
configmap/kube-prometheus-stack-cluster-total 58m	1
configmap/kube-prometheus-stack-controller-manager 58m	1
configmap/kube-prometheus-stack-etcd 58m	1
configmap/kube-prometheus-stack-grafana 58m	1
configmap/kube-prometheus-stack-grafana-config-dashboards 58m	1
configmap/kube-prometheus-stack-grafana-datasource 58m	1
configmap/kube-prometheus-stack-grafana-overview 58m	1
configmap/kube-prometheus-stack-k8s-coredns 58m	1
configmap/kube-prometheus-stack-k8s-resources-cluster	1

58m		
configmap/kube-prometheus-stack-k8s-resources-multicluster		1
58m		
configmap/kube-prometheus-stack-k8s-resources-namespace		1
58m		
configmap/kube-prometheus-stack-k8s-resources-node		1
58m		
configmap/kube-prometheus-stack-k8s-resources-pod		1
58m		
configmap/kube-prometheus-stack-k8s-resources-workload		1
58m		
configmap/kube-prometheus-stack-k8s-resources-workloads-namespace		1
58m		
configmap/kube-prometheus-stack-kubelet		1
58m		
configmap/kube-prometheus-stack-namespace-by-pod		1
58m		
configmap/kube-prometheus-stack-namespace-by-workload		1
58m		
configmap/kube-prometheus-stack-node-cluster-rsrc-use		1
58m		
configmap/kube-prometheus-stack-node-rsrc-use		1
58m		
configmap/kube-prometheus-stack-nodes		1
58m		
configmap/kube-prometheus-stack-nodes-darwin		1
58m		
configmap/kube-prometheus-stack-persistentvolumesusage		1
58m		
configmap/kube-prometheus-stack-pod-total		1
58m		
configmap/kube-prometheus-stack-prometheus		1
58m		
configmap/kube-prometheus-stack-proxy		1
58m		
configmap/kube-prometheus-stack-scheduler		1
58m		
configmap/kube-prometheus-stack-workload-total		1
58m		
configmap/kube-root-ca.crt		1
158m		
configmap/prometheus-kube-prometheus-stack-57.2-prometheus-rulefiles-0		35
147m		
configmap/prometheus-kube-prometheus-stack-prometheus-rulefiles-0		35
58m		

1.6 Utilize Grafana Dashboards:


1. Access Grafana using `minikube service kube-prometheus-stack-grafana`.

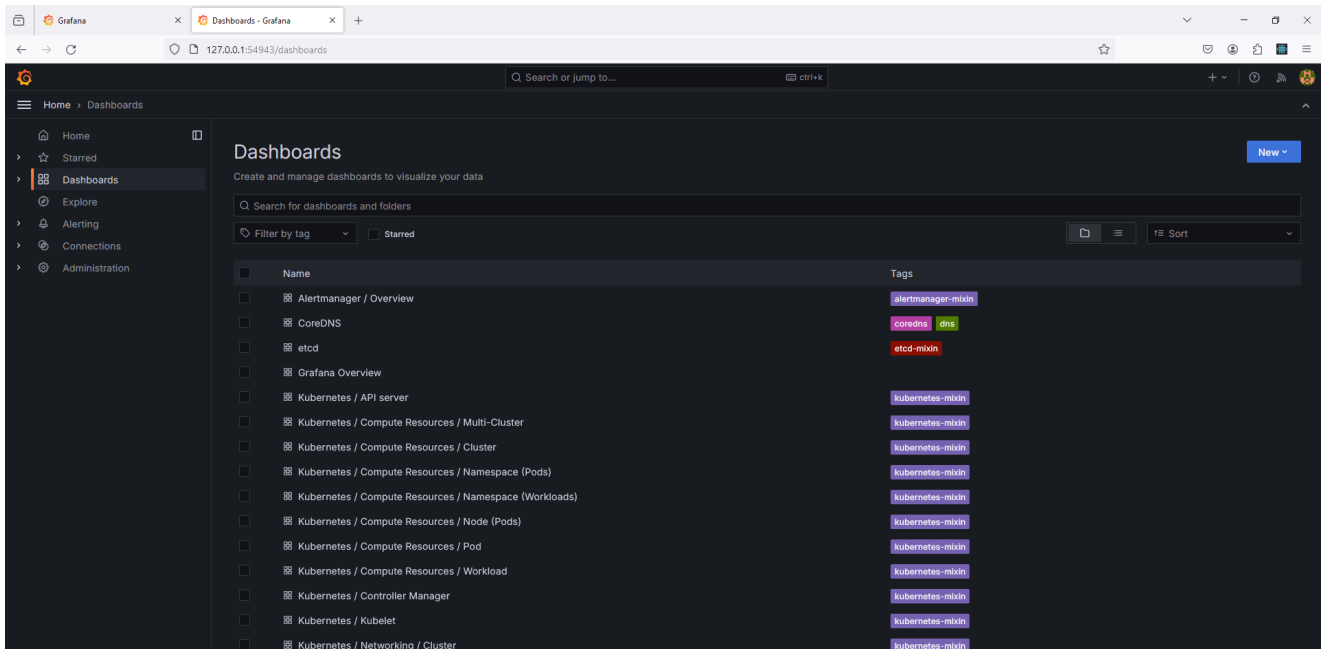

1.7 [Explore existing dashboards] Answers:

1. Check CPU and Memory consumption of your StatefulSet.

- CPU Utilization: **21.9%**
- Memory Utilization: **243%**

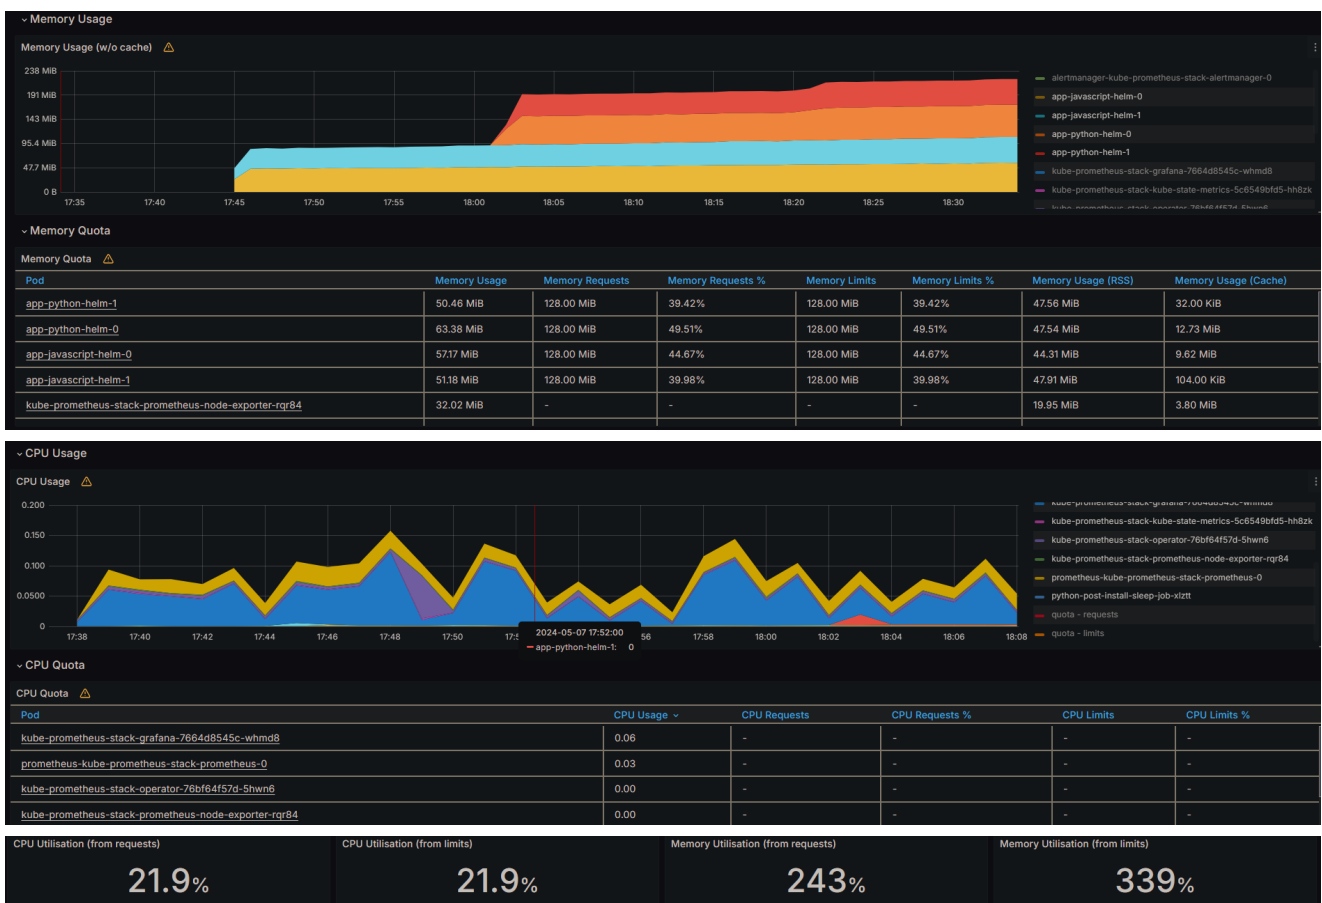


2. Identify Pods with higher and lower CPU usage in the default namespace.

- Highest among all the stateful statefulset: **kube-prometheus-stack-grafana-7664d8545c-whmd8**

- Highest among my apps: **app-python-helm-1**


Lowest: **app-javascript-helm-0**

3. Monitor node memory usage in percentage and megabytes.

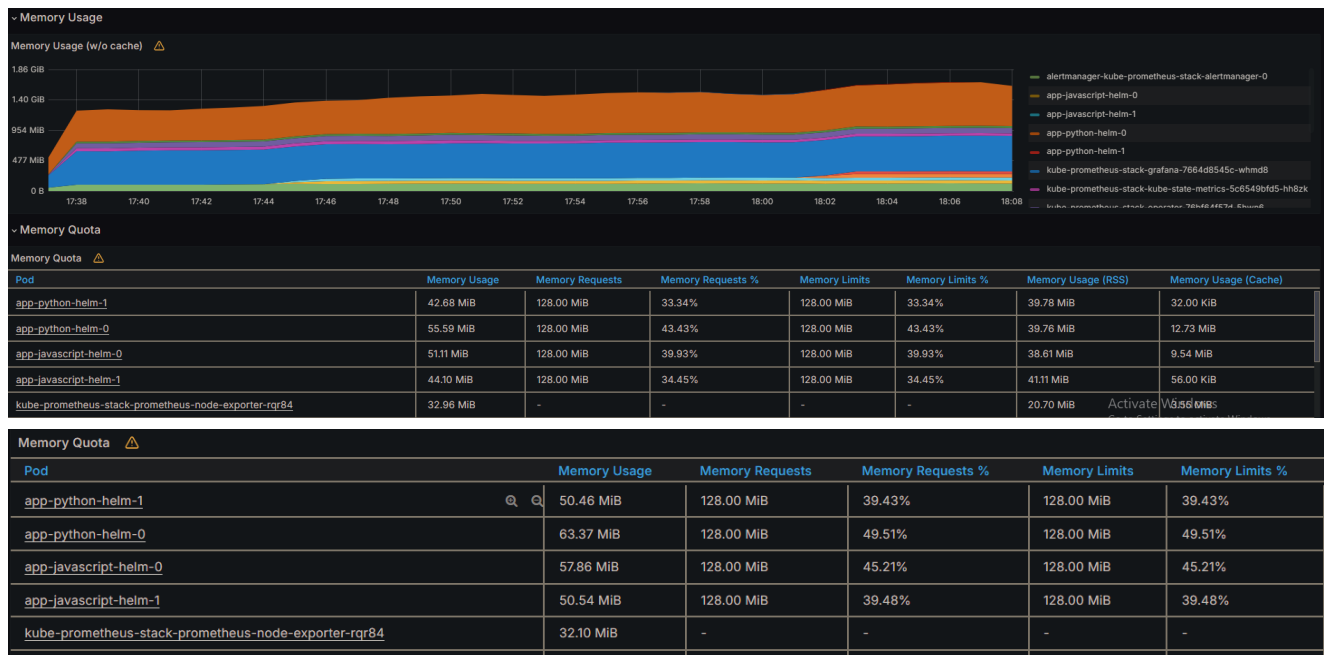


4. Count the number of pods and containers managed by the Kubelet service.

- Number of Running Pods: **20**
- Number of Running Containers: **32**

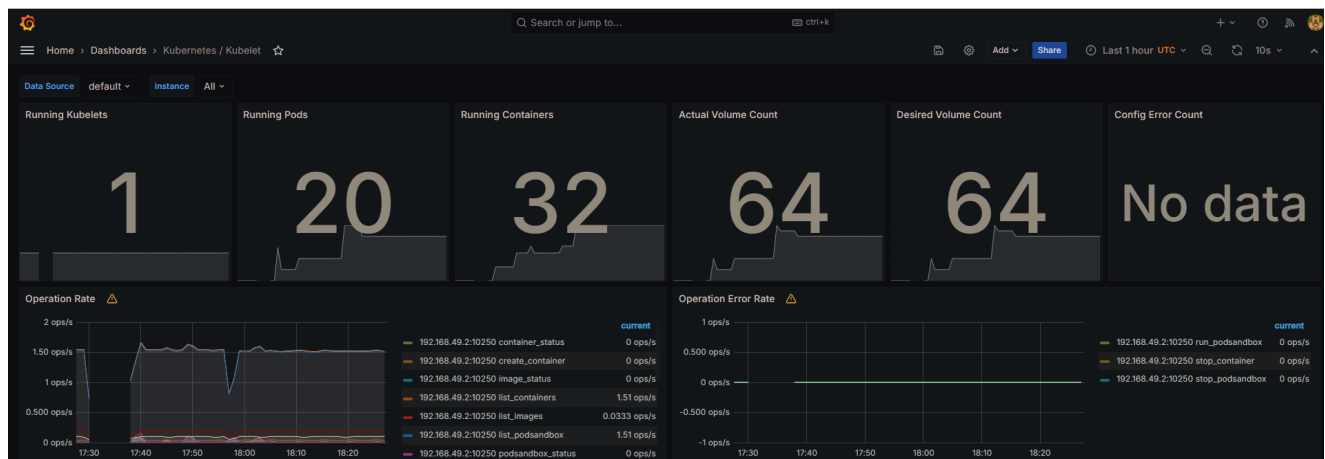


5. Evaluate network usage of Pods in the default namespace.

- Rate of Bytes Received: **93.4 kB/s**
- Rate of Bytes Sent: **28.9 kB/s**

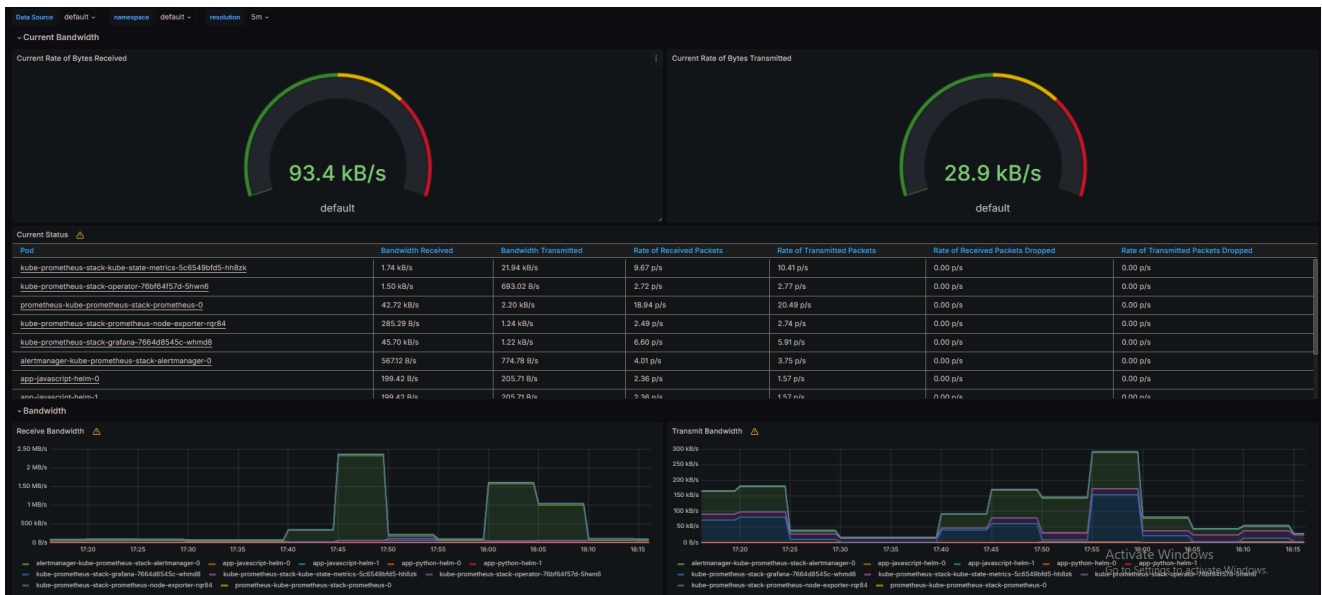

6. Determine the number of active alerts; also check the Web UI with `minikube service monitoring-kube-prometheus-alertmanager`:

- Number of Active Alerts: **10**

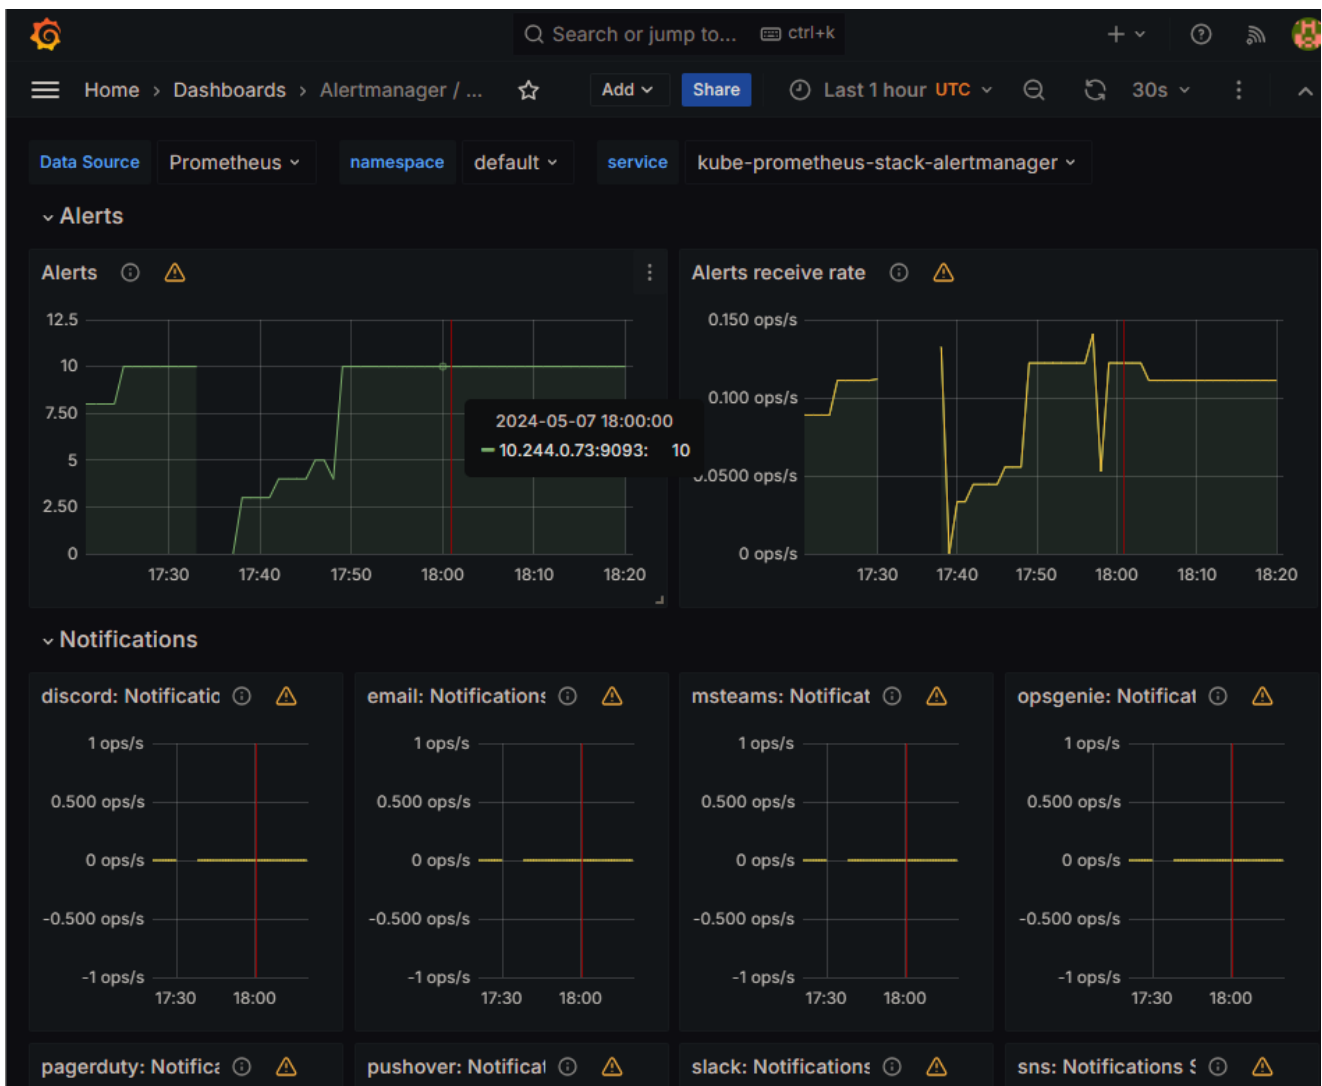

Task 2: Init Containers

1. create a `pod.yaml` file:

```
apiVersion: v1
kind: Pod
metadata:
  name: demo
spec:
  volumes:
    - name: workdir
      emptyDir: {}
  initContainers:
    - name: init
      image: busybox
      command: ["sh", "-c", "wget -O /workdir/test.html http://example.com"]
      volumeMounts:
        - name: workdir
          mountPath: "/workdir"
  containers:
    - name: main
      image: busybox
      command: ["sleep", "infinity"]
      volumeMounts:
        - name: workdir
          mountPath: "/workdir"
```

2. Apply the pod:

```
kubectl apply -f pod.yaml
pod/demo created
```

3. Exec into the pod and check the file:

```
kubectl exec demo -- cat /workdir/test.html
Defaulted container "main" out of: main, init (init)
<!doctype html>
<html>
<head>
  <title>Example Domain</title>

  <meta charset="utf-8" />
  <meta http-equiv="Content-type" content="text/html; charset=utf-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1" />
  <style type="text/css">
    body {
      background-color: #f0f0f2;
      margin: 0;
      padding: 0;
```

```

        font-family: -apple-system, system-ui, BlinkMacSystemFont, "Segoe UI",
"Open Sans", "Helvetica Neue", Helvetica, Arial, sans-serif;

    }
    div {
        width: 600px;
        margin: 5em auto;
        padding: 2em;
        background-color: #fdfdff;
        border-radius: 0.5em;
        box-shadow: 2px 3px 7px 2px rgba(0,0,0,0.02);
    }
    a:link, a:visited {
        color: #38488f;
        text-decoration: none;
    }
    @media (max-width: 700px) {
        div {
            margin: 0 auto;
            width: auto;
        }
    }
</style>
</head>

<body>
<div>
    <h1>Example Domain</h1>
    <p>This domain is for use in illustrative examples in documents. You may
use this
    domain in literature without prior coordination or asking for permission.
</p>
    <p><a href="https://www.iana.org/domains/example">More information...</a>
</p>
</div>
</body>
</html>

```

4. Proof of success.

```

PS D:\Innopolis\3\2\devops\S24-core-course-labs\k8s> kubectl apply -f pod.yaml
pod/demo created
PS D:\Innopolis\3\2\devops\S24-core-course-labs\k8s> kubectl exec demo -- cat /workdir/test.html
Defaulted container "main" out of: main, init (init)
<!doctype html>
<html>
<head>
  <title>Example Domain</title>

  <meta charset="utf-8" />
  <meta http-equiv="Content-type" content="text/html; charset=utf-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1" />
  <style type="text/css">
    body {
      background-color: #f0f0f2;
      margin: 0;
      padding: 0;
      font-family: -apple-system, system-ui, BlinkMacSystemFont, "Segoe UI", "Open Sans", "Helvetica Neue", Helvetica, Arial, sans-serif;
    }
    div {
      width: 600px;
      margin: 5em auto;
      padding: 2em;
      background-color: #fdfdff;
      border-radius: 0.5em;
      box-shadow: 2px 3px 7px 2px rgba(0,0,0,0.02);
    }
    a:link, a:visited {
      color: #38488f;
      text-decoration: none;
    }
    @media (max-width: 700px) {
      div {
        margin: 0 auto;
        width: auto;
      }
    }
  </style>
</head>

<body>

```