
1. Import the supplied Rule Chain

Use the Rule Chain JSON provided by INOWAS. Follow the red numbered markers in order.

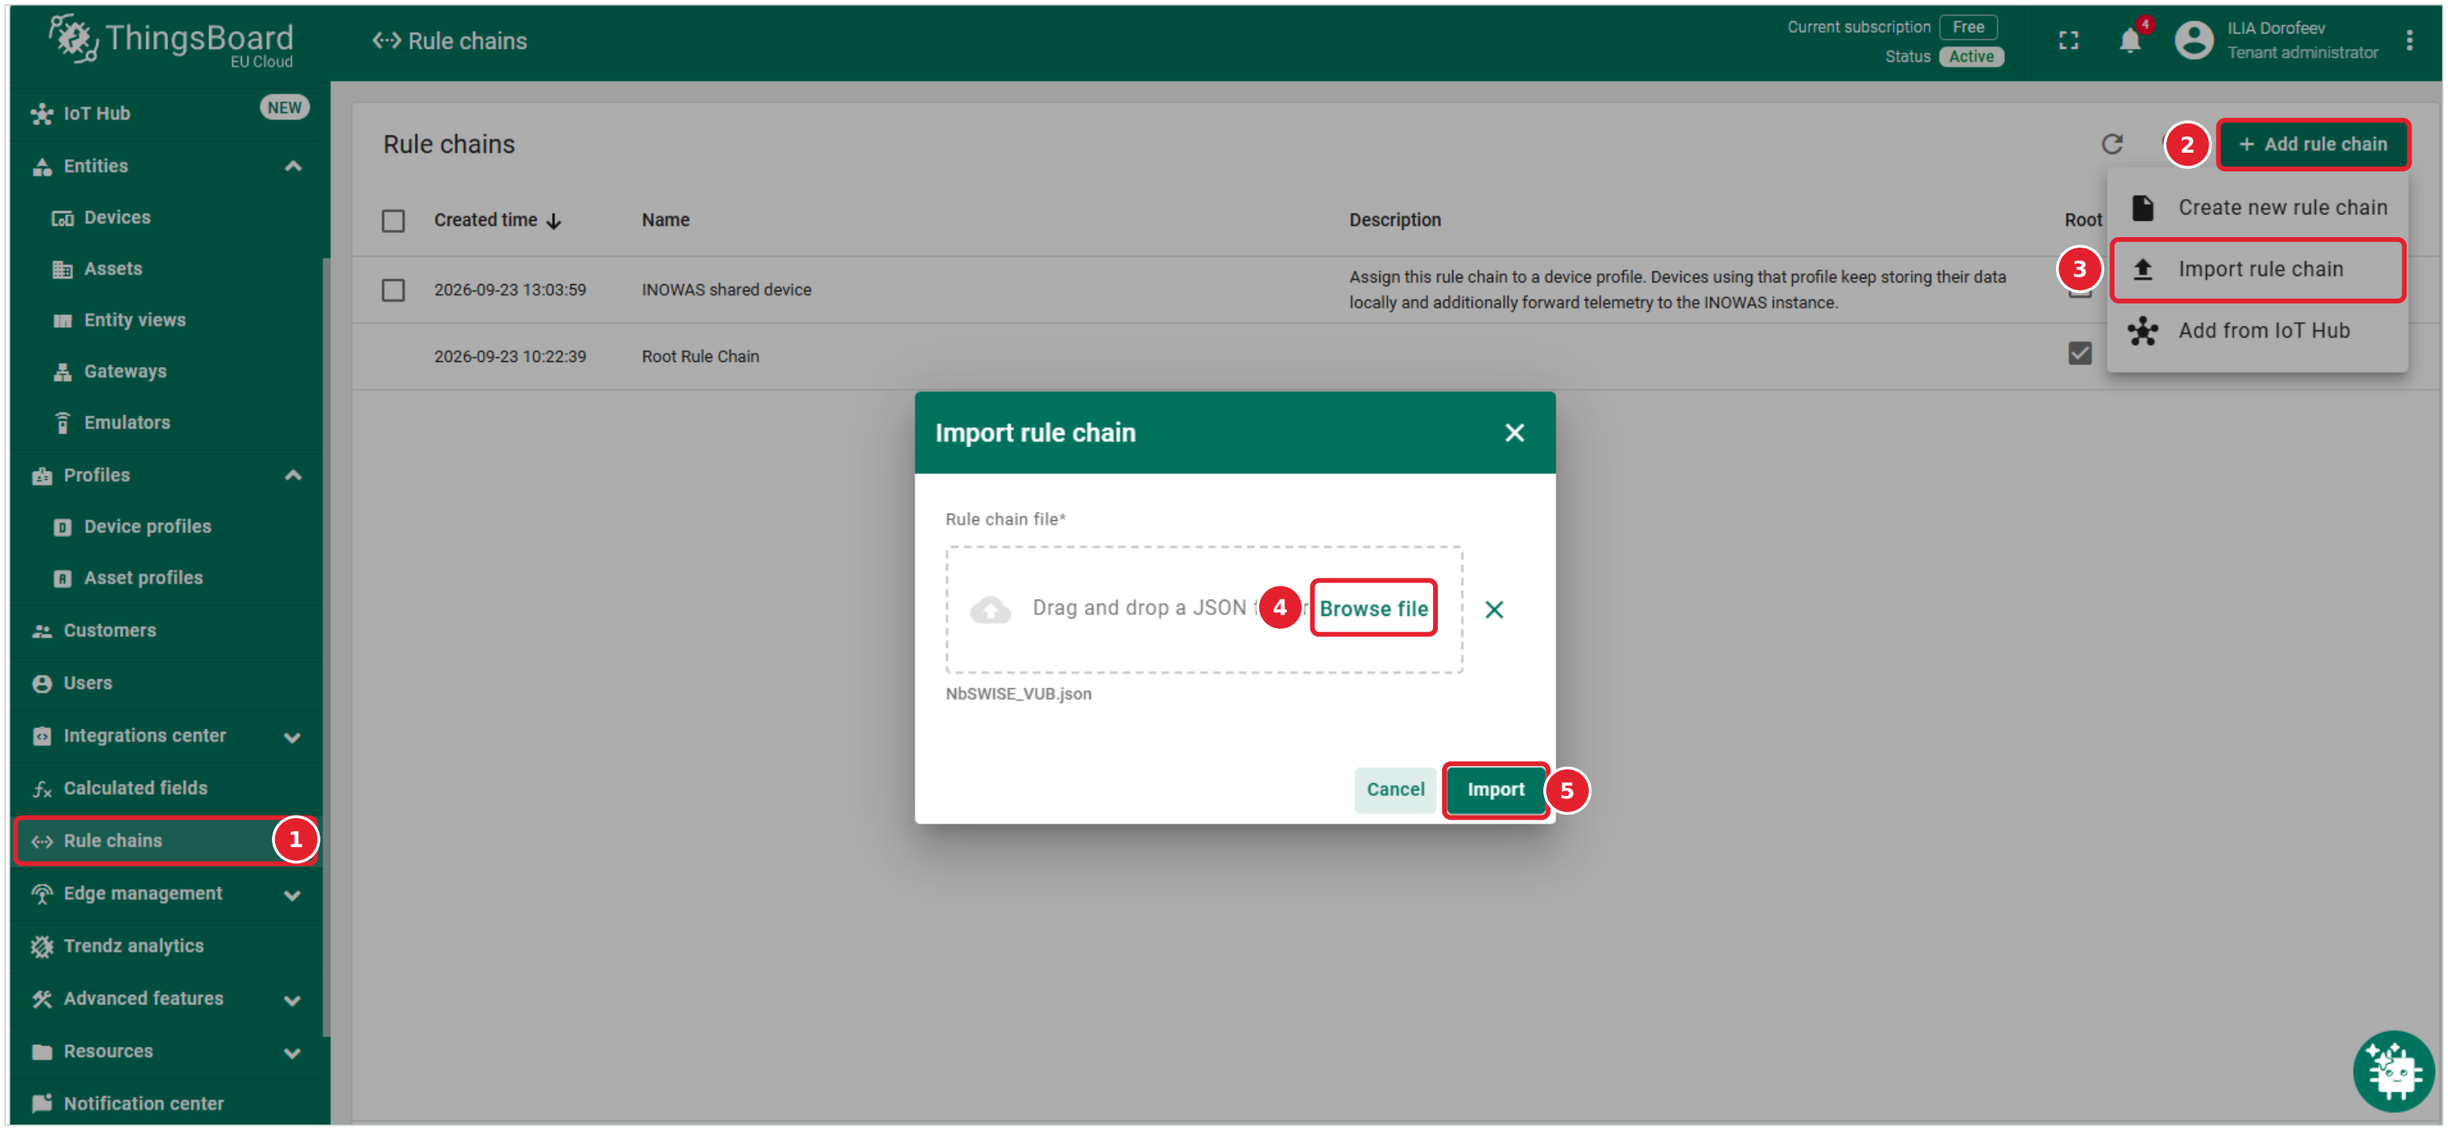


1 Open Rule chains in the left menu.
2 Click Add rule chain.
3 Select Import rule chain.
4 Click Browse file and choose the supplied JSON.
5 Click Import to finish.

Next, create a device profile and select this imported Rule Chain as its default rule chain.

2. Create a device profile

The example profile is named NbSWISE. Select the Rule Chain you imported on the previous page.

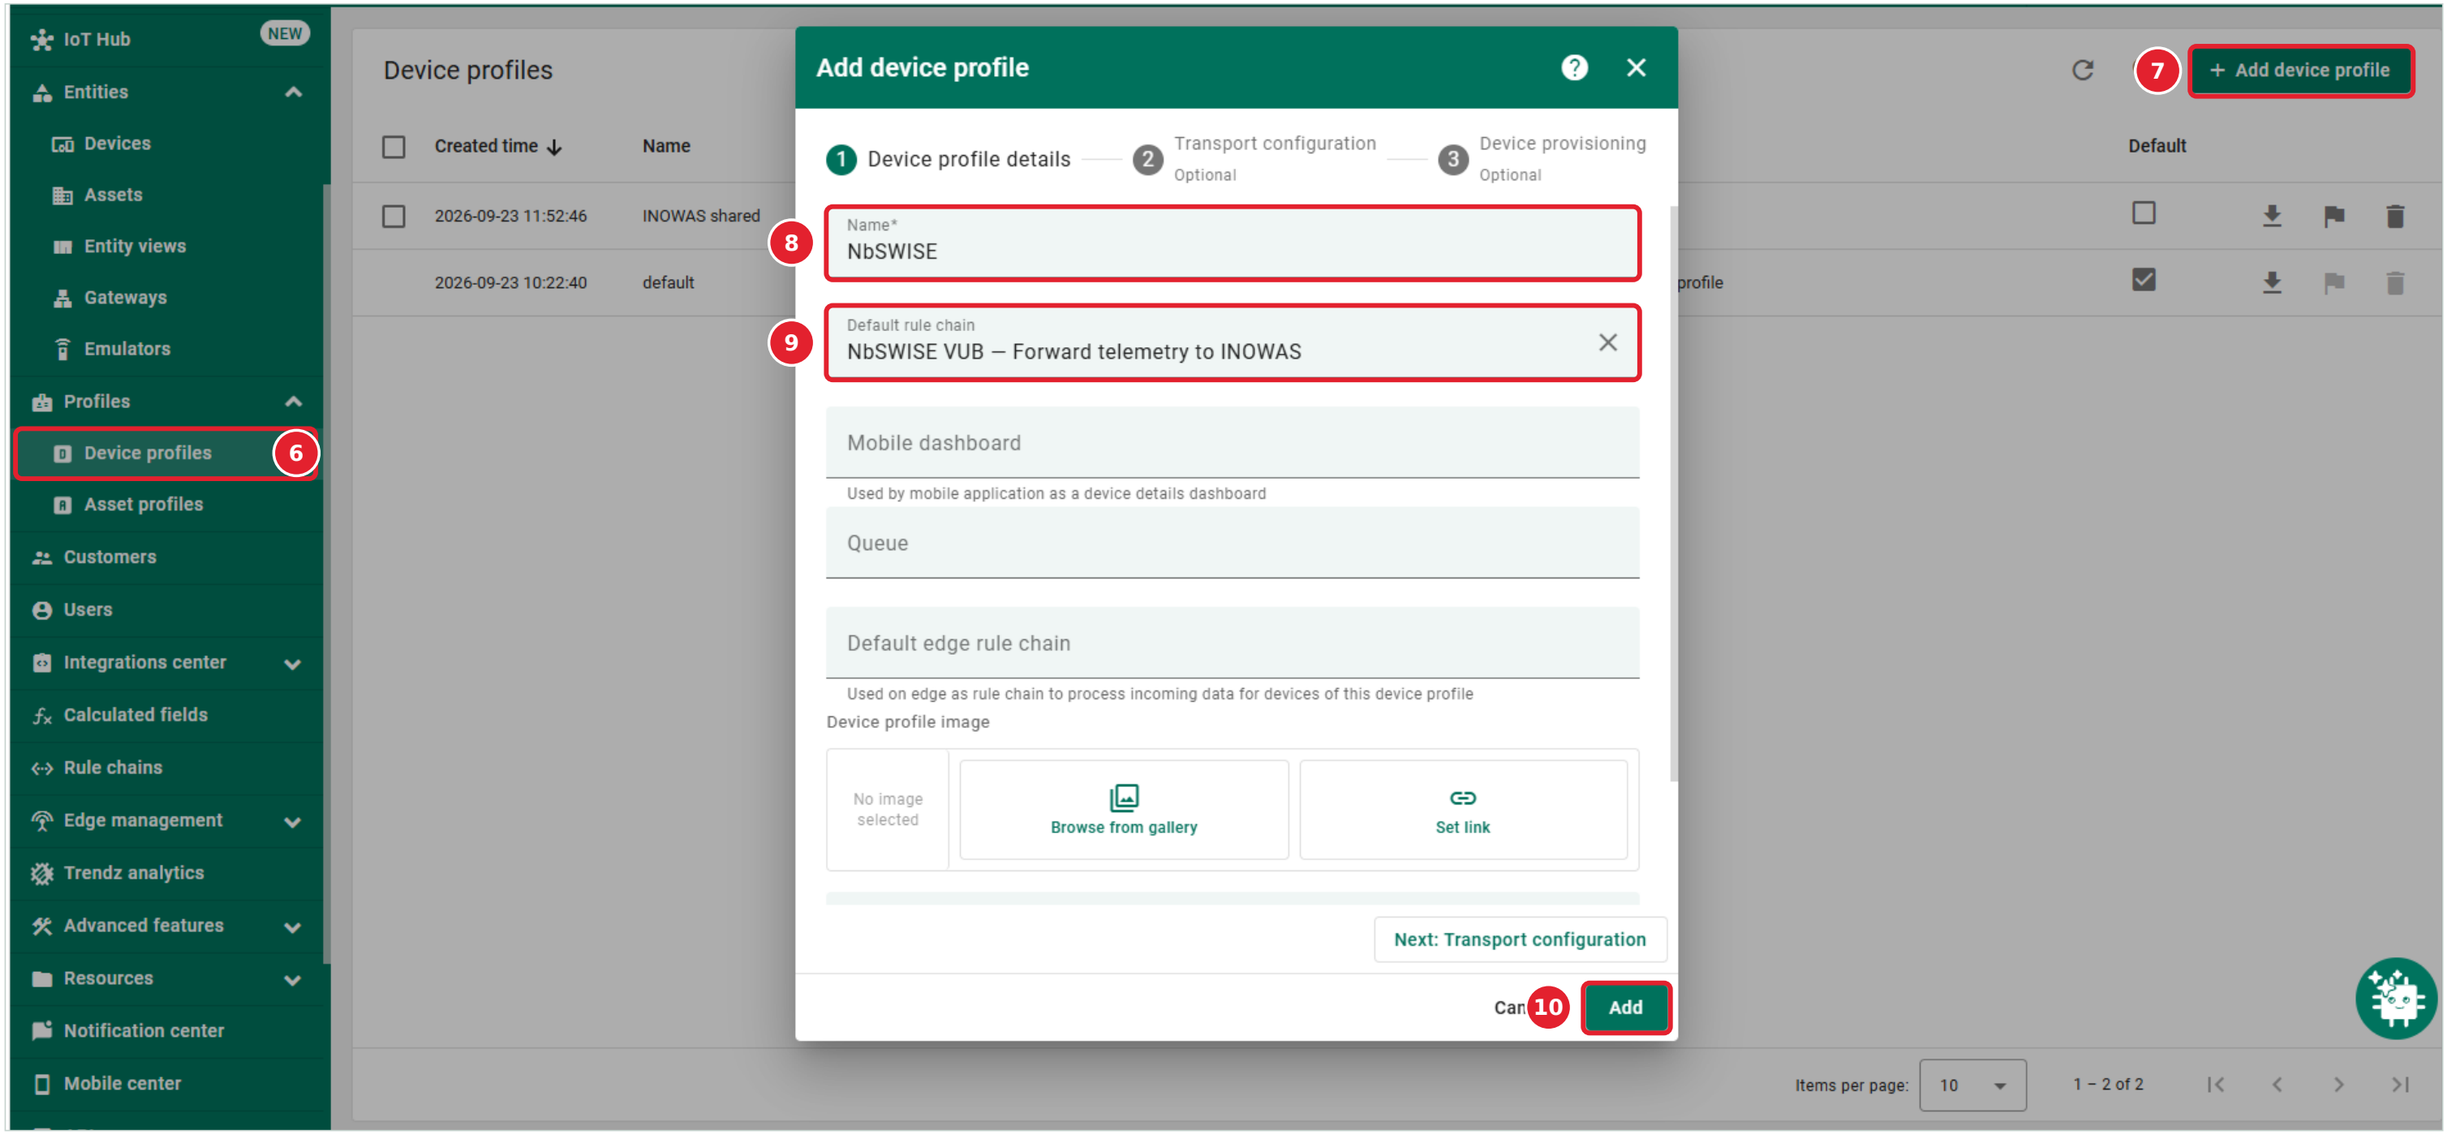


6 Open Profiles > Device profiles.
7 Click Add device profile.
8 Enter a profile name, for example NbSWISE.
9 Under Default rule chain, select the imported RC.
10 Click Add to save the profile.

Use transport settings compatible with the devices you plan to share. Names shown in the screenshot are examples.

3. Assign the profile to the selected devices

Open a device and enter edit mode. This screenshot shows the device details already in edit mode.

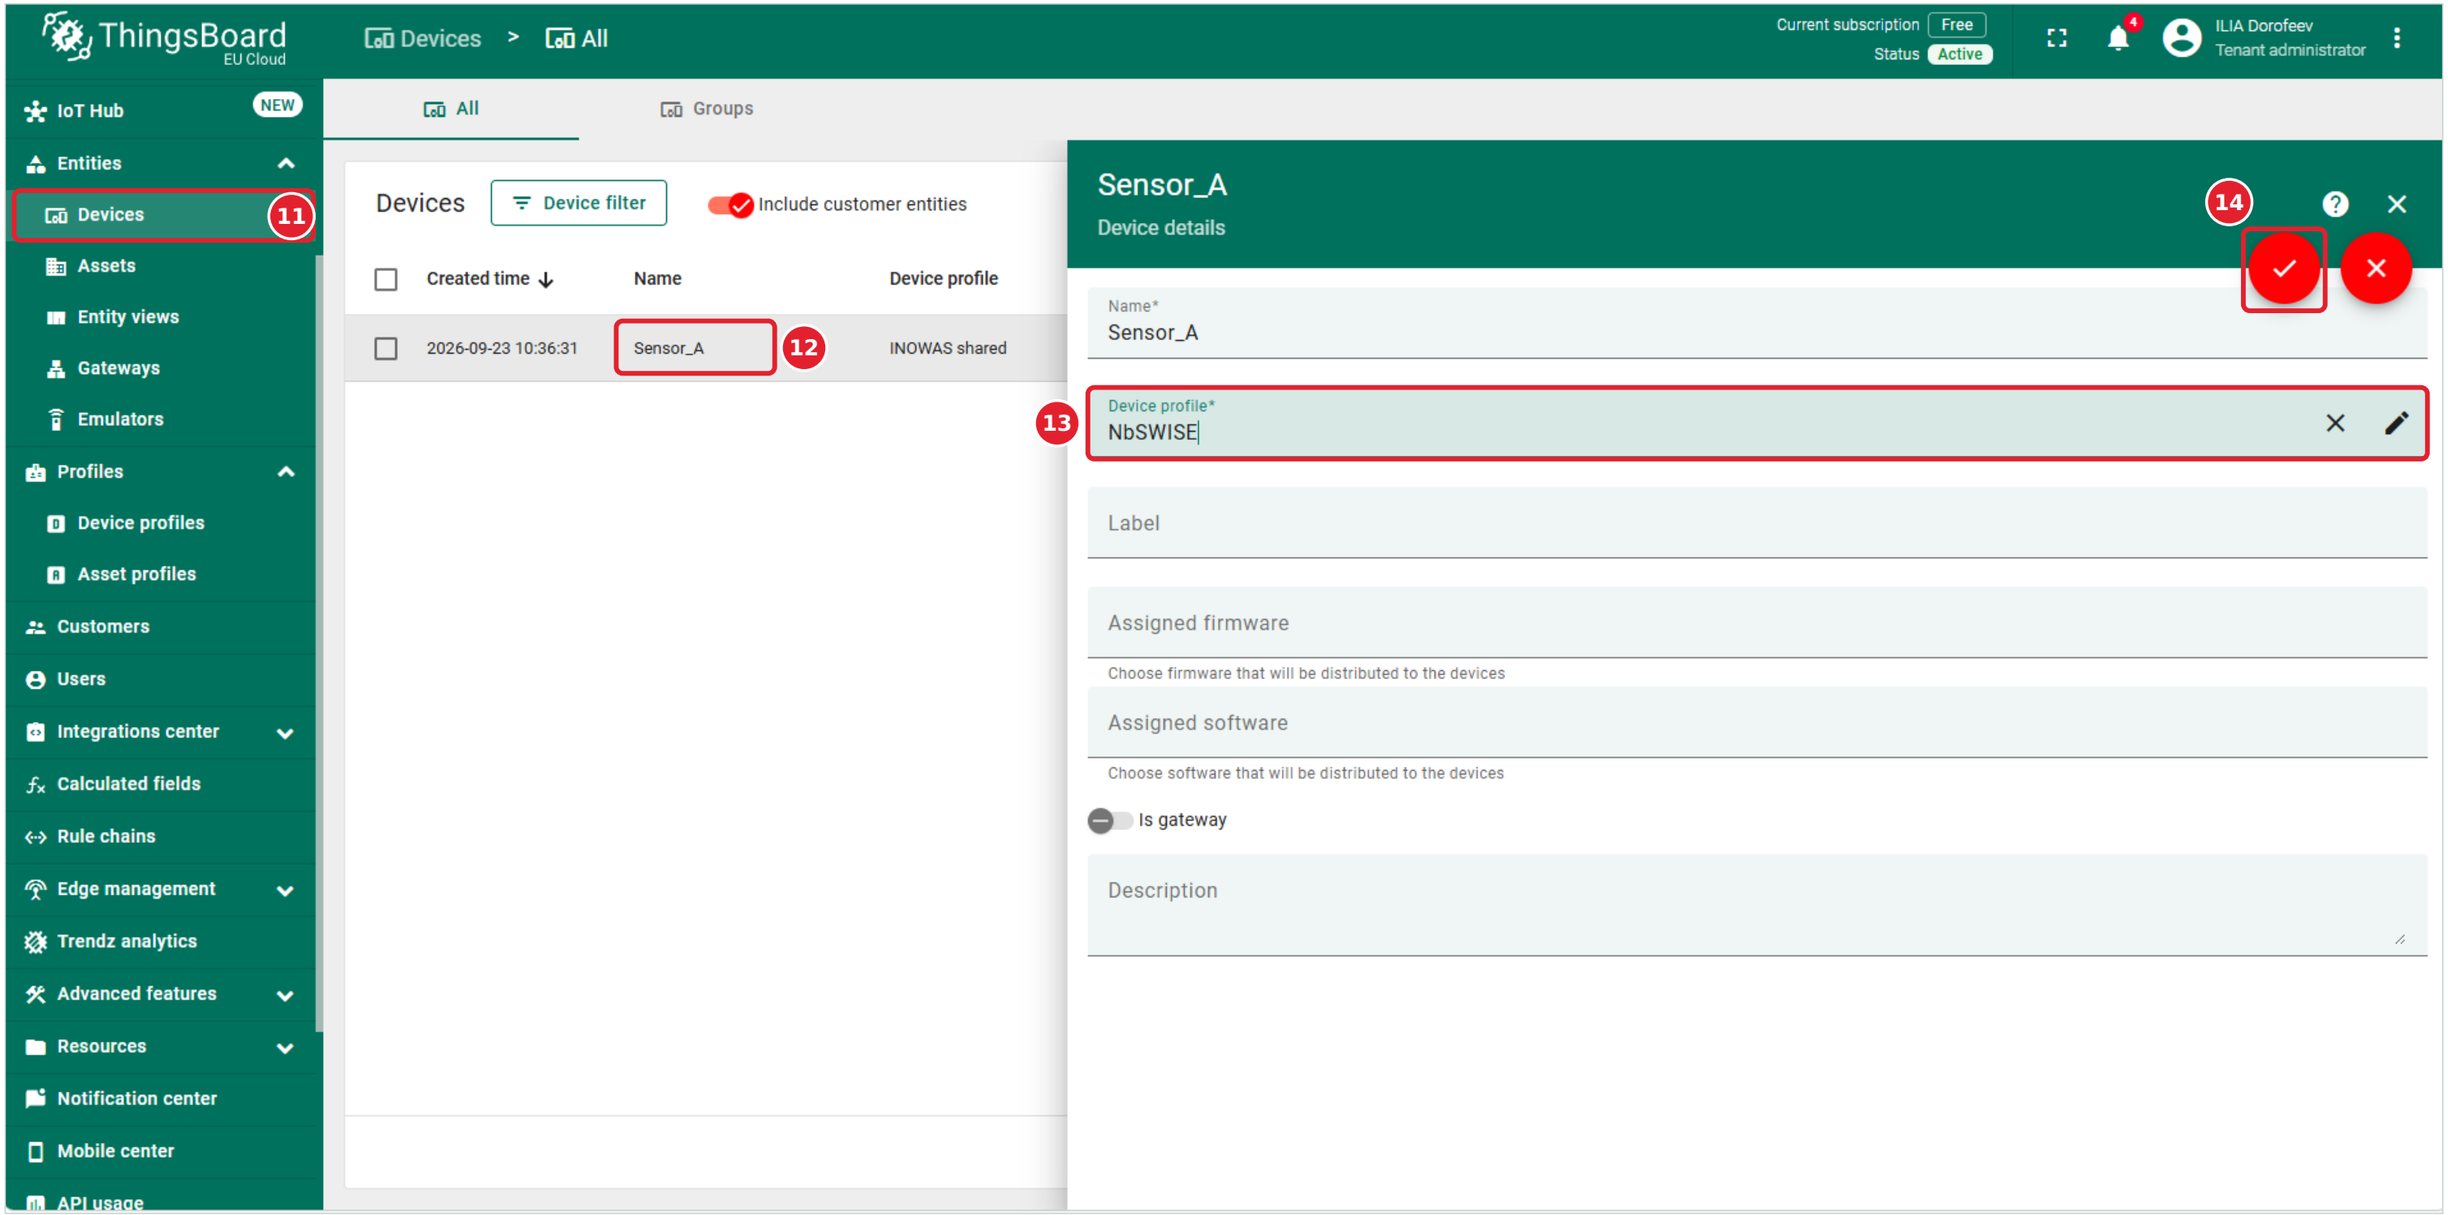

11 Open Entities > Devices.
12 Open the device to share, then click its edit button.
13 In Device profile, select the profile created above.
14 Click the check mark to save.

Check first: confirm that new telemetry from one device reaches INOWAS and remains available in your instance. Then repeat for the other devices you want to share.

Historical data: to share earlier measurements, export the telemetry separately from the selected devices (CSV or JSON). Include device names or IDs, timestamps with time zone, telemetry keys, values and units. Exporting a device configuration JSON does not export its telemetry history.