A SHORT MANUAL


Touying Ambrosia

One presentation, many flavors.

Ambrosia is an institution-neutral theme for Typst and Touying. Choose geometry, colors, branding, and navigation separately. Ordinary Typst content and Touying animations remain the authoring tools.

Your First Deck

```
#import "@preview/touying-ambrosia:0.1.0": *
#show: ambrosia-theme.with(
  flavor: "minimal", palette: "ocean",
  config-info(title: [From Idea To Evidence],
    author: [Alex Researcher]),
)
#title-slide()
```

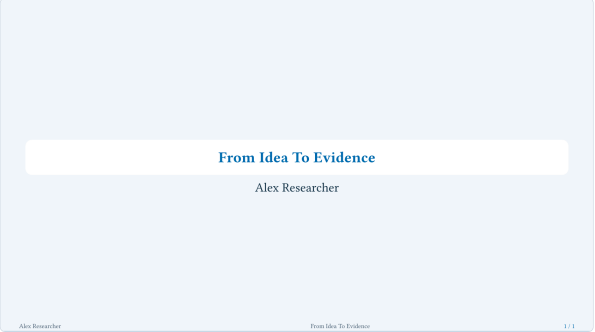

Most flavors use level-two headings for slides; Cambridge uses level three. Level-one headings start sections and insert fitted agenda dividers. Explicit `slide` calls are useful for custom compositions in any flavor:

```
= Introduction
== A Clear Result
One useful claim, with its evidence.
#pause
A qualification on the next animation frame.
#slide(title: [Two Perspectives])[First column.][Second column.]
#ending-slide(title: [Questions?])[]
```

Find Your Way

2 · Geometry And Color
3 · Covers, Logos, And People
4 · Navigation And Agendas
5 · Slide Patterns And Images
6 · Content Blocks
7 · Citations And Bibliographies
8 · Text And Small Components
9 · Project Roadmaps
10 · Output And Customization

> Use `typst init @preview/touying-ambrosia:0.1.0 my-slides` for the complete starter, including Ambrosia branding. A checkout install defaults to `@local`; use that namespace for development imports. The base theme starts without any logo.

Geometry And Color

A **flavor** defines the composition: header/footer geometry, logo placement, slide heading level, cover defaults, and component presets. A **palette** supplies semantic colors. **Navigation** reserves its own space independently. Choosing one does not constrain the others.

`minimal`, `simple`	Quiet defaults or a spacious classic treatment.
`dewdrop`, `stargazer`	Lightweight dot navigation or accent headings with section tabs.
`darmstadt`, `cambridge`	Structured bands; Cambridge uses level-three slide headings.
`portico`	A metadata band and optional contrasting right outline panel.

Twelve Starting Palettes



`ambrosia-palette(…)` → dictionary

Compose a palette from a preset or descriptor. Hue rotation runs before the explicit primary seed and named role overrides; semantic hues stay fixed.

Parameter / Type	Default	Meaning
`base` str | dictionary	`"light"`	Base preset name or another palette descriptor.
`name` str	`"custom"`	Display name; does not register a global preset.
`primary` auto | color	`auto`	Accent seed. Text accents are adjusted for contrast when resolved.
`rotate` angle	`0deg`	Relative OKLCH hue rotation of the base colors.
`..roles` arguments	named / extra	Named color roles, such as `background` or `surface`; `dark` is a boolean.

```
#let custom = ambrosia-palette(
  primary: rgb("2b6b51"))
#let p = palettes.resolve(custom)
#rect(fill: p.accent, stroke: none,
  inset: 0.8em)[
  #text(fill: p.on-accent)[My Accent]
]
```

My Accent

Pass the descriptor to `ambrosia-theme(palette: custom, ...)`. The light preset derives its alternate surface from the seed; other presets retain their curated surfaces. Start from a dark preset to make a dark theme. Explicit ink overrides need an appropriate contrasting surface. Palette roles and overrides · Editable palette example

Covers, Logos, And People

`title-layout` and `ending-layout` override a flavor's defaults. A local `title-slide(layout: ...)` or `ending-slide(layout: ...)` takes priority. Extend a preset with `ambrosia-title-layout(base: ..., ...)` or `ambrosia-ending-layout(base: ..., ...)` when a few dimensions need adjustment.

Opening	`stacked`: centered panel; `header`: top logo band; `plain`: left typography; `split`: side logo panel; `featured`: prominent primaries; `cover`: immersive color/photo.
Closing	`centered`: questions panel; `plain`: left typography; `split`: takeaways beside contacts; `cover`: immersive color/photo.

One Logo Or Several

`primary-logos` is the repeated brand collection. With `auto`, it falls back to `config-info(logo: ...)`. `logos` adds opening partners. `title-logos` replaces that complete ordered list; `none` hides it. Ordinary header and footer logo settings remain independent. Native image paths stay relative to the caller.

Equal cells are the default. `title-logo-distribution: "grouped"` aligns primary marks left and partners right in horizontal rows. The featured layout instead gives primaries their own region and centers the remaining partners.

```
// Inside ambrosia-theme.with(...):
title-layout: "header",
primary-logos: (image("lab.svg"),),
logos: (image("university.svg"),),
config-info(
  title: [A Collaborative Talk],
  authors: (
    (name: [Alex Researcher],
      affiliations: ("lab",),
      email: "alex@example.org"),
    (name: [Sam Collaborator],
      affiliations: ("lab",)),
  ),
  institutions: (lab: [Example Lab],),
  short-author: [Researcher et al.],
  short-title: [Collaboration],
),
```



Header layout with Ambrosia's project logo. This snapshot uses simpler metadata than the recipe at left.

Linked Metadata And Fitted Covers

Institution markers link to their title-page entries. Set `affiliation-numbering: "*"`, `"a"`, or a native numbering function; `ambrosia-affiliation("lab")` reuses the marker elsewhere. Authors flow into one to three balanced columns; `author-columns` pins the count. Shared `emails` supplement personal addresses; endings collect the appropriate contacts.


Title metadata fits as one unit, down to `title-min-scale: 65%` by default. If it still cannot fit, a diagnostic asks for less content instead of creating an extra page. Large consortia usually benefit from a separate contributor slide. People and footers · Title layouts · Ending layouts

Navigation And Agendas

Choose `navigation` explicitly, keep `auto` for the flavor preset, or use `none` to reclaim its space. Navigators follow visible headings and logical slides; animation frames share one position. PDF links target the original slides.

`tabs`	Linked level-one section labels in a compact header.
`dots`	Logical-slide dots grouped by section.
`context`	Current section/subsection in a compact band.
`tree`	Talk title and current ancestors in thin, indented strips.
`panes`	Sections beside the current section's children.
`breadcrumbs`	Linked ancestor path in the ordinary title slot.
`sidebar`	A bounded outline in a reserved left or right column.
`segments`	Section labels and local progress in a footer rail.

```
#show: ambrosia-theme.with(
  flavor: "cambridge",
  navigation: "tree",
  navigation-buttons: true,
  section-progress: false,
)
// Hide locally and release space:
#slide(config: config-store(
  navigation: none,
))[A wide figure.]
```

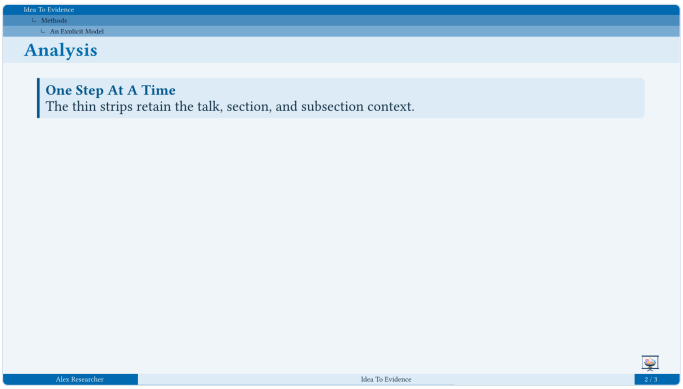

`navigation-side`, `navigation-width`, and `navigation-depth` tune a sidebar. `sidebar-background: none` is the default; `auto` enables the flavor's panel paint. `ambrosia-navigation(base: ..., ...)` adjusts a descriptor, such as a segmented rail's header/footer placement. Header bands and sidebars reserve space; transparent `navigation-buttons` and the global `progress-bar` are independent. Long navigators window around the current location rather than growing forever.

Agendas

`agenda-style` chooses `"list"`, `"cards"`, or `"path"` for the opening outline and automatic section transitions. `outline-slide(style: ...)` overrides one view. Cards suit a short talk; crowded cards fall back to the compact list. `agenda-text-size` defaults to `1.15em`; either helper accepts local `text-size`. Set `outline-fill: repeat[.]` on the theme, or `fill:` on one overview/divider, for dotted leaders. The core default is `none`.

Section dividers center the current section and expanded children, with quiet neighbors (`neighbors: 0`, `1`, or `2`). Fitting removes neighbors and excess depth before introducing linked omission markers. Nothing spills onto a second page. Text between the chapter heading and its first slide becomes a quiet summary panel; chapters without visible summary content add no panel or summary gap.

```
#show: ambrosia-theme.with(
  config-common(new-section-slide-fn:
    new-section-slide.with(style: "path", neighbors: 1)),
)
#outline-slide(style: "cards", depth: 1)
```

Navigator configuration · Agenda selection and fitting · Editable navigation example

Slide Patterns And Images

Use `slide` or ordinary headings for results, comparisons, tables, quotations, and equations. Multiple positional bodies make columns. Native `grid`, `figure`, `table`, and `quote` remain useful inside them.

`focus-slide[One message]` creates an immersive emphasis slide and freezes the logical counter. `section-slide(title: [...])[]` is a simple counted divider; `new-section-slide` is the fitted agenda transition. `backup-slide[...]` freezes the counter for an interlude. `ending-slide` stays counted and uses normal flow.

```
#image-slide("../../assets/kyklo.webp",
  alt: "A circular research pavilion",
  caption: [A Space For Shared Ideas],
  credit: [Generated demonstration image],
  caption-position: bottom + right,
  caption-width: 48%, caption-margin: 1em,
)
```



`image-slide(…)` → content

Full-page image. Native alignments place a band or an inset caption card. Forward image arguments unchanged to retain caller-relative paths and alt text.

Parameter / Type	Default	Meaning
`caption` content | none	`none`	Caption content; omit it for a credit-only overlay.
`credit` content | none	`none`	Image credit, optionally containing a native link.
`caption-position` alignment	`bottom`	Native placement, such as `top` or `bottom + right`. Unspecified axes use left/bottom.
`caption-width` length | ratio | relative	`100%`	Width relative to the region remaining after the outer margin.
`caption-margin` length | ratio | relative | dictionary	`0em`	Outer inset: a length/percentage or native inset dictionary.
`caption-fill` auto | color | gradient | none	`auto`	Panel fill. Auto uses translucent chrome; none removes the panel.
`caption-text-fill` auto | color | gradient	`auto`	Text and link fill. Auto follows chrome, or contrasts with an explicit solid panel.
`fit` str	`"cover"`	Native image fit; use “contain” to retain the complete image.
`config` dictionary	`(:)`	Per-slide Touying configuration.
`..args` arguments	named / extra	Native image arguments, including its source, alt text and scaling controls.


> Positions use native alignments: `top` creates a top band; `bottom + right` can place an inset card. Margins reduce the region before width is calculated. The image is cropped with `cover`; `contain` keeps the complete image. Panel and link ink adapt to the selected fill. A photograph’s contrast remains the author’s choice.

Caption placement and contrast · Editable image comparison

Content Blocks

Choose **style** for appearance and **kind** for semantic meaning. Both are independent of flavor and palette. A block is a nonbreaking container, with optional title; `ambrosia.block` is its scoped spelling.

```
#ambrosia-block(style: "tabbed",
  kind: "success", title: [A Useful Result],
  shadowed: false,
)[
  Explain the result in one sentence.
  #pause
  Add the evidence when you are ready.
]
```

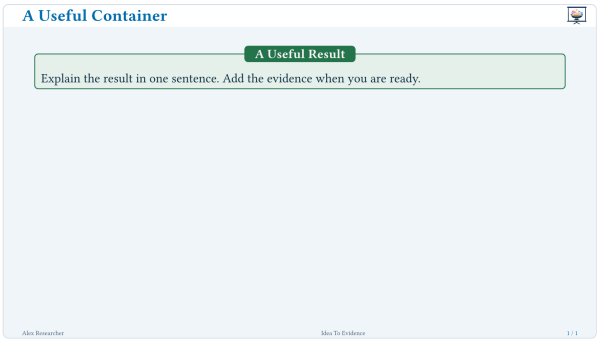

`ambrosia-block(…)` → content

A nonbreaking content container. Style selects geometry; kind selects meaning. Positional content keeps nested Touying pauses visible to the slide parser.

Parameter / Type	Default	Meaning
`title` content | none	`none`	Optional heading; omitted titles reclaim their region.
`style` auto | str	`auto`	Theme default, or plain, framed, poster, outlined, stripe, or tabbed.
`kind` str	`"accent"`	Accent, info, success, warning, danger, or neutral.
`fill` auto | color	`auto`	Accent override for borders and title regions.
`background` auto | color | gradient | none	`auto`	Body surface override; none makes it transparent.
`text-fill` auto | color | gradient	`auto`	Body ink; auto chooses contrast on solid surfaces.
`title-fill` auto | color | gradient	`auto`	Heading ink; auto follows the selected style.
`shadowed` auto | bool	`auto`	Follow the style/theme, or explicitly enable/disable its shadow.
`radius` length	`0.3em`	Corner radius; stripe keeps its left corners square.
`inset` length	`0.5em`	Internal padding.
`stroke` auto | stroke | color | length | dictionary | none	`auto`	Native border override, including a side dictionary.
`width` length | ratio | relative	`100%`	Width relative to the available region.
`gap` length	`0.45em`	Space between the title and body regions.
`it` content	positional	Positional block body, including nested content and pauses.
`watermark` bool | str	`false`	False hides it; true/body or title chooses the watermark region.

For a reusable preset: `#let result = ambrosia-block.with(style: "poster", kind: "success")`. Styles are plain (quiet panel), framed (joined colored header), poster (detached header), outlined (transparent frame), stripe (square left accent), and tabbed (centered title crossing the border). Nested blocks and pauses keep their normal behavior. The theme's `block-style` sets the default. Watermarks need a `watermark-logo`, which the neutral theme does not supply; `watermark-opacity` (a percentage, `5.5%` by default) and `watermark-height` tune the page mark. Block styling and nesting

Citations And Bibliographies

Author/year labels connect a short reference to the same work throughout a talk. By default, `footcite`, native `cite`, `@key`, and the bibliography use matching compact CSL identifiers, including disambiguation. Ordinary footnotes retain their native numbering. Footnote citations appear once per presentation by default, with subsequent markers linking back to the full entry.

```
== A Useful Reference
A full note #footcite(<knuth84>); an ordinary citation @knuth84.
#bibliography-slide("references.bib")
// Or register a source without a visible reference list:
// #hidden-bibliography("references.bib")
```

`footcite(…)` → content

Cite a work with a full reference at the foot of its first cited slide. The theme controls repetition and the default marker. Unscoped keys use Typst's normal bibliography routing; scopes distinguish reused keys.

Parameter / Type	Default	Meaning
`key` label	positional	Bibliography entry label, for example `<knuth84>`.
`cite-style` str | bytes	`"apa"`	CSL style for the optional additional inline citation.
`foot-style` str | bytes	`"apa"`	CSL style of the full footnote entry.
`supplement` content | none	`none`	Locator or other citation supplement.
`numbering` auto | str | function	`auto`	Local/reference-number pattern. Explicit numbering selects local mode unless marker is set.
`label` auto | str | label	`auto`	Optional label for referring to this footnote elsewhere.
`scope` none | str	`none`	Named bibliography scope; register the list with the same scope.
`marker` auto | str | content	`auto`	Theme default, author-year, number, local, key, or custom content.
`inline` auto | bool	`auto`	Add an ordinary inline citation too. Auto does so only in local mode.
`form` str	`"normal"`	Native citation form for the optional inline citation.

Marker Policy And Multiple Sources

Set `footcite-marker`, `cite-marker`, and `bibliography-marker` on the theme. The first accepts `"author-year"`, `"number"` (stable citation identity), `"local"` (native per-slide numbering), or `"key"` (literal database key). `cite-marker` and `bibliography-marker` accept `"author-year"` or `"native"`. Explicit native CSL styles take priority. `footcite-once: false` repeats the full note on each cited slide.

With Typst 0.15, separate bibliographies can reuse a key. Pass the same `scope` to `footcite` and `bibliography-slide` to select it explicitly; native citations can be labeled and selected with a bibliography's `target`. Unscoped keys retain native routing.

```
#footcite(<shared>, scope: "methods")
#bibliography-slide("methods.bib", scope: "methods", group: none)
// Alternative: native labeled-citation routing (without scope).
#cite(<shared>) <methods-citation>
#bibliography-slide("methods.bib",
  target: <methods-citation>, group: none)
```

Author-highlighted publication lists use an optional Pergamon recipe and example ordinary decks do not import it.

Citation behavior and multiple bibliographies · Citation example

Text And Small Components

`alert[the key point]` applies the accent without forcing bold. `muted` and `subtle` reduce prominence while inheriting typography. They remain readable on known solid slide and block surfaces. Arbitrary image/gradient backgrounds may need explicit native `text(fill: ...)`.

```
A #alert[main result], #muted[secondary context],
and #subtle[an optional aside].
#ambrosia-source-note[Source: Example Dataset, 2026.]
```

`ambrosia-badge(…)` → content

Compact inline semantic label for status, results, and annotations.

Parameter / Type	Default	Meaning
`kind` str	`"accent"`	Accent, info, success, warning, danger, or neutral.
`fill` auto | color	`auto`	Explicit solid fill; auto follows kind.
`shadowed` bool	`false`	Add a small shadow to the badge.
`body` content	positional	Positional label text or content.

```
#ambrosia-badge(kind: "success", shadowed: true)[Verified]
#ambrosia-badge(kind: "warning")[Preliminary]
```

Native Content Gets A Consistent Treatment

Fenced code and block `raw` receive a compact palette surface. Inline code stays inline. Block `quote` receives an accent stripe. `code-style: "plain"` and `quote-style: "plain"` disable those treatments. Native language highlighting, explicit syntax themes, attribution, links, and reveals still work. Table text defaults to `0.85em`, captions to `0.8em`, and footnotes to `0.65em`, relative to the default `text-size: 18pt`.

Show Colors Or Credit The Theme

`ambrosia-palette-showcase()` shows the actual current roles, including local color overrides. Use `roles: (...)`, `columns: 3`, or `codes: false` to simplify it. `ambrosia-shadow[...]` decorates native content; built-in blocks/badges expose their own `shadowed` option for shadows matched to their geometry. `ambrosia-credit-card()` is an optional small package credit with logo, PDF link, and bundled repository QR. Nothing adds it automatically. `qr: false` hides the code; `width: ...` changes its size. Institution wrappers can supply their own project credit. Ordinary acknowledgements need only text or a block.


> Use familiar names for slides and Touying operations. Ambrosia-specific generic utilities use the `ambrosia-` prefix to avoid native collisions. A scoped import also exposes `ambrosia.block`, `ambrosia.badge`, `ambrosia.muted`, and the other helpers. Import Ambrosia after Touying when using both wildcard imports.

Public names and scoped equivalents · Text and code example · Credit card options

Project Roadmaps

Use a roadmap when duration, overlap, and milestones matter. Time is elapsed from zero: `start: 0, end: 2.5` lasts 2.5 units. Units change labels, not the values. Tasks on the same track must be ordered and disjoint; concurrent work uses separate tracks.

```
#ambrosia-roadmap(
  total: 6, unit: "week", tick-every: 1,
  now: 2.5, milestones: (4.5,),
  tasks: (
    (content: [Explore], start: 0, end: 2.5),
    (content: [Build], start: 2, end: 5,
      kind: "success"),
    (content: [Review], start: 4.5, end: 6,
      kind: "warning"),
  ),
)
```

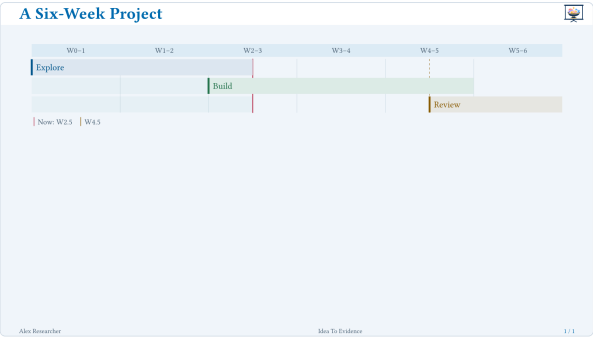

`ambrosia-roadmap(…)` → content

A proportional timeline using elapsed positions from zero, including fractions. Each task dictionary makes a track; an array of tasks shares one track.

Parameter / Type	Default	Meaning
`total` int | float	`12`	Positive finite duration of the complete plan.
`unit` str	`"week"`	Time-unit label; no calendar conversion is performed.
`now` none | int | float	`none`	Current elapsed position; none hides the marker.
`milestones` array	`()`	Positions, or records with at and optional label/kind/fill.
`phases` array	`()`	Ordered name/end records; start defaults to the previous end.
`tasks` array	`()`	Tracks with content/start/end and optional kind/fill/details.
`tick-every` int | float	`2`	Positive tick spacing in the same unit as total.
`tick-label` auto | function	`auto`	Custom label function receiving (start, end).
`legend` bool	`true`	Show explanatory milestone/current-position labels.
`fit` bool	`true`	Reduce size to fit the remaining height when necessary.
`min-scale` ratio	`75%`	Lower fitting limit; exceeding it raises a diagnostic.

Group dictionaries inside an array to share a track. Phase records need `name` and `end`; starts default to the previous end. A task's `details` can be content or a `(content: ..., start: ..., end: ...)` drawer below its track. Phases, tasks, and milestone records accept `kind` or a solid `fill`. Fractional boundaries retain proportional spacing. Very dense plans produce a fitting diagnostic at `min-scale`, rather than an overflow page. Whole-component reveals work; pauses inside task dictionaries are not an animation interface. The roadmap does not schedule dependencies or convert calendar dates. Data model and custom tick labels · Editable project and event plans

Output And Customization

A Small Configuration Model

Theme keywords	Geometry, palette, navigation, typography, logos, and slide-layout defaults.
`config-info(...)`	Title, people, institution IDs, emails, date, and short footer labels.
`config-store(...)`	Per-slide component and navigation options.
`config-common(...)`	Touying behavior, section callback, and output mode.
`config-page(...)` / `config-colors(...)`	Final page and color overrides; custom chrome owns its spacing.

```
#slide(config: config-store(navigation: none))[
  A local change without altering the rest of the talk.
]
#show: appendix
== Supporting Detail
Visible backup material with separate Roman slide numbers.
```

Footer Labels And Speaker Output

Give `config-info(short-author: ..., short-title: ...)` concise footer text. Dates appear only when metadata supplies one. The footer reserves the complete date and slide count, then fits author/title down to `footer-min-scale: 80%` before clipping with an ellipsis. Covers use the full metadata. Touying's `#speaker-note[...]` stays invisible in ordinary slide output. Export its matching `.pdfpc` sidecar to get private notes in pdfpc. The presenter guide and editable example show both commands and an optional single-compilation bundle export.

`config-common(show-notes-on-second-screen: right)` creates a double-width PDF; launch it with `pdfpc --notes=right` to separate audience and notes halves. A normal viewer displays both. `show-only-notes: true` creates a rehearsal page with a slide thumbnail. `handout: true` keeps each slide's last animation frame. Use an extended desktop for separate presenter/projector views.

Linked Miniature Slides

```
#ambrosia-slide-preview(<result>, width: 35%,
  thumbnail: image("previews/result.svg"),
  caption: [Return To The Result], frame: "last")
```

The thumbnail is an ordinary static image; the PDF destination comes from the live target label and selected animation frame. Without `thumbnail`, a linked placeholder remains. Typst cannot capture a finished page during that same run. The optional standalone Python exporter creates persistent SVGs in a separate pass. Browser-only authors can upload already exported images. The shipped example and this manual bundle snapshots, so normal IDE preview needs no script.

Extend Only What You Need

Palette, flavor, navigation, title, and ending constructors accept descriptors. Custom callbacks can own a fully different composition. Institution wrappers should use the supported `extensions` module to add their own logos, palettes, and custom cover compositions. The experimental Sankey stays an optional diagram recipe, outside the public API.

Snapshot workflow · Renderer extension contract · Standalone diagram recipe

> The API index and linked guides list all options. Tidy extracts the typed API tables; slide snapshots come from shared examples.