THE REMOTE SUPPORT PROGRAM · JOB SHEET


Put the landing page live on theremotesupportprogram.com

Create a small Linux server, point the domain at it, and publish a one-page website with Anywhere IT's contact details on it. Everything you need is in the folder this document came in. Allow about an hour, most of it waiting for DNS.

Version 1 · 14 September 2026 Owner: Clint, Anywhere IT queries@theremotesupportprogram.com

The job, in one paragraph

The full product is not being installed yet — it is waiting on two-factor authentication. For now the domain must show a **holding page**: what the product is, and how to get in touch. You are building the server it will eventually run on, so this work is not thrown away later: the same machine and the same DNS become the real site when Clint is ready.

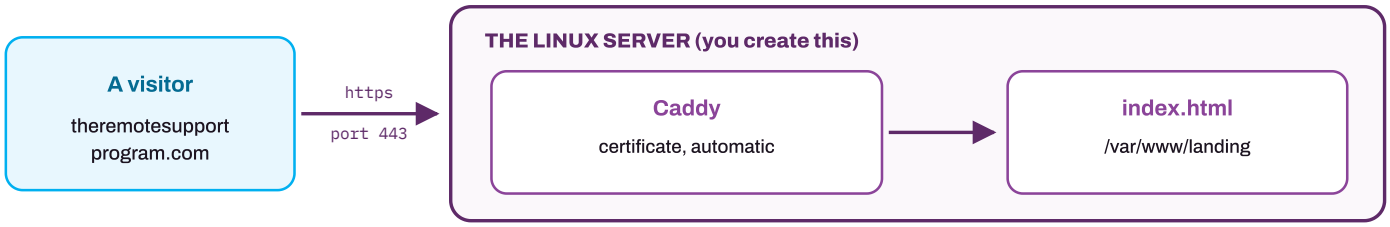

What is in this folder

`Landing-Page-Runbook.pdf` — this document
`Publish-Landing.ps1` — the one command you run, from Windows
`index.html` — the page itself
`go-live-landing.sh` — what runs on the server; you never run this by hand
`README.txt` — the same instructions in one screen, if you would rather not read a PDF

Copy the whole folder onto the Windows machine you are working from — the Desktop is fine. Do not run it from the memory stick itself if you can avoid it; a stick pulled out mid-upload is an avoidable problem.

What you need before starting

YOU NEED	NOTES
An account that can create a server	xneelo Cloud, or whichever provider Clint has given you.
Access to the domain's DNS	`theremotesupportprogram.com` is registered at **Afrihost**, but its nameservers point at **Cloudflare**. The records are edited in the **Cloudflare dashboard**, not in Afrihost ClientZone.
A Windows PC	Nothing to install. Windows 10 and 11 already include the SSH tools this uses. No .NET, no build.
An SSH key pair	If you do not have one: run `ssh-keygen -t ed25519` in PowerShell, press Enter at every prompt, then use the contents of `C:\Users\<you>\.ssh\id_ed25519.pub`.

1 Create the server AT THE HOSTING PROVIDER

Create a virtual machine:

- **Ubuntu 24.04 LTS** (22.04 is fine too).
- The **smallest size offered** is enough for a one-page site. If you are asked to choose and Clint has not said otherwise, pick 2 vCPU / 4 GB — that is what the full product will need when it moves in later, and resizing afterwards is a nuisance.
- Add **your SSH public key** during creation, so you can log in as `root` without a password.
- Leave the provider's firewall open on **22, 80 and 443**.

Write down the **public IP address**. Everything below calls it `<THE-IP>`.

Check the login works before going further. The first time it will ask you to confirm the server's fingerprint — type `yes`:

```
ssh root@<THE-IP>
```

Type `exit` to come back out.

> **IF IT ASKS FOR A PASSWORD**
>
> Your key did not get attached to the server. Fix that before step 3 — the publish command needs key-based login and will not prompt. Most providers let you add a key and rebuild, or paste one into the console.

2 Point the domain at it IN THE CLOUDFLARE DASHBOARD

Open the domain in Cloudflare and go to **DNS → Records**. Change exactly two records:

TYPE	NAME	VALUE	PROXY STATUS
A	`@`	<THE-IP>	**DNS only** (grey cloud)
A	`www`	<THE-IP>	**DNS only** (grey cloud)

DO NOT TOUCH THESE

- **The mail records.** `mail`, `smtp` and `webmail`, and every MX and TXT record, carry the company's email from a different server on purpose. Changing them stops mail arriving, and it is not obvious for hours that you have done it.
- **The nameservers.** DNS hosting is not moving anywhere. Only the two A records above change.
- **The grey cloud.** Leave both records on *DNS only*. Cloudflare's orange cloud stops the certificate in step 3 from being issued.

Changes usually appear within minutes, but allow up to an hour. Check from the Windows PC and do not continue until it answers with the server's IP — the certificate in step 3 cannot be issued before then:

```
nslookup theremotesupportprogram.com
```

3 Publish the page ON THE WINDOWS PC

Open **PowerShell** in the folder you copied (right-click the folder while holding Shift → *Open PowerShell window here*), and run this, with the real IP in place of `<THE-IP>`:

```
powershell -ExecutionPolicy Bypass -File Publish-Landing.ps1 -Server <THE-IP>
```

That uploads the page and sets the server up. It prints the phone number and links it is about to publish, so you can see they are right before it finishes. On the server it:

1. installs **Caddy**, the web server;
2. copies the page to `/var/www/landing`;
3. gets a TLS certificate for the domain and `www`, automatically;
4. closes the firewall to **22, 80 and 443** only;
5. fetches the site and tells you the result.

The last line should read `https://theremotesupportprogram.com -> HTTP 200` followed by **Live.**

> **IF IT IS NOT 200**
>
> Nearly always DNS. Caddy has to be reachable on port 80 at the domain name before a certificate can be issued. Re-check step 2, give it a few minutes, and watch the certificate arrive with:
>
> ```
> ssh root@<THE-IP> "journalctl -u caddy -f"
> ```
>
> Press Ctrl+C to stop watching. Once DNS is right, this fixes itself without you re-running anything.

> **RUNNING IT AGAIN IS SAFE**
>
> If Clint asks for a wording change, he edits `index.html` and you run the same command again. It takes a couple of seconds the second time — Caddy and the certificate are already there.

If the script will not run at all

Only if PowerShell refuses and you cannot get past it. This does the same thing by hand, but **the contact details will be missing from the page** — the script is what fills them in. Tell Clint if you have to do it this way. The address at the end is not a typo: that is who the certificate is registered to, which is Clint himself, not the enquiries mailbox on the page.

```
scp index.html go-live-landing.sh root@<THE-IP>:/tmp/
ssh root@<THE-IP> "cd /tmp && sed -i 's/\r$//' go-live-landing.sh && chmod +x go-live-
landing.sh && ./go-live-landing.sh theremotesupportprogram.com clint@anywhereit.co.za"
```

4 Check it FROM A PHONE, NOT THE PC YOU WORKED ON

- [ ] `https://theremotesupportprogram.com` loads, with a padlock and no warning.
- [ ] `https://www.theremotesupportprogram.com` does the same.
- [ ] The page shows **078 131 5618** and **queries@theremotesupportprogram.com**.
- [ ] Tapping the phone number offers to call it.
- [ ] Tapping **WhatsApp** opens a chat to that number with a message already typed.
- [ ] Tapping **Ask for more information** opens a new email to Clint.
- [ ] It reads properly on a phone screen — nothing cut off, no sideways scrolling.

> **WHY A PHONE**
>
> The phone and WhatsApp links are the whole point of the page, and they only really work from a phone. A desktop browser will not prove they are right.

Hand back to Clint

- The **server's public IP**, and which provider and account it was created under.
- Confirmation that **both** addresses load with a valid padlock.
- Confirmation that the **phone, WhatsApp and email links** were tested from a real phone.
- Anything in the checklist that did not pass.
- The monthly cost of the server, if you chose the size yourself.

What happens later — not part of this job

When two-factor authentication is finished, Clint runs a different command from his own machine that turns this same server into the full product: the website, the customer portal and the remote support service. That replaces what the web server hands out — same server, same certificate, same DNS, no gap where the domain is dead.

> **SO DO NOT**
>
> - delete or rebuild this server when you are finished with it;
> - install anything else on it, or use it for another customer;
> - change the DNS records again.

If something goes wrong

SYMPTOM	WHAT IT USUALLY IS
Certificate warning, or the site does not load	DNS is not pointing at this server yet, or port 80 is blocked at the provider. Re-check step 2, then `journalctl -u caddy -n 50 --no-pager`.
`could not reach ... over SSH`	Confirm `ssh root@<THE-IP>` works on its own. The script needs key-based login, not a password.
`ssh is not on PATH`	The Windows OpenSSH Client is switched off. Settings → System → Optional features → Add → OpenSSH Client.
PowerShell refuses to run the file	Use the full command in step 3, including `-ExecutionPolicy Bypass`. Do not right-click → Run with PowerShell.
The page loads but the phone number is wrong	Do not edit the page on the server. Tell Clint — the number comes from one line in `Publish-Landing.ps1`.

Useful commands

```
ssh root@<THE-IP> "systemctl status caddy"
ssh root@<THE-IP> "journalctl -u caddy -n 50 --no-pager"
ssh root@<THE-IP> "systemctl restart caddy"
```

If you are stuck for more than a few minutes, stop and call Clint on **078 131 5618** rather than working around it. The domain is about to be the company's public face, and a creative fix is harder to undo than a phone call.