

# **Lex'it**

# **HowTo**

**IvdNT**

Mathieu Fannee, 2019 – 2023

## Inhoud

|                                                            |    |
|------------------------------------------------------------|----|
| Introduction.....                                          | 8  |
| What is Lex'it? .....                                      | 8  |
| API .....                                                  | 8  |
| Installation: quick start.....                             | 9  |
| Prerequisites.....                                         | 9  |
| Build the project .....                                    | 9  |
| Copy needed files to the server.....                       | 11 |
| Set your user.....                                         | 12 |
| First test.....                                            | 13 |
| My first project.....                                      | 14 |
| The .database file .....                                   | 14 |
| The .config.js file.....                                   | 14 |
| Remarks.....                                               | 16 |
| Call your Lex'it project via an URL .....                  | 17 |
| Full list of configuration parameters .....                | 18 |
| oTableSettingsList parameters .....                        | 18 |
| oTableConfigurationList parameters.....                    | 21 |
| Assign rights to users.....                                | 27 |
| Setting rights .....                                       | 27 |
| Activating rights.....                                     | 27 |
| The API.....                                               | 28 |
| First things first: open a table.....                      | 28 |
| Close a table .....                                        | 29 |
| Project wide settings .....                                | 30 |
| Setting a project title, background-color, font, etc ..... | 30 |
| Table global settings.....                                 | 31 |
| General settings.....                                      | 31 |
| Is a table loaded?.....                                    | 31 |
| Get the name of a table.....                               | 31 |
| View type.....                                             | 31 |
| Row selection .....                                        | 31 |
| Is a table empty? .....                                    | 31 |
| Table results count quality .....                          | 31 |
| Positioning.....                                           | 32 |
| Table absolute positioning .....                           | 32 |

|                                                                                  |    |
|----------------------------------------------------------------------------------|----|
| Table relative positioning .....                                                 | 32 |
| Saving and retrieving settings .....                                             | 32 |
| Read the configuration settings .....                                            | 32 |
| Restore the configuration settings .....                                         | 33 |
| Save table extra settings (position etc.) for later re-use .....                 | 33 |
| Save and restore table state.....                                                | 33 |
| Tabel header.....                                                                | 34 |
| Ways of setting header buttons .....                                             | 34 |
| Add a SELECT button .....                                                        | 34 |
| Implement a button for row duplication .....                                     | 35 |
| Click on a button programmatically .....                                         | 35 |
| Modify the name/style of a button programmatically .....                         | 35 |
| Filters & search boxes in the GUI .....                                          | 37 |
| Modify a user's search query programmatically, before search is fired.....       | 38 |
| Modifying the filter silently (that is: without modifying the search boxes)..... | 38 |
| Query builder.....                                                               | 39 |
| Table-body.....                                                                  | 40 |
| Some basic cell configuration.....                                               | 40 |
| Dealing with rows.....                                                           | 41 |
| Get the first row .....                                                          | 41 |
| Which row is now active?.....                                                    | 41 |
| Get the row before/after any other row.....                                      | 41 |
| Which row is now selected? At which index? .....                                 | 41 |
| How many rows are now selected? .....                                            | 42 |
| How many rows are now visible on screen? .....                                   | 42 |
| Iterating over rows .....                                                        | 42 |
| Get total number of rows.....                                                    | 42 |
| Get the index of a row (row-number) .....                                        | 42 |
| Get all visible rows.....                                                        | 42 |
| Get all visible rows meeting some filters .....                                  | 43 |
| Select or unselect row programmatically.....                                     | 43 |
| Dealing with cells.....                                                          | 44 |
| Get a cell and its type, given a row node and a column name .....                | 44 |
| Assign a mouse event to a cell .....                                             | 44 |
| Assign a mouse event to an element in a cell .....                               | 44 |
| Highlighting data in cells.....                                                  | 45 |

|                                                                        |    |
|------------------------------------------------------------------------|----|
| Sorting data .....                                                     | 46 |
| Read data.....                                                         | 47 |
| Read text from cells, columns, of rows .....                           | 47 |
| Read selected text in cell.....                                        | 48 |
| Read id's of rows .....                                                | 48 |
| Write data.....                                                        | 49 |
| Write data in editable cells.....                                      | 49 |
| Sending data to the database.....                                      | 49 |
| Context menus in cells or rows .....                                   | 49 |
| Refreshing a table, or only single rows .....                          | 50 |
| Remove data.....                                                       | 51 |
| Remove a row.....                                                      | 51 |
| Implement an autocomplete in an editable cell .....                    | 51 |
| Wild cards in columns configuration.....                               | 52 |
| Navigate programmatically .....                                        | 53 |
| Callbacks .....                                                        | 54 |
| Table callbacks.....                                                   | 54 |
| Function callbacks .....                                               | 55 |
| Updating a table configuration after initialization .....              | 56 |
| Error handlers.....                                                    | 57 |
| Table columns error handlers .....                                     | 57 |
| Function error handlers.....                                           | 57 |
| Show a clean error message, when the database threw an exception ..... | 57 |
| Dialogs .....                                                          | 59 |
| Classic dialogs.....                                                   | 59 |
| Entering data in a dialog.....                                         | 59 |
| Data to be typed in .....                                              | 59 |
| Data to be chosen out of a list of items .....                         | 60 |
| Data to be sorted.....                                                 | 61 |
| Menu dialog.....                                                       | 61 |
| Spread data among tabs in dialog .....                                 | 62 |
| Get rid of the 'OK' button.....                                        | 63 |
| Closing a dialog programmatically .....                                | 63 |
| Show a progress indicator and hide it.....                             | 63 |
| Key events .....                                                       | 64 |
| Assign event to some key .....                                         | 64 |

|                                                                                        |    |
|----------------------------------------------------------------------------------------|----|
| Trigger a key event programmatically.....                                              | 64 |
| Detect which key was stricken.....                                                     | 65 |
| Calling external resources: .....                                                      | 66 |
| Call a database function and get its output .....                                      | 66 |
| Call a webservice .....                                                                | 67 |
| Form views .....                                                                       | 69 |
| Basic configuration .....                                                              | 69 |
| Tables in a form .....                                                                 | 72 |
| The 'add' button .....                                                                 | 74 |
| The 'delete' button.....                                                               | 75 |
| The 'show' button .....                                                                | 76 |
| Advanced Lex'it programming .....                                                      | 77 |
| Lex'it internal registry.....                                                          | 77 |
| Create a full new table configuration at runtime.....                                  | 77 |
| Set the active table programmatically .....                                            | 78 |
| Use libraries.....                                                                     | 78 |
| Load new CSS dynamically .....                                                         | 79 |
| Accessing session and user info .....                                                  | 79 |
| Cleaning the cache .....                                                               | 80 |
| Setting behavior when switching between tabs containing distinct Lex'it instances..... | 81 |
| Changing accessed table schema .....                                                   | 81 |
| Custom sorting .....                                                                   | 81 |
| Tips and tricks.....                                                                   | 84 |
| Call a Lex'it projects and tables via an URL .....                                     | 84 |
| Change table columns visibility and redraw table automatically .....                   | 84 |
| Synchronicity problems and solutions .....                                             | 84 |
| Implement a radio button using Boolean columns.....                                    | 86 |
| Implement a character picker .....                                                     | 86 |
| Scroll to a table programmatically .....                                               | 87 |
| Add a full export button .....                                                         | 88 |
| Help functions .....                                                                   | 89 |
| String array conversion.....                                                           | 89 |
| Escaping chars .....                                                                   | 89 |
| Http parameters .....                                                                  | 89 |
| Solve z-Index problems .....                                                           | 89 |
| Objects functions.....                                                                 | 89 |

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| Clone an object.....                                                     | 89 |
| Count the number of properties of an object .....                        | 90 |
| Regex functions .....                                                    | 90 |
| Test if a string is a regex or not .....                                 | 90 |
| Regex version of replaceAll(string, replacement) .....                   | 90 |
| Regex version of indexOf(regex, from) and lastIndexOf(regex, from) ..... | 90 |
| Regex version of inArray(value, array, start).....                       | 90 |
| Regex selectors.....                                                     | 90 |
| Arrays functions.....                                                    | 90 |
| Unify any value in array.....                                            | 90 |
| Clone an array .....                                                     | 90 |
| Array equality .....                                                     | 91 |
| Sort an array of arrays .....                                            | 91 |
| HTML entities .....                                                      | 91 |
| Numbers .....                                                            | 91 |
| Generate series (JavaScript version of Psql function) .....              | 91 |
| Get a random unique number.....                                          | 91 |
| String functions .....                                                   | 92 |
| The good old BASIC or JAVA functions .....                               | 92 |
| String replacement.....                                                  | 92 |
| Remove HTML tags from a string .....                                     | 92 |
| Remove non alphabetical chars from string .....                          | 92 |
| If a string a string? .....                                              | 92 |
| If a string truly empty? .....                                           | 92 |
| Colors.....                                                              | 92 |
| Is a color dark or light? .....                                          | 92 |
| Convert a string to a color .....                                        | 93 |
| Text selection .....                                                     | 93 |
| Allow or prevent screen text selection.....                              | 93 |
| Clear screen text selection .....                                        | 93 |
| DOM elements functions .....                                             | 93 |
| Test if some element is visible in the current viewport .....            | 93 |
| Does an element exist? .....                                             | 93 |
| Events .....                                                             | 93 |
| Pre-binding .....                                                        | 93 |
| PSQL functions in Lex'it .....                                           | 94 |

|                                                     |    |
|-----------------------------------------------------|----|
| Call a PSQL-function and read the result.....       | 94 |
| Concordance table for the fn and fx namespaces..... | 95 |

## Introduction

### What is Lex'it?

In short: a customizable web interface on databases. Out of the box, it allows for viewing or editing database tables within a webpage, and offers searching, paging and sorting functionalities without any configuration needed.

Thanks to an extensive API, developers can easily customize or extend the standard functionalities. And programming is not limited to the Lex'it API: since it all runs with JavaScript and jQuery, lots of third parties js-plugins can be implemented in Lex'it projects.

### API

The client-side part of Lex'it is built with the datatables.net framework, so as a consequence the Lex'it API uses the same objects as datatables.

Since its creation, the datatables API (<https://datatables.net/reference/api/>) has gone through a lot of development, causing its API to shift from one type of objects to another. Originally addressing the DOM tree and its nodes, datatables now works with its own table representation object. The Lex'it API still uses both approaches: the first one is represented by the `fn` namespace (mostly addressing nodes) and the other by the `fx` namespace (mostly addressing datatables objects). The Lex'it API provides of course a set of functions allowing both functions types to be used together.

The Lex'it API is described at [github.com/INL/Lexit/tree/master/jsdoc](https://github.com/INL/Lexit/tree/master/jsdoc), so we won't be doing that again here. But do consult the **Concordance table for the fn and fx namespaces** in this document!

The aim of this document is to give clear examples of how to use some functions. This tries to give an answer to the question: how can I get Lex'it to do this for me?

## Installation: quick start

### Prerequisites

- A server running Java 7+ and Apache tomcat 8.5+ which is needed to host the Lex'it webservice
- A server (might be the same as the first one) running PostgreSQL 10+ containing the database to be viewed or edited in Lex'it

### Build the project

Lex'it is stored in GitHub : <https://github.com/INL/Lexit>

Clone it and build it:

```
git clone https://github.com/INL/Lexit
cd Lexit
mvn package
```

Prior to Java 11 this should be enough. In newer Java version, you'll get error "*package javax.xml.bind does not exist*". So solve this, just add the following lines to the POM.xml (and rerun `mvn package`):

```
<dependency>
  <groupId>javax.xml.bind</groupId>
  <artifactId>jaxb-api</artifactId>
  <version>2.4.0-b180830.0359</version>
</dependency>
<dependency>
  <groupId>com.sun.xml.bind</groupId>
  <artifactId>jaxb-core</artifactId>
  <version>2.3.0.1</version>
</dependency>
<dependency>
  <groupId>com.sun.xml.bind</groupId>
  <artifactId>jaxb-impl</artifactId>
  <version>2.4.0-b180830.0438</version>
</dependency>
<dependency>
  <groupId>javax.annotation</groupId>
  <artifactId>javax.annotation-api</artifactId>
  <version>1.3.2</version>
</dependency>
```

It might also be needed to set the compiler plugin to an higher version in the POM.xml (and rerun `mvn package`):

```
<!-- Compiles Java sources -->
<plugin>
  <groupId>org.apache.maven.plugins</groupId>
  <artifactId>maven-compiler-plugin</artifactId>
  <version>3.8.0</version>
  <configuration>
    <release>8</release>
    <encoding>UTF-8</encoding>
  </configuration>
</plugin>
```

## Lex'it HowTo

```
<plugin>  
  <groupId>org.apache.maven.plugins</groupId>  
  <artifactId>maven-war-plugin</artifactId>  
  <version>3.3.0</version>  
</plugin>
```

Now you've got a WAR-file (`lexit2.war`) to be installed on the tomcat server.

### Copy needed files to the server

We need some files to be copied to the tomcat server, that is:

- lexit2.war (the WAR file you just built)
- the /lexit2\_config\_folders folder (projects configuration folders)

Send those to the tomcat server:

```
scp lexit2.war root@<your_host>:<some_folder>
scp -r /lexit2_config_folders root@<your_host>:<some_folder>
```


The 'lexit2\_config\_folders' folder contains two subfolders:

- /webapps/lexit2\_config  
This folder is about projects functionalities. It is supposed to contains Javascript files only!
- /etc/lexit2\_db\_config  
This folder contains the projects' databases credentials and the users access rights settings.

Now go to the tomcat server, copy the war file and the lexit2\_config folder to the tomcat webapps folder (eg. /vol1/webapps), and copy the lexit2\_db\_config folder to the parent of the webapps folder (eg. /vol1).

```
ssh root@<your_host>
mv lexit2.war /vol1/webapps
mv lexit2_config_folders/webapps/lexit2_config/ /vol1/webapps/
mv lexit2_config_folders/etc /vol1
```

You should end up with the following structure:

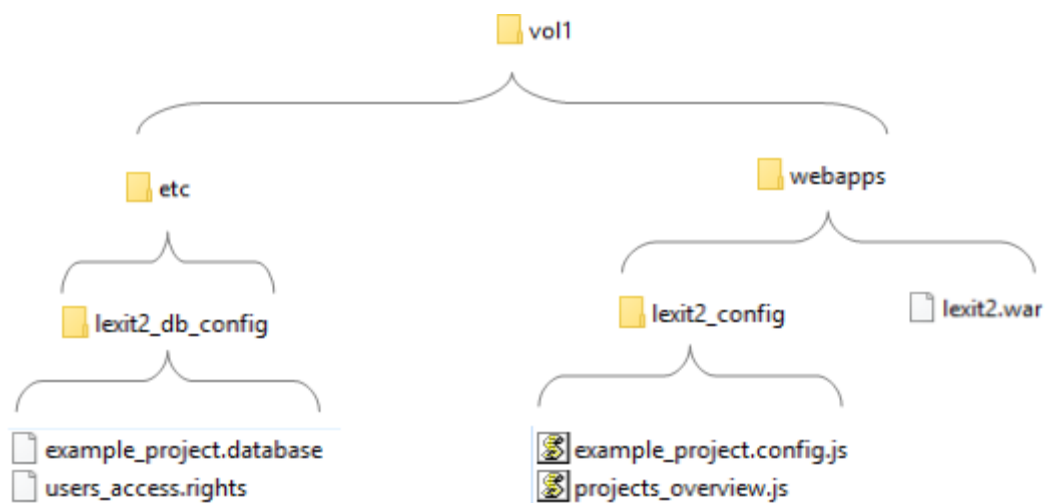

**NB:** In the older Lex'it versions, all config files were stored in the `/webapps/lexit2_config` folder, but it turned out to be a bad idea. Since the `webapps` folder can be accessed by the client, it can form a security risk [remember: it contains the database credentials]. That's why we eventually chose for a new location, which can't be accessed by the client.

### Set your user

Finally, you need to declare a tomcat user and assign him/her Lex'it access rights, so as to be able to log in.

First go to the `/vol1/etc/lexit2_db_config` folder, open file `users_access.rights` and add your username followed by `'=superuser'` (for sake of ease, we now assign full rights – later on we'll read more about this in section **Assign rights to users**):

```
myname=superuser
```

As a second step, go to the tomcat config folder and open the tomcat users file:

```
cd /etc/tomcat
sudo vi tomcat-users.xml
```

Add a Lex'it access 'role', which we will be assigning to any user needing to work with Lex'it. Of course, we'll need to restart tomcat afterwards, in such a way that it takes the new role and users into account:

```
<role rolename="lexit_access"/>
<user username="myname" password="12345" roles="lexit_access"/>

:qw!

sudo service tomcat restart
```

### First test

As far as files installation on the server is concerned, we're done now. You can test your installation by typing the Lex'it URL in a genuine browser.<sup>1</sup>

`http://<your_host>:8080/lexit2/`

You should be getting a start screen like the following. The screen displays some project names you might want to try. Of course, clicking those links won't work properly, because those are dummy's for the sake of being able to test the front page of your installation. We now need to build a project and configure it! We'll do that in the next section.

### Welkom in Lex'it

Kies een project:

#### Productie

|   |                                                |                                                 |
|---|------------------------------------------------|-------------------------------------------------|
| ◆ | <a href="#">Some beautiful project name</a>    | : <i>This project is about beautiful things</i> |
| ◆ | <a href="#">Another wonderful project name</a> | : <i>This project is wonderful too</i>          |

#### Goodies en tools

|  |                                   |                                                                                   |
|--|-----------------------------------|-----------------------------------------------------------------------------------|
|  | <a href="#">Login overzicht</a>   | : <i>Overzicht actieve accounts (wordt om de 2 sec bijgewerkt)</i>                |
|  | <a href="#">Reset user rights</a> | : <i>Toegangsrechten resetten (klik alleen als het nodig is, geen speelgoed!)</i> |

#### In ontwikkeling

|   |                                     |                                       |
|---|-------------------------------------|---------------------------------------|
| ◆ | <a href="#">Yet another project</a> | : <i>This project is being tested</i> |
|---|-------------------------------------|---------------------------------------|

#### Afgesloten

|   |                                          |                                                                  |
|---|------------------------------------------|------------------------------------------------------------------|
| ◆ | <a href="#">Some project of the past</a> | : <i>We used to work on this one, we're finished with it now</i> |
|---|------------------------------------------|------------------------------------------------------------------|

#### Onbekend

|   |                                 |                   |
|---|---------------------------------|-------------------|
| ◆ | <a href="#">example_project</a> | : <i>onbekend</i> |
|---|---------------------------------|-------------------|

---

<sup>1</sup> Lex'it was successfully tested in browsers Chrome, Mozilla Firefox and Edge. Internet Explorer is not a browser (nobody knows what that is).

## My first project

A project needs only two files:

- a `.database` file, which contains the project database location and credentials
- a `.config.js` file, which indicates which database tables can be accessed, how they should look and behave, etc.

These two files need to be named the following way: if your project is named 'myproject', those two files should be called `myproject.database` and `myproject.config.js`

As for their storage location:

- The `myproject.config.js` file must be stored in the tomcat webapps folder in 'configuration' subfolder `/webapps/lexit2_config`.
- The `myproject.database` file can't be saved in the same location, because the webapps folder can be accessed by the client so it can form a security risk (since it contains the database credentials). So we need to store the file elsewhere: `/etc/lexit2_db_config`. We saw before that the `etc` folder was created next to (that is: as a sibling of) the `webapps` folder.

### The `.database` file

A typical `.database` file looks like this:

```
db=myproject_name
schema=public
host=somehost.com
user=postgres
pass=password
send_tomcat_username_to_db=true
```

Most of the content is straightforward:

- **db** is assigned the name of the project database,
- **schema** is assigned the database schema Lex'it is allowed to access in the project database (note that this allows you to easily keep parts of a database hidden, since Lex'it will only be able to access the specified schema)
- **user** and **pass(word)** are of course needed for Lex'it to access the database
- **send\_tomcat\_username\_to\_db** is the only optional parameter. This is needed when one wants to be able to identify (and store) the users identity for logging purposes etc. (see the **Accessing session and user info** section about that)

### The `.config.js` file

A default `.config.js` file looks like this:

```
oHiddenTablesList = [];
oShowOnlyTables = [];
```

```
oTableSettingsList = {};
oTableConfigurationList = {};
```

The config file consists of four arrays. The first two arrays are about tables visibility. The one array must be used to declare the names of the tables that must keep hidden, while the other is about tables that must be visible. Those arrays are mutually exclusive: only one can be used at the time. If only a few tables need to be visible, and lots of tables must keep hidden, using `oShowOnlyTables` makes more sense as only a few names will have to be declared. If, on the contrary, many tables must be visible, and only a few must be hidden, one should use `oHiddenTablesList` instead.

The two following arrays are associative arrays:

- The `oTableSettingsList` array is used for global table settings like: table width, header color and buttons, etc.
- The `oTableConfigurationList` array is to be used for configuration at column level, like click events assigned to cells, cells editability, etc.

These arrays are associative arrays, so as to be able to assign a setting to a table name, or to a column name. The table or column name will act as a parameter name (or key), and the setting will act as a parameter value.

Let's give a short example. Let's say we have a table called 'my\_table', with only two columns: a 'word' and its 'ID'. With only two columns our table is quite narrow, so we set it to occupy only 50% of the available screen width. And we want to sort the table by its ID column. Those *table-wide* settings are to be declared in the `oTableSettingsList` array.

The second array – `oTableConfigurationList` – is about configuration *at column level*. Here is the place where one can specify how a columns should render or behave. In this particular case, we want the ID column to be hidden. And we want the column 'word' to be editable, meaning that the user will be able to click on any cell of this column to edit its value. To achieve all that, the configuration file should look like the following:

```
oTableSettingsList = {
    "my_table": {
        "width": "50%",
        "columns_sorting": {"id": "asc"}
    }
};

oTableConfigurationList = {
    "my_table": {
        "id": {
            "visible": false
        },
        "word": {
            "editable": true
        }
    }
};
```

## Remarks

Easy, isn't it? Well, be careful.

Although Lex'it is aiming at making everything as simple as possible (including all kinds of database querying optimizations), there remain things that we need to take care of ourselves. In this case: if a table needs to be editable, in the database it will need a primary key. Typically, the primary key is the ID column.

So all you'll need to do in your database is setting a primary key for the table to be edited, and Lex'it will be able to use it without any further configuration:

```
ALTER TABLE my_table ADD primary key( id );
```

Editing a database view is possible as well, provided that the view has rules declared allowing insert, update and/or delete operations. Since a database view doesn't have such thing as a primary key (needed for table edition, see above), we need to use a trick. Choose a column that can act as a primary key (t.i.: it contains only unique values) and give it 'pkid' as an alias in the view declaration. Lex'it will recognize it automatically and use that column as if it was a genuine primary key on a table:

```
CREATE OR REPLACE VIEW my_view
AS
SELECT column_1 AS pkid, column_2, column_3
FROM my_table;
```

**Important note:** in its current version (2021-10-11), Lex'it does not yet support primary keys on multiple columns.

Another remark is about the sorting parameter. In the previous example, we've defined sorting in the table-wide setting array. Of course, deciding if some setting belongs to the table-wide settings or to the column settings, is not always self-evident. For example, sorting a table by a given column can be seen as a column setting instead of a table-wide setting. Which is the reason why the API provides us with a parameter to define sorting at column level too:

```
oTableConfigurationList = {
    "my_table": {
        "id": {
            "colsort": "asc"
        }
    }
};
```

But this parameter – dating from the early Lex'it days – is not recommended: sometime one wants to sort a table by multiple columns at the same time, t.i. by a primary column and a secondary column (or even more columns). For example by people's last name (primary) and then by people's first name (secondary). In the past, that was achieved by ordering the columns settings of sorting columns

## Lex'it HowTo

in the `oTableSettingsList` by priority: primary sorting columns first, followed by the secondary sorting column, etc.

Of course, this can be neatly done with a table-wide parameter, which is now the recommended way:

```
oTableSettingsList = {  
    "some_other_table": {  
        "columns_sorting": {"lastname": "asc", "firstname": "asc"}  
    }  
};
```

### Call your Lex'it project via an URL

One can open Lex'it straight in a given project (that is: skipping the menu page) by specifying the projectname in the URL:

```
http://<your_host>:8080/lexit2/?db=myproject
```

## Full list of configuration parameters

### oTableSettingsList parameters

| Name               | Type   | Description                                                                                                                                                                                                                                                                               |
|--------------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| group              | string | If one wishes to group some tables of the table selection menu in particular labels, assign each tables a label with the 'group' parameter. All tables sharing the same label value will be shown together under this same group name.                                                    |
| header_color       | string | By default, the header of a table had a light grey background color. Give it another color by assigning a color code to 'header_color'.<br>With value 'auto', Lex'it chooses a color automatically                                                                                        |
| nice_name          | string | Give a table a user friendly name (instead of the possible technical sounding name it might have).                                                                                                                                                                                        |
| displaylength      | string | By default, a table shows 10 rows at the time. Change this number with this setting.<br><br>displaylength: 5                                                                                                                                                                              |
| displaylength_menu | string | Modify the 'Show ... rows' menu (in the table header). For 'show everything' use value -1.<br><br>displaylength_menu": [1, 5, 10, 50]                                                                                                                                                     |
| viewtype           | string | Change the view mode of a table: 'table' (default) or 'form'.                                                                                                                                                                                                                             |
| info               | string | If one wants to show more info about a tablet in the tables selection menu, this info can be declared here. When set, the information will be seen in the 'Choose a table' menu.                                                                                                          |
| columns_order      | array  | Change the default columns order (default: null)<br><br>columns_order: ["colname1", "colname2", "colnameX"]                                                                                                                                                                               |
| columns_sorting    | array  | Declare the table default sorting. Each column and sort direction is to be given a key/values in an associative array:<br><br>columns_sorting: { colname1: sortdir1, colname2: sortdir2, ...}                                                                                             |
| grouping_column    | string | When a table contains a column by which rows can be grouped (for example a column <i>bundle_title</i> , while rows are about articles as parts of bundles), such a column can be given as a value to the "grouping_column".<br>Beware: this parameter allows for showing grouping labels, |

| Name               | Type     | Description                                                                                                                                                     |
|--------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                    |          | not for the grouping itself. The table needs to be sorted by the group column to actually 'group'.                                                              |
| size               | string   | Width of a table.<br>Synonym: "width"                                                                                                                           |
| width              | string   | Width of a table.<br>Synonym: "size"                                                                                                                            |
| top                | string   | Vertical position of the left upper corner of the table (px)                                                                                                    |
| left               | string   | Horizontal position of the left upper corner of the table (px)                                                                                                  |
| header_height      | string   | Height of the header above the table; default is 50px                                                                                                           |
| footer_height      | string   | Height of the footer under the tabel; default is 50px                                                                                                           |
| main_search        | boolean  | Set if the global search box (which searches each column of the table) needs to be available; default is true                                                   |
| callback           | function | callback to be executed each time the table is drawn (initialisation) or redraw (when changing page or refreshing)<br><br>callback: function(t){ do something } |
| repeat_callback    | boolean  | Repeat the callback each time the table is being redrawn (default: false)                                                                                       |
| preinit_callback   | function | callback to be executed before a table is shown and its data loaded (this allows to performing some data update or so before the table is shown and populated). |
| prereset_callback  | function | callback to be executed when the Reset button is clicked (can be used to ensure some filters are reapplied etc.)                                                |
| close_callback     | string   | callback to be executed when the Close button is clicked                                                                                                        |
| exact_count        | boolean  | Tell if Lex'it must return an exact table (results) count (default: false)                                                                                      |
| get_focus_on_tab   | boolean  | Set if a table is supposed to get focus when pressing TAB (default: true)                                                                                       |
| refresh_upon_focus | boolean  | Refresh a table when the window regains focus (default:                                                                                                         |

| Name                    | Type     | Description                                                                                                                                                                                                                       |
|-------------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                         |          | true)                                                                                                                                                                                                                             |
| reset_button            | boolean  | show/hide the "RESET" button (default: true)                                                                                                                                                                                      |
| columns_button          | boolean  | show/hide the "Column selection" button (default: true)                                                                                                                                                                           |
| viewtype_button         | boolean  | show/hide the "Form/Table view" button (default: true)                                                                                                                                                                            |
| refresh_button          | boolean  | show/hide the "Refresh table" button (default: true)                                                                                                                                                                              |
| replace_button          | boolean  | show/hide the "Search & Replace" button (default: true)                                                                                                                                                                           |
| selection_button        | boolean  | show/hide the "Row selection" button (default: true)                                                                                                                                                                              |
| selection_button_active | boolean  | Switch the "Row selection" button to ON at startup (default: false = uit)                                                                                                                                                         |
| undo_button             | boolean  | show/hide the "Undo" button (default: true)                                                                                                                                                                                       |
| goto_button             | boolean  | show/hide the "Go to" button (default: true)                                                                                                                                                                                      |
| help_button             | boolean  | show/hide the "?" button (default: true)                                                                                                                                                                                          |
| contextmenu             | function | Set a context menu at row/cell click<br><br>The contextmenu-object has to be define following this API: <a href="https://swisnl.github.io/jQuery-contextMenu/docs.html">https://swisnl.github.io/jQuery-contextMenu/docs.html</a> |
| menu                    | array    | Set a pulldown menu for a button in the tabelheader                                                                                                                                                                               |
| selected                | string   | Pre-select an item, in the list of items declared with the 'menu' setting.                                                                                                                                                        |
| keyup                   | function | Assign functions to keys at keyup event                                                                                                                                                                                           |
| keydown                 | function | Assign functions to keys at keydown event                                                                                                                                                                                         |
| draggable               | boolean  | Make a table draggable (default: true)                                                                                                                                                                                            |
| resizable               | boolean  | Make a table resizable (default: true)                                                                                                                                                                                            |

## oTableConfigurationList parameters

| Name           | Type     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| click          | function | Assign a function to be executed at cell click<br><br>click: function(t, n, e){}                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| dblclick       | function | Assign a function to be executed at cell doubleclick<br><br>dblclick: function(t, n, e){}                                                                                                                                                                                                                                                                                                                                                                                                                          |
| bgcolor        | string   | Assign a background color to a column. One can assign both a single or a pair of colors. Assigning only one color implies that Lex'it will have to compute automatically a second, complementary color, because different colors must be shown on even and odd rows, making the screen more readable. When assigning two color codes, those will be used for even resp. odd rows, and Lex'it won't need to compute a second color.<br><br>bgcolor: "grey"<br>bgcolor: "#123ABC"<br>bgcolor: ["#123ABC", "#456DEF"] |
| button         | string   | Put a button in a column, with the name specified as a parameter value.<br>Instead of setting a name, one can instead have the button use the column's textual context as a label. To achieve that, give this parameter an empty string as a value.<br><br>button: "Click me"                                                                                                                                                                                                                                      |
| button_tooltip | string   | Set a tooltip for a button, to be shown at mouseover.<br><br>button_tooltip: "some explanations..."                                                                                                                                                                                                                                                                                                                                                                                                                |
| cell_tooltip   | string   | Set a tooltip for a cell, to be shown at mouseover.<br><br>cell_tooltip: ""                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| choosefrom     | string   | Set the search box of a column to be a select-box. The values to choose from, can be given in two ways:<br>[1] as an empty array, in which case Lex'it will                                                                                                                                                                                                                                                                                                                                                        |

| Name              | Type   | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   |        | <p>gather the unique column values in the database to build the select box. E.g.:</p> <pre>choosefrom: []</pre> <p>[2] as an array of strings. Since the select box has "Please choose" as a first value, it must have an underlying neutral value too (which corresponds to the database search value for this select item). This neutral value must be given as the very first member of mentioned array; an empty string will do. E.g.:</p> <pre>choosefrom: ["", "1", "2", "3"]</pre> <p>in which "" is the underlying neutral search value corresponding to "Please choose".</p> |
| choosefrom_labels | object | <p>Set the labels for the items of a select box. This is to be used when the database returns technical sounding values to build the select box with, and one want to have human readable values instead to have the user choose from. Like:</p> <pre>choosefrom_labels: {"val1": "label1", "val2": "label2"}}</pre>                                                                                                                                                                                                                                                                  |
| class             | string | <p>Assign a CSS class to a column, so as to be able to assign styling properties. That is: classes declared in <code>css/lexit_table.css</code>. Lex'it has several default classes available, such as 'inlfont10pt' (to allow rendering of INL font in 10 pt), or 'inlfont' (this one has no font size specified).</p>                                                                                                                                                                                                                                                               |
| nice_name         | string | <p>Give a column having a technical sounding name, a human readable / user-friendly name.</p> <p>The list of column names can be retrieved by calling the Lex'it internal register function <code>mt.getListOfColumnsOf( t )</code>. But if one wants to get this list with all names converted in 'nice names' (when available), <code>fn.getListOfColumnsNiceNames( t )</code> is the function to be called instead.</p>                                                                                                                                                            |

| Name             | Type     | Description                                                                                                                                                                                                                                                                                                                                                |
|------------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| colsort          | string   | <p>If given as a setting for a column, the table will be sorted by this column right at initialization. The allowed values are 'asc', 'desc' or null (default).</p> <p>Beware: for multiple columns sorting, use the "columns_sorting" oTableSettingsList parameter instead.</p>                                                                           |
| contextmenu      | object   | <p>Set a context menu, to appear when right clicking a cell. The contextmenu-object has to be defined following this API: <a href="https://swisnl.github.io/jQuery-contextMenu/docs.html">https://swisnl.github.io/jQuery-contextMenu/docs.html</a></p>                                                                                                    |
| copy_upon_insert | object   | <p>If set to true, the Search&amp;Add action (in Search and Replace screen) will use this column's value for insertion. Columns having this parameter set to false will instead NOT have their value used at insert.</p>                                                                                                                                   |
| editable         | boolean  | <p>Set a column to be manually editable.</p> <p><b>BEWARE:</b> this parameter only works when the database table has a primary key defined.</p> <pre>editable: true</pre>                                                                                                                                                                                  |
| editcallback     | function | <p>Callback function to be executed right after a cell was manually edited.</p> <p>Beware: this is different from 'editfunc'. 'editfunc' is meant to modify the default behaviour of 'editable'. Instead 'editcallback' is executed as a final step, after 'editfunc'.</p> <pre>editcallback: function(t, n, newValue){     doSomething(newValue); }</pre> |
| editfunc         | function | <p>Set a custom function to process cell edition. By default, Lex'it would take the user input and update the corresponding database cell with it. 'editfunc' can be defined to have Lex'it this processed otherwise.</p> <pre>editfunc: function(t, n, newValue){     doSomething(newValue); }</pre>                                                      |
| editrefresh      | array    | <p>Set a list of tables to be refreshed was a cell was</p>                                                                                                                                                                                                                                                                                                 |

| Name             | Type     | Description                                                                                                                                                                                                                                                                                                             |
|------------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |          | edited. (deprecated)                                                                                                                                                                                                                                                                                                    |
| editpreprocess   | function | <p>Set a function to be applied to values entered when editing a cell. That way, a value can be modified upon edition, before it is inserted/updated in the database.</p> <pre>editpreprocess: function(value){   return value.replace(/thing/, ""); }</pre>                                                            |
| edittrigger      | string   | <p>As a kind of data validation, one can set a regex as a 'edittrigger'. When the user's textual input in a editable cell matches the regex, the 'editfunc' will be triggered; otherwise it won't. In the following example, we expect the entered value to contain a pipe (" ").</p> <pre>edittrigger: "\\ "</pre>     |
| editerrorhandler | function | <p>Handles to be executed as soon as an error occurs in an editable cell.</p> <pre>editerrorhandler: function(err){   console.log(err); }</pre>                                                                                                                                                                         |
| ellipsis         | boolean  | Set ellipsis on or off in a cell with textual content. The full content will only be shown at mouseover.                                                                                                                                                                                                                |
| ellipsis_delay   | integer  | <p>Set a delay for ellipsis to be activated. Setting some delay allows users to go with the mouse over ellipsis cell without immediately getting the full textual content shown. The text will only unwrapped when the mouse keeps on the cell beyond the set delay.</p> <pre>ellipsis: true, ellipsis_delay: 500</pre> |
| ellipsis_width   | string   | <p>'max-width' attribute for ellipsis.</p> <pre>ellipsis_width: (\$(window).width())*.33</pre>                                                                                                                                                                                                                          |
| ellipsis_height  | string   | <p>'max-height' attribute for ellipsis. When the cell content goes beyond this value, a scrollbar will be added to the ellipsis cell.</p> <pre>ellipsis_height: "200px"</pre>                                                                                                                                           |

| Name                             | Type     | Description                                                                                                                                                                                                                    |
|----------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ellipsis_unwrap                  | boolean  | When true, the textual content of cell will be unwrapped at mouseover; when false, it won't.                                                                                                                                   |
| ellipsis_keep_selected_unwrapped | boolean  | When true, an unwrapped ellipsis cell will remain open a mouseout; when false, it won't. Default: true.                                                                                                                        |
| filter                           | string   | Set a filter to be applied at initialization time. Beware: to keep the filter active afterwards, you'll need to set 'keepfilter':true.<br><br>filter: 567                                                                      |
| flexible_visibility              | boolean  | When 'false', a user won't be able to change the visibility setting of this column (this can be used when some info has to be kept hidden).<br><br>flexible_visibility: true                                                   |
| keepfilter                       | boolean  | When 'true', a filter (from parameter 'filter':...) will be reapplied when the Reset button is pressed.                                                                                                                        |
| searchable                       | boolean  | Set a column to be manually searchable (default: true).                                                                                                                                                                        |
| sortable                         | boolean  | Set a column to be manually sortable (default: true).                                                                                                                                                                          |
| searchform                       | function | Set a function to be applied to some filter value as soon as a search is started: this can be used to automatically replace some search terms by other, etc. to ensure a successful search.<br><br>Synonym: "searchpreprocess" |
| searchpreprocess                 | function | Set a function to be applied to some filter value as soon as a search is started: this can be used to automatically replace some search terms by other, etc. to ensure a successful search.<br><br>Synonym: "searchform"       |
| render                           | function | Modify the content of a text cell upon rendering. This function has no influence on the underlying data.<br><br>render: function(text){                                                                                        |

| Name       | Type    | Description                                                                                                                                                                                                                                                                                                  |
|------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|            |         | <pre>return text.toUpperCase() }</pre>                                                                                                                                                                                                                                                                       |
| textcolor  | string  | Set the font color in a column.                                                                                                                                                                                                                                                                              |
| textfont   | string  | Set the font-family in a column.                                                                                                                                                                                                                                                                             |
| textsize   | string  | Set the font-size in a column.                                                                                                                                                                                                                                                                               |
| textstyle  | string  | Set the font-style in a column.                                                                                                                                                                                                                                                                              |
| textweight | string  | Set the font-weight in a column.                                                                                                                                                                                                                                                                             |
| validator  | string  | <p>Set a key that HAS to be pressed when one uses a select menu in a cell. This can be convenient to prevent selecting an item by mistake when moving the mouse or so. Pressing the key indicates that one is selecting on purpose.</p> <pre>"some_column": {   editable: true,   validator: "shift" }</pre> |
| visible    | boolean | Set the visibility of a column. To prevent the user from modifying the default setting, set "flexible_visibility": false as well!                                                                                                                                                                            |
| width      | string  | Set the width of a column. This can be specified in 'px', or as a relative value (in '%' of the table width).                                                                                                                                                                                                |

## Assign rights to users

### Setting rights

Lex'it users have to be declared in two different files:

```
[1] /etc/tomcat/tomcat-user.xml
[2] /etc/lexit2_db_config/users_access.rights
```

In file **[1]** one sets the username/password (as usual in tomcat-users.xml) and one also need to assign the 'lexit\_access' role to the user as well, allowing him/her to access the application.

File **[2]** is more about specific project rights. Let's imagine we have a user called 'somebody' and a project called 'someproject'. If we want to grant that user reading rights to our project, we'll need to add the following line to file **[2]**:

```
somebody=someproject_read
```

Of course, it is possible to assign even more right: writing right, of even more: all rights, including deleting:

```
somebody=someproject_write
somebody=someproject_all
```

Since some users might need to have the same rights in all projects, it is also possible to declare super-readers or even super-users. The first one can read everything but can't edit, the second type is allowed to read, write and delete:

```
somebody=someproject_superuser
somebody=someproject_superuser
```

### Activating rights

Finally, the user rights need to be activated, whenever those were modified. To do so, go to the Lex'it main menu (that is: the lex'it link without the .../?db=projectname part. There, you'll need to click the 'reset user rights' link in the goodies.

Goodies en tools

[Login overzicht](#) : Overzicht actieve accounts (wordt om de 2 sec bijgewerkt)  
[Reset user rights](#) : Toegangsrechten resetten (klik alleen als het nodig is, geen speelgoed!)

If you don't activate the user rights, modifications to file **[2]** won't have any effect at all.

## The API

The API provides for functions to deal with different aspects of the tables. The most important are:

- The header
- The search boxes
- The table body (cells, rows, columns)
- Dialogs
- Functions and callbacks

The Lex'it API is built upon the native Datatables API, which means that not only the Lex'it functions but also all the native Datatables functions can be used.

The current Datatable API is described at: <https://datatables.net/reference/api/>

### First things first: open a table

A table can be opened the following way:

```
fn.callDatabase(tablename);
```

Of course, one can specify some filtering, and even give a callback to be executed as soon as the table is opened and initialized:

```
fn.callDatabase(tablename, {"somecolumn_name": value}, function(){
    // do something when table is open
} [, oExtraSettings]);
```

The `oExtraSettings` parameter is optional, but allows to set the position of a table, its view mode, its display length etc. from the very start. Here are the available parameters, all to be declared in an associative array:

| Parameter                    | Type    | Default value | Description                                                                                                                                                                                                                                                                          |
|------------------------------|---------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| pane                         | string  | all elements  | Elements to use in the rendering of the top pane. This string must consist of a combinations of letters symbolizing the needed functionalities, like: 'i' for table information summary, 'f' for filtering input, 'l' for length changing input control, 'p' for pagination control. |
| top                          | string  |               | Vertical position of the left upper corner of the table (px)                                                                                                                                                                                                                         |
| left                         | string  |               | Horizontal position of the left upper corner of the table (px)                                                                                                                                                                                                                       |
| viewtype                     | string  | table         | 'table' or 'form'                                                                                                                                                                                                                                                                    |
| displaylength                | int     | 10            | Number of rows to show at once in the table                                                                                                                                                                                                                                          |
| ignore_initialisaton_filters | boolean | false         | if true, the default filters (stated in config file) to be set at initialization time will be omitted                                                                                                                                                                                |

This function will open a table in the current tab. If one want to open a table in a new tab, it can be done as well:

```
fn.callDatabaseInNewTab(tablename, {"somecolumn_name": value}, oExtraSettings,  
projectName);
```

### Close a table

Of course, if we can open a table, we can close it too!

```
fn.closeTable(t, fnCallback);
```

## Project wide settings

### Setting a project title, background-color, font, etc.

Usually, the title shown in the Lex'it GUI is the content of the “name” parameter assigned to the project in file `/webapps/lexit2_config/projects_overview.js`. But if needed, it is possible to modify the title shown programmatically:

```
fn.setProjectTitle(sProjectName, sColor, sFontSize, sFontWeight);
```

A background color can be set for the screen:

```
fn.setBackgroundColor(sColor);
```

It is also possible to set a particular font, to be used project-wide (in tables, tooltips, etc)

```
setProjectFont(sFontFamily, sFontSize);
```

## Table global settings

### General settings

Is a table loaded?

Do you need to know programmatically if a table was loaded already? Do this:

```
if (fn.tableExists(t) ) { ... }
```

### Get the name of a table

One can retrieve the name of a table, given any piece of information about it (a cell or row node, or a API object instance):

```
var sTableName = fn.getTableName(mixed);
```

### View type

The Lex'it GUI gives two viewing type for table content: 'table' view or 'form' view. This is set manually by the user. Which mode is on, can be read by the following function:

```
var sViewMode = fn.getViewType(t);
if (sViewMode == 'form') {

    fn.message("OK", "You're viewing the table in form mode now!");
}
```

### Row selection

The Lex'it GUI has a 'row selection mode', that can be switched on or off by the user. When turned on, a user can click rows for selection without triggering function usually attached to rows (like editable, click, etc.). Check if this mode is on or off by calling:

```
fn.rowsSelectionIsAllowed(t);
```

### Is a table empty?

A reliable way of knowing programmatically if a query has returned any results, is by calling:

```
if (fn.tableIsEmpty(t) ){ ... }
```

### Table results count quality

Lex'it always tries to count the number of results as fast as possible. To do so, it will often choose to compute an estimated count instead of an exact count, which is much, much faster. However, this might sometimes not be convenient. If you need Lex'it to (always) return exact counts instead of (much faster) estimated counts, proceed this way:

```
oTableSettingsList = {
    "some_table": {
        "exact_count": true
    }
};
```

## Positioning

### Table absolute positioning

A user can set the position of a table by dragging it with the mouse, or one can set the absolute screen position programmatically:

```
Var oExtraSettings = {top: ..., left: ...};
fn.callDatabase(t, {"somecolumn": value}, fnCallback, oExtraSettings);
```

And of course one can read out the table position:

```
fn.getTablePosition(t);

// this returns an associative array like: {top: ..., left: ...}
```

It is also possible to center a table horizontally on the screen:

```
fn.centerTable(t);
```

### Table relative positioning

One can set the position of a table relatively to other tables. For example, one can align two tables horizontally, in such a way that those appear side to side:

```
fn.alignTables(t1, t2, fnCallback);
```

There also exist a vertical equivalent, allowing to put two tables on top of each other:

```
fn.pileupTables(t1, t2, fnCallback);
```

## Saving and retrieving settings

### Read the configuration settings

In the **My first project** section of this document, we saw that configuration is set in two main arrays, one for table wide configuration and one for column level configuration.

The *table wide* configuration can be retrieved by:

```
var oTableSettings = conf.getTableSettings(sTablename);
```

The *column level* configuration is to be retrieved by:

```
var oTableConfig = conf.getTableConfig(sTablename);
var oColumnConfig = conf.getColumnConfig(oTableConfig, sColumnName);
```

### Restore the configuration settings

```
fn.resetTable(sTableName, fnCallback);
```

### Save table extra settings (position etc.) for later re-use

Tables settings consist of its position ({top: ... left: ...}), its view type (table, form), its display length, its size.

When a table needs to be closed, and one wants to be able to re-open it with the very same settings (like screenposition, etc.), this is what needs to be done:

```
// save the table settings before closing your table:
var oExtraSettings = fn.getTableExtraSettings(sTablename)

// now close it
fn.closeTable(sTablename);

// do other cool stuff
// ...

// open the table again with the settings saved before:
fn.callDatabase(tablename, {"somecolumn_name": value}, function(){
    // do something when table is open
}, oExtraSettings);
```

### Save and restore table state

With table state, we mean: the active sorting columns, the active filters (=search values) applied to the table, and its display position (shown page). It is possible to save this table state and restore it later on:

```
// save current table state
fn.saveTableState(sTableName);

// do something else with the table
// ...

// restore the original state of the table
fn.restoreTableState(sTable)
```

## Tabel header

### Ways of setting header buttons

Usually, buttons are declared in the `oTableSettingsList`. Such buttons will be available in the GUI from initialization time:

```
oTableSettingsList:{
  "button_0": {
    "name": "put the button label here",
    "click": function(t){
      // do something
    }
  }
}
```

However, it is also possible to add buttons later on. In that case, the buttons name and behavior have to be set into an associative array, which can be given as an argument to the following function:

```
var oButtonConfig = {
  "name": "put the button label here",
  "click": function(t){
    // do something
  }
}
fn.addCustomButton(sSomeTableName, oButtonConfig);
```

### Add a SELECT button

Give the button a `name` and define the options of the select menu by giving up each option name as a key, and its behavior as a function (with the table variable as a parameter):

```
"button_0": {
  "name": "Name of the button",
  "menu": {
    "option name 1": function(t){
      // do something cool here
    },
    "option name 2": function(t){
      // do something else here
    },
    // if needed, set option to be selected by default
    "selected": "option name 2"
  }
}
```

### Implement a button for row duplication

Row duplication can be implemented in a generic way by using the Lex'it native function `fn.duplicateRecord(sSomeTable, aListOfColumnsToSkip, primaryKeySubstitute, primaryKeyValue, fnCallback)`.

Duplicating a row doesn't necessarily imply duplication of each column of that row: some columns need to be skipped (like the primary key, obviously). Columns excluded from duplication can be declared in an array (`aListOfColumnsToSkip`).

Of course, one need to tell the function which rows has to be duplicated. That's where the parameters `primaryKeySubstitute` and `primaryKeyValue` come into action. If the table has a primary key set in Postgres already, `primaryKeySubstitute` can be left empty (null) and one only needs to specify the row id in the `primaryKeyValue` parameter. But if the table hasn't any primary key, one must specify a column that can act as such: its name can be given in the `primaryKeySubstitute` parameter:

```
"button_0": {
  "name": "Duplicate row",
  "click": function(t){
    var nRow = fn.getFirstSelectedRowNodeFrom(t);
    var iCounter = fn.getDataFromCellInRowNode(nRow, "counter");

    fn.duplicateRecord(t, null, null, iCounter, function(response){

      // arg #2 with null value means we won't skip any field (t.i. the whole
      row with all its cells will be duplicated, except the primary key of course)

      // arg #3 with null value means we rely on the primary key ('counter'), so
      we don't need to declared some other serial typed column to act as such
      (which is needed when a table lacks a primary key)

      fn.refreshTable(t, function(){
        fn.message("New row", "The duplicated row has
          id counter="+response);
      });
    });
  },
},
```

### Click on a button programmatically

This can be done by calling this function, specifying the table and the button id in the DOM tree:

```
fn.clickOnButton(sTableName, sButtonId)
```

### Modify the name/style of a button programmatically

Normally, the name of a button is set in the table declaration in the configuration file. But it might be convenient to be able to change the name of a button. For example, if a button is used to turn on a function, it might be convenient if the button label 'says' that the function is on, etc. That can be done by calling this function:

```
fn.setCustomButtonName(sTableName, iButtonNumber, sNewName);
```

The same can be achieved for the button style:

```
fn.setCustomButtonCss(sTableName, iButtonNumber, sProperty, sNewValue);
```

If one wants to read the current style of a button, one should call:

```
fn.getCustomButtonCss (sTableName, iButtonNumber, sProperty);
```

Finally, the index of a button with a given name (or the other way round) can be retrieved with:

```
fn.getIndexOfButtonNamed(sTableName, sName);  
fn.getNameOfButtonAtIndex(sTableName, iIndex);
```

## Filters & search boxes in the GUI

One can programmatically change the content of a search box, or read what's inside.

First, the search boxes can be reset by:

```
fn.resetAllFilters(sSomeTable, true);
```

And search values can be put into the search boxes by doing the following:

```
fn.putDataIntoFilterBox(sSomeTable, sSomeColumn, sSomeValue);
```

But that will only set the content of the search boxes in the GUI, allowing you to edit this content before starting a search. That means that before a search is started, the engine is NOT set with these search values yet. If you wish to set the engine as well, do this instead:

```
fn.setFilters(sSomeTable, {"column1": value1, "column2": value2}, true);  
  
// The last parameter 'true' tells the function to put the search values in the  
// search boxes in the GUI as well.  
// If set to 'false' instead, the engine will be set but the search boxes in the  
// GUI won't change.
```

The filter behind the 'Search whole table' field can be set too:

```
fn.setGlobalFilter(sTable, sSearchTerm);
```

The above example operates **both** on the search engine as on the search boxes (updating the search boxes is actually the meaning of the 'true' value; set the filters silently with 'false' instead).

The filters currently active in the search engine can be retrieved by:

```
var aSearchFilters = fn.getFilters(sSomeTable);
```

This function, however, has no access to the search boxes of the GUI.  
But their content can be programmatically read by doing the following:

```
var searchBoxValue = fn.getValueOfFilterBox(sSomeTable, sColumnName);
```

And if needed, its type can be retrieved too. The following function will return 'checkbox', 'select' or 'text':

```
var searchBoxType = fn.getTypeOfFilterBox(sSomeTablename, sColumnName);

if (searchBoxType == 'select') {
    fn.message("Info", "You just click on a select box");
}
```

### Modify a user's search query programmatically, before search is fired

Sometimes search queries require some pre-processing before the search effectively starts. Because of the necessity to meet the data format in the database, for example.

Let's say we have a table containing a list of lemmata containing some diacritics (é, à, ü, etc.) coded as html-entities: searching for a lemma containing a -é- will fail, because the -é- of the search query won't match the equivalent html-entity (t.i. &eacute;). To solve that, one can set a 'searchform' in the table configuration:

```
"lemma": {
    "editable": true,
    "searchform": function(value){
        value = value.replace("é", "&eacute;");
        value = ...
        return value;
    }
}
```

In the example here above, the 'searchform' parameter makes sure that diacritics occurring in the search term of column 'lemma' are automatically re-written into corresponding html entities.

### Modifying the filter silently (that is: without modifying the search boxes)

Filters can be all erased silently (despite the search boxes being filled in!):

```
fn. clearAllFilters(t);
```

To add filters to the table, do:

```
fn.addFilters(t, {"column_name1": val1, "column_name2": val2});
```

The command hereabove won't change the existing filters on other columns. If you need to erase all pre-existing filters, do instead:

```
fn.setFilters(t, {"column_name1": val1, "column_name2": val2});
```

## Query builder

Lex'it offers query building help, that is: when one strikes the CTRL key when clicking into a search box, a query builder popup opens.

Out-of-the box, the query build gathers the most frequent values of a column and allows to build a query with a selection of those values, combined in a single regular expression. Additionally, one can require exact matching, or negative matching (that is, excluding what matches from the results).

This process can be fine-tuned with some configuration:

The `query_builder_settings` parameter can be used to declare some settings as an associative array:

| Parameter name           | Default value               | Effect                                                                                                                                                                                                          |
|--------------------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>grid</code>        | Boolean: <code>false</code> | Way of rendering the values to choose from:<br>If <code>false</code> , show the values as a list.<br>If <code>true</code> , show those as a grid.                                                               |
| <code>preselected</code> | Empty array                 | List of pre-selected values, to be marked as chosen right from the start                                                                                                                                        |
| <code>autostart</code>   | Boolean: <code>true</code>  | Behaviour after some query was built:<br>If <code>true</code> , start the search as soon as OK is clicked.<br>If <code>false</code> : the user will have to start the search manually (by pressing ENTER or so) |

With the `query_builder_values` parameter, one can declare an associative array of search terms (keys) and the string into which those must be converted (values), ensuring a successful search.

Finally the `query_builder_processor` parameter can host a function, allowing to process the query built in the query builder in any way not supported by the default parameters or settings. The function takes the query as input string, and gives the modified query back as output string.

## Table-body

### Some basic cell configuration

If a cell is just supposed to be displayed, not configuration is needed. It will be displayed, that's all.

If you need a cell to be editable, that needs to be set:

```
tablename: {
  cellname: {
    editable: true
  }
}
```

Note that editing a cell value is usually only possible when the database table has a primary key. Lex'it will detect that automatically and will be able to update the right row/cell.

If the database table doesn't have a primary key, and it's for some reason not possible to assign any, you'll have to design a custom update function, telling Lex'it which cells must be taken as a row-reference: without it, Lex'it just can't know where to operate!

```
tablename: {
  cellname: {
    editable: true,
    editfunc: function(t, nRow, value){
      // let's say we've got row IDs stored in 'id_column'
      var sRowId = fn.getDataFromSiblingNode(nRow, "id_column");
      // do the update programmatically:
      fn.updateTableGivenFieldValues(t,
        {"id_column": sRowId }, // point to this row!
        {" cellname": value},    // assign value entered by user
      );
    }
  }
}
```

There might be other reasons for doing updates programmatically, for example because you just need all kind of custom stuff to happen. For example you want the entered value to be modified in some way before sending it to the database. In this example, we assume that the table does have a primary key, so we'll be updating given a row node:

```
tablename: {
  cellname: {
    editable: true,
    editfunc: function(t, nRow, value){
```

## Lex'it HowTo

```
// do something with the value entered by the user

value = value.replace( ... );

// do the update programmatically:

fn.updateTableeGivenANode(n, // point to the row of this cell node!
    {" cellname": value},    // assign the (modified) value
);
    }
}
```

Note that this can be achieved with less code, since Lex'it does have a 'editpreprocess' parameter. So the following code should do exactly the same thing:

```
tablename: {
    cellname: {
        editable: true,
        editpreprocess: function(value){
            return value.replace( ... );
        }
    }
}
```

## Dealing with rows

### Get the first row

```
var nRow = fn.getFirstRowNodeFrom(t);
fn.message("OK", "The very first row has ID "+ nRow.id );
```

### Which row is now active?

```
var nRow = fn.getActiveRowNode(t);
fn.message("OK", "You're just clicked row ID "+ nRow.id );
```

### Get the row before/after any other row

```
var nPrecedingRow = fn.getPreviousRowNode(nAnyRow);

var nNextRow = fn. getNextRowNode(nAnyRow);
```

### Which row is now selected? At which index?

```
var nRow = fn.getFirstSelectedRowNodeFrom(t);
fn.message("OK", "The ID of the currently selected row is "+ nRow.id );

var iRowNumber = fn.getIndexOfFirstSelectedRowNodeFrom(t);
fn.message("OK", "Row number"+ iRowNumber + "is currently selected";
```

### How many rows are now selected?

```
var iNumberOfSelectedRows = fn.getNumberOfSelectedRowNodes(t);
```

### How many rows are now visible on screen?

```
var iNumberOfVisibleRows = fn.getNumberOfVisibleRows(t);
```

### Iterating over rows

This can be done two ways, depending on the type of object:

```
// iterating over row nodes
$(aRows).each(function(){
    ...
});

// iterating over rows in a DataTables instance
oRows.every(function(){
    ...
});
```

### Get total number of rows

```
// in whole table
t.page.info().recordsTotal;

// displayed on screen
t.rows().count();
```

### Get the index of a row (row-number)

```
// get the (0-based) number of a row node on the screen, that is: the row number
within current display range
var iRowNr = fn.getRowNodeNumberOnScreen(nRow);

// get the number of a row node (0-based), that is: its index within the set of ALL
database rows
var iRowNr = fn.getRowNodeIndex(nRow);
```

### Get all visible rows

One can get all visible rows of a table (so as to perform some operation with those) by using

`fn.getAllRowNodes(t):`

```
var aRows = fn.getAllRowNodes(t);
var aApprovedRows = new Array();

$(aRows).each(function(){
    var thisRow = this;
```

## Lex'it HowTo

```
var bApproved = fn.getDataFromCellInRowNode(thisRow, "approved");
var sId = fn.getDataFromCellInRowNode(thisRow, "id");

if (bApproved == 't' || bApproved == true){

    aApprovedRows.push(sId);
}
```

### Get all visible rows meeting some filters

One can select all rows, given some values expected in some given columns. The result is an array that can be used the same way as the result set of `fn.getAllRowNodes(t):`

```
var aRows = fn.getAllRowNodesWhere(t, {"col1": value1, "col2": value2});

$(aRows).each(function(){

    // do something
})
```

### Select or unselect row programmatically

Rows can be selected or unselected one at the time...

```
// give a row node
fn.selectRowNode(nRow);
fn.unselectRowNode(nRow);

// or given a table and a row number
fn.selectRowNode(sTableName, iRowNumber);
fn.unselectRowNode(sTableName, iRowNumber);
```

...or all at once:

```
fn.unselectAllRowNodes(sTableName);
```

## Dealing with cells

Get a cell and its type, given a row node and a column name

```
var nCell = fn.getCellInRowNode(nRow, sColumnName);

var sCellType = fn.getCellNodeType(nRow, sColumnName);
// this function returns 'text', 'checkbox', 'selectbox' or 'unknown'
```

## Assign a mouse event to a cell

To assign a mouse event (`click`, `dblclick`, `mouseenter`, `mouseleave`, ...) to a cell, just use it as a parameter name in the cell configuration:

```
"tablename": {
  "columnname": {
    "click": function(t, n){
      // do something
    }
  }
}
```

## Assign a mouse event to an element in a cell

Let's imagine we've got cells containing not only text data, but also some clickable icons for calling some functions. If a cell only contains an icon, there is no problem at all: the icon click event will be caught as a cell click event, since the icon is part of a cell.

But if a cell contains both text AND some icon at the same time, we do have a challenge. Since Lex'it attaches mouse event to cells, it is primarily impossible to assign a function to only *a part* of a cell, like a clickable icon from our example.

One way to solve this, is retrieving the true target of the click event, as soon as it is caught as a cell click event. The event variable can be retrieved as a 3<sup>rd</sup> function parameter, after the usual parameter `t` and `n`:

```
"tablename": {
  "columnname": {
    "click": function(t, n, e) { ... }
  }
}
```

Let's say our icon is implemented in our text cells as button with classname 'hello'. We can verify if the icon was clicked the following way:

```
"tablename": {
  "columnname": {
    "click": function(t, n, e){
      var bIconClicked = $(e.target).is("button") &&
        $(e.target).hasClass("hello");

      if (bIconClicked){
        console.log("the icon was clicked!");
      }
    }
  }
}
```

### Highlighting data in cells

Selected parts of the cell textual content can be highlighted. This is especially handy to show that some text has been selected or so.

Let's say some words were selected in a cell. The onsets and offsets of the selected words can easily be retrieved (see section **Read data / Read selected text in cell**).

The onsets/offsets must be put into an array, and given to the `fn.getHighlight` function as a parameter so as to highlight the words:

```
tablename: {
  columnname: {
    "click": function(t, n, e){
      // get the full text content of the cell
      var sText = fn.getDataFromSiblingNode(nRow, sColumnName);

      // get the selected text
      var oSelection = fn.getSelectedTextInNode(n);

      // extract the onset/offset of the selected text
      var iStart = oSelection.start;
      var iEnd = oSelection.end;
      var aOnsetsOffsets = [ [iStart, iEnd] ];

      // apply highlighting between this onset/offset
      var sHighlightText = fn.getHighlight(sText, aOnsetsOffsets, sColor);

      // put the highlighted text back into the cell
      fn.putDataIntoCellNode(nRow, sColumnName, sHighlightText);
    }
  }
}
```

Highlighting can be removed too:

```
// get the text content of a cell
var sText = fn.getDataFromSiblingNode(nRow, sColumnName);

// remove the highlighting
var sCleanText = fn.removeHighlight(sText);

// put the cleaned up text back into the cell
fn.putDataIntoCellNode(nRow, sColumnName, sCleanText);
```

### Sorting data

Normally, a table is sorted from the configuration by setting the `column_sorting` parameter. But it is possible to change the way a table is sorted programmatically afterwards:

```
fn.setSorting(sTablename, {"column1": "asc", "column2": "desc", etc.});
```

And it is possible to retrieve information about the way a table is sorted as well.

Here is how to get the sorting columns of a table, in priority order:

```
var aColumnNames = fn.getSortingColumns(sTablename);
```

And the sorting direction of the columns, in the same order:

```
var aSortDir = fn.getSortingDirections(sTablename);
```

## Read data

### Read text from cells, columns, of rows

Given a cell node or a row node, one can read data from that node or its siblings by calling the following functions:

```
// get data from a cell, given a cell node
var sData = fn.getDataFromCellNode(nCell);

// get data from a cell, given its name and the row node it belongs to
var sData = fn.getDataFromCellInRowNode(nRow, sColumnName);

// get data from a cell, given its name and the node of another cell
// (this is typically the type of function to call when one has
// clicked some cell and we want to know the corresponding row ID, which
// is stored in other column of the same row)
var sData = fn.getDataFromSiblingNode(nCell, sOtherColumnName);
```

A particular case is that of checkboxes. Some function makes sure their value is read in a reliable way:

```
var bTrueOrFalse = fn.getCheckboxValue(nCell);
```

It is also possible to get the data of all cells of a column, by specifying its name:

```
var aData = fn.getDataFromColumn(sSomeTable, sColumnName);
```

The functions here above are about reading data from screen. But one can also read a row straight from the database without displaying it. The result is stored into an associative array. Which function to use depends on the data at your disposal (an row ID or some other field value to match):

```
var oRow = fn.getRecord(sSomeTablename, sRecordId, fnCallback, fnErrorHandler);

var oRow = fn.getRecordGivenFieldValues(sSomeTablename, {"column": valuetomatch},
fnCallback, fnErrorHandler);
```

### Read selected text in cell

If one selects some text in a cell (by highlighting it just like in a Word document or such), that can be detected. Typically, this to be implemented as a click event on a column. For example:

```
tablename: {
    columnname: {
        "click": function(t, n, e){
            var oSelection = fn.getSelectedTextInNode(n);

            var sText = oSelection.text;
            var iStart = oSelection.start;
            var iEnd = oSelection.end;

            fn.message("Info", "You selected the text "+sText+" starting
                at index "+iStart+" and finishing at index "+iEnd);
        }
    }
}
```

A special case is selecting by clicking onto a word. In that can the word might not be highlighted, but Lex'it can automatically search for the edges (begin, end) of the word clicked upon and return its full string:

```
tablename: {
    columnname: {
        "click": function(t, n, e){
            var oSelection = fn.getWordClickedUponInNode(n);

            var sWord = oSelection.text;
            var iStart = oSelection.start;
            var iEnd = oSelection.end;

            fn.message("Info", "You clicked the word "+sWord+" starting
                at index "+iStart+" and finishing at index "+iEnd);
        }
    }
}
```

### Read id's of rows

Id's of rows on screen can be read by calling this function:

```
fn.getIdFromDatabase(sSomeTablename, {"column": valuetomatch}, fnCallback,
fnErrorHandler);
```

## Write data

### Write data in editable cells

There are two main different ways of writing data into cells.

- The first one is about putting data into screen cells, without modifying the underlying database. Such an operation can be convenient for modifying the text format (eg. adding some style).
- The second one is about putting data into the database, without modifying the screen cells. If the screen cells need are visible at the time of writing into the database, one can reflect the changes by refreshing the table (`fn.refreshTable`).

Putting some content into screen cells is taken care of by this function:

```
fn.putDataIntoCellNode(nRow, sColumnName, sContent);
```

For checkboxes, some special functions are needed:

```
fn.toggleCheckbox(nRow, sColumnName, fnCallback);
fn.uncheckCheckboxes(nMixed, aListOfColumns, fnCallback);
```

### Sending data to the database

Writing into the database is taken care of by the following set of functions. Here is how to insert data. Only the first two sets of parameters are compulsory:

```
fn.insertIntoDatabase(sSomeTablename, {"column1": newvalue1, "column2": newvalue2},
returnField, fnCallback, fnErrorHandler);
```

We can update the following way. Which function to use depends on the reference data one has at one's disposal, a node or some field values:

```
fn.updateDatabaseGivenANode(nMixed, {"column": newvalue}, fnCallback,
fnErrorHandler);

fn.updateDatabaseGivenFieldValues(sSomeTablename, {"column1": valuetomatch,
"column2": othervaluetomatch}, {"column1": newvalue1, "column2": newvalue2},
fnCallback, fnErrorHandler);
```

### Context menus in cells or rows

Context menus can be set on any cells of a table. So do so, two things need to be set: a list of menu items, and a callback which will perform actions assigned to the items of the context menu items.

Here is a simple example: we set a context menu on column/cell 'lemma'. When clicked upon with the mouse context menu button, the user is given a menu with two items to choose from:

[1] show the paradigm of the lemma or [2] open the dictionary article of that lemma

```



```

**Note:** if the “name” of an item needs some html (like “<B>” etc.), make sure to add “isHtmlName”: true, like this:

```

items": {
  // here we set keys to which user friendly names
  // are assigned
  wordform": {"name": "Show <B>wordforms</B>",
    "isHtmlName": true}
}

```

**Note:** context menus in Lex'it are implemented with the plugin ‘jQuery contextMenu’. Items can be defined following the native API of that plugin, which allows for more than is described here (<https://swisnl.github.io/jQuery-contextMenu/docs.html>).

### Refreshing a table, or only single rows

If one wants to make sure that the screen rows reflect the current content of the database, one can call the `fn.refreshTable()` function. For sake of speed, Lex'it won't necessarily return an exact table count: an approximate table count is much faster to get, and mostly good enough for paging aims. In case in which an exact count is required, do the following:

## Lex'it HowTo

```
fn.forceExactCount(); // now Lex'it knows the next refreshTable call must be exact!
fn.refreshTable(t);
```

The same can also be done for a single row, for example when one expects only that row to have changed. The advantage of refreshing only one row (instead of the whole table) is obviously speed, since sorting and such don't apply to a single row:

```
fn.callRecord(nRow, aColumnsToUpdate, fnCallback, fnErrorHandler)
```

## Remove data

### Remove a row

A row can be removed by calling one of the following functions, depending on the data at one's disposal, a row or some particular field values:

```
fn.removeFromDatabaseGivenANode(nRow, fnCallback, fnErrorHandler);

fn.removeFromDatabaseGivenFieldValues(sSomeTablename, {"column1": value1,
"column2": value2}, fnCallback, fnErrorHandler);
```

## Implement an autocomplete in an editable cell

When one wants to get suggestions when typing some data in a cell, an autocomplete function has to be implemented. First we need a database function to provide the data to choose from:

```
CREATE OR REPLACE FUNCTION api.get_lemmata(text)
  RETURNS text AS
$BODY$
  SELECT string_agg( modern_lemma || '/' || lemma_gigpos || ':' || lemma_id ,
'|') -- output (=suggestions) must be pipe separated
  FROM (
    SELECT modern_lemma, lemma_gigpos, lemma_id
    FROM lemmata
    WHERE modern_lemma ~* ('^'||$1)
    ORDER BY modern_lemma
    LIMIT 10
  ) x;
$BODY$
LANGUAGE sql VOLATILE
COST 100;
```

When we've got that, implementing the autocomplete is easy:

```
fn.setAutoComplete("someTable", "correction", false, "api.get_lemmata");
```

This will implement an autocomplete in table 'someTable', column 'correction', and the suggestions will be provided by the database function 'api.get\_lemmata'.

Beware: some functions might issue other separators. Those can be specified with two additional parameters, `sPrimarySeparator` and `sSecondarySeparatoropt`:

```
fn.setAutoComplete("someTable", "correction", false, "api.get_lemmata",  
sPrimarySeparator, sSecondarySeparator);
```

By default, the autocomplete expects two things before getting active:

- \* it requires an input length of 2 chars
- \* and it will wait 750 milliseconds after the last key strike (which allows the user to type several chars without triggering the autocomplete, as it will start working only after the delay following the last key strike)

The default values of these parameters can be modified thanks to two extra function parameters, `iMinLength` and `iDelay`:

```
fn.setAutoComplete("someTable", "correction", false, "api.get_lemmata",  
sPrimarySeparator, sSecondarySeparator, iMinLength, iDelay);
```

### Wild cards in columns configuration

If one wants to assign some setting to lots of columns at once, one can use wild cards. If the setting must NOT apply to some columns, just add explicit configuration for those columns: explicit configuration will win over wildcards!

```
"*": {  
  parameter: value  
},  
"some_column": {  
  parameter: other_value  
}
```

### Navigate programmatically

One can go to the previous or the next page of a table by calling these functions:

```
fn.goToPreviousPage(sSomeTable);  
fn.goToNextPage(sSomeTable) ;
```

Navigating to a particular page, given some cell value to be found on that page, so done by:

```
fn.goToTheRightPage(sSomeTable, sColumnName, sColumnValue);
```

If one needs this function to trigger some callback after completion, one should use the `fn.addDrawCallback()` function, which is recommended for any function lacking a callback function parameter:

```
// set the callback in advance  
fn.addDrawCallback(t, function(){  
    // do something  
});  
  
// call the function, and the callback will be called afterwards  
fn.goToTheRightPage(t, sColumnName, sColumnValue);
```

## Callbacks

### Table callbacks

Typically, table callbacks have to be set in the `oTableSettingsList`.

For several stages of the tables rendering, one can set callbacks. For example, let's say one wants to change the color of some cells or rows when those meet some constraint. One will have to declare a callback function in the following way:

```
Tablename: {
    "callback": function(t){
        var oRows = fx.getAllRows(t);
        oRows.every(function(){
            var nCellSelector =
                $( fx.getNode(oThisRow) ).find("td");
            if (some constraint) {
                nCellSelector.find("input").css("color", "green");
            }
        });
    },
    "repeat_callback": true
}
```

The `repeat_callback` part makes sure that the callback is not called only once (say: at table initialization) but always now and in the future, at every new table draw event. Of course, leaving out the `repeat_callback` part is the way to set a initialization callback.

Next to the draw callback, have callbacks targeting other events like clicking the reset or close button: `prereset_callback`, `close_callback`. Those callbacks must be declared the same way as above (though the `repeat_callback` part won't be needed there):

```
Tablename: {
    "prereset_callback": function(t){
        // do something upon reset, but before table is called
    }
}
```

Some callback can also be called when some user closes a table:

```
Tablename: {
    "close_callback": function(t){
        // do something when table is closed
    }
}
```

One can also set a pre-initialization callback. This can be used to carry out any task that needs to be done before the database is loaded.

```
Tablename: {  
    "preinit_callback": function(t){  
        // do something before the table is loaded  
    }  
}
```

### Function callbacks

Lots of Lex'it functions allow a callback to be given as an argument. That way, Lex'it will wait till the function is fully executed before executing the code given as a callback.

```
fn.callDatabase(t, ..., function(){  
    // some code for your callback  
});
```

Sadly, for multiple reasons, some function lack the possibility to give a callback as an argument. But in many cases, we have a workaround: set a so called 'draw callback'. That is a function to be called as soon as the table is redrawn, for example when browsing the table or refreshing it.

The following declares a draw callback for table `t`. Note that this works only once. As soon as this callback was called once, it won't be called again.

```
fn.addDrawCallback(t, function(){  
    // do something here  
});
```

## Updating a table configuration after initialization

Updating a table configuration can be done by calling the `conf.changeTableConfigValue` function. For example, if one wants to assign a function to a click event on column 'some\_column' in table 'some\_table', one should write:

```
conf.changeTableConfigValue("some_table", "some_column",
    "click", function(){
        do something();
    }
);

// reset the table filters afterwards, taking the new setting into account
fn.resetAllFilters("some_table", true);

// see the result
Fn.refreshTable("some table");
```

Some modifications in the configuration require a table to be removed from the screen to be able to update it. Modified columns visibility settings is such a situation. In such a case, one needs to destroy the table, modify the settings and call the table again. Schematically:

```
// first destroy the table (on screen)
tb.destroyTable("some_table", function(){

    // modify the configuration
    conf.changeTableConfigValue( ... );

    // call the table back
    fn.callDatabase(("some_table", ... )
});
```

Some complications can occur when more tables are open and visible on screen at the same time. That is: destroying a table and calling it again will cause that table to be appended at the bottom of the screen, underneath all other tables. If this table was (before destruction) first on top of the other tables, the users might get confused as the table now reappears at the bottom when it is called again.

To solve this particular problem, one should read the table position before destruction, and re-apply the table position to the table when it is called (and shown) again. Fortunately, it is quite easy to do. Read the position with `fn.getTablePosition` and give the result as a fourth argument to the `fn.callDatabase` function:

```
tb.destroyTable("some_table", function(){

    // read the table position
    var oPosition = fn.getTablePosition(t);
    conf.changeTableConfigValue( ... );

    // apply the table position
    fn.callDatabase(("some_table", oSomeFilters, function(){}), oPosition );
});
```

At last, it might be convenient to get rid of some configuration value. Changing a value was done by calling `conf.changeTableConfigValue`, as we saw above. Getting rid of a value must happen like this:

```
conf.removeTableConfigValue("some_table", "some_column", "setting_name");  
// setting_name is now removed from the configuration and will act default
```

### Error handlers

Error handlers can be set in different ways: in the configuration of a column, or as a function parameter:

#### Table columns error handlers

When a column is `editable`, just add a `editerrorhandler` key with some handler as a value:

```
"editable": true,  
"editerrorhandler": function(jqXHR, textStatus, errorThrown){  
    fn.message("Error!", "Something went wrong! More info:"+  
        JSON.stringify( err["jqXHR"] ) )  
    };  
},
```

#### Function error handlers

Quite some functions allow for a custom error handler to be declared as an argument.

The error handler is to be called with one argument:

```
fn.callFunction(sFunctionName, [...], function(response){...}, function(errorInfo){...});
```

...where `errorInfo` is an object containing at least the following keys, giving access to extra info in the corresponding values:

```
errorInfo = {  
    "jqXHR": ..., "textStatus": ..., "errorThrown": ...,  
    "lexit_function": "fn.callFunction"  
}
```

The `"lexit_function"` key indicates which function caused the error.

### Show a clean error message, when the database threw an exception

The SQL database can throw an exception for various reasons. One can be that some operation performed in the Lex'it GUI caused a database integrity issue (like constraint violation or so). Another reason can be, that some function raises an exception when some unwanted situation occurs, as defined in the function body.

In both cases, the exception will cause a malfunction in the Lex'it webservice, leading the Lex'it GUI to receive a HTTP 500 error, which will be displayed in a dialog.

Though informative for a developer, such a dialog is not very helpful for the average Lex'it editor. She or he will only need a clear message telling what she/he did wrong. To achieve that, the most logical solution is to generate an error message at the very location where the error occurred: in the SQL function that raised the exception.

That generally looks like this:

```
CREATE OR REPLACE FUNCTION some_function()
  RETURNS trigger
  LANGUAGE 'plpgsql'
  COST 100
  VOLATILE NOT LEAKPROOF
AS $BODY$
DECLARE
BEGIN
...

IF (some condition to be met) THEN
  RAISE EXCEPTION 'The thing you tried is not allowed.
    Do that instead.';
END IF;

...
END;
$BODY$;
```

When the exception is raised, the Lex'it GUI shows a dialog with the full server error response (a long HTTP 500 error message, as we already said). This response will contain the exception text issues by the SQL function, but since it's surrounded by a lot of other technical details, it won't stand out and won't be seen by the user.

Solving that is very easy: put the text of the exception between <lexit> tags. When the Lex'it GUI finds those, it cuts that out of the very long server response and only displays that! The result is a clean, readable and relevant error message!

```
...

IF (some condition to be met) THEN
  RAISE EXCEPTION '<lexit>The thing you tried is not allowed.
    Do that instead.</lexit>';
END IF;

...
```

## Dialogs

### Classic dialogs

Lex'it support several kinds of dialogs:

The classic JavaScript functions `alert()` and `confirm()` have their Lex'it equivalents, provided with some callbacks:

```
fn.message(sTitle, sMessage, fnFunction)

fn.confirm(sTitle, sMessage, fnFunction, fnCancelFunction)
```

The callbacks of these (and the following functions) can process the response:

```
fn.confirm(sTitle, sMessage, function(resp){
    var answer = resp;
});
```

### Entering data in a dialog

#### Data to be typed in

Lex'it has some more functions meant to prompt the user to enter information.

The first of those functions – `fn.prompt()` – displays a dialog in which the user is asked to fill in some fields. The field labels and corresponding default values (most of the time an empty value) must be given as separate arrays.

```
var aFieldNames = ["first name", "last name"];
var aValues = ["", ""];

fn.prompt(sTitle, aFieldNames, aValues, fnFunction, fnCancelFunction, bTextarea,
aColsAndRows)
```

Fields can be of different types. Given the format of the values, Lex'it will adapt automatically:

- if a value is an array, Lex'it will display a select-box
- if a value is a Boolean, Lex'it will display a checkbox
- if a value is a string of a number, Lex'it will display a text field

Some particularities:

- In case of a select-box, a value to be selected by default must have the string `'::selected'` attached.
- To disable a field (allowing the user to see its default value, without being able to change it), its value must have the string `'::disabled'` attached.
- If one wants a datepicker, attach the string `'::datepicker'` to the field value.
- If a field must be a textarea, just attach the `'::textarea'` string to its value.

```
var aFieldNames = ["name", "gender", "employed"];
var aValues = [ "",
                ["male::selected", "female", "other"],
                true
              ];

fn.prompt(sTitle, aFieldNames, aValues, fnFunction, fnCancelFunction [, bTextarea,
aColsAndRows])
```

### Data to be chosen out of a list of items

The second type of function displays a dialog in which the user is asked to select one or more items.

The items to choose from must be given as an array list, and if some value(s) must be pre-selected, that can be specified in another array:

```
var aAllOptions = ["nike", "addidas", "other"];
var aAlreadyChosen = ["other"]; // pre-selected

fn.promptSelect(sTitle, aAllOptions, aAlreadyChosen, fnFunction, fnCancelFunction,
mSelectionMode);
```

We have to pay attention to the `mSelectionMode` parameter. Note his Hungarian notation prefix `m` indicates it can have various types:

\* It can be a Boolean. When true, the dialog will be closed as soon as an item is clicked. When false, the dialog will remain open, allowing a 'multiple choice' selection.

```
fn.promptSelect(sTitle, ["item 1", "item 2"], [],
function(aChoice){
    // a choice was made, do something with it now
},
function(){
    fn.message("OK", "Operation cancelled by the user.");
},
true // click is choosing, as the dialog will close directly upon click!
);
```

\* It can be a function. This entails the same behavior as false, and the function is executed as a callback, with the selected options as function parameter.

```
fn.promptSelect(sTitle, ["item 1", "item 2"], [],
function(aChoice){
    // a choice was made, do something with it now
},
function(){
    fn.message("OK", "Operation cancelled by the user.");
},
function(selectedText){
    // do something when the item specified in selectedText
    // is clicked, like giving extra info etc.
}
);
```

### Data to be sorted

The third type of function displays a list of items to be sorted. It comes with a help function to process the response:

```
fn.promptReorder(sTitle, aArrayToResort, function(){
    var aNewOrderIdx = fn.getPromptBoxOrder();
    var aResortedArray = fn.processPromptBoxOrder(aPromptBoxOrder, aArrayToResort);
}, fnCancelFunction);
```

### Menu dialog

A special type of dialog is 'askToChoose', which asks the user to make some choice, which will automatically triggers a function assigned to that particular choice:

```
var oOptions = {
    "choice 1": function(){ // do something },
    "choice 2": function(){ // do something else }
};


fn.askToChoose(sTitle, sMessage, oOptions);
```

**Note that this functionality is also available in `fn.promptSelect(...)`, when using its `mSelectionMode` parameter as a callback function.**

```
fn.promptSelect(sTitle, ["choice 1", "choice 2"], [], fnFunction, fnCancelFunction,
    function(selectedText){
        if (selectedText == "choice 1") { // do something }
        if (selectedText == "choice 2") { // do something else }
    }
);
```

## Spread data among tabs in dialog

Let's say you've got several pieces of text, images, charts or whatever to show to the user. Showing that all at once on the screen might be too much. As a solution, one can spread the data among tabs:

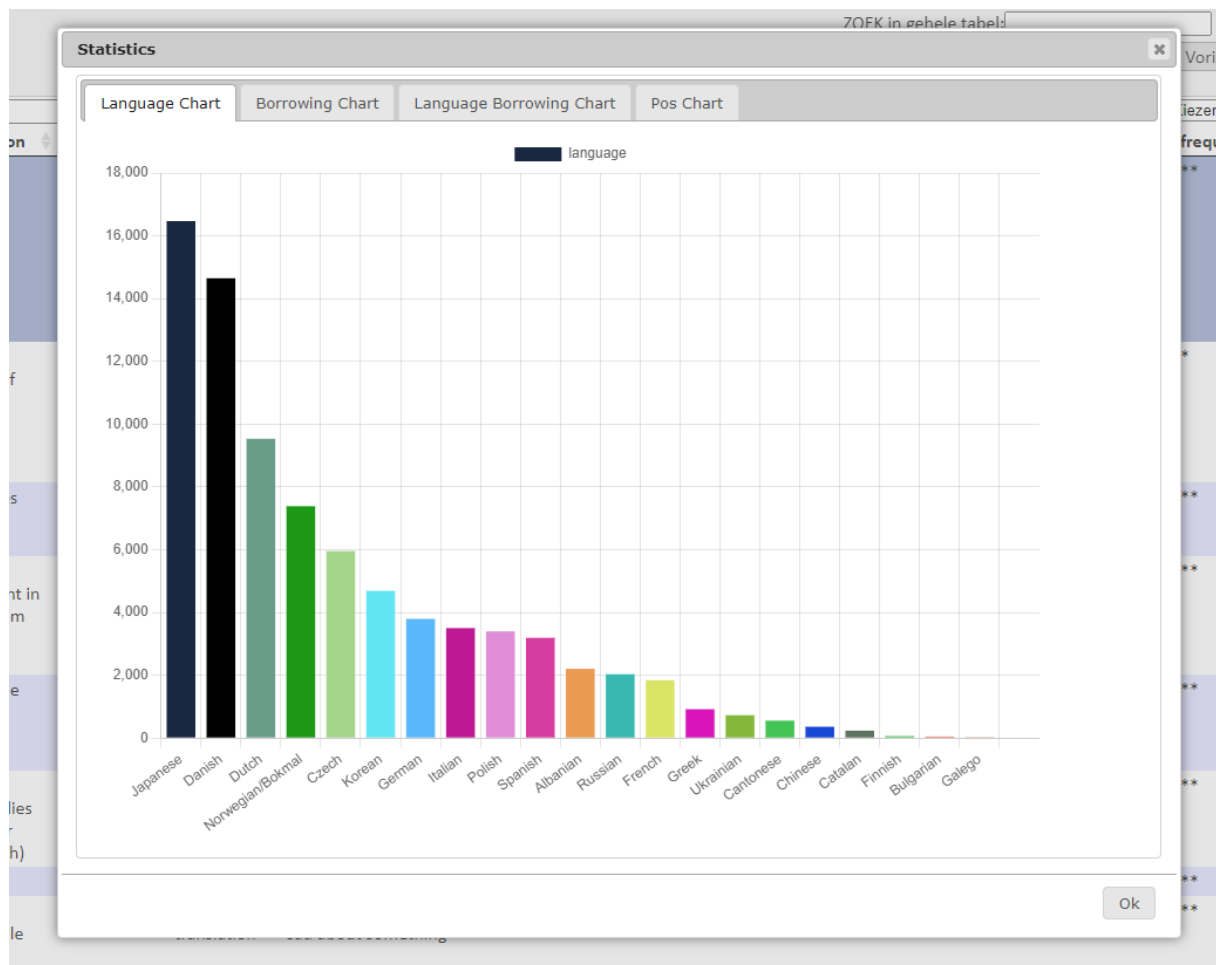

This can be achieved by putting the data into an associative array, with the tab names as array keys, and their content as array values.

```
var oTabNames_2_HtmlContent = {
  "Language Chart": "<div class='chart_container' ...> ... </div>",
  "Borrowing Chart": "...",
  etc.
};

fn.showTabs(sTitle, sMessage, oTabNames_2_HtmlContent, ...);
```

### Get rid of the 'OK' button

By default, most dialog functions display an 'OK' button and a 'Cancel' button. The 'Cancel' button is compulsory as one must be capable of canceling some action. On the contrary, the 'OK' button can be gotten rid of. For example, in a `fn.promptSelect()` call, one of the given options might fulfill the role of an 'OK' button, causing the default 'OK' button to be unnecessary.

Getting rid of the default 'OK' button is easy: just replace the corresponding callback by `null`.

```
fn.promptSelect(sTitle, aAllOptions, aAlreadyChosen,  
  NULL, function(){ // cancel function });
```

### Closing a dialog programmatically

The dialog currently in front can be closed by calling:

```
fn.closeDialog();
```

Which dialog is opened makes no difference. Any dialog will be closed by this command.

### Show a progress indicator and hide it

Show it with:

```
fn.showProcessingMsg(sTableName);
```

And hide it with:

```
fn.removeProcessingMsg(sTableName);
```

## Key events

### Assign event to some key

Any table can be assigned functions to be performed when some keys are pressed. Such functions must be declared in the `oTableSettingsList` array:

```
oTableSettingsList = {
    mytable: { // the following will work only when this table is active
        "keyup": {
            "a": function(t){
                // do something when 'a' is pressed
            }
        }
    }
};
```

In some circumstances, the key events need to be suppressed, for example when some editable cell be being edited while the key event is supposed to operation in completely different circumstances. In such can, one can use the `editFunctionIsActiveNow()` function:

```
oTableSettingsList = {
    mytable: {
        "keyup": {
            "b": function(t){
                If (editFunctionIsActiveNow() ) {
                    // do nothing, because some cell is edited now!
                }
                else {
                    // carry on: do something because 'b' was pressed
                }
            }
        }
    }
};
```

### Trigger a key event programmatically

We can trigger some pre-defined key event by specifying its key code and DOM element to trigger the key strike upon. The last parameter (some DOM element node that is part of `nElement`) is optional.

```
fn.triggerKeyStrikeOnElement (iKeyCode, nElement, nSubElement);
```

### Detect which key was striken

First, one can test if a particular key was pressed:

```
if ( kf.isPressed("alt") ){  
    // do something  
}
```

But Lex'it can also tell which key was pressed when no one else knows:

```
var sPressedKey = kf._getPressedKey();  
fn.message("Info", sPressedKey + " was pressed!");
```

## Calling external resources:

### Call a database function and get its output

```
fn.callFunction(sFunctionName, aFunctionArguments, fnCallback, fnErrorHandler);
```

Calling a database function is done by specifying the name of that function and also the database schema it is part of, separated by a dot just like in Postgres.

The function output (if relevant), which is put in an associative array, can be retrieved within the function callback (because of asynchronicity), by calling the array key named after the function (but without the dot and the schema name):

```
some_table : {
  some_column : {
    "click": function(t, n){
      var sId = fn.getDataFromSiblingNode(t, n, "id");

      // call a function and use its output
      fn.callFunction("api.get_lemma", [ fn.quote(sId) ],

        function(response){
          var sLemma = response["get_lemma"]
          ...
        });
    }
  }
}
```

The example here above shows how to retrieve function output consisting of one single value. But some Postgres functions might issue sets of keys and values (see section **PSQL functions in Lex'it**). In that case, one can retrieve the value of each key (or: table column) by the array key named after it:

```
function(response){
  var sLemma = response["lemma"];
  var sPartOfSpeech = response["part_of_speech"];
  var sId = response["id"];
  ...
}
```

## Call a webservice

For calling a webservice, only a few parameters are needed, a ULR and some parameters, and a callback so as to process the service's response.

```
fn.callService(sURL, aParameters, null, null, function(resp){  
    // process response here  
});
```

But more parameters can be given, most of which (`sMethod`, `sResponseDataType`, `fnCallback`, `fnErrorHandler`) are quite self-explanatory. The `oExtraParams` parameter might need extra explanation: it is there for additional ajax parameters that aren't part of the default function parameters, like in the following:

```
Var oExtraParams = {  
    "contentType": "application/json; charset=UTF-8",  
    "processData": false  
};  
  
fn.callService(sURL, aParameters, sMethod, sResponseDataType, fnCallback,  
oExtraParams, fnErrorHandler);
```

## Form views

### Basic configuration

Although Lex'it is primarily meant to work with tables, it allows the user to see or edit data in a form as well.

Such form can be displayed by clicking the 'View mode' button in the table header (which allows to switch between table and form view). Or it can be activated programmatically by setting the `viewtype` in the `extrasettings` parameter of the `fn.callDatabase()` function:

```
fn.callDatabase(tablename,
    {"somecolumn": value}, function(){ ... },
    {"viewtype": "form"}
);
```

If the configuration of your project doesn't contain any form declaration, Lex'it will generate a default not-editable form view. But it is possible to design your own form. Technically, a Lex'it form consists of a grid on which text fields, checkboxes, buttons etc. can be placed.

The following needs to be declared in the `oTableSettingsList`.

First declare the grid and its dimensions, that is:

- a `"size"` (width/height of the form-area, in pixels)
- a `"definition"` of the grid (number of columns by number of rows to divide the form-area into: column/row-numbers will be used as coordinates to put text fields, buttons, etc. at)

```
tablename: {
    "formgrid": {
        "size": [1000, 300], // form area will be 1000 x 300 pixels
        "definition": [10, 6] // grid will have 10 columns and 6 rows
                               // within the declared form area
                               // so, one cell will have a resolution of
                               // (1000/10)=100px by (300/6)=50px
    }
}
```

One can also set a background color, and align the form within the table frame:

```
tablename: {
    "formgrid": {
        "bgcolor": "#88BBCA",
        "align": "center" // possible settings: left/center/right
    }
}
```

But the most important are the text edit fields and buttons the form will consist of. Each of those need a "position" (t.i. its column/row coordinates in the grid) and a "definition" (width/height, defined as number of columns/rows in the grid).

Note that the cell needs to be called the same name as column names of the table the form represents:

```
tablename: {
  "formgrid": {
    "size": [1000, 300],
    "definition": [10, 6],
    ...
    "cells": {
      "some_table_column": {
        "position": [1, 1], // put cell at column 1 row 1
        "definition": [2, 1] // make cell 2 columns wide
      },
      "another_table_column": {
        "position": [1, 3], // put cell at column 1 row 3
        "definition": [3, 1] // make cell 3 columns wide
      }
    }
  }
}
```

Buttons are to be declared the same way. The labels of the buttons have to be given as keys. The associated array of properties must at least contain a "click" property (associating a function to the button) and a position. One can also set colors, but that it's optional.

```
tablename: {
  "formgrid": {
    "size": [1000, 300],
    "definition": [10, 6],
    ...
    "buttons": {
      // button label
      "click me!": {
        "position": [2, 5], // put button at column 2 row 5
        "click": function(t){ // execute this upon click
          // do something cool here!
        },
        "color": "black",
        "bgcolor": "red" // red button with black label
      }
    }
  }
}
```

The forms also contain default buttons, t.i. a 'undo' button and a 'save' button. By default, these buttons will be positioned in the bottom left corner of the form. But this set of buttons can be repositioned the same way as anything else in the formgrid:

```
tablename: {
  "formgrid": {
    "buttonsbar_position": [4, 5] // default buttons at row 4 column 5
    ...
  }
}
```

As far as cell editability or visibility is concerned, the formgrid uses the table config by default. But if one needs a form cell to behave differently than the corresponding table cell, one can set a different editability or visibility in the formgrid:

```
tablename: {
  "formgrid": {
    "size": [1000, 300],
    "definition": [10, 6],
    ...
    "cells": {
      "some_table_column": {
        "position": ...,
        "definition": ...,

        "editable": true, // this will win over the tableconfig!
        "visible": true,
        "click": function(t, n){ ... }
      },
    },
  }
}
```

## Tables in a form

Next to fields and buttons, a form may contain tables, allowing to display a paradigm, example sentences, etc. We called such tables 'lists'.

Just like fields and buttons, a list needs a "position" and a "definition":

```
tablename: {
  "formgrid": {
    "lists": {
      "some_list": {
        "position": [4, 1], // put list at column 4 row 1
        "definition": [10, 8], // make it large enough if needed
        "table": {
          ...
        }
      }
    }
  }
}
```

The "table" parameter is needed to declare the source of the list information, how it has to be sorted, etc.:

```
tablename: {
  "formgrid": {
    "lists": {
      "some_list": {
        "position": ...
        "definition": ...
        "table": {
          "name": "namename",
          "columns_sorting": {"col1": "asc", ...},
          "columns": {
            "col1": {
              "visible": false,
              ...
            },
            "col2": {
              ...
            }
          }
        }
      }
    }
  }
}
```

Finally, the list needs to know which data to load, given the current state of the form. For example: if a form displays some lemma, we might need its paradigm to be loaded in a list. And if the user browses through the lemmata, the paradigm list will need to synchronize with the lemma (in other words: this list will need to be filled with the paradigm of the last chosen lemma).

In the underlying database, the data to be loaded as a list is usually linked to the rest of the form data by some id. So, when the form displays a record with a given id, this should trigger the list to display content corresponding to the very same id.

To achieve that, go to the "cells" declaration of the form, look up the cell that act as id-column, and add a parameter called "synchronize\_with". The value to be assigned to this parameter must be an associative array, associating one (or more) list-labels and the id-column of each list that needs to synchronize with the id displayed in the form. When declared, that will tell the lists to be filled with records whose id's match the id in the form:

```
tablename: {
  "formgrid": {
    "cells": {
      "lemma_id": {
        "position": ...,
        "synchronize_with": {"paradigma": "lemma_id"}
      },
      "modern_lemma": {...}
    },
    "lists": {
      "paradigma": {
        "position": ...
        "table": {
          "name": "paradigm",
          "columns": {
            "wordform": {...}
          }
        }
      }
    }
  }
}
```

A list comes with a set of buttons, allowing the user to perform some operations:

- at the top of the list : a button to add a row
- at the end of each row: a button to delete the row, and a button to show content connected to the row

Each of those buttons need to be configured, which can be done in the "buttons" parameter:

```

tablename: {
  "formgrid": {
    "lists": {
      "paradigma": {
        "buttons": { ... }
        "table": { ... }
      }
    }
  }
}

```

### The 'add' button

If a new row needs to be connected to other content, some IDs might have to be taken over automatically. One must tell which columns to fill with which content. For example, in the following, the "lemma\_id" column will get the value stored in the "lemma\_id" cell of the form, and the "part\_of\_speech" column will get the value stored in the "pos" cell of the active row of the "allowed\_pos" list.

```

tablename: {
  "formgrid": {
    "lists": {
      "paradigma": {
        "buttons": {
          "add": {
            "copy": {
              "lemma_id": {
                "form": "lemma_id"
              },
              "part_of_speech": {
                "allowed_pos": "pos"
              }
            }
          }
        },
        "table": { ... }
      }
    }
  }
}

```

Instead of relying on the default behavior, it is also possible to write a custom add-function, which is to be declared with the “do” parameter:

```
tablename: {
  "formgrid": {
    "lists": {
      "paradigma": {
        "buttons": {
          "add": {
            "do": function(sListLabel, sFeedingTable){
              ...
            }
          },
          "table": { ... }
        }
      }
    }
  }
}
```

### The ‘delete’ button

Just as the “add” parameter for the add-button, the delete-button needs a “delete” parameter as part of the “buttons” configuration. Leaving it will cause the delete-button to be left out of the list. If you want it to behave the default way (that is: remove the row with the current ID), just set “delete”: true.

But if you wish custom behavior instead, just declare a function within the “do” parameter:

```
tablename: {
  "formgrid": {
    "lists": {
      "paradigma": {
        "buttons": {
          "delete": {
            "do": function(sListLabel, nRow){

              // retrieve the Datatable object the list represents
              var sListTableId = lists.getTableIdFromNode(nRow);
              var oTable = lists.getDataTableObjectOf(sListTableId);

              // now remove the row
              oTable.row( $(nRow) ).remove().draw();
            }
          },
          "table": { ... }
        }
      }
    }
  }
}
```

### The 'show' button

The show-button, which should be clicked upon to get content connected to a row, must be configured too. Given the row-ID, the configuration must tell in which column of another list the row-ID must be looked up to retrieve the desired content. For example, if we want to look up example sentences of a lemma of our lemma list, we need to look up the row-ID of the lemma in the "lemma\_id" column of the 'examples' list:

```
tablename: {
  "formgrid": {
    "lists": {
      "lemmata": {
        "buttons": {
          "show": {
            "do": {
              "examples": "lemma_id"
            }
          }
        },
        "table": { ... }
      }
    }
  }
}
```

Of course one can declare custom behavior instead:

```
tablename: {
  "formgrid": {
    "lists": {
      "lemmata": {
        "buttons": {
          "show": {
            "do": function(sListLabel, nRow){
              var someId = nRow.id;
              lists.feed("examples", { "some_id": someId });
            }
          }
        },
        "table": { ... }
      }
    }
  }
}
```

## Advanced Lex'it programming

### Lex'it internal registry

Every single piece of information about tables etc. is stored in a dedicated namespace `mt` (which stands for *multitables*). It is often needed to get info from this registry. Here are some examples.

For example, the most important object of all in Lex'it – the Datable object of some named table – can be retrieved from there:

```
var t = mt.getDataTableObjectOf(someTableName);

// go to page 1 if the results
t.page( 0 );
```

One can retrieve the names of all the tables available, so as to refresh them all:

```
var aTables = mt.getListOfLoadedTables();
for (var i=0; i< aTables.length; i++){
    fn.refreshTable(aTables[i]);
}
```

The same way, one can get a list of all (visible) columns, so as to change their `css` properties, or whatever else:

```
var aListOfAllColumns = mt.getListOfColumnsOf( t );
var aListOfColumns = mt.getListOfVisibleColumnsOf( t );
for (var i=0; i< aListOfColumns.length; i++){
    var sColumnName = aListOfColumns[i];
    var nCell = fn.getCellInRowNode( nCurrentRow, sColumnName);
    $( nCell ).css("color", sSomeColorCode);
}
```

Check the `mt`-namespace in the JS-docs ([github.com/INL/Lexit/tree/master/jsdoc](https://github.com/INL/Lexit/tree/master/jsdoc)) to find out what can be retrieved from the Lex'it internal registry.

### Create a full new table configuration at runtime

This function is needed when one wants to call a fully configured table that didn't exist yet at start up (which is why the table was not registered nor configured yet). Such thing can happen when a new table is created at runtime by some other app (e.g. to store some results) and one wishes to see the content in Lex'it right away:

```
fn.registerNewTable(sTableName, sTableDescription, sType, sTableComment,
oConfiguration, oSettings);
```

Synonym:

```
fn.declareNewTable (...);
```

| Parameter         | Data type | Description                                                                                                             |
|-------------------|-----------|-------------------------------------------------------------------------------------------------------------------------|
| sTableName        | String    | Name of the new table to register                                                                                       |
| sTableDescription | String    | table description (visible to user in tables list)                                                                      |
| sType             | String    | database table type ('base table', 'view')                                                                              |
| sTableComment     | String    | table comments, which a user can edit by clicking onto the table name (in the table header) in the GUI                  |
| oConfiguration    | Array     | An associative array, containing the table configuration, in the way this has to be declared in oTableConfigurationList |
| oSettings         | Array     | An associative array, containing the table settings, in the way those have to be declared in oTableSettingsList         |

### Set the active table programmatically

In Lex'it, the active table is the one that has focus. One can give another table focus, by typing:

```
fn.setActiveTable(sTableName);
```

By doing this, of course key actions assigned to this table will get active, etc.

### Use libraries

Lex'it `config.js`-files can gradually grow quite large, causing such file to be more and more difficult to maintain. An easy way to solve that is (for example) moving some of the project functions to some functions library.

By default, Lex'it expects libraries to be located in the same directory as the `config.js`-files. And the libraries are expected to have the same core name as the `config.js`-file they belong to. For example, if your project is called 'myproject' and you want a function library to be attached to it, you should have two files named like this:

- `myproject.config.js`
- `myproject.library.js`

Of course, the library file must be explicitly called by the `config.js` file, so as to be effectively loaded:

```
fn.getLibrary(sPathToLibrary, fnCallback, fnErrorHandler);
```

If you follow the rules hereabove, you won't need to declare any `sPathToLibrary`, because Lex'it will know where to look for it, so use the null value instead:

```
fn.getLibrary(null, fnCallback, fnErrorHandler);
```

The `fnCallback` argument is a function the code of which must/can be executed only after the library was loaded. Finally, you can add an error handler as a third argument, but this is null by default.

### Load new CSS dynamically

Loading new css can be done in two ways: load a file, or set some css declaration straight away:

```
fn.getCssFile(sPath, fnCallback, fnErrorHandler);  
  
fn.addCss("div#some_id {color: ..., border: ...}");
```

### Accessing session and user info

Lex'it provides with some function for accessing session and user info. That allows for different operations:

- Logging who performed some data editing

Logging who performed some data edit of a record could be implemented that way:

```
"some column": {  
  "editable": true,  
  "editcallback": function(t, n, value){  
    var sRecordId = fn.getDataFromSiblingNode(n, "id");  
    fn.insertIntoDatabase("log", {  
      "record_id": sRecordId,  
      "modified_by": fn.getCurrentUser(),  
      "modification_time": getCurrentTimestamp()  
    });  
  }  
}
```

This solution is of course only recommended when the developer is not allowed to edit the project database. However, when one is entitled to edit the database functions, logging should be implemented there, so as to allow logging to occur at any occasion, even when the database wasn't processed by Lex'it:

```

CREATE TRIGGER log_trigger
  AFTER INSERT OR DELETE OR UPDATE ON yourtable
  FOR EACH ROW
  EXECUTE PROCEDURE do_some_logging();
CREATE FUNCTION do_some_logging()
  RETURNS trigger
  LANGUAGE 'plpgsql'
  COST 100
  VOLATILE
AS $BODY$
BEGIN
  INSERT INTO log(record_id, modified_by, modification_time)
  SELECT NEW.id, t.username, now()
  FROM active_user t;  -- this table is a temporary
                      -- table automatically created by Lex'it
  RETURN NULL; -- result is ignored since this is an AFTER trigger
END;
$BODY$;

```

### Cleaning the cache

Lex'it caches data about tables. For example, counting the exact number of rows of a large table upon any request to do so, makes no sense. Once this number is known, it can be cached, and retrieved very quickly if requested once again.

This caching concerns mostly 'table statistics' like number of rows of the whole table, or of the result set of a particular query, and 'table metadata', like primary keys, columns data types, etc. Note that the table content is *never* cached.

In some situation however, it might be needed to clean the cache, to make sure every single piece of information is reliable at that moment. To do so, call this:

```
cleanTableCache(t, fnCallBack, fnErrorHandler);
```

## Setting behavior when switching between tabs containing distinct Lex'it instances

One can set a function to be executed when some Lex'it tab gains focus or loses it:

```
fn.doAtFocusGain( function() {

    fn.refreshTable(t);
});

fn.doAtFocusLoss( function() {

    ...
});
```

## Changing accessed table schema

As explained in the first sections of this document, the `.database` table sets Lex'it to access only a particular schema of a database. It has the advantage of confining Lex'it to a particular area of the database, which allows for hiding less relevant schemata etc.

But in cases in which one needs to switch to another database schema during 'runtime', some function can be called to achieve just that:

```
fn.setSchema(sNewSchema, fnCallback, fnErrorHandler);
```

## Custom sorting

If some textual column has to be sorted in a special, custom way, one has to assign a weight (rank) to each sign occurring in the column to be sorted, want put that in a table, like:

| Sign | Rank |
|------|------|
| A    | 1    |
| B    | 2    |
| C    | 3    |
| ...  | ...  |

Once this is set, we must convert each cell of the textual column to be sorted into an integer array, in which each letter is replaced by its rank. The array must be stored in a new column named after the converted one with suffix `'_lexit_custom_sort'` added to the column name, like:

| word  | word_lexit_custom_sort |
|-------|------------------------|
| Abc   | [1, 2, 3]              |
| Book  | [2, 15, 15, 11]        |
| Think | [20, 8, 9, 14, 11]     |
| ...   | ...                    |

When this naming convention is met, Lex'it will automatically recognize this new column and use it to sort the converted column according to the weights/ranks saved in the arrays.

If one wishes to be able to sort such a column reversely as well, one must store the reversed array's

in another new column, this time with suffix `'_lexit_custom_rversesort'` added to the name of the converted column.

Here is an example for Russian:

```
CREATE TABLE public.russian_chars (
    "char" text COLLATE pg_catalog."en_US",
    rank integer DEFAULT 0
);

INSERT INTO public.russian_chars ("char", rank)
VALUES ('Б', 12), ('Б', 13), ('Б', 14), ('Б', 15), ('Б', 16), ('Г', 18),
....., ('е', 184), ('е', 185);

-- split a Russian word into its separate chars
-- and deal with the fact that some chars are stored as TWO signs (char + accent)

CREATE OR REPLACE FUNCTION get_sep_russian_chars( input_word text )
    RETURNS text[]
    LANGUAGE 'plpgsql'
    COST 100
    VOLATILE PARALLEL UNSAFE
AS
$BODY$
DECLARE
    word_arr integer[];
    output_arr text[];
BEGIN
    SELECT INTO word_arr array_agg( ascii(tokens) )
    FROM unnest( string_to_array($1, NULL) ) AS tokens;

    IF (array_lower(word_arr, 1) IS NOT NULL AND array_upper(word_arr, 1) IS NOT
NULL) THEN

        FOR i IN array_lower(word_arr, 1)..array_upper(word_arr, 1)
        LOOP
            CONTINUE WHEN ( ARRAY[ word_arr[i] ] <@
ARRAY[46,8217,769,768,774,779] );

            IF ( i < array_upper(word_arr, 1) AND ARRAY[ word_arr[i+1] ] <@
ARRAY[46,8217,769,768,774,779] ) THEN
                output_arr := ARRAY_APPEND( output_arr,
chr(word_arr[i])||chr(word_arr[i+1]) );
            ELSE
                output_arr := ARRAY_APPEND( output_arr, chr(word_arr[i]) );
            END IF;
        END LOOP;
    END IF;

    RETURN output_arr;
END;
$BODY$;

-- Convert a russian word into an array, consisting of a sorting rank for each char
of the word

CREATE OR REPLACE FUNCTION convert_word_into_rank_arr(inputword text)
    RETURNS integer[]
    LANGUAGE 'plpgsql'
    COST 100
    VOLATILE PARALLEL UNSAFE
```

```

AS $BODY$
DECLARE
    output_arr integer[];
BEGIN
    SELECT ARRAY(
        SELECT rc.rank
        FROM (
            SELECT x.one_char, row_number() over () as row_nr
            FROM (SELECT unnest(get_sep_russian_chars($1)) AS one_char )x
        ) chars
        LEFT JOIN russian_chars rc
        ON chars.one_char = rc.char
        WHERE rc.rank IS NOT NULL
        ORDER BY chars.row_nr
    ) INTO output_arr;

    RETURN output_arr;
END;
$BODY$;

-- now add the needed columns (properly named to allow lex'it to recognize those)
ALTER TABLE russian_table ADD COLUMN word_lexit_custom_sort integer[];
ALTER TABLE russian_table ADD COLUMN word_lexit_custom_reversesort integer[];

-- fill the columns with the generated array's for custom sorting
UPDATE russian_table
SET word_lexit_custom_sort = convert_word_into_rank_arr(word);

UPDATE russian_table
SET word_lexit_custom_reversesort = (word_lexit_custom_sort);

-- and add indexes for performance
CREATE INDEX ON russian_table( word_lexit_custom_sort );
CREATE INDEX ON russian_table( word_lexit_custom_reversesort );

```

## Tips and tricks

### Call a Lex'it projects and tables via an URL

One can open Lex'it and go straight to a given project (that is: skipping the menu page) by specifying the project name in the URL:

```
http://<your_host>:8080/lexit2/?db=myproject
```

It is even possible to open a project and call a table straight away. To do so, specify the table name too:

```
http://<your_host>:8080/lexit2/?db=myproject&table=sometable
```

The next step is to get the table filtered by some values right from the start as well. Once again: just specify the filters to be applied!

```
http://<your_host>:8080/lexit2/?db=myproject&table=sometable
&columnName1=someValue1&columnName2=someValue2
```

Instead of targeting specific columns to be searched, one can just search the whole table at once:

```
http://<your_host>:8080/lexit2/?db=myproject&table=sometable
&anycolumn=someValue
```

Finally, one can also set some particular settings, like the table screen position or so. Settings can be specified the same way as anything else, but the setting name must have the 'setting.' prefix, like this:

```
http://<your_host>:8080/lexit2/?db=myproject&table=sometable
&setting.top=150px&setting.left=20px
```

**N.B.:** a list of all available settings can be found in section **First things first: open a table**.

### Change table columns visibility and redraw table automatically

Once a table is rendered on screen, it is still possible to modify the columns' visibility programmatically, so as to switch between alternative views of the data.

Declare the list of columns (`aListOfColumns`) that have to be visible, and call the following function:

```
fn.changeTableColumnsVisibility(t, aListOfColumns, fnCallback, oExtraSettings);
```

This function takes care of redrawing the table properly at the very same screen position, and re-applies filters, view type, pagination, etc. If needed, some extra custom settings can be passed on with argument `oExtraSettings` (see section **The API, First things first: open a table**) and some callback can be applied to with `fnCallback`.

### Synchronicity problems and solutions

When a function calls a webservice or some database function etc., we need the function that will process the results to be waiting till those are issued. Otherwise we'll end up with undefined variables etc.

In Lex'it, this is supported by the implementation of callbacks. Most of the function allow one or more callbacks as a parameter. It's only when the function execution is finished, that the callback will be run:

```
fn.updateDatabaseGivenFieldValues( t,
    {"column1": someValue1},
    {"column2": someValue2, "column3": someValue3},
    ...,
    function(){ // put some nice callback code here });
```

Sometimes one might want to execute a chain of operations, in such a way that each operation waits for the previous one to be finished before starting the current one, and so on. That can be achieved with recursion.

In the following example, we gather the id's of some rows, onto which some operations will be carried out. As a second step, we define a function to be executed on one row at the time. Since the function can process only one row at once, we want it to process the following row only when it's done with the current one.

To do that, we have the function call itself in a callback. The parameter value is increased at each call, ensuring that the next id of the list is chosen for processing. The recursion ends when the last id was reached.

The whole process is started by calling the function with parameter value 0, telling the function to pick up the very first element of our list of id's. It will end when every id is processed:

```
var aIdsToProcess = new Array();
var aSelectedAtts = fn.getSelectedRowsFrom(t);
aSelectedAtts.each(function(){
    aIdsToProcess.push( fn.getNodeId(this) );
});

// process each selected row now
var functionToRepeat = function(i){
    fn.updateDatabaseGivenFieldValues( t,
        {"id_column": aIdsToProcess[i]},
        {"column1": someValue1, "column2": someValue2},
        false,
        function(){
            if ( (i+1) < aIdsToProcess.length )
            {
                functionToRepeat(i+1);
            }
            else
            {
                // finished? Refresh to see the results!
                fn.refreshTable(t);
            }
        });
};

// start the function now
// it will increment its own argument till all ids are processed
functionToRepeat(0);
```

### Implement a radio button using Boolean columns

Let's say we have three Boolean columns designed to hold the gender of a lemma: 'male', 'female' or 'neuter'. And only one at the time can be true: if male is true, female and neuter must be false, etc. We can implement that the following way:

```
// declare the fields that have to behave as a set radio buttons
var editionTypeFields = ["male", "female", "neuter"];

// declare a callback, setting the radio button behaviour
var fnRadioCallback = function(n, fieldsToUpdate, fieldName) {

    // set the other fields to false
    var updatedFields = {}
    fieldsToUpdate.filter(f => f != fieldName).forEach(f => updatedFields[f] =
false );

    var nRow = fn.getRowNode(n);
    fn.updateDatabaseGivenANode(nRow, updatedFields, function(){
fn.callRecord(nRow, fieldsToUpdate) });
    }

    return editcallbackfunction
}

oTableConfigurationList = {

// usual table declaration, implementing the callback declare hereabove

    some_table: {
        "male": {
            "editable": true,
            "editcallback": function(t, n, value){
                fnRadioCallback(n, editionTypeFields, "male");
            }
        },
        "female": {
            "editable": true,
            "editcallback": function(t, n, value){
                fnRadioCallback(n, editionTypeFields, "female");
            }
        },
        "neuter": {
            "editable": true,
            "editcallback": function(t, n, value){
                fnRadioCallback(n, editionTypeFields, "neuter");
            }
        }
    }
}
}
```

### Implement a character picker

When one needs to type in data consisting of foreign characters, with diacritics, anyhow characters not available on a current keyboard, a character picker can be the right solution. All you need is a table (let's call it 'character\_picker') with one single cell, in which all needed characters are displayed, separated by spaces. Picking up a character can be done by just clicking on it.

```

"character_picker": {
    "character_picker_cell": {
        "textsize": "20pt",
        "click": function( t, n ){

            // copy chars clicked upon
            var oCell = fx.getCell(n, " character_picker_cell ");
            var oClickedUpon = fx.getWordClickedUponInCell(oCell);
            var sClickedUpon = oClickedUpon.text;

            // put the chars into an invisible textarea
            var tmpTextArea = $("<textarea></textarea>")
            .attr("id", "chosen_character").text(sClickedUpon);
            $("#temporary_stuff").append(tmpTextArea);

            // and select it!
            var copyChar = $('#chosen_character');
            copyChar.select();

            try {
                // now copy it to clipboard
                document.execCommand('copy');

                // confirm to user which chars he/she has
                chosenfn.message("Chosen character",
                "Chosen character:<BR><BR>" + sClickedUpon);

                // remove temporary textarea
                $("#chosen_character").remove();
                setTimeout(function(){

                    // remove message
                    fn.closeDialog();

                    // put focus onto the main table
                    // this will call a header function,
                    // which will make this table active
                    $("#mytable_wrapper div.top").mousedown();
                }, 1000);
            } catch (err) {

                // tell user if something went wrong
                fn.message("Selection failed, try again!");
            }
        }
    }
}

```

### Scroll to a table programmatically

When a table is opened programmatically, and other tables are already open, the newly opened table might not be visible as it is automatically put at the bottom of all others. In such cases, it might be convenient to automatically scroll to it:

```
fn.scrollToTable(sTableName);
```

### Add a full export button

The default export buttons of Lex'it are by default 'screen export buttons'. That is: the export buttons only output the table rows that are displayed on screen when the export is started.

This is by design: by giving only limited export capabilities, we prevent the database engine from being overloaded by suddenly exporting a massive amount of data, and we also prevent the database from being fully exported while we might not want that to happen!

But, in your own project, you might need a full export function. That can be made available with a bit of configuration:

```
oTableSettingsList = {
  "your_table": {
    // we want a full export button for this table:
    "full_export_button": {
      // set export button label
      "nice_name": "Volledige Excel Export",
      // where do we put it, within the default export buttons
      // available options: "first" or "last"
      "position": "last",
      // set the buttons groups labels,
      // t.i. one label for the default 'screen export' buttons
      // and one label for the 'full export' button
      "buttons_groups_labels": ["Scherm:", "Filter:"]
    }
  }
};
```

This configuration will allow the following layout:



## Help functions

### String array conversion

Convert an array to a string, or back:

```
fn.arrayToString(arr);
fn.stringToArray(str);
```

### Escaping chars

Escape quotes in string parameters of function or service call:

```
fn.escapeSingleQuotes(str);
fn.escapeDoubleQuotes(str);
```

Escape regular expression characters, for example for using some string in a search query:

```
var sSearchString = fn.escapeRegexChars( someStringContainingRegexChars );
fn.callDatabase(t, {"some_column": sSearchString});
```

### Http parameters

Some help function do not belong to the `fn` namespace, but are part of the `util.js` class. They are to be called without `fn` prefix or so.

Get the http parameters of Lex'it (like value of `db`, `test`, etc.):

```
var hParams = getHttpParams(); // this is a Hashtable
Var sDb = hParams.get("db");
```

### Solve z-Index problems

Put any object in front (solves many z-index problems):

```
$(obj).putInFront();
```

### Objects functions

#### Clone an object

```
var oClone = NEW cloneObject(obj);
```

### Count the number of properties of an object

```
Var iCount = countProperties(obj);
```

### Regex functions

#### Test if a string is a regex or not

```
var bIsRegex = isRegex( str );
```

#### Regex version of replaceAll(string, replacement)

**NB:** beware: for IE compatibility, the search argument must be a string, and not a regex literal, t.i.

"^(...)\$" instead of /^(...)\$/ (well: nowadays Lex'it isn't IE compatible anymore...):

```
var sNewString = str.regexReplaceAll( regex, replacement );
```

#### Regex version of indexOf(regex, from) and lastIndexOf(regex, from)

```
var firstMatch = str.regexIndexOf( regex, fromStartPos );  
var lastMatch = str.regexLastIndexOf( regex, fromStartPos );
```

#### Regex version of inArray(value, array, start)

```
var idx = $.inArrayRegex( value, array, start );
```

### Regex selectors

Examples of use in Lex'it implementation:

```
$(':regex(id,[aeiou])');  
$('div:regex(class,[0-9])');  
$('script:regex(src,jQuery)');
```

### Arrays functions

#### Unify any value in array

```
var aNoDoubles = getOnlyUniqueValues( arr );
```

#### Clone an array

```
var aClone = cloneArray( arr );
```

### Array equality

```
var bEqual = arrays_equal( arr1, arr2);
```

### Sort an array of arrays

```
var aaSorted = sortArrayOfArray( aaArray );
```

### HTML entities

Test if a given HTML entity is a common (internationally known) entity:

```
var bTrueOrFalse = isCommonEntity( sSomeEntity );
```

Translate an entity into the character it represents:

```
var sChar = translateEntityToChar( sEntity );
```

Translate a character into the corresponding entity:

```
var sEntity = translateCharToEntity( sChar );
```

### Numbers

Generate series (JavaScript version of Psql function)

**NB:** de series generated contains 0-prefixes (like: 002, 003, ...) so as to match the length of the biggest member of the series (iEndValue).

```
var aStr = generateSeries( iStartValue, iEndValue, bAscending );
```

### Get a random unique number

Based on the current date, this number is surely unique:

```
var iUniqueNumber = getUniqueNumber();
```

## String functions

### The good old BASIC or JAVA functions

```
var sLeftPart = left( str, n );  
var sRightPart = right( str, n );  
var bTrueOfFalse = $.startsWith( str, search );  
var bTrueOfFalse = $.endsWith( str, search );
```

## String replacement

### Normal and regex version:

```
var sNewStr = str.replaceAll( regex, replacement );  
var sNewStr = str.regexReplaceAll( regex, replacement );
```

## Remove HTML tags from a string

```
var sCleanStr = removeTags( str );
```

## Remove non alphabetical chars from string

```
var sCleanStr = keepOnlyLettersAndDigits( str );
```

## If a string a string?

```
var bTrueOfFalse = $.isString( str );
```

## If a string truly empty?

```
var bTrueOfFalse = $.emptyString( str );
```

## Colors

### Is a color dark or light?

```
// parameter might be RGB or HEX color code  
var lightOrDark = lightOrDark( color );
```

### Convert a string to a color

**NB:** sometimes convenient for random color generation:

```
// output is HEX color code
var sColor = stringToColour( str );
```

Generate some color code, but make sure it's not too light or so:

```
// generate random color for group of variants
sColor = stringToColour( sLem );
while( lightOrDark(sColor) == 'light'){
    sColor = ColorLuminance( sColor, -0.1 )
}
```

### Text selection

Allow or prevent screen text selection

```
$('#html, body').enableSelection();
$('#html, body').disableSelection();
```

Clear screen text selection

```
clearSelection();
```

### DOM elements functions

Test if some element is visible in the current viewport

```
$(el).elementExists();
```

Does an element exist?

```
$(el).isOnScreen();
```

### Events

Pre-binding

Pre-bind function, t.i. bind a handler to some event, to be executed before all other handlers of the same event:

```
$('#button').preBind('click', function() {
    console.log('hello');
});
```

## PSQL functions in Lex'it

### Call a PSQL-function and read the result

A PSQL function (say `api.do_something`) can be called in Lex'it in the following way:

```
fn.callFunction("api.do_something", [arg1, arg2],
               function(resp){ ... }
);
```

The output (`resp`) of this Lex'it function is always an associative array. However, the way its output must be read, depends on the output type of PSQL function being called:

If the PSQL function returns a **simplex** result like a single string or so ( ... RETURNS text ... ), the output will be associated to a key named after the PSQL function:

```
function(resp) {
    var ourResult = resp["do_something"];
    doWhatever( ourResult );
}
```

As you probably already noticed, the schema name (`api.`) mustn't be used in the key name when retrieving the output. Only the function name (`do_something`) is to be used as a key to the output value.

But if the function returns a **complex** result type, like a table record ( ... RETURNS TABLE(id integer, some\_string text)... ), the value of each table column will be associated to a key named after the columns name:

```
function(resp) {
    var ourId = resp["id"];
    var ourString = resp["some_string"];
    doSomething( ourId, ourString );
}
```

## Concordance table for the fn and fx namespaces

| fn functions                                 | fx function                        |
|----------------------------------------------|------------------------------------|
| fn.addCustomButton(sSomeTableName, ...)      | <i>Not needed</i>                  |
| fn.addDrawCallback(sSomeTablename, ...)      | <i>Not needed</i>                  |
| fn.addFilters(sSomeTable, ...)               | <i>Not needed</i>                  |
| fn.alignTables(sSomeTablename1, ...)         | <i>Not needed</i>                  |
| fn.arrayToString(str)                        | <i>Not needed</i>                  |
| fn.askToChoose(sTitle, ...)                  | <i>Not needed</i>                  |
| fn.callDatabase(sSomeTablename, ...)         | <i>Not needed</i>                  |
| fn.callDatabaseInNewTab(sSomeTablename, ...) | <i>Not needed</i>                  |
| fn.callFunction(sFunctionName, ...)          | <i>Not needed</i>                  |
| fn.callRecord(nRow, ...)                     | fx.callRecord(oRow, ...)           |
| fn.callService(sUrl, ...)                    | <i>Not needed</i>                  |
| fn.changeTableColumnsVisibility(sTable, ...) | <i>Not needed</i>                  |
| fn.cleanTableCache(sSomeTablename, ...)      | <i>Not needed</i>                  |
| fn.clearAllFilters(sSomeTable)               | <i>Not needed</i>                  |
| fn.clickOnButton(sTableName, ...)            | <i>Not needed</i>                  |
| fn.closeDialog()                             | <i>Not needed</i>                  |
| fn.closeTable(sSomeTablename, ...)           | <i>Not needed</i>                  |
| fn.confirm(sTitle, ...)                      | <i>Not needed</i>                  |
| fn.declareNewTable(...)                      | <i>Not needed</i>                  |
| fn.doAtFocusGain(fnFunction)                 | <i>Not needed</i>                  |
| fn.duplicateRecord(sSomeTablename, ...)      | <i>Not needed</i>                  |
| fn.editFunctionIsActiveNow()                 | <i>Not needed</i>                  |
| fn.escapeDoubleQuotes(str)                   | <i>Not needed</i>                  |
| fn.escapeRegexChars(str)                     | <i>Not needed</i>                  |
| fn.escapeSingleQuotes(str)                   | <i>Not needed</i>                  |
| fn.forceExactCount()                         | <i>Not needed</i>                  |
| fn.getActiveRowNode(someTable)               | fx.getActiveRow(t)                 |
| fn.getAllRowNodes(sSomeTablename)            | fx.getAllRows(t)                   |
| fn.getAllRowNodesWhere(sSomeTablename, ...)  | fx.getAllRowsWhere(t, ...)         |
| fn.getCellInRowNode(nRow, ...)               | fx.getCell(mixed, ...)             |
| <i>Not needed</i>                            | fx.getCellNode(oRow, ...)          |
| fn.getCellNodeType(nMixed, ...)              | fx.getCellType(oMixed, ...)        |
| fn.getCheckboxValue(nCell)                   | fx.getCheckboxValue(oCell)         |
| fn.getColumnNumberOf(sSomeTable, ...)        | <i>Not needed</i>                  |
| fn.getCurrentDisplayLength(sSomeTablename)   | <i>Not needed</i>                  |
| fn.getCurrentDisplayStart(sSomeTablename)    | <i>Not needed</i>                  |
| fn.getCurrentProject()                       | <i>Not needed</i>                  |
| fn.getCurrentSessionId()                     | <i>Not needed</i>                  |
| fn.getCurrentTabId()                         | <i>Not needed</i>                  |
| fn.getCurrentTimestamp(sFormatopt)           | <i>Not needed</i>                  |
| fn.getCurrentUser()                          | <i>Not needed</i>                  |
| fn.getCustomButtonCss(sTableName, ...)       | <i>Not needed</i>                  |
| fn.getDataFromCellNode(nCell)                | fx.getDataFromCell(oCell)          |
| fn.getDataFromCellInRowNode(nRow, ...)       | fx.getDataFromCellInRow(oRow, ...) |
| fn.getDataFromColumn(sSomeTable, ...)        | <i>Not needed</i>                  |
| fn.getDataFromRowNode(nRow)                  | fx.getDataFromRow(oRow)            |

|                                                  |                                                |
|--------------------------------------------------|------------------------------------------------|
| fn.getDataFromSiblingNode(nCell, ...)            | fx.getDataFromSiblingCell(oCell, ...)          |
| fn.getFilters(sSomeTable)                        | <i>Not needed</i>                              |
| fn.getFirstRowNodeFrom(someTable)                | fx.getFirstRowFrom(oSomeTable)                 |
| fn.getFirstSelectedRowNodeFrom(someTable)        | fx.getFirstSelectedRowFrom(oSomeTable)         |
| fn.getFunctionOutput()                           | <i>Not needed</i>                              |
| fn.getGlobalFilter(sSomeTable)                   | <i>Not needed</i>                              |
| fn.getHighlight(sString, ...)                    | <i>Not needed</i>                              |
| fn.getIdFromDatabase(sSomeTablename, ...)        | <i>Not needed</i>                              |
| fn.getIndexOfButtonNamed(sTableName, ...)        | <i>Not needed</i>                              |
| fn.getIndexOfFirstSelectedRowNodeFrom(sTable )   | fx.getIndexOfFirstSelectedRowFrom(oSomeTable ) |
| fn.getLibrary(sPath, ...)                        | <i>Not needed</i>                              |
| fn.getListOfColumnsNiceNames(someTable)          | <i>Not needed</i>                              |
| fn.getNameOfButtonAtIndex(sTableName, ...)       | <i>Not needed</i>                              |
| fn.getNameOfColumnForThisNode(nCell)             | fx.getNameOfColumnForThisCell(oCell)           |
| fn.getNameOfColumnForThisVisibleIndex(sTable, .) | <i>Not needed</i>                              |
| fn.getNewPositionOfElementAt(iOriginalIndex)     | <i>Not needed</i>                              |
| fn.getNextRowNode(nRow)                          | <i>Not needed</i>                              |
| <i>Not needed</i>                                | fx.getNode(oMixed)                             |
| fn.getNumberOfSelectedRowNodes(someTable)        | fx.getNumberOfSelectedRows(someTable)          |
| fn.getNumberOfVisibleRows(someTable)             | fx.getNumberOfVisibleRows(someTable)           |
| fn.getPreviousRowNode(nRow)                      | <i>Not needed</i>                              |
| fn.getPromptBoxInput(sFieldName)                 | <i>Not needed</i>                              |
| fn.getPromptBoxOrder()                           | <i>Not needed</i>                              |
| fn.getRecord(sSomeTablename, ...)                | <i>Not needed</i>                              |
| fn.getRecordGivenFieldValues(sTablename, ...)    | <i>Not needed</i>                              |
| fn.getRecords(sSomeTablename, ...)               | <i>Not needed</i>                              |
| fn.getRowNode(nMixed)                            | fx.getRow(nRow)                                |
| <i>Not needed</i>                                | fx.getRowFromCell(oCell)                       |
| fn.getRowNodeId(nMixed)                          | fx.getRowId(oRow)                              |
| fn.getRowNodeIndex(nRow)                         | fx.getRowIndex(oRow)                           |
| fn.getRowNodeNumberOnScreen(nRow)                | fx.getRowNumberOnScreen(oRow)                  |
| fn.getRowNodeWhere(sSomeTablename, ...)          | fx.getRowWhere(sSomeTable, ...)                |
| fn.getRowNodeWhereIdIs(sSomeTable, ...)          | fx.getRowWhereIdIs(sSomeTable, ...)            |
| fn.getSelectedRowNodesFrom(someTable)            | fx.getSelectedRowsFrom(oSomeTable)             |
| fn.getSelectedTextInNode(nMixed, ...)            | fx.getSelectedTextInCell(oCell, ...)           |
| fn.getSortingColumns(sSomeTablename)             | <i>Not needed</i>                              |
| fn.getSortingDirection(sSomeTablename)           | <i>Not needed</i>                              |
| fn.getSortingDirectionOf(sSomeTablename, ...)    | <i>Not needed</i>                              |
| fn.getSortingDirections(sSomeTablename)          | <i>Not needed</i>                              |
| fn.getTableExtraSettings(sSomeTablename)         | <i>Not needed</i>                              |
| fn.getTableName(mixed)                           | fx.getTableName(oMixed)                        |
| fn.getTablePosition(sSomeTablename)              | <i>Not needed</i>                              |
| fn.getTypeOfFilterBox(sSomeTablename, ...)       | <i>Not needed</i>                              |
| fn.getValueOfFilterBox(sSomeTable, ...)          | <i>Not needed</i>                              |
| fn.getViewType(sSomeTablename)                   | <i>Not needed</i>                              |
| fn.getVisibleColumnNumberOf(sSomeTable, ...)     | <i>Not needed</i>                              |
| fn.getWordClickedUponInNode(nMixed, ....)        | fx.getWordClickedUponInCell(oCell, ...)        |
| fn.goToNextPage(sSomeTable)                      | <i>Not needed</i>                              |

|                                                    |                                           |
|----------------------------------------------------|-------------------------------------------|
| fn.goToPreviousPage(sSomeTable)                    | <i>Not needed</i>                         |
| fn.goToTheRightPage(sSomeTable, ...)               | <i>Not needed</i>                         |
| fn.hideTable(sSomeTablename)                       | <i>Not needed</i>                         |
| fn.insertIntoDatabase(sSomeTablename, ...)         | <i>Not needed</i>                         |
| <i>Not needed</i>                                  | fx.isApiInstance(obj)                     |
| fn.isCellNode(nMixed)                              | fx.isCell(oMixed)                         |
| fn.isEditableNode(nCell)                           | fx.isEditableCell(oCell)                  |
| fn.isLastNodeOf(nRow, ...)                         | fx.isLastRowOf(oRow, ...)                 |
| fn.isRowNode(nMixed)                               | fx.isRow(oMixed)                          |
| fn.message(sTitle, ...)                            | <i>Not needed</i>                         |
| fn.pileupTables(sSomeTablename1 ...)               | <i>Not needed</i>                         |
| fn.preventAutomaticStartup()                       | <i>Not needed</i>                         |
| fn.processPromptBoxOrder(aPromptBoxOrder, ...)     | <i>Not needed</i>                         |
| fn.prompt(sTitle, ...)                             | <i>Not needed</i>                         |
| fn.promptReorder(sTitle, ...)                      | <i>Not needed</i>                         |
| fn.promptSelect(sTitle, ...)                       | <i>Not needed</i>                         |
| fn.putDataIntoCellNode(nRow, ...)                  | <i>Not needed</i>                         |
| fn.putDataIntoFilterBox(sSomeTable, ...)           | <i>Not needed</i>                         |
| <i>Not needed</i>                                  | fx.putDataIntoCell(oRow, ...)             |
| fn.quote(str)                                      | <i>Not needed</i>                         |
| fn.refreshTable(sSomeTablename)                    | <i>Not needed</i>                         |
| fn.registerNewTable(sTableName, ...)               | <i>Not needed</i>                         |
| fn.removeFromDatabaseGivenANode(nRow, ...)         | fx.removeFromDatabaseGivenARow(oRow, ...) |
| fn.removeFromDatabaseGivenFieldValues(sTable, ...) | <i>Not needed</i>                         |
| fn.removeHighlight(sString)                        | <i>Not needed</i>                         |
| fn.removeProcessingMsg(sSomeTablename)             | <i>Not needed</i>                         |
| fn.resetAllFilters(sSomeTable, ...)                | <i>Not needed</i>                         |
| fn.resetTable(sSomeTablename, ...)                 | <i>Not needed</i>                         |
| fn.restoreTableState(sSomeTablename)               | <i>Not needed</i>                         |
| fn.rowsSelectionIsAllowed(sSomeTablename)          | <i>Not needed</i>                         |
| fn.saveTableState(sSomeTablename)                  | <i>Not needed</i>                         |
| fn.scrollToTable(sSomeTablename)                   | <i>Not needed</i>                         |
| fn.selectAllRowNodes(sSomeTable)                   | fx.selectAllRows(sSomeTable)              |
| fn.selectRowNode(sSomeTable, ...)                  | fx.selectRow(sSomeTable, ...)             |
| fn.setActiveTable(sSomeTablename)                  | <i>Not needed</i>                         |
| fn.setAutoComplete(sSomeTablename, ...)            | <i>Not needed</i>                         |
| fn.setBackgroundColor(sColor)                      | <i>Not needed</i>                         |
| fn.setCurrentUser(sName, ...)                      | <i>Not needed</i>                         |
| fn.setCustomButtonCss(sTableName, ...)             | <i>Not needed</i>                         |
| fn.setCustomButtonName(sTableName, ...)            | <i>Not needed</i>                         |
| fn.setFilters(sSomeTable, ...)                     | <i>Not needed</i>                         |
| fn.setGlobalFilter(sSomeTable, ...)                | <i>Not needed</i>                         |
| fn.setProjectTitle(sProjectName, ...)              | <i>Not needed</i>                         |
| fn.setSchema(sNewSchema, ...)                      | <i>Not needed</i>                         |
| fn.setSorting(sSomeTablename, ...)                 | <i>Not needed</i>                         |
| fn.showProcessingMsg(sSomeTablename)               | <i>Not needed</i>                         |
| fn.showTable(sSomeTablename)                       | <i>Not needed</i>                         |
| fn.showTabs(sSomeTablename)                        | <i>Not needed</i>                         |

|                                                |                                               |
|------------------------------------------------|-----------------------------------------------|
| fn.stringToArray(str)                          | <i>Not needed</i>                             |
| fn.tableExists(sSomeTablename)                 | <i>Not needed</i>                             |
| fn.tableIsEmpty(sSomeTablename)                | <i>Not needed</i>                             |
| fn.tableIsHidden(sSomeTablename)               | <i>Not needed</i>                             |
| fn.toggleCheckbox(nRow, ...)                   | fx.toggleCheckbox(oRow, ...)                  |
| fn.triggerKeyStrikeOnElement(iKeyCode, ...)    | <i>Not needed</i>                             |
| fn.uncheckCheckboxes(nMixed, ...)              | fx.uncheckCheckboxes(oRow, ...)               |
| fn.unselectAllRowNodes(sSomeTable)             | fx.unselectAllRows(sSomeTable)                |
| fn.unselectRowNode(sSomeTable, ...)            | fx.unselectRow(sSomeTable, ...)               |
| fn.updateDatabaseGivenANode(nMixed, ...)       | fx.updateDatabaseGivenACellOrRow(oMixed, ...) |
| fn.updateDatabaseGivenFieldValues(sTable, ...) | <i>Not needed</i>                             |