

LAnCeLoT manual

Table of contents

Introduction	2
Access	2
Characteristics of LAnCeLoT	3
From type to token	3
Lexicon suggestions	3
LAnCeLoT Search	3
Release history	3
Application user manual	3
Projects	4
Set up new project	4
First step: enter the name of your corpus	4
Second step: upload or select a corpus	5
Third step: define the tagset	7
Fourth step: select a reference lexicon	8
Editing a corpus	9
Lay-out of the editing environment	9
General information	9
Number of rows	9
Tooltips	10
Reset, refresh, go to and help	10
Navigation	11
Sorting	11
Locking mechanism	11
Types table	12
Description	12
type	12
corpus frequency	12
corpus analyses and how to modify these via the Types table	12
Adding or modifying an analysis	12
status	13
lexicon suggestions	13
comments	14
Supporting features	14
Project information	14
Show lemmata	14
Scrollbar button (ON / OFF)	15
Part-of-speech editor	15
Worktable	15
Description	15

match	15
Adding an analysis	16
Adding or modifying a multiple analysis	17
left and right context	17
Combining tokens	17
analyses	18
Modifying or removing an analysis	18
valid(ation)	18
comments	19
Supporting features	19
Validated analyses per type	19
Invalid analysis	19
Context	20
Metadata and more context	20
Tips and Tricks	20
Verification and correction of your data per category	20
How to filter	20
Working without continuous clicking in the Types table	21
Adding Written Form	21

Introduction

This is the manual of LAnCeLoT (Linguistic Annotation Corpus Laundry tool), an online tool (service) to manually verify and correct corpora that are linguistically annotated with part-of-speech and lemma. LAnCeLoT is meant to help you clean the linguistic annotations of your corpus, hence the name Linguistic Annotation Corpus Laundry Tool. LAnCeLoT offers both an environment to query your corpus (LAnCeLoT Search) and a place to inspect and correct the annotations.

LAnCeLoT was designed in combination with [GaLAHaD](#) (Generating Linguistic Annotations for Historical Dutch), an environment where you can linguistically annotate diachronic corpus material and evaluate the linguistic annotations. There are several taggers to choose from, and your corpus can be exported in several formats.

For now, LAnCeLoT handles TEI encoded documents only, the format of which is described [here](#). If you use GaLAHaD for the linguistic annotation of your corpus, simply choose TEI P5 as export format. For people who want to run LAnCeLoT on their own systems, the open source code will become available on GitHub.

The platform has been developed by the Dutch Language Institute (Instituut voor de Nederlandse Taal or INT). It is a substantial revision of the corpus based lexicon tool [CoBaLT](#).

Access

The online service is accessible with a CLARIN log-in.

Characteristics of LAnCeLoT

LAnCeLoT is designed to make the verification process efficient and the linguistic annotation consistent.

From type to token

The manual verification is not done by correcting each token in running text. Instead, a list of types is presented with the accompanying annotation. Per type, the corresponding concordances can be listed. You can either correct the linguistic annotation at type level or at token level. It is also possible to make a sub selection of tokens (concordances) and assign a specific annotation to every token in the subselection all at once. The available validation mechanism allows users to distinguish between valid and non verified annotations.

Lexicon suggestions

To help with assigning the correct lemma and/or part-of-speech, suggestions for each type are given in the `lexicon_suggestion` column, using the INT lexicon service with the historical computational lexicon [GiGaNT-HILEX](#).

The current version of GiGaNT-HILEX in the lexicon service contains the lexicon modules based on the *Dictionary of the Dutch Language (Woordenboek der Nederlandsche Taal, WNT)* and the *Dictionary of Middle Dutch (Middelnederlandsch Woordenboek, MNW)*.

The lemmatisation in the GiGaNT-lexicon follows the principles of [Mooijaart](#) (2012), the part-of-speech information is conformant with the TDN, the tagset for the annotation of diachronic corpora of historical Dutch, developed in the context of the CLARIAH+ project. A detailed description can be found [here](#).

LAnCeLoT Search

LAnCeLoT makes use of LAnCeLoT Search to index your uploaded corpora and display the concordances of each annotated type in your corpus. LAnCeLoT Search is a customised version of [AutoSearch](#), with [BlackLab](#) as a corpus search engine. This way, you can search your automatically annotated corpus or view individual documents for more context when the provided context of a token in the concordance is not sufficient.

Release history

Version 0.9 was released in June 2024.

Application user manual

To start working in LAnCeLoT, you have to define a project, upload the corpus data for this project or select a corpus you have already uploaded, specify the tagset and select the lexicon you would like to use. You can add contributors and/or viewers to your project and as a project owner you can also delete the project. Work is organised in projects to allow you to work on different corpora at the same time.

Since LAnCeLoT is accessible via a CLARIN log-in, contributors and viewers for your project(s) need to have a CLARIN log-in as well.

Projects


Here you can set up a new project (explained [below](#)) and get an overview of all projects you have access to. As a user, you see the projects you have initiated, or the projects you have been assigned to as a contributor or viewer.

To start working on a project, click on the name of the project (green button). You can also export a corpus by clicking on the orange `Export` button if you are a contributor or the project owner.

As a project initiator, you can add contributors or viewers to your project. Click on the blue `Contributors` button to open the Users Management panel.

Only a project initiator can also remove a project by pressing the red `Delete` button. Since deleting is final, you will be asked to either confirm or cancel your request.

In the screenshot below, there are four projects available. The logged in user is project owner of *19e-eeuwse citaten*, contributor of *Brabantse bijbel* en *Warmondse literatuur* and viewer of *test1*.

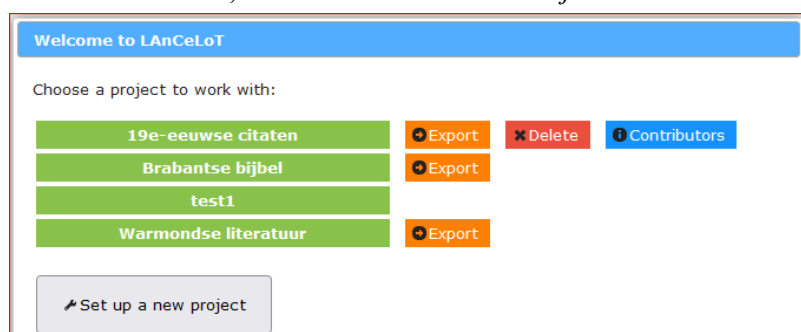

Set up new project

To start setting up a project click on `Set up new project`.

First step: enter the name of your corpus


The work in LAnCeLoT is organised into projects. A first step is therefore to define a project by entering its name (see the screenshot below).

A screenshot of the 'Set up your project' form in LAnCeLoT. The form has a blue header bar with the text '(1/4) Set up your project'. Below this, the text 'To set up a project you have to define:' is followed by a bulleted list: 'A project name', 'A corpus', 'A tagset', and 'A reference lexicon'. Below the list, the text 'Please fill in a project name' is displayed. There is a text input field with the placeholder text 'Project name' and a blue border.

Second step: upload or select a corpus

If you are completely new to LAnCeLoT, you will have to upload a new corpus. That can be done in LAnCeLoT Search (click on Upload a new corpus).

If you have already used LAnCeLoT in several projects, you will get an overview of the corpora you have already uploaded (Your corpora). It is possible to use the same corpus in different projects. A use case for this could be when you would like to determine the inter annotator agreement.

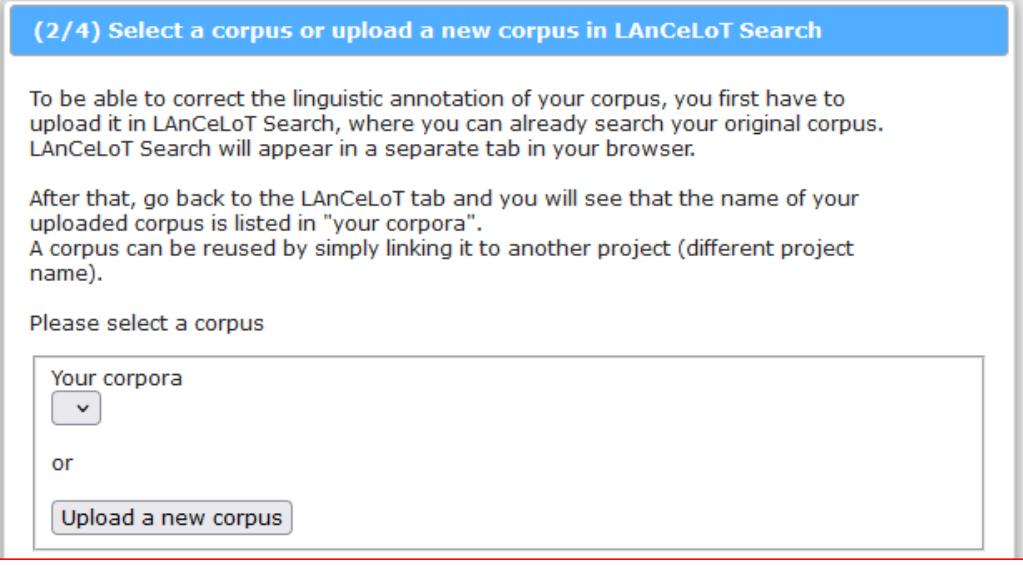

(2/4) Select a corpus or upload a new corpus in LAnCeLoT Search

To be able to correct the linguistic annotation of your corpus, you first have to upload it in LAnCeLoT Search, where you can already search your original corpus. LAnCeLoT Search will appear in a separate tab in your browser.

After that, go back to the LAnCeLoT tab and you will see that the name of your uploaded corpus is listed in "your corpora". A corpus can be reused by simply linking it to another project (different project name).


Please select a corpus

Your corpora
▼

or

Upload a new corpus


When you have clicked on Upload a new corpus, you are directed to LAnCeLoT Search (appearing in a separate tab) where an overview of your corpora is shown. If you have no available corpora, LAnCeLoT Search will look like this:

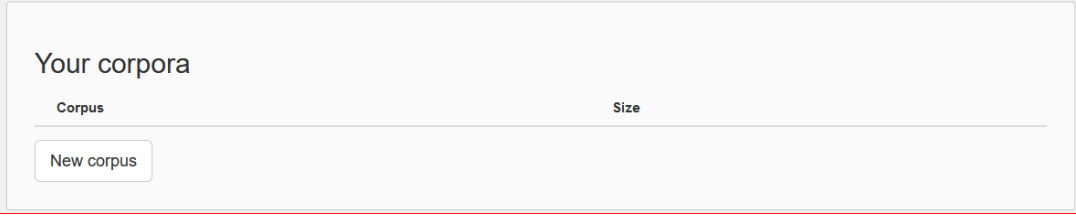

Your corpora

Corpus	Size
New corpus	

You upload a new corpus by clicking on New corpus and by first giving the corpus a corpus name, for instance *19e-eeuwse citaten*.

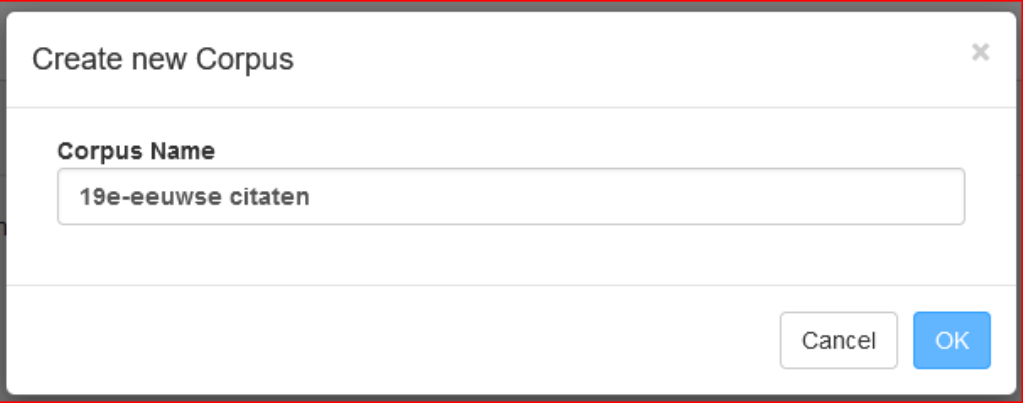


Create new Corpus

Corpus Name


19e-eeuwse citaten

Cancel OK


Afterwards your corpus has been created, as indicated by the message in green above, and an empty corpus in your list of corpora. The corpus is created and the name of your corpus is listed.

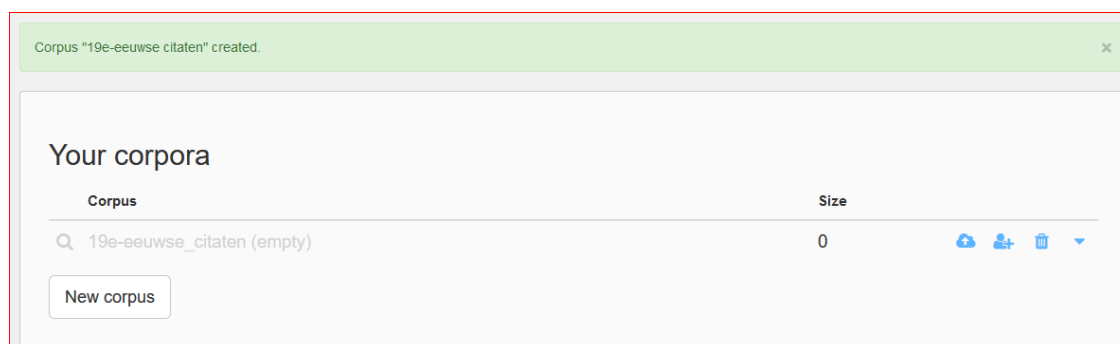

You can add documents to your corpus, share your corpus, delete your corpus or look at some metadata for your corpus by pressing the different buttons at the right side to your corpus. By clicking on the cloud with the arrow you get the following screen.

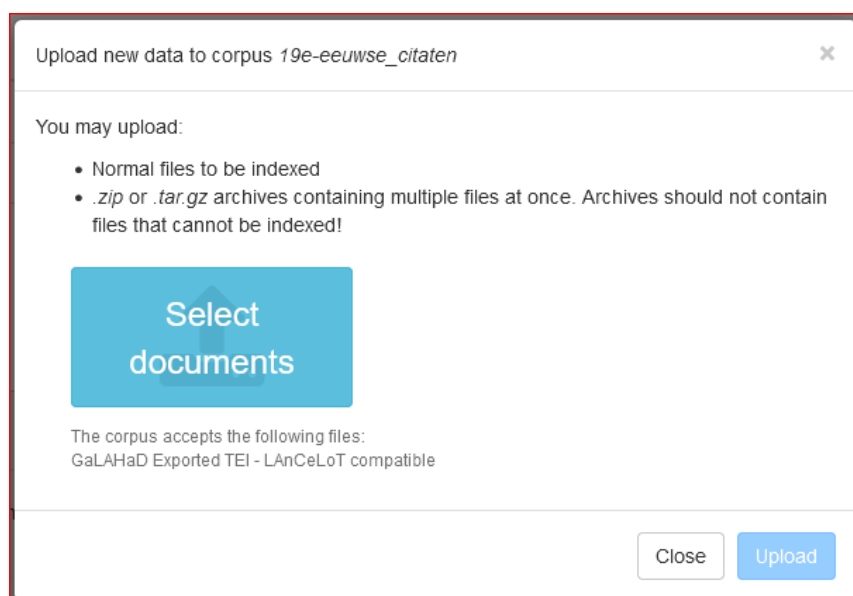

If successful, the name of the corpus is no longer greyed out, and the size of the corpus is visible. It might require reloading LAnCeLoT Search to see that your upload was successful.

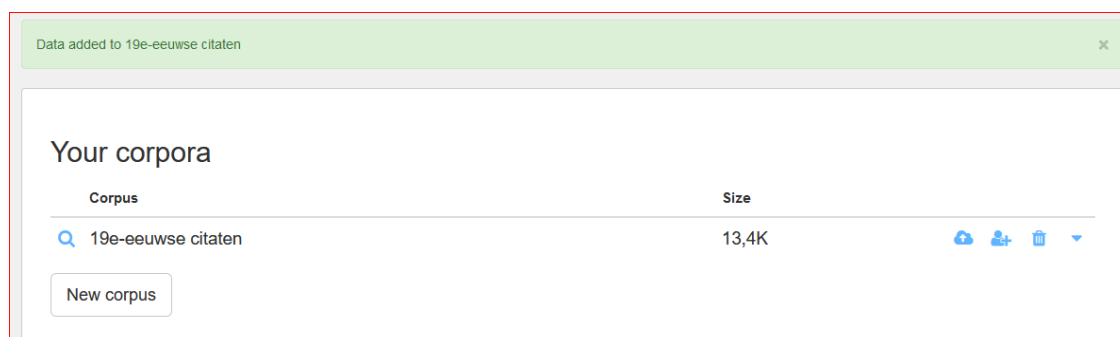

Leave this tab open, and click on the name of your corpus: your uploaded corpus can be searched now.

To continue with the set-up of your project, please return to the previous tab.

Third step: define the tagset

As a third step, you have to select the tagset you want to be using. The TDN-core is selected as default. It is also the tagset used in GaLAHaD, if you have used one of the GaLAHaD taggers to automatically annotate your corpus. If you have uploaded a corpus with a different tagset, please follow the instructions to be able to work with this other tagset. Then click on **Ok** to move to the next part.

(3/4) Define the tagset you want to use

By default, the tool uses the TDN core tagset.
If you only wish to use the TDN main part of speech information, choose TDN-bare.
If you wish to adapt the TDN core tagset, please choose TDN-adapted.

If you wish to use a totally different tagset, it is also possible:
- Choose tagset 'other'
- *COPY & PASTE* your list in the tagset box.

Warning: only one part-of-speech per line is allowed

Tagset name
TDN-core

Tagset

```
AA
AA(degree=comp,position=free)
AA(degree=comp,position=free,WF=abbr)
AA(degree=comp,position=free,WF=mis)
AA(degree=comp,position=free,WF=trunc)
AA(degree=comp,position=postnom)
AA(degree=comp,position=postnom,WF=abbr)
AA(degree=comp,position=postnom,WF=mis)
AA(degree=comp,position=postnom,WF=trunc)
AA(degree=comp,position=prenom)
AA(degree=comp,position=prenom,WF=abbr)
```

Ok Cancel

Here, the opportunity is offered to define tags that are not allowed.

(3/4) Define the forbidden parts-of-speech

You have chosen either the TDN-core tagset or the option to adapt the TDN-core tagset.

In TDN, there are rules for indicating ambiguity : binary ambiguous values should be given the value "und". The tags that are not allowed are listed below.

If needed, the list can be adapted. Make sure that there is only one part of speech per line.


Forbidden parts-of-speech

```
NQU-C(number=sg|pl)
NQU-C(number=pl|sg)
ADV(type=real|ron)
ADV(type=pron|rsa)
CONJ(type=coord|sub)
CONJ(type=sub|coord)
NUM(type=card|ord)
NUM(type=ord|card)
PD(type=d-p,subtype=art|oth)
PD(type=d-p,subtype=oth|art)
PD(type=undef,subtype=art|oth)
```

Ok Cancel

Fourth step: select a reference lexicon

To get lexicon suggestions to help you with the verification of the annotations in your corpus, you have to choose either the complete available lexicon (default) or a part of it.

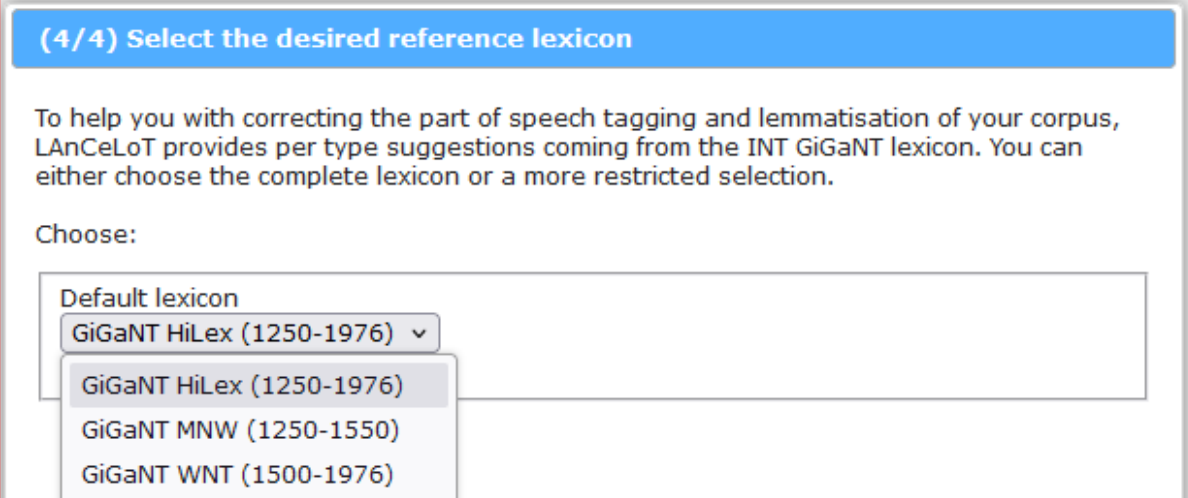

(4/4) Select the desired reference lexicon


To help you with correcting the part of speech tagging and lemmatisation of your corpus, LAnCeLoT provides per type suggestions coming from the INT GiGaNT lexicon. You can either choose the complete lexicon or a more restricted selection.

Choose:

Default lexicon
GiGaNT HiLex (1250-1976) ▼

- GiGaNT HiLex (1250-1976)
- GiGaNT MNW (1250-1550)
- GiGaNT WNT (1500-1976)

By clicking on **Ok** a final time, the project will be set up. As long as the setup process is running, it can be cancelled.

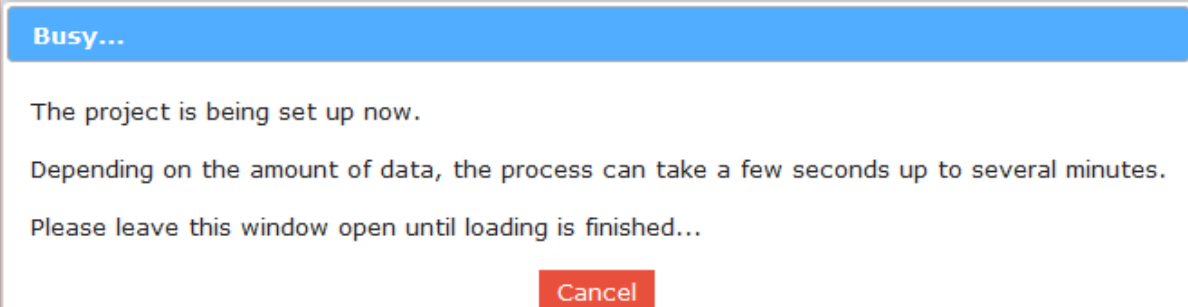

Busy...


The project is being set up now.

Depending on the amount of data, the process can take a few seconds up to several minutes.

Please leave this window open until loading is finished...

Cancel

You receive a message when the set-up has been completed:

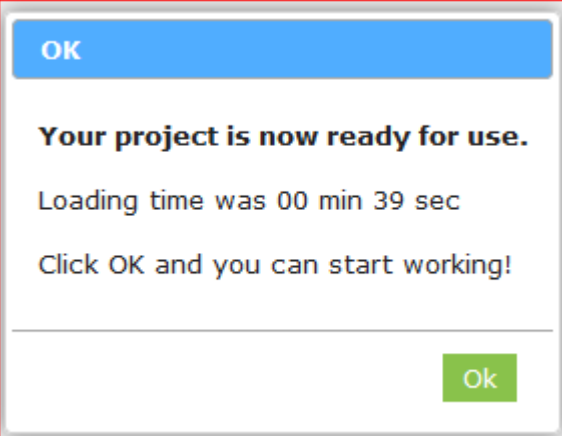

OK

Your project is now ready for use.

Loading time was 00 min 39 sec

Click **OK** and you can start working!

Ok

Clicking on **Ok** here takes you to the project.

Editing a corpus

You have entered the editing environment, either by having selected a project in **Projects** or after having finalised the set-up of your project.


Typical for the verification and correction process in LAnCeLoT is that it is not done token by token in running text. Instead, a list of types is presented with the accompanying annotation. Per type, the corresponding concordances can be listed. You can either correct the linguistic annotation at type level or at token level. It is also possible to make a sub selection of tokens (concordances) and assign a specific annotation to every token in the subselection all at once. In this section, a detailed description of the editing environment is given.

Lay-out of the editing environment

The editing environment consists of two tables:

(1) The upper table (**Types**) lists every type in your corpus. Each type has:


- information on its frequency in the corpus;
- a summary of all analyses of the corresponding tokens;
- progress information on the work done for this type;
- lexicon suggestions;
- room to make notes for this type.

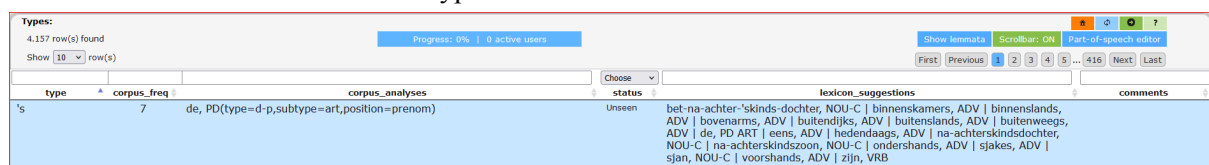

type	corpus_freq	corpus_analyses	status	lexicon_suggestions	comments
s	7	de, PD(type=d-p,subtype=art,position=prenom)	Unseen	bet-na-achter-skinds-dochter, NOU-C binnenskamers, ADV binnenslands, ADV bovenarms, ADV buitendijks, ADV buitenslands, ADV buitenweegs, ADV de, PD ART eens, ADV hedendaags, ADV na-achterskindsdochter, NOU-C na-achterskindszoon, NOU-C ondershands, ADV sjakes, ADV sjan, NOU-C voorshands, ADV zijn, VRB	

(2) The lower table (**Worktable**) shows all tokens that belong to one specific type. For each token there is:

- the left and right context;
- its linguistic analysis;
- a validation field;
- room to make notes for this token.

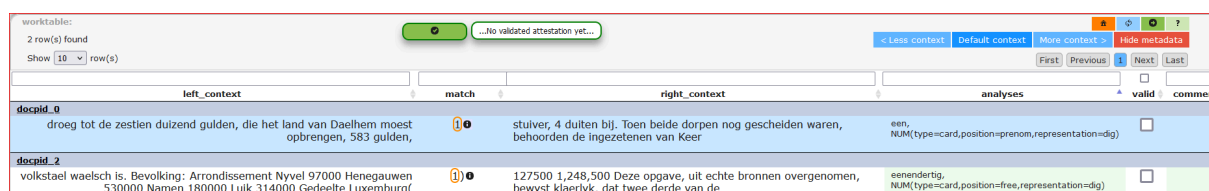

docid	left_context	match	right_context	analyses	valid	comment
0	droeg tot de zestien duizend gulden, die het land van Daelhem moest opbrengen, 583 gulden,	0	stulver, 4 duiten bij. Toen beide dorpen nog gescheiden waren, behoorden de ingezetenen van Keer	een, NUM(type=card,position=prenom,representation=dig)	☐	
2	volkstaal walsch is. Bevolking: Arrondissement Nyvel 97000 Henegauwen 530000 Namen 180000 Luik 314000 Gedeelte Luxemburg	0	127500 1,248,500 Deze opgave, uit echte bronnen overgenomen, bewyyst klaerlyk, dat twee derde van de	eenendertig, NUM(type=card,position=free,representation=dig)	☐	

General information

Number of rows

For both the **Types** table and the **Worktable**, the total number of rows is indicated. If you do not want an estimation but the exact number, please click on the number.

Note that this number always corresponds with your current selection. If you have not made any selection, the total number is shown.

Types:
4.157 row(s) found
Show row(s)

If you have decided to limit the amount of types or tokens by entering a selection criterion in the box at the head of each column, the number of the selection is also displayed. For instance, by typing **z** + Enter in the box at the head of the column with Types, you will see that only types that contain a **z** are shown.

Types:
383 row(s) found (out of 4.157 rows)
Show row(s)

z	
type	corpus_freq

It is possible to determine the number of rows you want to have displayed per page in both Types table and Worktable. By default 10 rows are shown.

Show row(s)

1		
5		
10		
20		
50		
100		
500		

Tooltips

Every column of both the Types table and Worktable contains tooltips. You simply have to hover over the content of a cell with your mouse.


Reset, refresh, go to and help

In the upper right corner of both tables there are four buttons. These are shown below.



1. The reset button allows you to completely reset the table;
2. The refresh button refreshes your page. This can also be done by pressing F5;
3. The arrow button can be used to either go to a specific row or to a specific word in a column or (by using [Shift+Click]) to a specific row or specific page;

4. The help button gives a brief overview of the buttons, search options, sorting options, editing option and hotkeys. It also gives more information on the software used to build the editing environment.

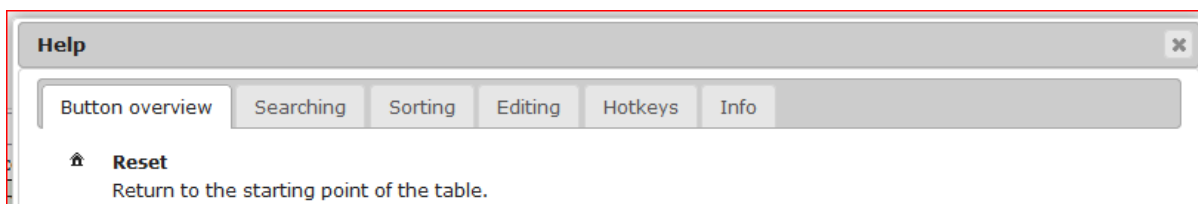

Navigation


There are two ways to navigate LAnCeLoT. You can either click your way around or use the arrow keys and press enter.

Sorting


Each column can be sorted by clicking on the column name or one of the accompanying arrows. With each click the sorting order changes. The sorting order is: alphabetical, reverse alphabetical and if applicable retrograde and reverse retrograde. For the Types table, the default sorting order is alphabetical per type. In the Worktable by default the analyses column is sorted alphabetically.

Locking mechanism

When working with more people on a project simultaneously, a locking mechanism is activated when two or more contributors try to change or validate the same token, or when one contributor tries to change the annotation of a token in a concordance that contains a token corresponding to a type another contributor is working on. When tokens are locked, the following message is displayed if you try to edit or validate an analysis.

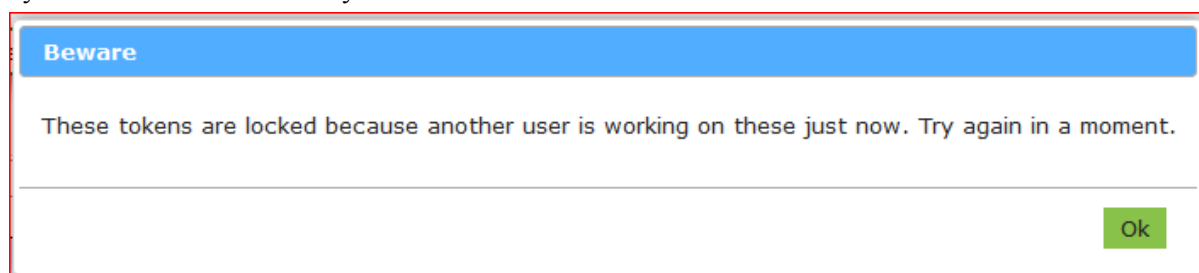

Furthermore, the following message is displayed if you try to validate all visible tokens, when at least one of the tokens in one or more concordances is locked.

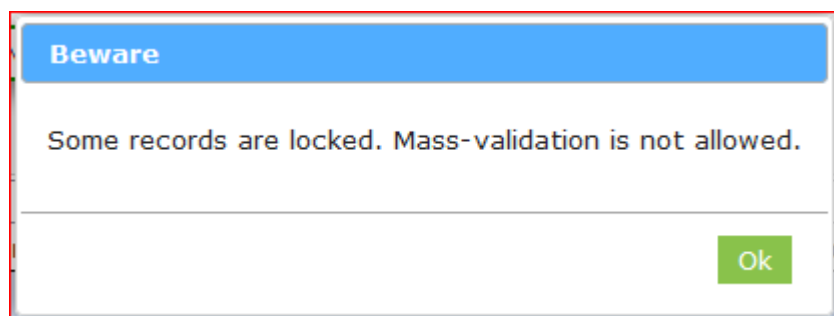

As soon as the other contributor starts to work on another type, the locking is cancelled.

Types table

In this section, we elaborate on the Types table. We give a detailed description of the table and what can be done there, and we explain the supporting features.


Description

type

The first column lists all the different types in your corpus, both accent and case sensitive. Therefore *man* and *Man* in the Worktable are both found under the type *man* en *een* en *één* in the Worktable are both found under the type *een*.

Clicking or pressing enter while navigating with your arrow keys on a type will open all tokens that belong to this type. This is also shown by the tooltip when hovering over a row here.


The tooltip also shows the row number. By default, type is sorted alphabetically.

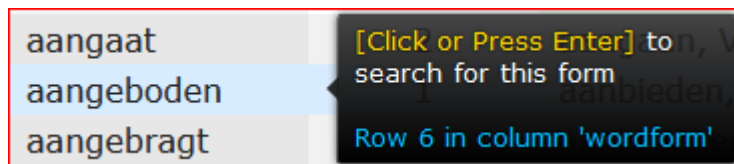

corpus frequency

The second column contains the amount of tokens (word forms) that belong to each type.

The tooltip shows the row number.

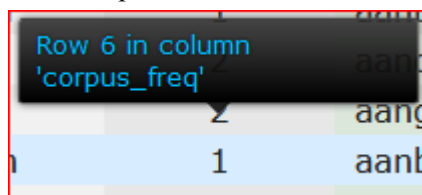

corpus analyses and how to modify these via the Types table


The third column gives an overview of all the analyses that have been assigned to the different word forms of that specific type, divided by a pipeline if there is more than one analysis.

Adding or modifying an analysis


To correct the annotations of a particular type, you have to click on the type and the concordances with the corresponding tokens will appear in the Worktable. In the Worktable, you then click on one or more concordances for which you would like to change the linguistic annotation.

- You can add an annotation to one or more selected tokens by clicking on a specific analysis;
- You can modify a specific analysis of one or more selected tokens via [Alt+Click];
- You can delete an analysis entirely via [Delete+Click].

It is not possible to edit a multiple analysis here, that can only be done in the worktable.

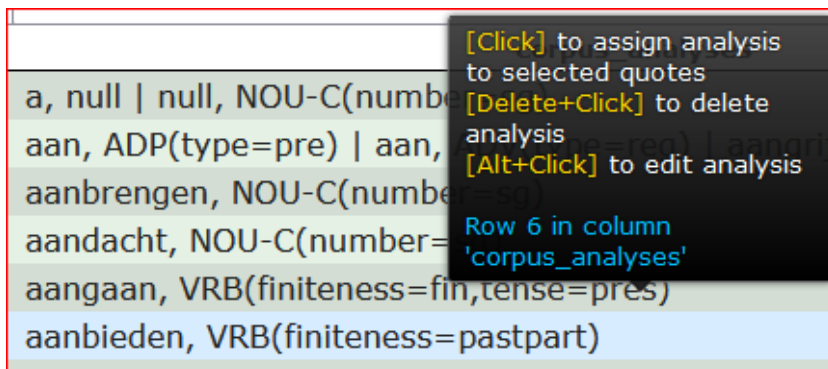

You can only assign, edit or delete analyses belonging to the current type. If you click on another row the following message is given.

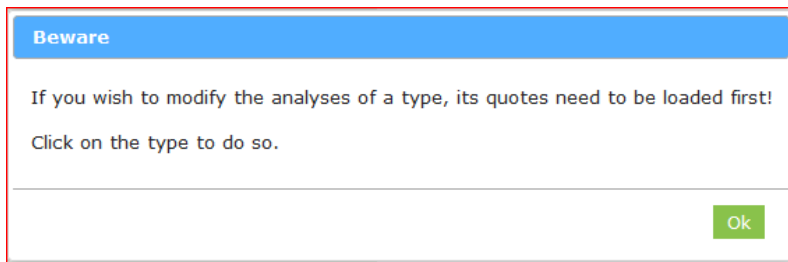


status

The fourth column gives the status of each type.

- **Unseen**: None of the tokens have been seen or no analysis has been validated in the Worktable;
- **In progress**: Some but not all of the tokens have been validated in the Worktable;
- **Finished**: All tokens have been validated.

You can search for all statuses, one specific status or all unfinished statuses by using the drop-down menu above. You can search for all unfinished statuses by selecting In Progress|Unseen.

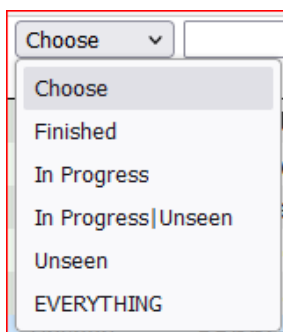


lexicon suggestions

In the fifth column the lexicon suggestions from the chosen lexicon (default: the GiGaNT lexicon) are shown. By default this is the entire lexicon, but it could only be the Middle Dutch or (Early) New Dutch part of the lexicon if that has been selected in the set-up of the project.

It is possible to assign a lexicon suggestion as an analysis to one or more tokens of a type. Click on a type to load the corresponding tokens in the worktable. Select the tokens you want to assign an analysis to. Click on a lexicon suggestion and the analysis will be added to the selected tokens.

Note that the lexicon suggestions only contain the main part-of-speech, so if you are adding features to your tokens, you will have to edit them accordingly.

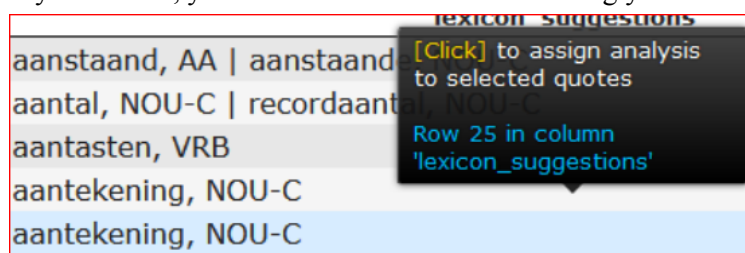


You can only assign analyses belonging to the current type, just like for the corpus analyses.

comments

The last column can be used to add notes. Keep in mind that these notes will not be available in the TEI export of your corrected corpus.


Click on the cell to add a note and press ENTER to place the comment. Note that you can change the size of a cell by clicking and dragging the lines in the bottom right corner.

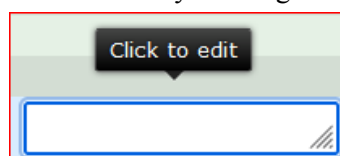

Supporting features

Project information

An indication of the progress is given based on the number of valid annotations. You can also see how many people are currently working on the same corpus.



Show lemmata

An overview of the lemmata with part-of-speech in your corpus or in the lexicon is available. By clicking on Show lemmata a table will appear to the right of the Types table, as shown below.

✖ lemmata: 4.296 row(s) found Show 10 row(s)		Show lemmata of: Corpus First Previous 1 ... 7 8 9 ... 430 Next Last	
lemma	lemma_part_of_speech		
aangewakkerd	AA(degree=pos,position=prenom)		
aangrijpen	VRB(finiteness=fin,tense=past)		
aangrijpen	VRB(finiteness=fin,tense=pres)		
aangroeien	NOU-C(number=sg)		
aanhoren	VRB(finiteness=inf)		
aankomen	VRB(finiteness=inf)		
aankopen	VRB(finiteness=pastpart)		
aanleiding	NOU-C(number=sg)		
aanlepegstaat	ADV(type=reg)		
aanleren	NOU-C(number=sg)		
		First Previous 1 ... 7 8 9 ... 430 Next Last	

Choosing between either the lemmata from your corpus or the lexicon is done via the dropdown list in the upper right corner of the table. This lemmata table is only shown for reference. If you want to go back to tagging, you can close this table by pressing on **X** in the upper left corner. When you have not finished correcting your linguistic annotations, the corpus may still contain mistakes, such as the lemma *aanlepgestaat* as adverb in the example above.

Scrollbar button (ON / OFF)

A large number of corpus analyses or lexicon suggestions can take up a lot of space. In these cases, by default LANCeLoT uses a scrollbar. A user can however toggle between a view with scrollbar and without, so as to be able to see the entire content with or without scrolling.

Part-of-speech editor

When setting up your project, you declare your tagset. A project owner is allowed to modify the declared tagset by clicking on **Part-of-speech editor**. If you later on in the project want to add, edit or even delete a tag you can click on the button to open the editor. Note that you can only do this as a project owner. The part-of speech editor appears in a separate tab.

Allowed parts-of-speech editor:

625 row(s) found

Show 10 row(s)

First Previous 1 2 3 4 5 ... 63 Next Last

tagset_type	pos
TDN-core	AA
TDN-core	AA(degree=comp,position=free)
TDN-core	AA(degree=comp,position=free,WF=abbr)
TDN-core	AA(degree=comp,position=free,WF=mis)
TDN-core	AA(degree=comp,position=free,WF=trunc)
TDN-core	AA(degree=comp,position=postnom)
TDN-core	AA(degree=comp,position=postnom,WF=abbr)
TDN-core	AA(degree=comp,position=postnom,WF=mis)
TDN-core	AA(degree=comp,position=postnom,WF=trunc)
TDN-core	AA(degree=comp,position=prenom)

First Previous 1 2 3 4 5 ... 63 Next Last

Worktable

By clicking on a token in the Types table, the corresponding tokens in context are shown in the Worktable. These “matches” for the type you selected are highlighted with an orange box. By either selecting one concordance, or a group of concordances (using [Ctrl+Click] or [Shift+Click]), we can alter the analysis of one concordance or simultaneously for a group of concordances.

We give a detailed description of the table and what can be done there, and we explain the supporting features.


Description

match


This column contains all matches, i.e. tokens that belong to a certain type. Contrary to the types, tokens are case and accent sensitive. This means that for example the type *een* corresponds to tokens like *Één*, *Een*, *éen* and *een*.

By clicking on the column header, the order of the tokens can be changed.

If more context is needed to determine whether the analysis of a token is correct, one can use [Alt+Click] or click on the 'i' icon to get more analysed context.

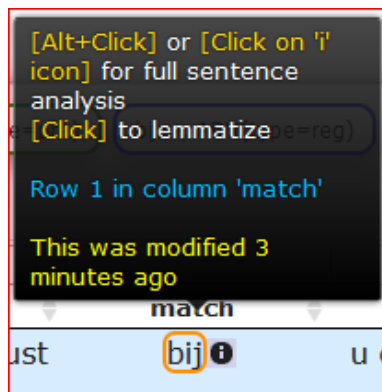


This will open a pop-up with a small portion and an analysis of the text. You can click on more context or close the pop-up when you are done inspecting it.

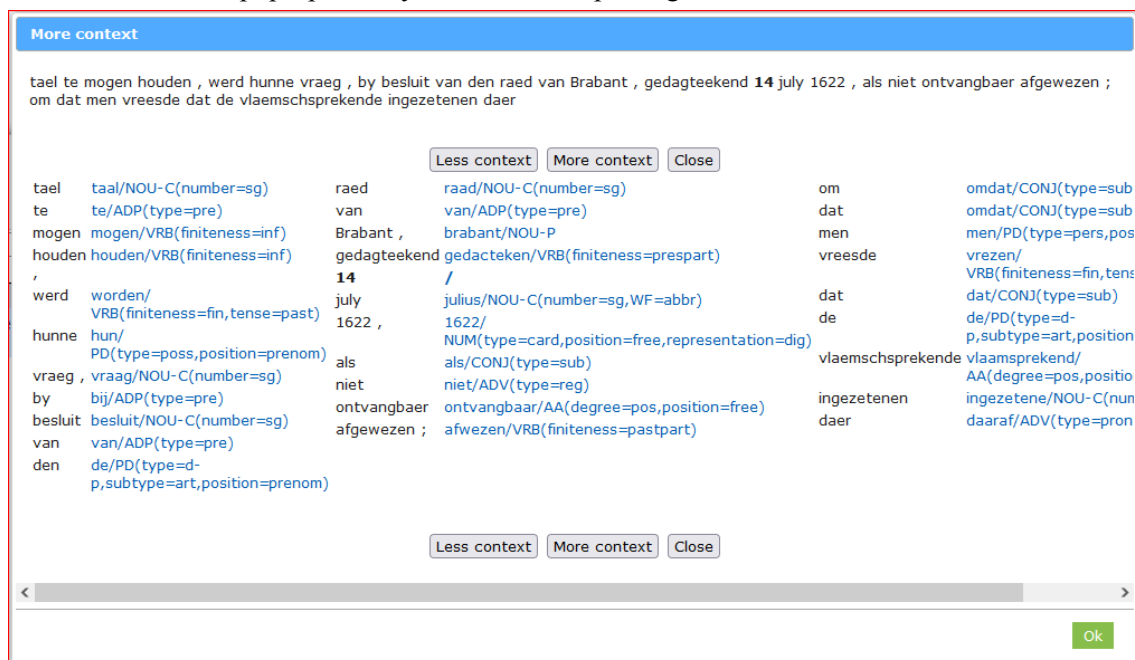

Adding an analysis

By clicking on the match (token), you can add an analysis.

A text field will appear with the first two letters of the match already filled in and a list with suggestions for a possible analysis. The suggestions are based on both existing analyses in your corpus or on lexicon suggestions. You can walk through the list with the arrow keys.

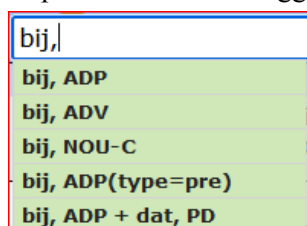

You can add an analysis by pressing ENTER either after you are done typing or after you have selected the correct analysis in the suggestion list.

Adding or modifying a multiple analysis

If you want to add (or edit) multiple analyses to an match (token) you fill in the first part of the analysis (lemma and part-of-speech), then press the (+) to add another part of the analysis (and repeat this until all parts of the analysis have been filled in). The first part disappears from the suggestion list, but can still be seen in the upper middle part of the Worktable as shown below.


bij, ADP(type=pre) + ...

After having added the second (or more) part(s), press ENTER to store the multiple analysis. The full analysis will be shown in the upper part of the Worktable when it has been validated.

bij, ADP(type=pre) + gebrek, NOU-C(number=sg)

left and right context


Left and right from the match, context is shown. You can click anywhere on the context to select the row. With [Shift+Click] and [Ctrl+Click] you can also select multiple rows.

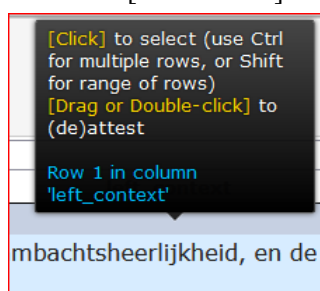


Combining tokens

If the match is in fact incomplete, and part of the match you want to analyse can be found in either the left or right context, you can add the missing part by either double clicking on the missing token(s) or by dragging. Both the original match and the added part or parts are now highlighted by an orange box. You can undo this by once again either double clicking or dragging.

In the example below *aan* has been added to *er* to form the pronominal adverb *eraan*.

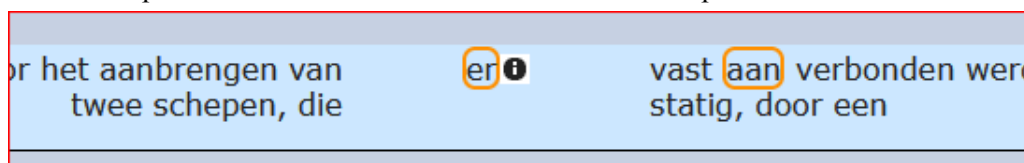

If you then open the type *aan* you can see that the link also exists there.



By giving the analysis *eraan*, ADV(type=pron) to the match when dealing with the type *er*; the analysis is also available when checking the type *aan*, and for both tokens that together form a match, the analysis is validated.


analyses

This column contains the token analyses. When an analysis is validated, it is also shown in the upper middle part of the Worktable. The Worktable is by default ordered alphabetically by analysis.

Modifying or removing an analysis

You can modify or remove the analysis of a match (token).

- Modifying an analysis is done by a combination of [Alt+Click] on the analysis. The same mechanism is applied here for “Adding an analysis” (see above);
- You can delete an analysis entirely via [Delete+Click];
- You can also start from the Types table (see above).

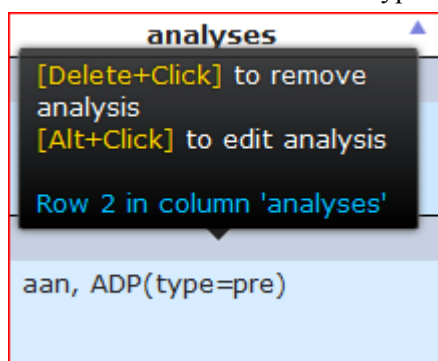

valid(action)


Manually adding or correcting an analysis automatically validates the analysis. This is shown in the check box on the right of each concordance. Validation is undone by either removing an analysis or by clicking on the checkbox.

Tokens for which the analysis in the corpus was already correct, need to be validated as well. This can be done by either clicking on the checkbox, by selecting multiple rows and clicking on the checkbox of one of the selected rows or by clicking on the green validation button in the top centre of the Worktable (Validate all visible rows).

It is also possible to only view the valid or invalid tokens. This is done by ticking the box at the head of the column. When you first tick it, the area surrounding the box turns green. Only valid analyses are shown now.



If you tick the box again, the area surrounding the box turns red. Only invalid analyses are shown now.




Ticking a box again returns it to the default state where all tokens are shown regardless of validation.

comments

The last column can be used to add notes. Keep in mind that these notes will not be available in the TEI export of your corrected corpus.


Click on the cell to add a note and press ENTER to place the comment. Note that you can change the size of a cell by clicking and dragging the lines in the bottom right corner.

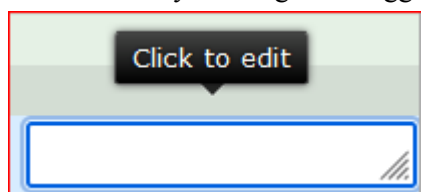


Supporting features

Validated analyses per type


In the upper middle part of the Worktable a little green box and a box with “...No validated attestation yet...” can be seen, as shown below.



If twenty or more rows are shown the green box is also shown below the attestations. This green button can be used to validate all visible rows.

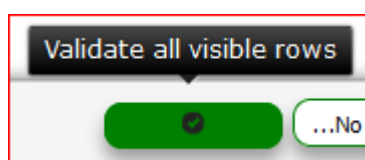


If one or more rows have been validated, the message to the right of the green box disappears and it instead shows the valid attestation(s), as shown below for the type *bij*.



Invalid analysis


If you enter an invalid analysis, that is, with a part-of-speech that is not declared within the selected tagset, you get an error message. The previous analysis can be restored with [Ctrl+v].

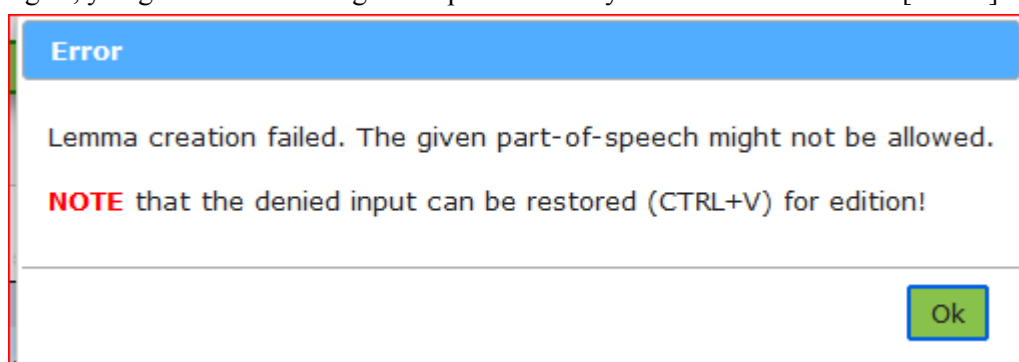

Context

In the upper right part of the worktable there is an option to show more or less context by pressing the corresponding buttons. By pressing “Default context” the amount of context that can be seen to the

left and right of the match is reset to the default. More context can be shown by looking at the source (see the next section).



It is also possible to get more context of one specific row. See the match section.

Metadata and more context

By default, information is given on the text where a concordance belongs to. The metadata can be hidden by clicking on `Hide metadata`.

If you still feel you do not have enough context to correctly analyse a match, you can either go to LAnCeLoT Search, and look for the specific passage in your corpus or click on the metadata link so that the corresponding document is displayed in the corpus application.

An example is given below. You can click on **docpid_1** and **docpid_0**.

docpid_1	
te Amsterdam in De school des levens had gespeeld. Voeldet ge niet soms den lust	bij ⓘ
enz. Van meester Adolf leert hij veel over staatkunde en staathuishoudkunde, over hoogheid en laagheid	bij ⓘ
docpid_0	
duizend gulden, die het land van Daelhem moest opbrengen, 583 gulden, 1 stuiver, 4 duiten	bij ⓘ
drie landen van Overmaze, liggen, behalve Cadier, alleen nog de dorpen Mheer, Noorbeek en Oost	bij ⓘ

Tips and Tricks

You can use one or more of the following tips and tricks to make working with LAnCeLoT easier.

Verification and correction of your data per category

You are working more systematically if you evaluate your annotations per Part of Speech.

For instance you can start working on all verbs or all proper nouns that start with the letter **a**. You can do this by defining a filter in the headers of each column in the Types table.

How to filter

If you for instance search for a type that ends with **-lijk** and put **AA** in corpus analyses, you won't find conjunctions that end with **-lijk**. You put **lijk\$** in the header of *type* and **AA** in the header of *corpus analysis*.

- In the type column of the Types table you can use regular expressions to filter. Some examples are:
 - o **>=a**: this finds all types that do not start with a special character (like =) or a number;
 - o **^d**: this finds all types that begin with a **d**;
 - o **en\$**: this finds all types that end with **-en**;
 - o **l(y|ij|i)(c|k)k?e?(r|n)?\$**: this finds (all or at least) most lemmata that end with **-lijk**.

- In the corpus_analysis column of the type table you can search for specific analyses or filter part-of speech:
 - o **"CONJ"** (with square brackets to search case sensitively) finds all conjunctions;
 - o \+: finds all analyses that contain a plus (multiple lemmata);
 - o **en, VRB** finds all verbs, except for the few verbs that end on *-ën* (such as *yogaën*), *-an* (such as *gaan en staan*) and the verb *zijn*.
- If you put a note in the comments field, such as **discussion**, you can later filter on only types that contain this comment by typing **discussion** in the text field above the comments column.

Working without continuous clicking in the Types table


If you want to avoid having to continuously click on each type in the Types table when you are working on your corpus, do the following:

- Filter by only showing types that are 'Unseen' or 'Unseen|In Progress' in the status column in the Types table;
- Correct all tokens in the Worktable of the type you have selected to work on;
- Press Enter and the concordances of the next type in the Types table are automatically loaded in the Worktable.

Adding Written Form

If you encounter a token that should contain a Written Form, you can more easily add the analysis by using the following tip.

In the example below *zyu* is misspelled for *zyn*. You can navigate to the correct analysis by using the up or down arrows.

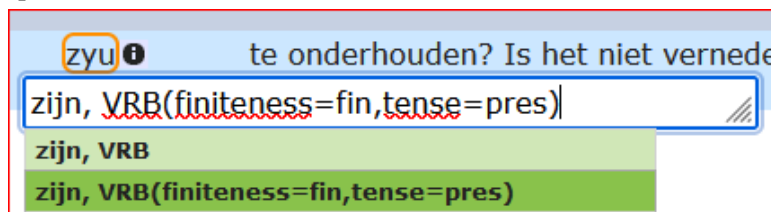

When the correct analysis is highlighted but you only miss the attribute WF, press on the Right arrow and your suggestion list will contain your highlighted analysis and its variants with WF. From there, you can navigate to the correct analysis, and for our example, select **WF=mis**, and press ENTER.

