


Data Analysis Subsystem			
Subsystem Code	dt	Component Codes	splk = Splunk elas = Elastic sysc = Syslog Collector winc = Windows Event Collector sens = Sensor

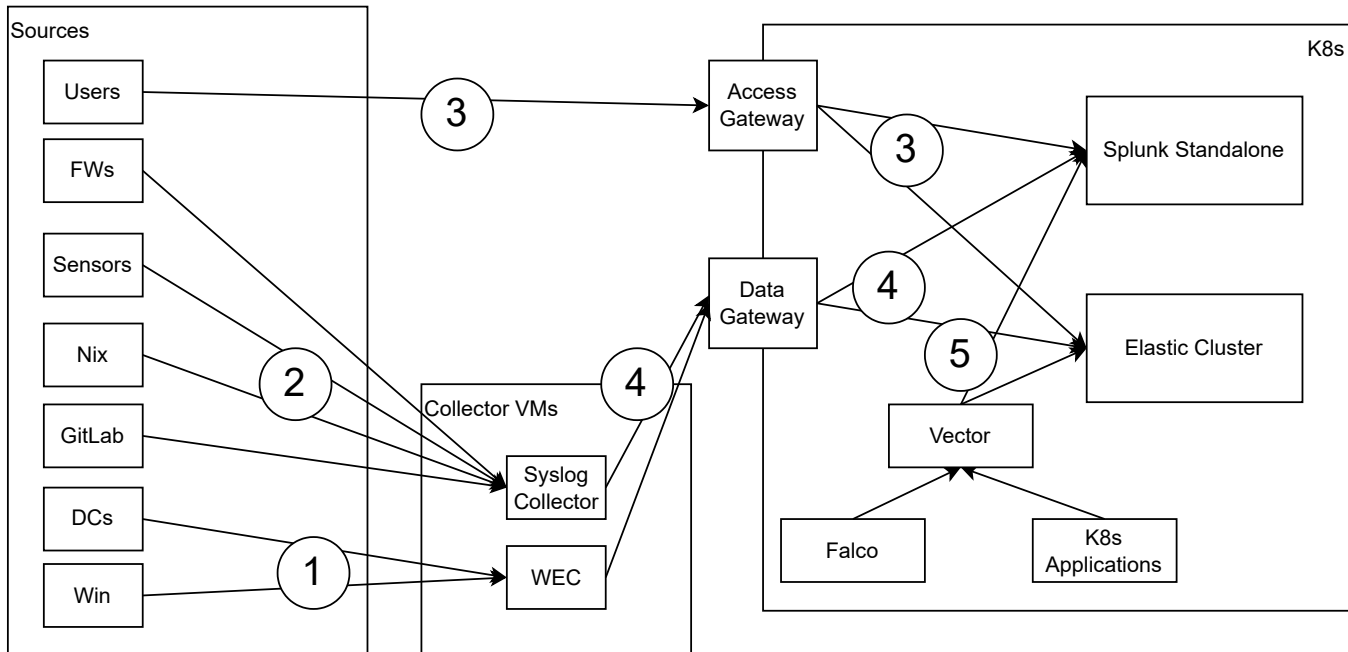

Data Flows			
ID	Port/Proto	Description	Controls
1	TCP/5986	Windows Event Forwarding using native OS tools.	TLS-encrypted WinRM sessions.
2	TCP/6514	Syslog-over-TLS forwarding to nix-based sources using rsyslogd or similar native tools.	Encrypted and reliable.
3	TCP/443	User access to the Splunk and Elastic applications	TLS-encrypted sessions using the primary gateway for the k8s cluster. Authentication provided by ADDS via TBD in-line proxy.
4	TCP/8088 TCP/9200	Vector data forwarder collects data from the hosts and forwards through the k8s data gateway to the indexing and storage systems.	TLS-encrypted sessions; forwarder authenticated using unique Splunk HEC tokens and Elastic API tokens per collector.
5	TCP/8088 TCP/9200	Vector DaemonSet running on each node collects logs from the node file system, correlates them with containers, and then forwards to indexing and storage systems.	TLS-encrypted sessions; forwarder authenticated using unique Splunk HEC tokens and Elastic API tokens per collector.

Network Sensor Architecture

TBD - will utilize Zeek for protocol analysis and Suricata for rule-based IDS.

Host Collection Architecture

TBD - will utilize BitDefender for antivirus and Wazuh for data collection and forwarding on top of native OS tooling (rsyslogd, windows event forwarding)