

Job Shop Scheduling

The example is based off the excellent resources provided by [Google OR-Tools](#).

1. What is Job Shop Scheduling


It is quite common in manufacturing to have machines that perform a given operation for a range of products.

A complete job may have a sequence of operations that require the use of different machines, each with their own processing time.

Below we have 3 jobs and 3 machines. Each job requires a sequence of operations using the machines.

Jobs	Operations	Sequence on Machines	Process Time on Machines
J_0	O_{01}, O_{02}, O_{03}	M_0, M_1, M_2	3,2,2
J_1	O_{11}, O_{12}, O_{13}	M_0, M_2, M_1	2,1,4
J_2	O_{21}, O_{22}	M_1, M_2	4,3

Here is an example schedule which is valid.

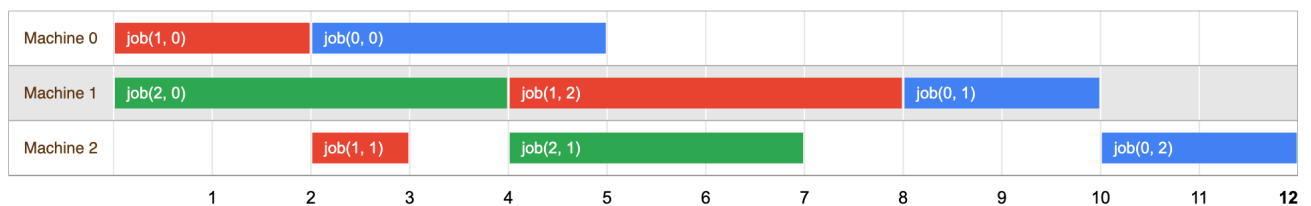

The question is how do we best schedule these jobs on the machines?

Note that we can also express this problem as,

Job 0 = [(0, 3), (1, 2), (2, 2)]

Job 1 = [(0, 2), (2, 1), (1, 4)]

Job 2 = [(1, 4), (2, 3)]

here the tuple of the form (m,p) represents:

- m = machine number
- p = processing time on m.

This is useful when writing code to solve these problems.

History

1. Early Development (1950s-1960s):

- The job shop scheduling problem emerged in the context of manufacturing operations during the 1950s and 1960s.
- Researchers began formalizing scheduling problems and exploring mathematical approaches to solve them.

2. Algorithmic Development (1970s-1980s):

- In the 1970s and 1980s, significant progress was made in developing algorithms to solve job shop scheduling problems.
- Branch and bound algorithms were explored, along with mathematical programming techniques such as linear and integer programming.

3. Heuristic Methods (1980s-Present):

- From the 1980s onwards, heuristic methods gained popularity for solving job shop scheduling problems.
- Heuristic algorithms, including genetic algorithms, simulated annealing, tabu search, and ant colony optimization, were developed to find approximate solutions efficiently.

4. Exact Algorithms (1990s-Present):

- In the 1990s and continuing into the present, research focused on developing exact algorithms for job shop scheduling.
- Exact methods, such as branch and bound with dynamic programming and constraint programming, aim to find optimal solutions by exhaustively searching through all possible schedules.

5. Hybrid Approaches and Applications (Present):

- Current research in job shop scheduling emphasizes hybrid approaches that combine different algorithms and techniques to improve solution quality and computational efficiency.
- Job shop scheduling has widespread applications across various industries, including manufacturing, transportation, healthcare, and services, where efficient resource scheduling is crucial for optimizing productivity and minimising costs.

2. Formal Definition

The job shop scheduling problem involves scheduling a set of n jobs on a set of m machines.

- Each job consists of a fixed sequence of operations
 - Each operation must be processed on a specific machine.
 - The **goal** is to determine the **optimal schedule** for executing these predetermined sequences of operations on the available machines in order to **minimise the makespan**.
-

Given

- A set of jobs $J = \{1, 2, \dots, n\}$
- A set of machines $M = \{1, 2, \dots, m\}$
- Each job $i \in J$ consists of a sequence of operations

$$O_{i1}, O_{i2}, \dots, O_{in_i}$$

where operation O_{ij} must be processed:

- on a specific machine $m(i, j) \in M$,
 - for a known processing time $p_{ij} > 0$.
-

Decision Variables

- S_{ij} : start time of operation O_{ij} (job i , operation j)
 - $C_{\max}$: makespan, the time at which the final operation finishes
-

Constraints

1. Precedence (Job Order)

Each operation in a job must start only after the previous one finishes:

$$S_{ij} + p_{ij} \leq S_{i,j+1} \quad \forall i \in J, j = 1, \dots, n_i - 1$$

This ensures that the sequence of operations within each job is maintained.

2. No Overlap (Machine Capacity)

For any two distinct operations (i, j) and (k, l) that require the same machine, one must finish before the other starts:

$$S_{ij} + p_{ij} \leq S_{kl} \quad \text{or} \quad S_{kl} + p_{kl} \leq S_{ij}, \quad \forall (i, j) \neq (k, l) : m(i, j) = m(k, l)$$

This ensures that each machine can process at most one operation at any given time.

3. Makespan Definition

The makespan must be at least as large as the completion time of every operation:

$$C_{\max} \geq S_{ij} + p_{ij} \quad \forall i \in J, j = 1, \dots, n_i$$

Objective

$$\min C_{\max}$$

That is, minimise the total time required to complete all jobs.

3. Solving with a Sat Solver

You can find out how to solve this via [Google OR-Tools](#)

4. Solving as an LP

Job Shop Scheduling MILP

Sets

- Jobs: $J = \{1, \dots, n\}$
- Machines: $M = \{1, \dots, m\}$
- Each job i has operations $j = 1, \dots, n_i$

Data

- $m(i, j) \in M$: machine required by operation (i, j)
- $p_{ij} > 0$: processing time of (i, j)
- H : big- M (e.g., $H = \sum_i \sum_j p_{ij}$)

Decision variables

- $S_{ij} \geq 0$: start time of operation (i, j)
- $C_{\max} \geq 0$: makespan
- $y_{ij,kl} \in \{0, 1\}$: ordering of operations (i, j) and (k, l) **only for pairs with $m(i, j) = m(k, l)$ and a canonical index choice $(i, j) < (k, l)$**

Objective

$$\min C_{\max}$$

Constraints

1. *Precedence (within jobs - the sequence of operations is maintained with no overlap)*

$$S_{ij} + p_{ij} \leq S_{i,j+1} \quad \forall i \in J, j = 1, \dots, n_i - 1$$

2. *Machine no-overlap (pairwise on same machine - all operations from all jobs on a given machine must not overlap)*

$$\begin{aligned} S_{ij} + p_{ij} &\leq S_{kl} + H(1 - y_{ij,kl}) \\ S_{kl} + p_{kl} &\leq S_{ij} + Hy_{ij,kl} \end{aligned} \quad \forall (i, j) < (k, l) \text{ s.t. } m(i, j) = m(k, l)$$

3. *Makespan definition*

$$S_{ij} + p_{ij} \leq C_{\max} \quad \forall i \in J, j = 1, \dots, n_i$$

4. Domains

$$S_{ij} \geq 0, \quad C_{\max} \geq 0, \quad y_{ij,kl} \in \{0,1\}$$

Pyomo Code

Runnable Code

```
from pyomo.environ import *

# === Job Shop Scheduling (MILP) for the example in the screenshot ===
# Each job i has a sequence of operations j = 1..n_ops[i].
# Each operation (i,j) must run on machine m[(i,j)] for p[(i,j)] time units.

model = ConcreteModel()

# -----
# Example data from screenshot (jobs start at 0, machines at 0)
# job 0 = [(0, 3), (1, 2), (2, 2)]
# job 1 = [(0, 2), (2, 1), (1, 4)]
# job 2 = [(1, 4), (2, 3)]
# -----

model.JOBS = Set(initialize=[0, 1, 2])
model.MACHINES = Set(initialize=[0, 1, 2])

# Number of operations in each job
n_ops = {0: 3, 1: 3, 2: 2}

# Map (i,j) -> (machine, processing_time) as in the screenshot
ops_data = {
    0: [(0, 3), (1, 2), (2, 2)],
    1: [(0, 2), (2, 1), (1, 4)],
    2: [(1, 4), (2, 3)],
}

# Build p[(i,j)] and m[(i,j)] from ops_data
p = {}
m = {}
for i in model.JOBS:
    for j, (mach, dur) in enumerate(ops_data[i], start=1):
        p[(i, j)] = dur
        m[(i, j)] = mach
    # Examples:
    # p[(0,1)] = 3 -> job 0 op 1 takes 3 units
    # m[(0,1)] = 0 -> job 0 op 1 must run on machine 0
```

```

# -----
# Sets of operations and conflict pairs
# -----

# All operations (i,j): for each job i, j = 1..n_ops[i]
model.OPS = Set(initialize=[(i, j) for i in model.JOBS for j in range(1, n_ops[i] + 1)])

# Build pairs of operations that use the same machine (potential overlap).
# Only once per unordered pair using the rule (i,j) < (k,l) (lexicographic).
pairs = []
for (i, j) in model.OPS:
    for (k, l) in model.OPS:
        if (i < k) or (i == k and j < l):
            if m[(i, j)] == m[(k, l)]:
                pairs.append((i, j, k, l))
model.PAIRS = Set(dimen=4, initialize=pairs)

# Big-M bound: safe (sum of all processing times)
H = sum(p.values())

# -----
# Decision Variables
# -----

model.S = Var(model.OPS, domain=NonNegativeReals) # start time S[i,j]
model.Cmax = Var(domain=NonNegativeReals) # makespan
model.y = Var(model.PAIRS, domain=Binary) # ordering y[i,j,k,l] for share

# -----
# Objective: minimize makespan
# -----

model.obj = Objective(expr=model.Cmax, sense=minimize)

# -----
# Constraints
# -----

# 1) Precedence within each job: S[i,j] + p[i,j] <= S[i,j+1]
def precedence_rule(model, i, j):
    if j < n_ops[i]:
        return model.S[i, j] + p[i, j] <= model.S[i, j + 1]
    return Constraint.Skip
model.Precedence = Constraint(model.OPS, rule=precedence_rule)

# 2) No-overlap on the same machine (pairwise, big-M with y)

```

```

def no_overlap_1(model, i, j, k, l):
    # If  $y=1 \rightarrow (i,j)$  before  $(k,l)$ 
    return model.S[i, j] + p[i, j] <= model.S[k, l] + H * (1 - model.y[i, j, k, l])

def no_overlap_2(model, i, j, k, l):
    # If  $y=0 \rightarrow (k,l)$  before  $(i,j)$ 
    return model.S[k, l] + p[k, l] <= model.S[i, j] + H * model.y[i, j, k, l]

model.NoOverlap1 = Constraint(model.PAIRS, rule=no_overlap_1)
model.NoOverlap2 = Constraint(model.PAIRS, rule=no_overlap_2)

# 3) Makespan:  $S[i,j] + p[i,j] \leq Cmax$ 
def makespan_rule(model, i, j):
    return model.S[i, j] + p[i, j] <= model.Cmax
model.Makespan = Constraint(model.OPS, rule=makespan_rule)

# -----
# Solve and pretty-print results
# -----
if __name__ == "__main__":
    from pyomo.opt import SolverFactory

    # Try a few common MILP solvers (use the first available)
    for solver_name in ["cbc", "glpk", "gurobi", "cplex"]:
        if SolverFactory(solver_name).available():
            opt = SolverFactory(solver_name)
            break
    else:
        raise RuntimeError(
            "No MILP solver found. Please install CBC (recommended), GLPK, Gurobi,
        )

    results = opt.solve(model, tee=False)

    print(f"\nOptimal makespan Cmax = {value(model.Cmax):.2f}\n")

    # Show schedule grouped by machine, ordered by start time
    by_machine = {mach: [] for mach in model.MACHINES}
    for (i, j) in model.OPS:
        mach = m[(i, j)]
        start = value(model.S[i, j])
        finish = start + p[(i, j)]
        by_machine[mach].append(((i, j), start, finish))

    for mach in sorted(model.MACHINES):
        print(f"Machine {mach}:")

```

```

for (op, start, finish) in sorted(by_machine[mach], key=lambda x: x[1]):
    print(f" op {op} start={start:5.2f} finish={finish:5.2f}")
print()

```

Output

Optimal makespan Cmax = 11.00

Machine 0:

```

op (1, 1) start= 0.00 finish= 2.00
op (0, 1) start= 2.00 finish= 5.00

```

Machine 1:

```

op (2, 1) start= 0.00 finish= 4.00
op (0, 2) start= 5.00 finish= 7.00
op (1, 3) start= 7.00 finish=11.00

```

Machine 2:

```

op (1, 2) start= 2.00 finish= 3.00
op (2, 2) start= 4.00 finish= 7.00
op (0, 3) start= 9.00 finish=11.00

```

