

Smart Material Changer

version: 1.14

Guide

Introduction

This is a texture replacement based on the dialog menu. It can manage multiple faces of multiple prims in the same linkset. Whether it's furniture, cars, airplanes, clothes, toys...

Efficient and convenient, make complex things simple through one unified planning


Quick Start. Follow this, step by step



- 1. Prepare your object, it can be a prim, mesh or a linkset of them.
- 2. Name them separately, the parts with the same texture can have the same name.
- 3. Plan your texture groups, according to color, style, subject, theme, etc., according to your ideas. write them to the config file.
- 4. Place script and configuration file into an object, either root prim or subprim.
- 5. Touch to get started.

Example

Single object

```
PART A|a|0|ALL_SIDES
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET GREEN|2f8ae0e4-22be-20c8-c0cc-c50bbfaf2871||
```

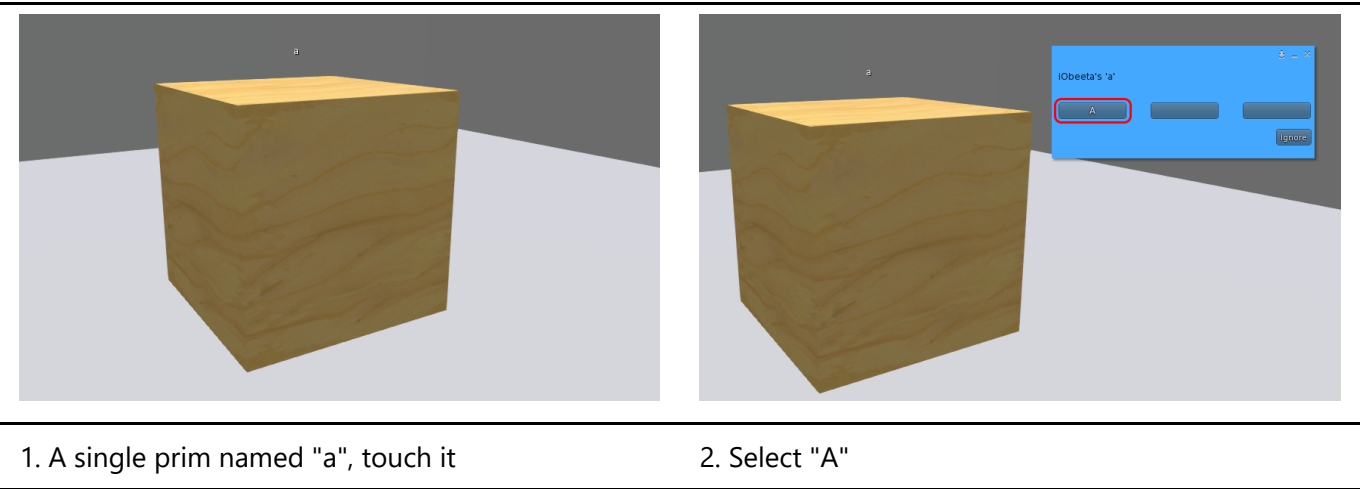

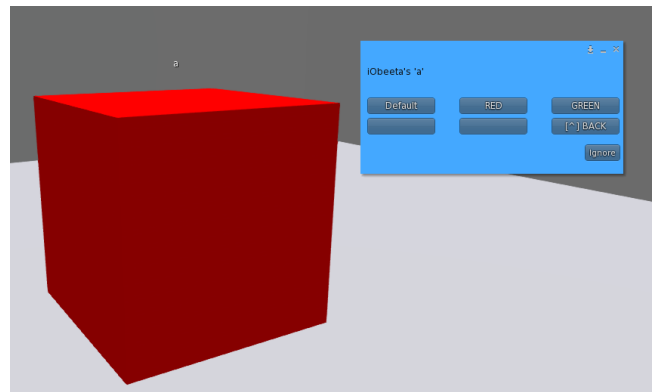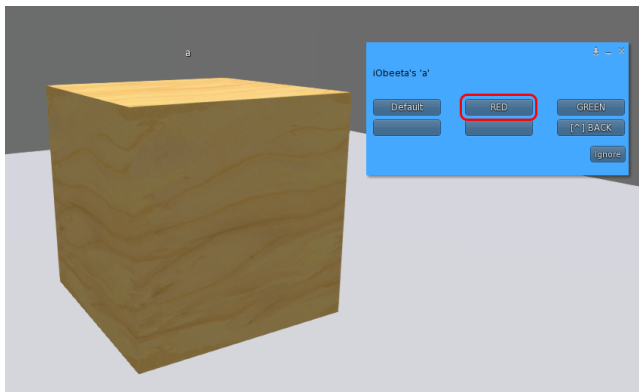

3. Select "RED"

4. **RED** is applied to **all faces** of **a**

In linkset

Script in root prim, manage multiple faces of multiple prims.



```

PART A|a|0|ALL_SIDES
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET GREEN|2f8ae0e4-22be-20c8-c0cc-c50bbfaf2871||

PART B|b|0|3
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET GREEN|2f8ae0e4-22be-20c8-c0cc-c50bbfaf2871||


```

PART B|b|0|3 Controls the 3rd face of the prim named "b"

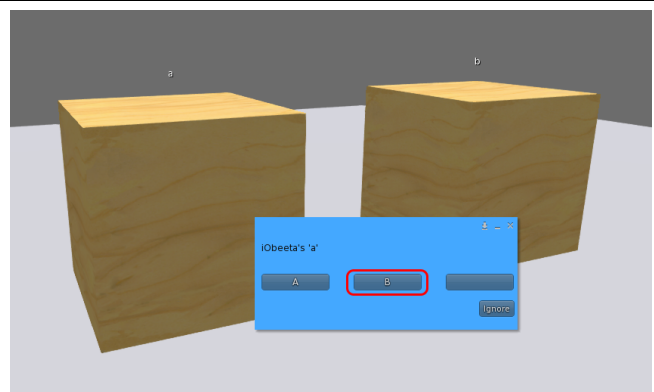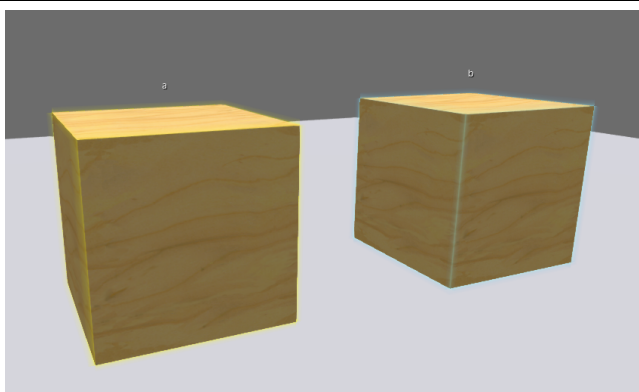


1. Linkset contains "a" and "b", the script is in the main prim, touch

2. Select "B"

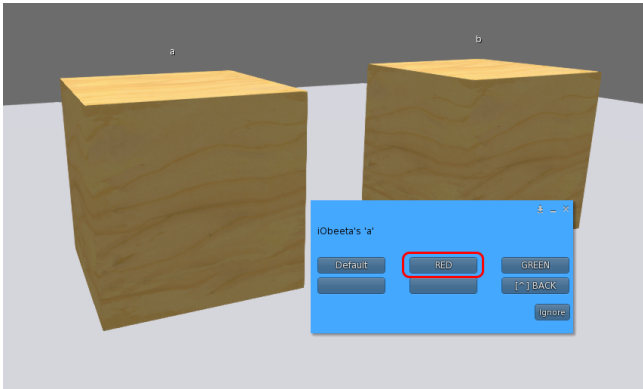


3. Select "RED"

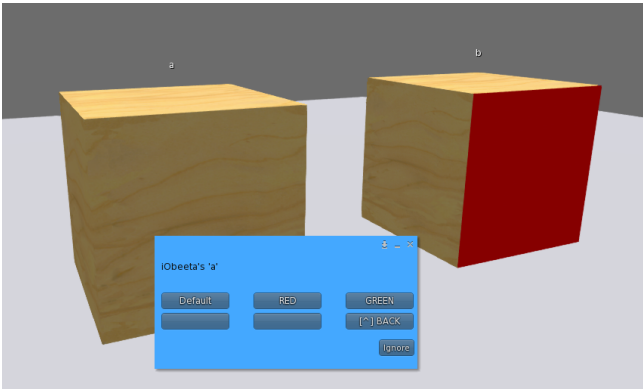


4. RED is applied to **the 3rd face** of **b**

Subprim with the same name

The configuration is the same as the above example, we create another box, the name is also "b", and connect it. Do the same.

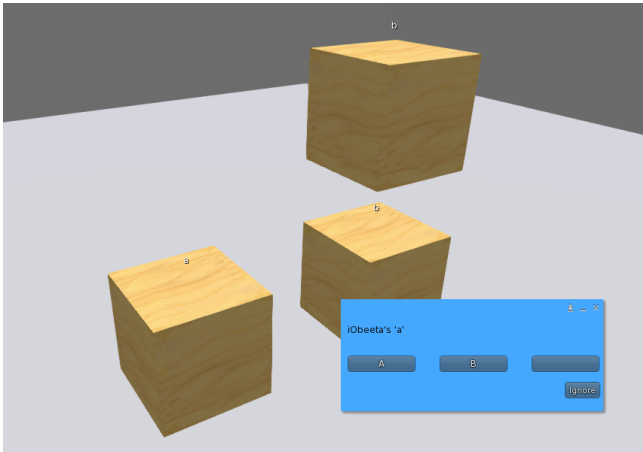

1. Linkset contains "a" and double "b"


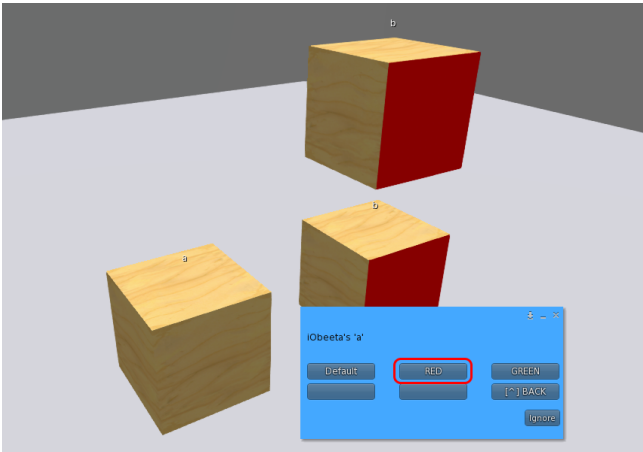


2. The same operation, **RED** is applied to **the 3rd face** of **all b**

Script in subprim

Script in subprim, at the same time, the root prim also has a popup menu.

A linkset containing "a" and "b", "a" is the root prim, let's put all the scripts into the subprim "b".

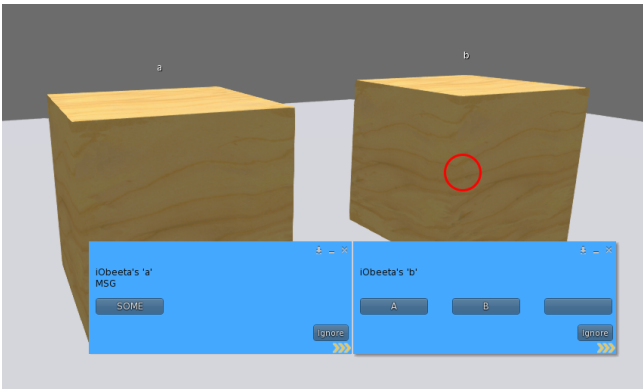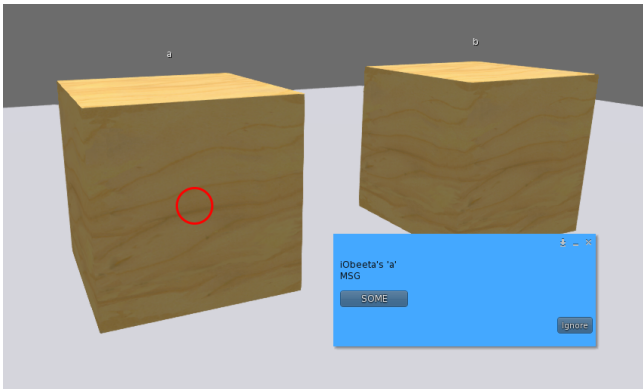

1. Touch "a"


2. Touch "b", pop up two menus

At this moment, open config file ADD this `PASS_TOUCHS 2`

```
PASS_TOUCHS 2
```

```
PART A|a|0|ALL_SIDES
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET GREEN|2f8ae0e4-22be-20c8-c0cc-c50bbfaf2871||

PART B|b|0|3
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET GREEN|2f8ae0e4-22be-20c8-c0cc-c50bbfaf2871||
```

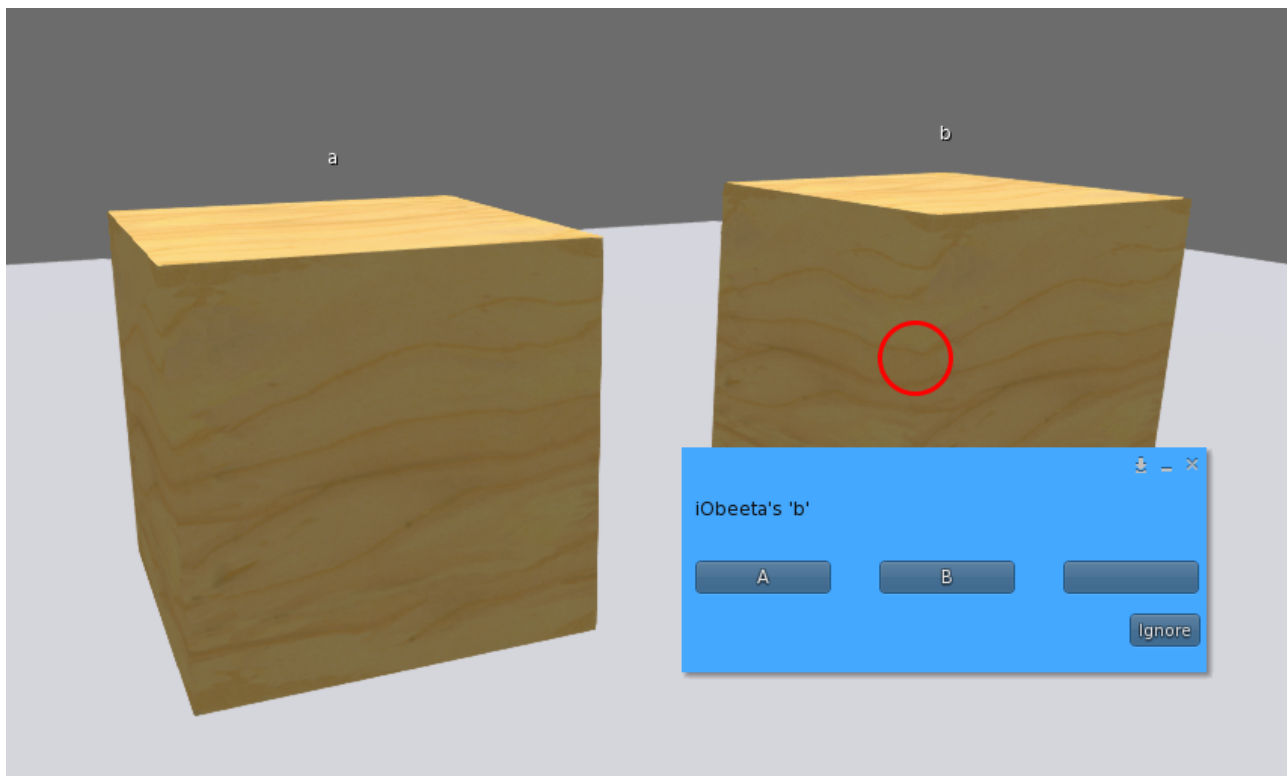

Touch "b", only pop up menus belonging to "b"

How to use SETS

Set `MENU_OPTION_SETS` to enable.

In the code below, PART A includes Default, RED, GREEN, and PART B includes Default, RED, BLUE, and the SETS will automatically generate: Default, RED, GREEN, BLUE

Select one of them will take effect on the PART they are associated with.


- Default, RED is valid for **all faces** named **a** and **the 3rd face** named **b**

- GREEN is only valid for **all sides of a**
- BLUE is only valid for the **3rd face of b**


```
MENU_OPTION_SETS [THEMES]

PART A|a|0|ALL_SIDES
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET GREEN|2f8ae0e4-22be-20c8-c0cc-c50bbfaf2871||


PART B|b|0|3
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET BLUE|2ddd156d-8107-6761-9b54-7165ec249704||
```

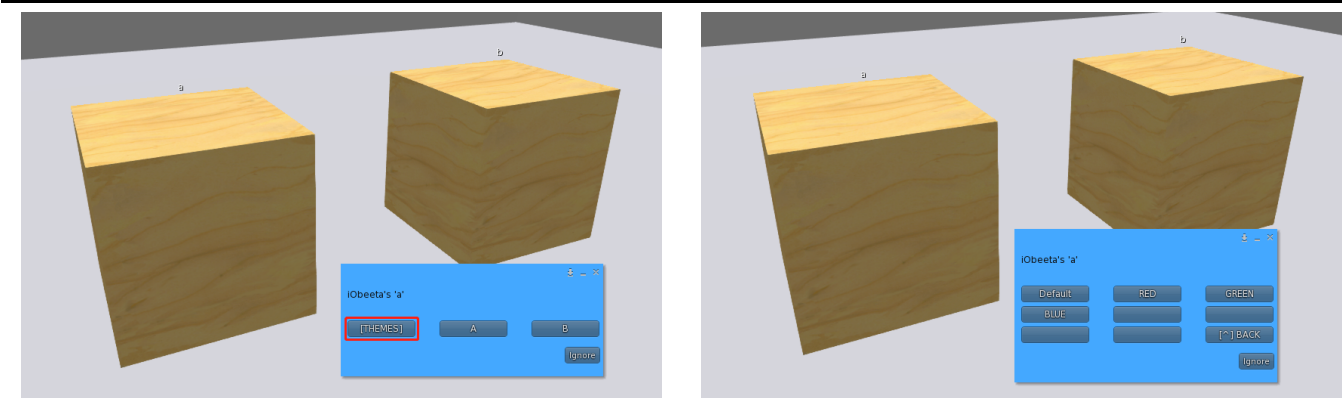


1. Touch "a"
2. Select "[THEMES]", you will get the list, it is automatically generated

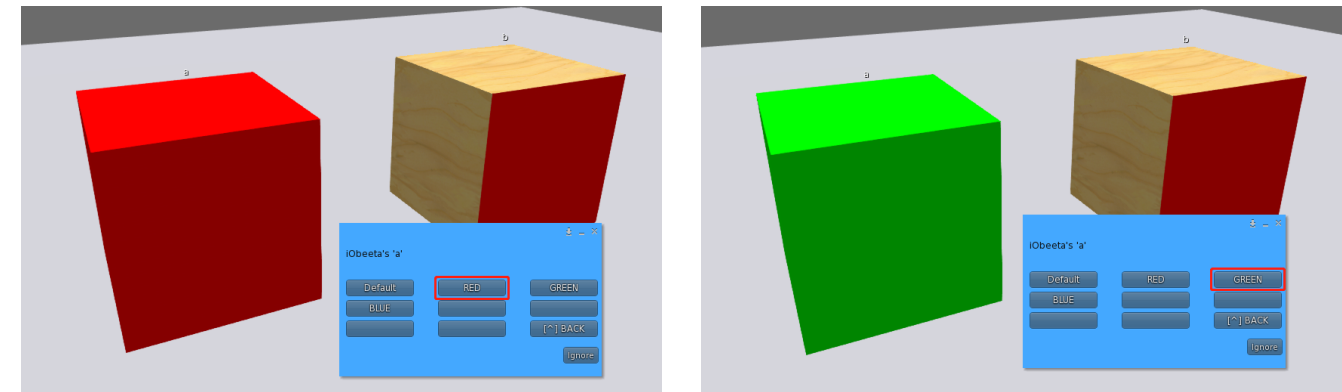

- Select "RED"
- Select "GREEN"

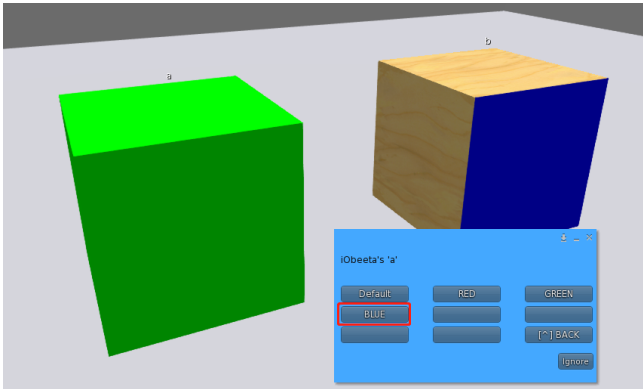

Select "BLUE"

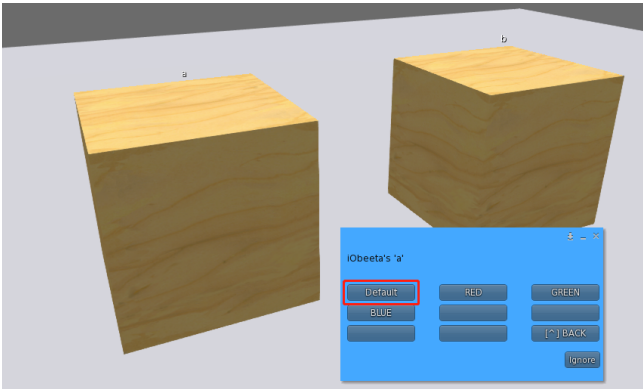

Select "Default"

Customize sets

You will use the configuration item **SETS**


In the following code, the SETS menu only includes two options: RED and BLUE.

If you want to use Default and RED, you need to enter PART.


```
MENU_OPTION_SETS [THEMES]
SETS RED|BLUE

PART A|a|0|ALL_SIDES
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET GREEN|2f8ae0e4-22be-20c8-c0cc-c50bbfaf2871| |

PART B|b|0|3
SET Default|TEXTURE_PLYWOOD||
SET RED|9c198f45-3f70-1a50-f38c-8ce19044b396||
SET BLUE|2ddd156d-8107-6761-9b54-7165ec249704| |
```

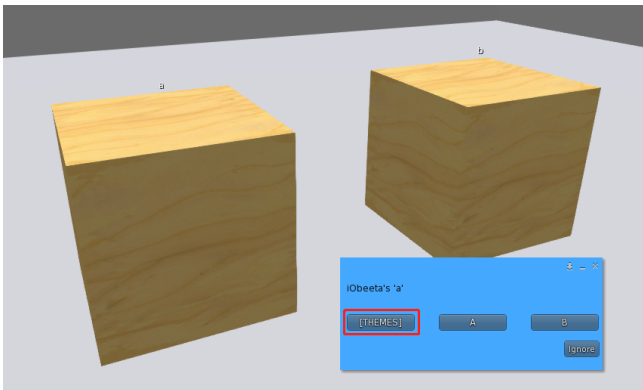

1. Touch "a"

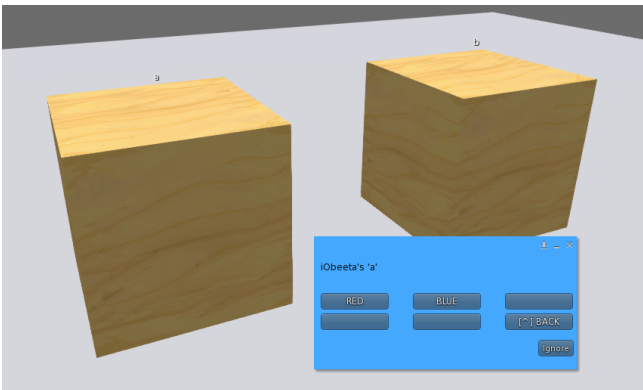

2. Select "[THEMES]", you will get the list

Configure

LOADING_TEXT

Floating text to show loading progress

- type: integer
- value:
 - 0: disable
 - 1: enable
- default: 0

LOADING_TEXT 0

LOG_LEVEL

log output level

- type: integer
- value:
 - 0: silent
 - 1: info
 - 2: debug
- default: 0

LOG_LEVEL 0

MENU_TEXT_PARTS

Hint text of menu PART

- type: string
- default: Empty string

MENU_TEXT_PARTS PART:

MENU_TEXT_SETS

Hint text of menu SET

- type: string
- default: Empty string

MENU_TEXT_SETS SET:

TOUCH

Is it possible to touch on an prim(subprim) to pop up the menu.

- type: integer
- value:
 - 0: no
 - 1: yes
- default: 1

TOUCH 1

PASS_TOUCHS

Sets the pass-touches prim attribute. Multiple menus pop up when you click on the subprim, this is useful.

Please refer to: <https://wiki.secondlife.com/wiki/LIPassTouches>

- type: integer
- value:
 - 0: Touches are passed if there is no script handling the event in the prim.
 - 1: Touches are always passed to the root.
 - 2: Touches are never passed to the root.
- default: 0

PASS_TOUCHS 0

OWNER_ONLY

Only the owner can touch

- type: integer
- value:
 - 0: no
 - 1: yes
- default: 1

OWNER_ONLY 1

REMEMBER_MENU_STATS

Memorize the status of the menus that have been accessed. The next touch will open the last menu.

- type: integer
- value:

- 0: no
- 1: yes
- default: 0

REMEMBER_MENU_STATS 0

CHANNEL_LOCAL_MENU

Number in the link message to pop up the menu.

- type: integer
- value:
 - 0: disabled
 - except 0: enable
- default: 0

CHANNEL_LOCAL_MENU 0

CHANNEL_LOCAL_MENU_BACK

Number in the link message to returns to the previous menu.

When this configuration is enabled, it will be displayed as "[^] BACK" as an option in the PART menu

- type: integer
- value:
 - 0: disabled
 - except 0: enable
- default: 0

CHANNEL_LOCAL_MENU_BACK 0

CHANNEL_LOCAL_SYNC

Number in the link message to apply SETS.

It is used to receive broadcast data of CHANNEL_LOCAL_BOARDCAST

Notice! CHANNEL_LOCAL_SYNC and CHANNEL_LOCAL_BOARDCAST cannot form a closed loop!

- type: integer
- value:
 - 0: disabled
 - except 0: enable
- default: 0

```
CHANNEL_LOCAL_SYNC 0
```

CHANNEL_LOCAL_BOARDCAST

When SETS is applied, the data will be broadcast and received by CHANNEL_LOCAL_SYNC of the same value

Notice! CHANNEL_LOCAL_SYNC and CHANNEL_LOCAL_BOARDCAST cannot form a closed loop!

- type: integer
- value:
 - 0: disabled
 - except 0: enable
- default: 0

```
CHANNEL_LOCAL_BOARDCAST 0
```

MENU_OPTION_SETS

SETS option name

When this configuration is enabled, it will be available as an option in the PART menu.

- type: string
- default: Empty string

```
MENU_OPTION_SETS [set name]
```

SETS_ON_TOP

Whether to use the package list menu as the top-level menu, you must set MENU_OPTION_SETS to take effect.

When this project is enabled, the package list menu will be used instead of the top menu, and the BUTTON custom menu configured in the top menu will not be displayed.

- type: integer
- value:
 - 0: no
 - 1: yes
- default: 0

```
SETS_ON_TOP 0
```

SETS

Custom set list

Show list after entering from MENU_OPTION_SETS

If not set or given an empty string, a list will be automatically generated including all SET keywords in all PART.

- type: string
- default: Empty string

```
SETS RED|GREEN
```

PART

It can represent one or more prims, they use the same texture.

- param 1:
 - type: string
 - value: The name of PART
- param 2:
 - type: string
 - value: The name of prim/subprims.
 - Available keywords: LINK_THIS, LINK_ROOT, LINK_SET, LINK_ALL_CHILDREN, LINK_ALL_OTHERS, it will take effect when the next parameter is set to "3"
- param 3:
 - type: integer
 - value:
 - 0: Exact match
 - 1: Match as prefix
 - 2: Match as suffix
 - 3: Use LSL constants(If possible, use as string when a constant is missed, like 0)
 - default: 0
- param 4:
 - type: integer
 - value: 0 ~ 7 and -1(ALL_SIDES)

```
PART OBJ_1|object name 1|0|ALL_SIDES
```

PART*

Same as PART, but it doesn't show in the menu.

```
PART* OBJ_2|object name 2|0|ALL_SIDES
SET RED|TEXTURE_BLANK|NULL_KEY|NULL_KEY
```

```
SET GREEN|TEXTURE_BLANK|NULL_KEY|NULL_KEY
```

SET

It represents a theme or style.

Constants available in diffuse/normal/specular: TEXTURE_BLANK, TEXTURE_DEFAULT, TEXTURE_TRANSPARENT, TEXTURE_PLYWOOD, NULL_KEY.

Of course, you can also use their corresponding UUID directly.

See details: https://wiki.secondlife.com/wiki/Category:LSL_Constants

SET must follow PART, it cannot exist in isolation.

- param 1, name:
 - type: string
 - value: The name of SET
- param 2, diffuse:
 - type: string
 - value: UUID / NULL_KEY / Empty string
- param 3, normal:
 - type: string
 - value: UUID / NULL_KEY / Empty string
- param 4, specular:
 - type: string
 - value: UUID / NULL_KEY / Empty string
- param 5, color:
 - type: vector
 - value: Vector string of color, likes: <1.0, 0.5, 0.0>
- param 6, alpha:
 - type: float
 - value: 0.0 ~ 1.0, 0.0(hidden) <=> 1.0(show)
- param 7, glow:
 - type: float
 - value: 0.0 ~ 1.0, 0.0(no) <=> 1.0(bright)
- param 8, fullbright:
 - type: string
 - value: 0/1 or FALSE/TRUE

***NULL_KEY will be set to initial (invalidate), Empty string will ignore this part (the original will remain unchanged)**

```
SET RED|TEXTURE_BLANK|NULL_KEY|NULL_KEY|<1.0, 0.0, 0.0>|1.0|0.0|TRUE
SET GREEN|TEXTURE_BLANK||
SET BLUE|TEXTURE_BLANK||<0.0, 0.0, 1.0>||0.05
```

BUTTON

Custom menu button.

It will be displayed on the same menu level as PART, click to send a link message.

The third parameter can be separated by "|".

- param 1:
 - type: string
 - value: The name of button
- param 2:
 - type: integer
 - value: except 0
- param 3: (not required)
 - type: string
- and more...

```
BUTTON MORE|100|arg1|arg2|arg3|...  
BUTTON MORE|100|
```