

```
In [ ]: import marimo as mo
import altair as alt
import dlt
```

Claude Code Agent Logs API — Report


Data loaded from `GET /logs` (Claude Code Agent Logs API) into DuckDB via the `agent_traces` dlt pipeline — 1,000 log records with nested message content normalized into a child table.

```
In [ ]: pipeline = dlt.attach("agent_traces")
dataset = pipeline.dataset()
```

Log types and activity

```
In [ ]: df_chart1 = dataset("""
    SELECT type, COUNT(*) AS records
    FROM logs
    GROUP BY 1
    ORDER BY records DESC
    """).df()
```

```
In [ ]: _chart = alt.Chart(df_chart1).mark_bar().encode(
    x=alt.X("type:N", sort="-y"),
    y="records:Q",
    color="type:N",
    tooltip=["type:N", "records:Q"],
).properties(title="Logs by Type")
_chart
```

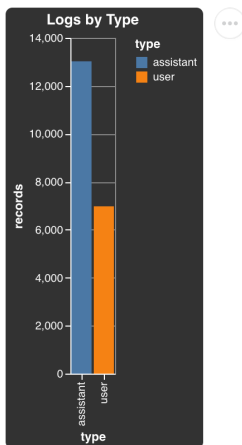

```
In [ ]: df_chart2 = dataset("""
    SELECT
        DATE_TRUNC('minute', timestamp) AS minute,
        type,
```

```


COUNT(*) AS records
FROM logs
GROUP BY 1, 2
ORDER BY 1, 2
""").df()

```

```

In [ ]: _chart = alt.Chart(df_chart2).mark_line().encode(
        x="minute:T",
        y="records:Q",
        color="type:N",
        tooltip=["minute:T", "type:N", "records:Q"],
    ).properties(title="Log Activity per Minute by Type")
_chart

```

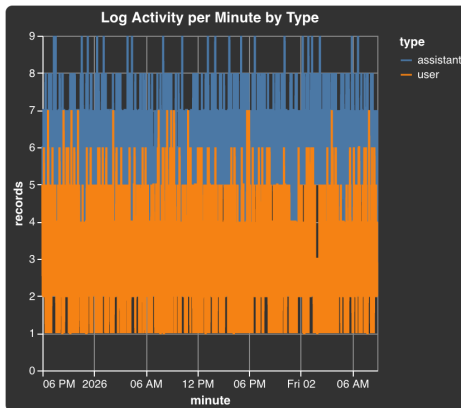

Work by git branch

```


In [ ]: df_chart3 = dataset("""
        SELECT git_branch, COUNT(*) AS records
        FROM logs
        GROUP BY 1
        ORDER BY records DESC
        """).df()

```

```


In [ ]: _chart = alt.Chart(df_chart3).mark_bar().encode(
        x=alt.X("git_branch:N", sort="-y"),
        y="records:Q",
        color="git_branch:N",
        tooltip=["git_branch:N", "records:Q"],
    ).properties(title="Logs by Git Branch")
_chart

```

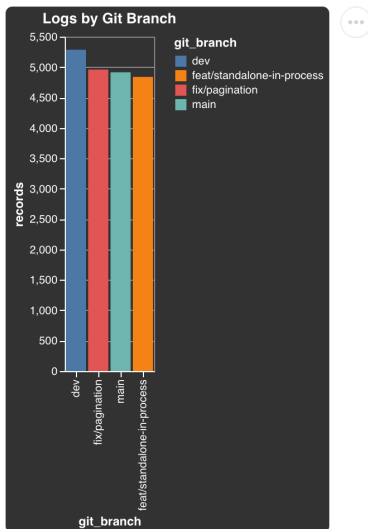

```
In [ ]: df_chart4 = dataset("""
        SELECT git_branch, SUM(usage__output_tokens) AS output_tokens
        FROM logs
        WHERE usage__output_tokens IS NOT NULL
        GROUP BY 1
        ORDER BY output_tokens DESC
        """).df()
```


```
In [ ]: _chart = alt.Chart(df_chart4).mark_bar().encode(
        x=alt.X("git_branch:N", sort="-y"),
        y="output_tokens:Q",
        color="git_branch:N",
        tooltip=["git_branch:N", "output_tokens:Q"],
    ).properties(title="Output Tokens by Git Branch")
_chart
```

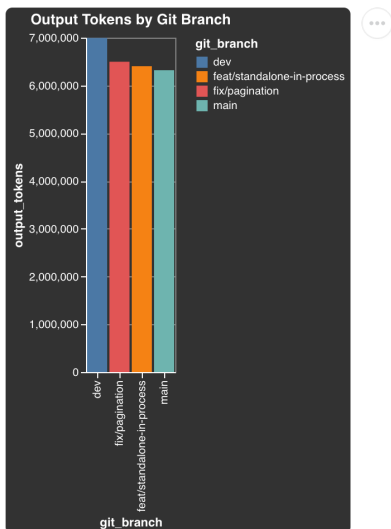

Content and sessions


```
In [ ]: df_chart5 = dataset("""
        SELECT type, COUNT(*) AS blocks
        FROM logs__message__content
        GROUP BY 1
        ORDER BY blocks DESC
        """).df()
```

```
In [ ]: _chart = alt.Chart(df_chart5).mark_bar().encode(
        x=alt.X("type:N", sort="-y"),
        y="blocks:Q",
        color="type:N",
        tooltip=["type:N", "blocks:Q"],
    ).properties(title="Message Content Block Types")
_chart
```

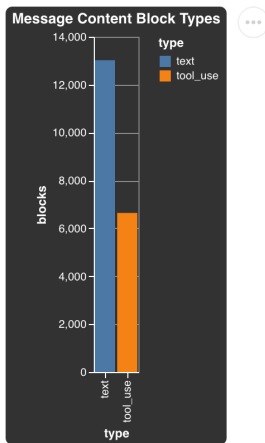

```
In [ ]: df_chart6 = dataset("""
        SELECT cnt AS msgs_per_session, COUNT(*) AS sessions
        FROM (
            SELECT session_id, COUNT(*) AS cnt
            FROM logs
            GROUP BY 1
        )
        GROUP BY 1
        ORDER BY 1
        """).df()
```

```
In [ ]: _chart = alt.Chart(df_chart6).mark_bar().encode(
        x=alt.X("msgs_per_session:0", title="messages per session"),
        y=alt.Y("sessions:Q", title="number of sessions"),
        tooltip=["msgs_per_session:0", "sessions:Q"],
    ).properties(title="Distribution of Messages per Session")
_chart
```

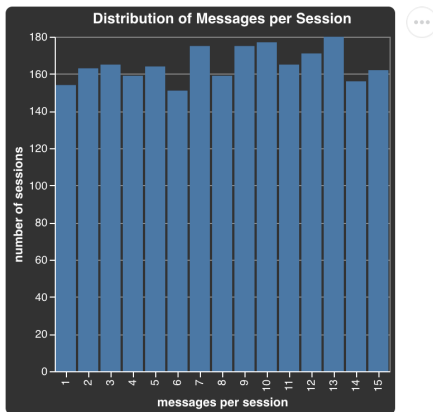

In []:

In []: