

```
In [ ]: import os

# The cross-encoder model is already cached locally from a prior run --
# skip HF Hub's network version-check on every load (avoids the
# "unauthenticated requests" warning and an unnecessary network call).
os.environ.setdefault("HF_HUB_OFFLINE", "1")

import time
from concurrent.futures import ThreadPoolExecutor, as_completed

import marimo as mo
import matplotlib.pyplot as plt
import numpy as np
import pandas as pd

import eval_lib as ev
from arxiv_rag.es_search import (
    get_es_client,
    index_exists,
    index_to_elasticsearch,
)
from arxiv_rag.indexing import get_index
from arxiv_rag.openai_client import get_client
from arxiv_rag.rerank import get_cross_encoder
```

## Retrieval Strategy Evaluation

Compares three retrieval strategies for the arXiv RAG pipeline on a sample of the dataset:

1. **hybrid\_rerank** -- NumPy/BM25 hybrid search (RRF) + local cross-encoder rerank (current production default)
2. **hybrid\_only** -- NumPy/BM25 hybrid search (RRF) only, no rerank
3. **elasticsearch\_rrf** -- Elasticsearch's native RRF retriever (BM25 + kNN), no rerank

For each strategy we measure **retrieval quality** (hit rate / MRR against a synthetic ground-truth question generated per sampled paper), **answer relevancy** (LLM-as-a-judge), **token cost**, and **latency** -- then combine them into a single composite score to pick a winner.

All three strategies share the exact same generation prompt and model; only the retrieval step differs, so the comparison isolates retrieval quality.

```
In [ ]: SAMPLE_SIZE = 200
TOP_K = 5
RANDOM_SEED = 42
# Kept low: the account's gpt-4o-mini rate limit (200k TPM) was getting
# exhausted at MAX_WORKERS=8, since generation + judge calls (~1.5-2k
# tokens each) stack up fast across many threads. 3 keeps sustained
```

```
# throughput comfortably under that limit; generate_question /
# generate_answer / judge_relevancy also retry with backoff on 429s.
MAX_WORKERS = 3
```

```
In [ ]: index = get_index()
        mo.md(f"Loaded **{len(index.df):,}** papers, embeddings shape`
        `{index.embeddings.shape}`.")
```

Loaded **10,000** papers, embeddings shape **(10000, 1536)** .

```
In [ ]: # Warm up the lazily-constructed singletons (OpenAI client, cross-encoder
# model, ES client) here in the main thread, before any ThreadPoolExecutor
# cell below. get_cross_encoder() in particular loads a PyTorch model via
# HF transformers; racing its first construction across multiple worker
# threads segfaults (native tokenizer/torch init isn't thread-safe).
get_client()
get_cross_encoder()
get_es_client()
mo.md("Warmed up OpenAI client, cross-encoder model, and Elasticsearch
client.")
```

Warmed up OpenAI client, cross-encoder model, and Elasticsearch client.

## Elasticsearch setup

```
In [ ]: try:
        if not index_exists():
            index_to_elasticsearch(index)
            es_message = f"Indexed {len(index.df):,} papers into
Elasticsearch."
        else:
            es_message = "Elasticsearch index already present, reusing it."
            es_available = True
    except Exception as exc: # noqa: BLE001
        es_message = f"Elasticsearch unreachable ({exc}); the elasticsearch_rrf
strategy will be skipped."
        es_available = False
    mo.md(f"**Elasticsearch:** {es_message}")
```

**Elasticsearch:** Elasticsearch index already present, reusing it.

```
In [ ]: strategy_names = [name for name in ev.RETRIEVAL_STRATEGIES if name !=
"elasticsearch_rrf" or es_available]
        mo.md(f"Evaluating strategies: **{'', '.join(strategy_names)}**")
```

Evaluating strategies: **hybrid\_rerank, hybrid\_only, elasticsearch\_rrf**

## Evaluation sample & ground-truth questions

```
In [ ]: sample_df = index.df.sample(n=SAMPLE_SIZE,
        random_state=RANDOM_SEED).reset_index(drop=True)
```

```
mo.md(f"Sampled **{len(sample_df)}** papers (seed={RANDOM_SEED}) as the  
evaluation set.")
```

Sampled **200** papers (seed=42) as the evaluation set.

```
In [ ]: questions_by_id = {}  
question_gen_cost = 0.0  
with mo.status.progress_bar(total=len(sample_df), title="Generating eval  
questions") as _bar:  
    with ThreadPoolExecutor(max_workers=MAX_WORKERS) as _pool:  
        _futures = {_pool.submit(ev.generate_question, row):  
row["entry_id"] for _, row in sample_df.iterrows()}  
        for _future in as_completed(_futures):  
            entry_id = _futures[_future]  
            question, usage = _future.result()  
            questions_by_id[entry_id] = question  
            question_gen_cost += usage.cost  
            _bar.update()  
  
eval_df = sample_df.copy()  
eval_df["question"] = eval_df["entry_id"].map(questions_by_id)  
mo.md(  
    f"Generated {len(eval_df)} questions. Question-generation cost: "  
    f"**${question_gen_cost:.4f}** (one-time, shared across all  
strategies)."  
)
```

Generated 200 questions. Question-generation cost: **\$0.0123** (one-time, shared across all strategies).

## Running the evaluation

```
In [ ]: tasks = [  
    (row.entry_id, row.question, strategy_name)  
    for row in eval_df.itertuples()  
    for strategy_name in strategy_names  
]  
  
eval_results = []  
eval_start = time.time()  
with mo.status.progress_bar(total=len(tasks), title="Running evaluation",  
subtitle="question x strategy") as _bar:  
    with ThreadPoolExecutor(max_workers=MAX_WORKERS) as _pool:  
        _futures = {  
            _pool.submit(ev.evaluate_one, index, entry_id, question,  
strategy_name, TOP_K): (entry_id, strategy_name)  
            for entry_id, question, strategy_name in tasks  
        }  
        for _future in as_completed(_futures):  
            eval_results.append(_future.result())  
            _bar.update()  
eval_elapsed_s = time.time() - eval_start  
  
results_df = pd.DataFrame([r.__dict__ for r in eval_results])
```



```


        bar_.get_x() + bar_.get_width() / 2,
        bar_.get_height(),
        fmt.format(value),
        ha="center",
        va="bottom",
        fontsize=9,
        color="#0b0b0b",
    )
    ax.set_title(title, color="#0b0b0b", fontsize=12,
fontweight="bold")
    ax.spines[["top", "right"]].set_visible(False)
    ax.spines[["left", "bottom"]].set_color("#c3c2b7")
    ax.tick_params(colors="#52514e", labelsize=9)
    ax.yaxis.grid(True, color="#e1e0d9", linewidth=0.8)
    ax.set_axisbelow(True)
    top = max(values) if values else 1
    ax.set_ylim(0, top * 1.25 if top > 0 else 1)

for ax in axes[n:]:
    ax.axis("off")


fig.tight_layout()
return fig

```


Overall plot:

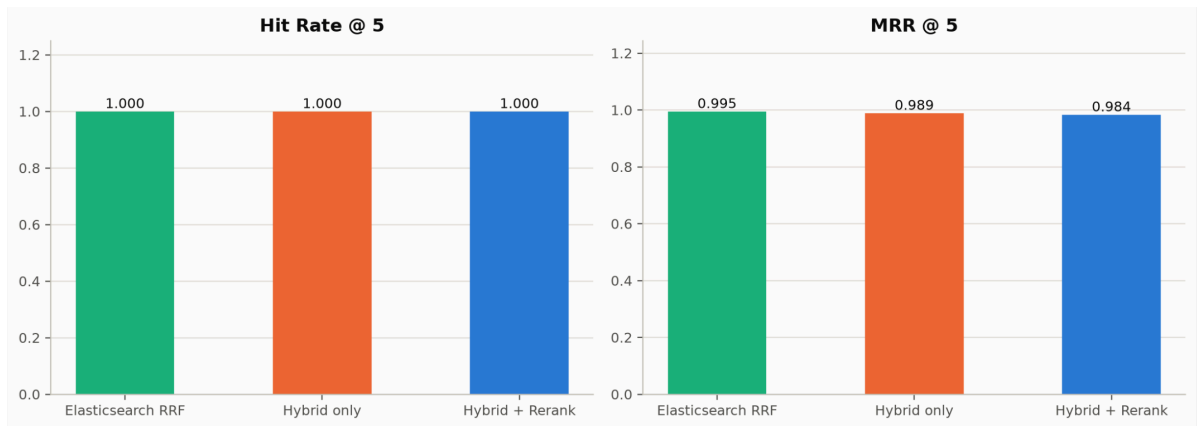


Cost breakdown by strategy

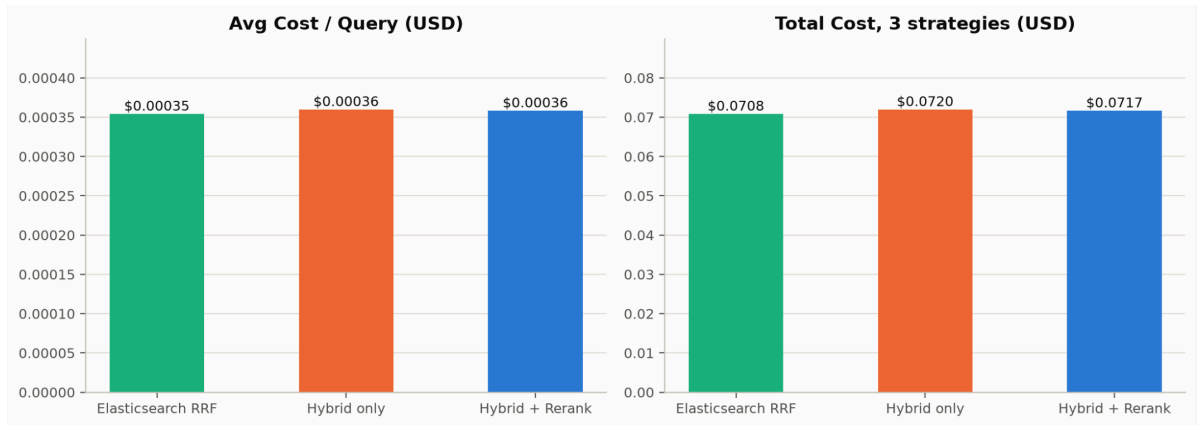

Latency comparison

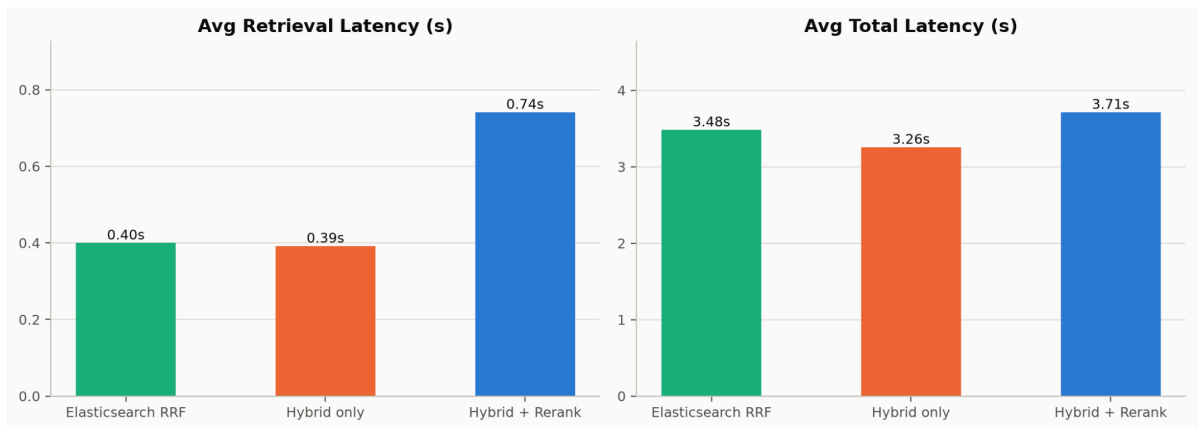

Answer relevancy by strategy

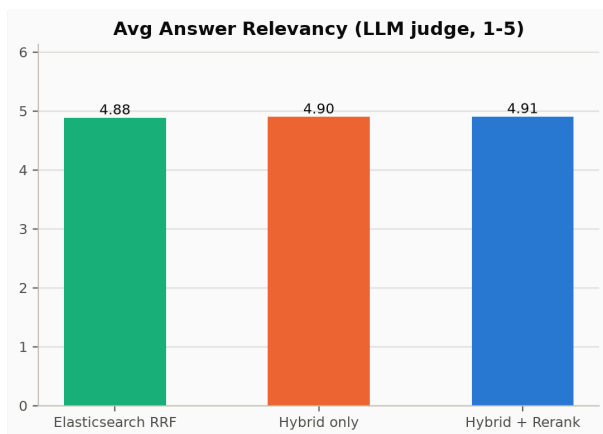


## Composite score

Combines all four dimensions into one score per strategy (each metric is min-max normalized across strategies, cost/latency inverted so "lower is better" scores higher).

Adjust the weights to see how the ranking shifts under different priorities.

```
In [ ]: DEFAULT_WEIGHTS = {  
        "retrieval": 0.30,  
        "relevancy": 0.35,  
        "speed": 0.15,  
        "cost": 0.20,  
    }  
    get_weights, set_weights = mo.state(DEFAULT_WEIGHTS)
```

```
In [ ]: reset_button = mo.ui.button(  
        label="Reset to defaults",  
        on_click=lambda _: set_weights(DEFAULT_WEIGHTS.copy()),  
    )
```

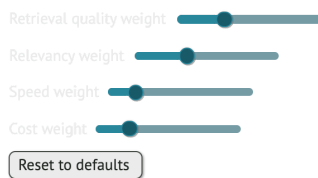


Q Search... (score 0.635)

| <input type="checkbox"/> | strategy<br>str   | score<br>float64   |  |
|--------------------------|-------------------|--------------------|--|
| <input type="checkbox"/> | hybrid_only       | 0.6347222222222271 |  |
| <input type="checkbox"/> | elasticsearch_rrf | 0.5753513931738987 |  |
| <input type="checkbox"/> | hybrid_rerank     | 0.5550625411454890 |  |

3 rows, 2 columns

No selection

Q Search... (score 0.635)

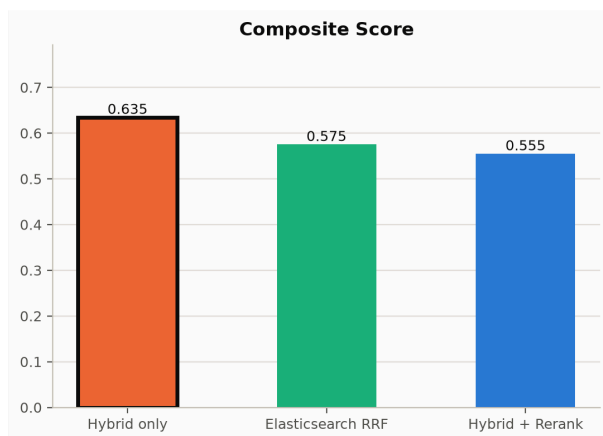

## Conclusion

Based on this evaluation, `hybrid_only` is the recommended retrieval strategy under the current weights. Adjust the sliders above to see how the ranking shifts under different priorities (e.g. cost-sensitive vs quality-sensitive deployments). To make the production app use it, set in `.env` :

```
RETRIEVAL_STRATEGY=hybrid_only
```

`src/arxiv_rag/rag.py` reads `settings.retrieval_strategy` to pick among the strategies defined in `src/arxiv_rag/strategies.py` -- no code changes needed.