

# Network Flow Problems

Jaehyun Park

CS 97SI  
Stanford University

June 29, 2015

# Outline

Network Flow Problems

Ford-Fulkerson Algorithm

Bipartite Matching

Min-cost Max-flow Algorithm

# Network Flow Problem


- ▶ A type of network optimization problem
- ▶ Arise in many different contexts
  - Networks: routing as many packets as possible on a given network
  - Transportation: sending as many trucks as possible, where roads have limits on the number of trucks per unit time
  - Bridges: destroying (!) some bridges to disconnect  $s$  from  $t$ , while minimizing the cost of destroying the bridges

## Network Flow Problem


- ▶ Settings: Given a directed graph  $G = (V, E)$ , where each edge  $e$  is associated with its capacity  $c(e) > 0$ . Two special nodes source  $s$  and sink  $t$  are given ( $s \neq t$ )
- ▶ Problem: Maximize the total amount of flow from  $s$  to  $t$  subject to two constraints
  - Flow on edge  $e$  doesn't exceed  $c(e)$
  - For every node  $v \neq s, t$ , incoming flow is equal to outgoing flow

## Network Flow Example (from CLRS)

- Capacities

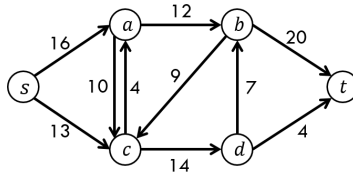

- Maximum flow (of 23 total units)

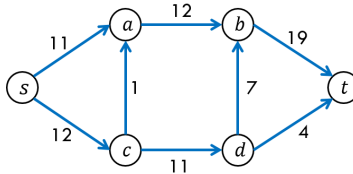


## Alternate Formulation: Minimum Cut


- ▶ We want to remove some edges from the graph such that after removing the edges, there is no path from  $s$  to  $t$
- ▶ The cost of removing  $e$  is equal to its capacity  $c(e)$
- ▶ The minimum cut problem is to find a cut with minimum total cost
  
- ▶ Theorem: (maximum flow) = (minimum cut)

## Minimum Cut Example

- Capacities

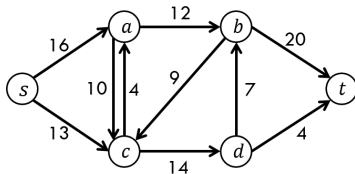


- Minimum Cut (red edges are removed)

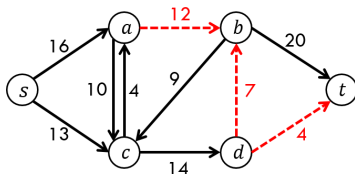

## Flow Decomposition

- Any valid flow can be decomposed into flow paths and circulations

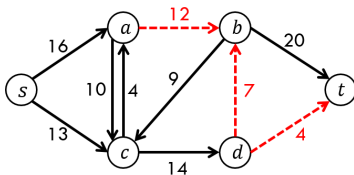

- $s \rightarrow a \rightarrow b \rightarrow t$ : 11
- $s \rightarrow c \rightarrow a \rightarrow b \rightarrow t$ : 1
- $s \rightarrow c \rightarrow d \rightarrow b \rightarrow t$ : 7
- $s \rightarrow c \rightarrow d \rightarrow t$ : 4



# Outline

Network Flow Problems

Ford-Fulkerson Algorithm

Bipartite Matching

Min-cost Max-flow Algorithm

## Ford-Fulkerson Algorithm

- ▶ A simple and practical max-flow algorithm
- ▶ Main idea: find valid flow paths until there is none left, and add them up
- ▶ How do we know if this gives a maximum flow?
  - Proof sketch: Suppose not. Take a maximum flow  $f^*$  and “subtract” our flow  $f$ . It is a valid flow of positive total flow. By the flow decomposition, it can be decomposed into flow paths and circulations. These flow paths must have been found by Ford-Fulkerson. Contradiction.

## Back Edges

- ▶ We don't need to maintain the amount of flow on each edge but work with capacity values directly
- ▶ If  $f$  amount of flow goes through  $u \rightarrow v$ , then:
  - Decrease  $c(u \rightarrow v)$  by  $f$
  - Increase  $c(v \rightarrow u)$  by  $f$
- ▶ Why do we need to do this?
  - Sending flow to both directions is equivalent to canceling flow

## Ford-Fulkerson Pseudocode

- ▶ Set  $f_{\text{total}} = 0$
- ▶ Repeat until there is no path from  $s$  to  $t$ :
  - Run DFS from  $s$  to find a flow path to  $t$
  - Let  $f$  be the minimum capacity value on the path
  - Add  $f$  to  $f_{\text{total}}$
  - For each edge  $u \rightarrow v$  on the path:
    - ▶ Decrease  $c(u \rightarrow v)$  by  $f$
    - ▶ Increase  $c(v \rightarrow u)$  by  $f$

## Analysis




- ▶ Assumption: capacities are integer-valued
- ▶ Finding a flow path takes  $\Theta(n + m)$  time
- ▶ We send at least 1 unit of flow through the path
- ▶ If the max-flow is  $f^*$ , the time complexity is  $O((n + m)f^*)$ 
  - “Bad” in that it depends on the output of the algorithm
  - Nonetheless, easy to code and works well in practice

## Computing Min-Cut

- ▶ We know that max-flow is equal to min-cut
- ▶ And we now know how to find the max-flow
  
- ▶ Question: how do we find the min-cut?
- ▶ Answer: use the residual graph

## Computing Min-Cut


- “Subtract” the max-flow from the original graph

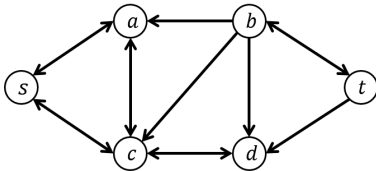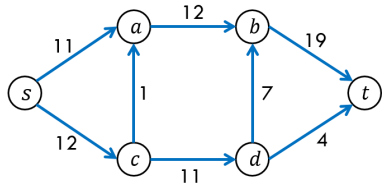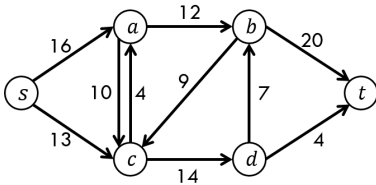

Only the topology of the residual graph is shown.  
Don't forget to add the back edges!

## Computing Min-Cut

- ▶ Mark all nodes reachable from  $s$ 
  - Call the set of reachable nodes  $A$

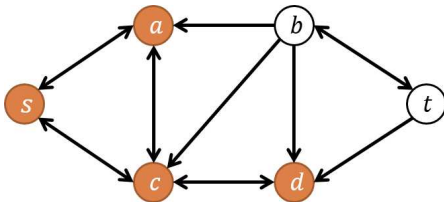


- ▶ Now separate these nodes from the others
  - Cut edges going from  $A$  to  $V - A$



## Computing Min-Cut

- Look at the original graph and find the cut:

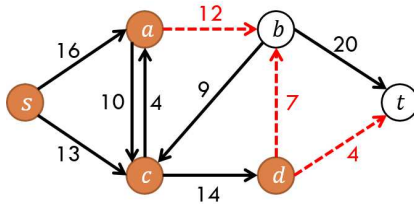

- Why isn't  $b \rightarrow c$  cut?

# Outline

Network Flow Problems

Ford-Fulkerson Algorithm

**Bipartite Matching**


Min-cost Max-flow Algorithm

# Bipartite Matching

- ▶ Settings:
  - $n$  students and  $d$  dorms
  - Each student wants to live in one of the dorms of his choice
  - Each dorm can accommodate at most one student (!?)
    - ▶ Fine, we will fix this later...
- ▶ Problem: find an assignment that maximizes the number of students who get a housing

## Flow Network Construction

- ▶ Add source and sink
- ▶ Make edges between students and dorms
  - All the edge weights are 1

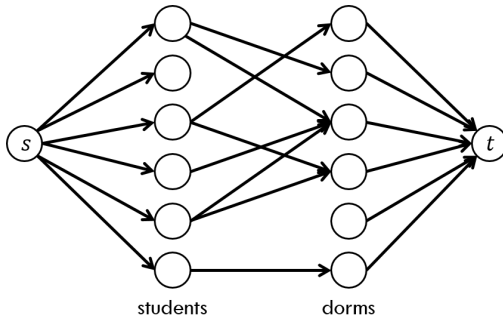

## Flow Network Construction

- ▶ Find the max-flow
- ▶ Find the optimal assignment from the chosen edges

