

Torrent Scout Configuration


Table of Contents

CONFIGURING TORRENT SCOUT FOR USE WITH A DATABASE	2
OPENING THE CONFIGURATION PANEL	2
OVERVIEW OF THE CONFIGURATION PANEL	2
1. THE DATABASE/SERVER URL:	3
2. THE RAW DIRECTORY RULE	4
3. THE RESULTS DIRECTORY RULE	4
4. CACHE DIRECTORY RULE	4
5. USING MULTIPLE STORAGE DEVICES	4
6. HELPING TORRENT SCOUT FIND THE DATA WITH FSTAB	5
DEFINING THE RULES	5
BASIC VARIABLES	5
ADDITIONAL VARIABLES	5
EXAMPLE RULES	6
RAW DIRECTORY RULE:	6
RESULTS DIRECTORY RULE:	6
CACHE DIRECTORY RULE:	6
CHECKING THE CONTENT OF THE VARIABLES	6
COMMON ERROR MESSAGE:	8

Configuring Torrent Scout for Use With a Database

Opening the Configuration Panel


- If you are using Torrent Scout for the very first time, it will automatically open the Options Panel for you
- Otherwise, go to the menu Tools/Options to open the configuration panel:

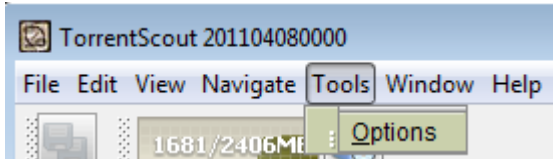

- It will try to figure out the configuration that makes the most sense to you, based on the url torrent scout was started with.


Overview of the Configuration Panel

- Torrent Scout can be used in several modes: offline use without any database, online use with a local database, and online use with one or more remote databases
- The "Site List" on the left shows all the modes. More modes can be defined in a complex environment with multiple Torrent Servers. Here by default, we are using just one server\
- On the right side the information panel allows you to define the URL to the database and the **rules** used to locate the experimental data.

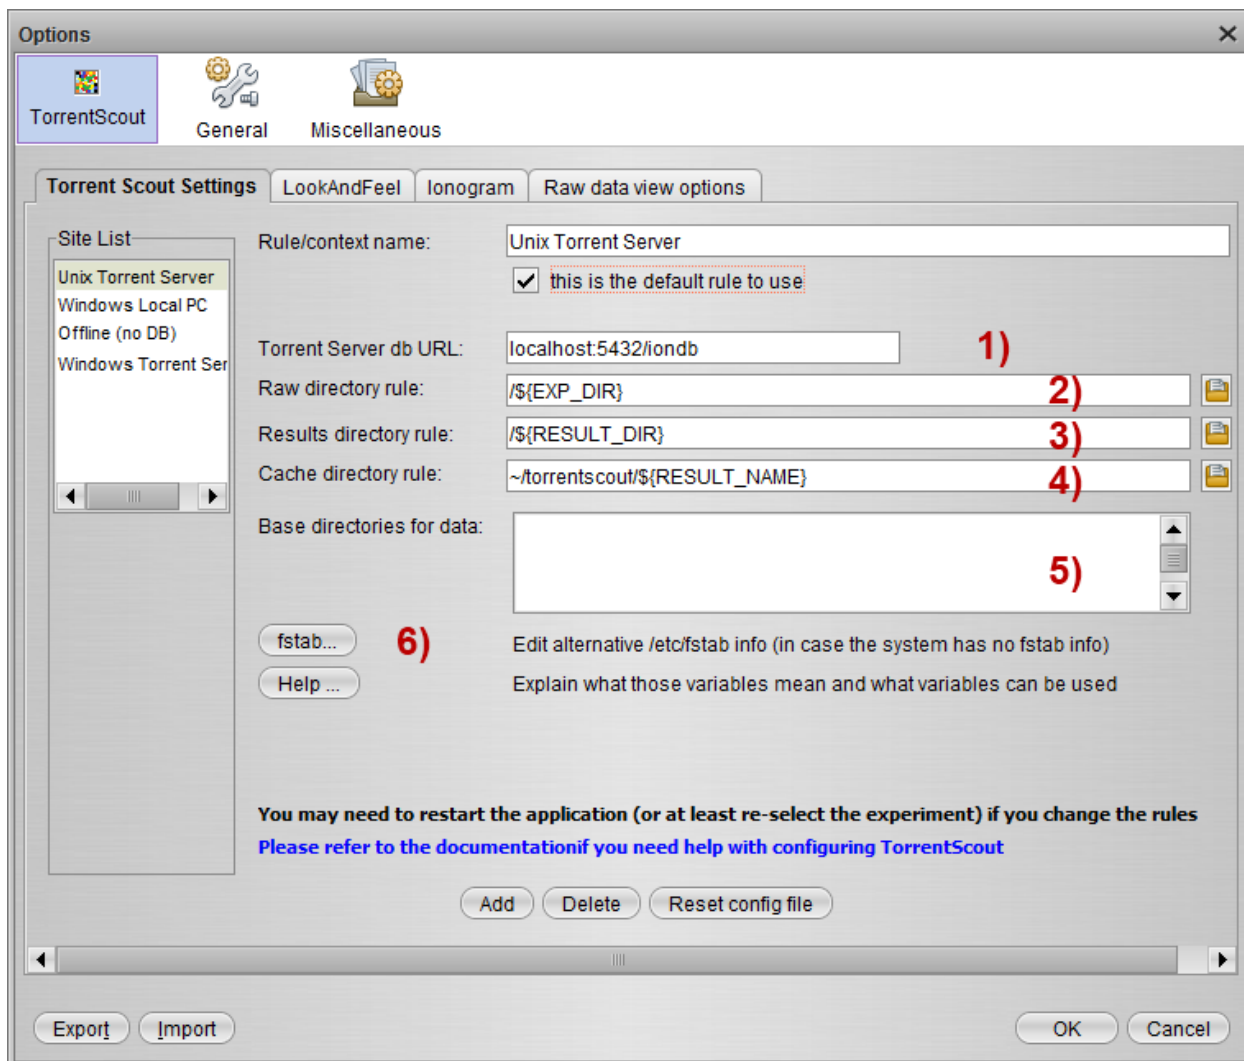

1. The Database/Server URL:


This is the URL of the experimental database



- If you want to connect to a locally installed database (if you run Torrent Scout either on the server itself), you can use localhost as URL
- The default port is **5432**
- The default database name is **iondb**
- If you are running Torrent Scout on a client machine that does not host the database, put in the URL of your Torrent Server where the database is hosted (without the http://).
Example: my.server.com:5432/iondb

2. The Raw Directory Rule

This rule tells Torrent Scout how to find the raw .dat files for every experiment:

Raw directory rule:	<input type="text" value="/\${EXP_DIR}"/>	2)	
---------------------	---	----	---

- If you are running Torrent Scout in offline mode (no database) and are just looking at one experiment, then you can of course specify a full path such as c:/mydata/someexperiment
- However if you want to look at different experiments and want to select them with the database, then Torrent Scout needs to know where to find the data.

How to define rules is explained in another section below

3. The Results Directory Rule

This rule tells Torent Scout where to find results files for a particular run such as:

- Bfmask.bin
- The .bam file
- The .sff file(s)
- 1.wells file etc


Results directory rule:	<input type="text" value="/\${RESULT_DIR}"/>	3)	
-------------------------	--	----	---

As in the raw rule, the explanation follows below.

4. Cache Directory Rule

- When running Torrent Scout, it will create index files (such as an index of the .sff file or of the .bam file). These are specific for each experiment and need to be stored somewhere.
- Also, when looking at 314 chip data, it will also create an index of those files. These index files are quite large and you will need at least 50 GB of storage if you want to index all flows. Files using a newer version of the .dat file format will no longer need those index files.
- The cache should be a separate folder for each run.

How to define rules is explained in another section below

Cache directory rule:	<input type="text" value="~/torrentscout/\${RESULT_NAME}"/>	4)	
-----------------------	---	----	---

5. Using Multiple Storage Devices

In most cases the simple rules should be sufficient. However if you are storing the results data on multiple drives and when there is not a clear rule on where to find the data, this allows you to specify multiple possible locations of where to find the data. Torrent Scout will then attempt to find the data on all of the drives listed.

Base directories for data:

5)

6. Helping Torrent Scout find the data with fstab

In a complex environment with many storage devices, it can sometimes take quite some time for Torrent Scout to find the experimental data if it has to try each base directory every time to locate an experiment.

fstab...

6)

Edit alternative /etc/fstab info (in case the system has no fstab info)

To speed up this process, the fstab (which is literally the copy/paste of /etc/fstab content) info will help to let Torrent Scout find the data more quickly.

Again this is only used in the most complex environments.

Defining the Rules

Basic Variables

- The content of all of the following variables is stored in the database.
- When a user clicks on an experiment or run in the ExperimentViewer, the information about the experiment is retrieved and stored in the variables below.

Variable Name	Description	Example Value
<code>\${PGM_NAME}</code>	The name of the PGM	PGM1, PGM2, Storm, Hendrix etc
<code>\${EXP_NAME}</code>	The name of the experiment (from the database)	R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM
<code>\${RESULTS_NAME}</code>	The name of the run (from the database)	Auto_HEN-272-R9017-BB229_LN434_NHB-KM_3807_6370
<code>\${EXP_DIR}</code>	The full path to the .dat files (from the database)	/results/PGM1/ R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM
<code>\${RESULTS_DIR}</code>	The URL to the report (from the database)	/output/Home/ Auto_HEN-272-R9017-BB229_LN434_NHB-KM_3807_6370

- When a rule contains a variable such as `${PGM_NAME}`, the variable name is replaced with the value from the current experiment, such as PGM1.

Additional Variables

These variables are evaluated after an experiment is selected:

Variable Name	Description	Example Value
<code>\${BASE}</code>	One of the directories listed in the “Base Directories” text area	Windows: C:\data1 C:\data2 Unix: \results1 \results2 \results3
<code>\${RAW_DIR}</code>	The evaluated directory for raw directory, for instance to be used in the rule for the cache directory	/results/PGM1/ R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM

Example Rules

Raw Directory Rule:

- The most common rule that works in most cases is simply `/${EXP_DIR}`
- An alternative is: `/results/${PGM}/${EXP_NAME}`

Results Directory Rule:


- The most common rule is: `/${RESULTS_DIR}`
Note usually the results directory starts with `/output`. If you want to use this simple rule, you have to make sure there is a symbolic link on your system called `/output` that points to the actual “output” directory where the results are stored
- As an alternative, specify the whole path:
`/results/output/analysis/Home/${RESULTS_NAME}`

Cache Directory Rule:

- The cache directory should always include the results name, otherwise the cache might be used for a different set of results that doesn’t apply to that experiment!
- The most common rules:
 - `/${RESULTS_DIR}`
 - `/${EXP_DIR}/${RESULTS_NAME}`
 - `/tmp/${RESULTS_NAME}`
- **Make sure the cache directory has enough disk space:**
 - **A few GB if you are working with newer, region based .dat files (after release 1.5), or not caching the .dat files**
 - **At least 50 GB if you are caching older .dat files (prior to release 1.5)**

Checking the Content of the Variables

On the left side of the Torrent Scout main Window there is a vertical tab called “TorrentScoutStartupWindow”:

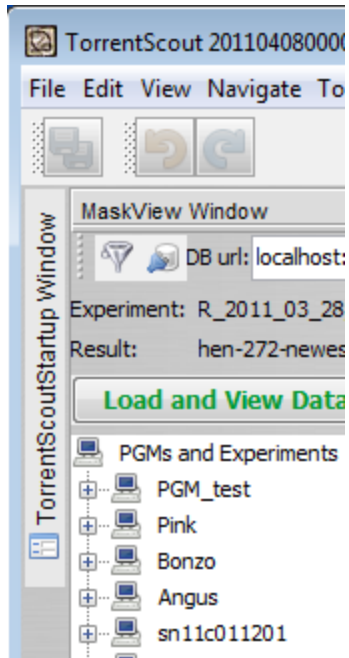

When you move your mouse over the floating tab, it will open an information window that shows you :

- The variable names and their content given the current context
- The rules as defined
- The resulting evaluated rules given the variable content

TorrentScoutStartup Window

Check cache

Site options and rules

trace-fix_6399

Url to report: localhost/output/Home/trace-fix_6399/Detailed_Report.php

Variable name	Variable value
\${PGM_NAME}	hendrix
\${EXP_NAME}	R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM
\${RESULT_NAME}	trace-fix_6399
\${EXP_DIR}	results/hendrix/R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM
\${RESULTS_DIR}	output/Home/trace-fix_6399
\${BASE}	

Rule for results dir: **/\${RESULTS_DIR}**
Rule for raw dir: **/\${EXP_DIR}**

Raw dir based on rule: /results/hendrix/R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM/
Results dir based on rules: /output/Home/trace-fix_6399/

Property	Value
BAM file	R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM_trace-fix.bam
SFF file	R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM_trace-fix.sff
Nr flows	220
Nr cols	2048
Nr rows	2048

Folder access permissions:
I cannot access the raw directory
/results/hendrix/R_2011_03_28_18_36_46_user_HEN-272-R9017-BB229_LN434_NHB-KM/
(Does the dir exist? Is there a symlink?)
I am able to **access** the cache directory ~\torrentscout\trace-fix_6399
I am able to **write** to the cache directory ~\torrentscout\trace-fix_6399
I am able to **access** the results directory /output/Home/trace-fix_6399/

For instance in this example, the **/\${RESULTS_DIR}** is **output/Home/trace-fix_6399**, the rule for the results directory is **/\${RESULTS_DIR}**, and the evaluated rule is **/output/Home/trace-fix_6399**

Common Error Message:

When a user attempts to view experimental data, Torrent Scout will apply the specified rules to the current experimental context and paths given from the database.

If Torrent Scout fails to locate the data, it will show a message similar to this:



If this happens, please go back to the configuration panel and make sure the rules are defined correctly.