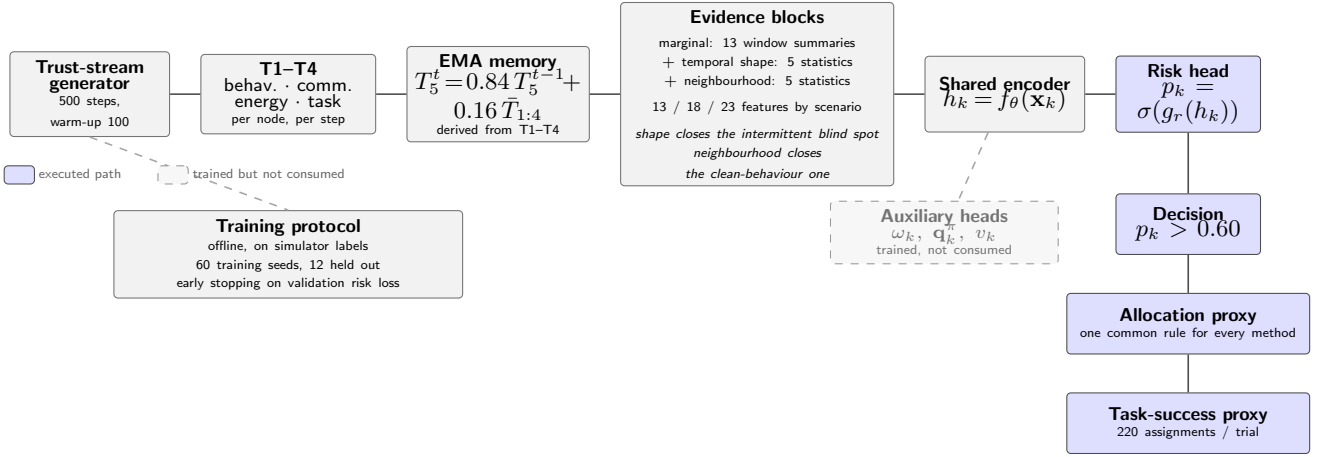

Trust-stream generator
500 steps,
warm-up 100
T1–T4
behav. · comm.
energy · task
per node, per step
EMA memory
$T_5^t = 0.84\,T_5^{t-1} +$
$0.16\,\bar{T}_{1:4}$
derived from T1–T4
Evidence blocks
marginal: 13 window summaries
+ temporal shape: 5 statistics
+ neighbourhood: 5 statistics
13 / 18 / 23 features by scenario
shape closes the intermittent blind spot
neighbourhood closes
the clean-behaviour one
Shared encoder
$h_k = f_\theta(\mathbf{x}_k)$
Risk head
$p_k =$
$\sigma(g_r(h_k))$
executed path
trained but not consumed
Training protocol
offline, on simulator labels
60 training seeds, 12 held out
early stopping on validation risk loss
Auxiliary heads
ω_k, $\mathbf{q}_k^\pi$, v_k
trained, not consumed
Decision
$p_k > 0.60$
Allocation proxy
one common rule for every method
Task-success proxy
220 assignments / trial