

iOS
DeCal

lecture 9

AVFoundation and Location


cs198-001 : fall 2017

Announcements

- Snapchat Clone Part 2 (hw3 pt2) due tonight (11:59pm)
 - remember - you have 3 slip days for part 1 and part 2

You will need an iPhone / iPad with iOS 11 and
iPhone cable for lab this week!

(if you don't have a device, you can work with a partner, as per usual)

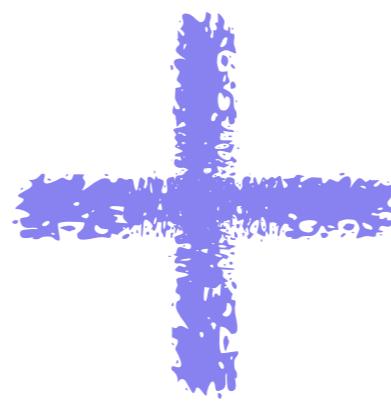

Overview : Today's Lecture

Core Location

Map Kit

AVFoundation

Core Location

Review: Stuff + GPS

GPS drains battery and is unreliable in dense urban and indoor environments

Need accurate location services...


What can you do?

Review: Stuff + GPS

Hybrid Positioning System

Use crowd-sourced database
of Wi-Fi hotspot and cell tower
locations

= Core Location

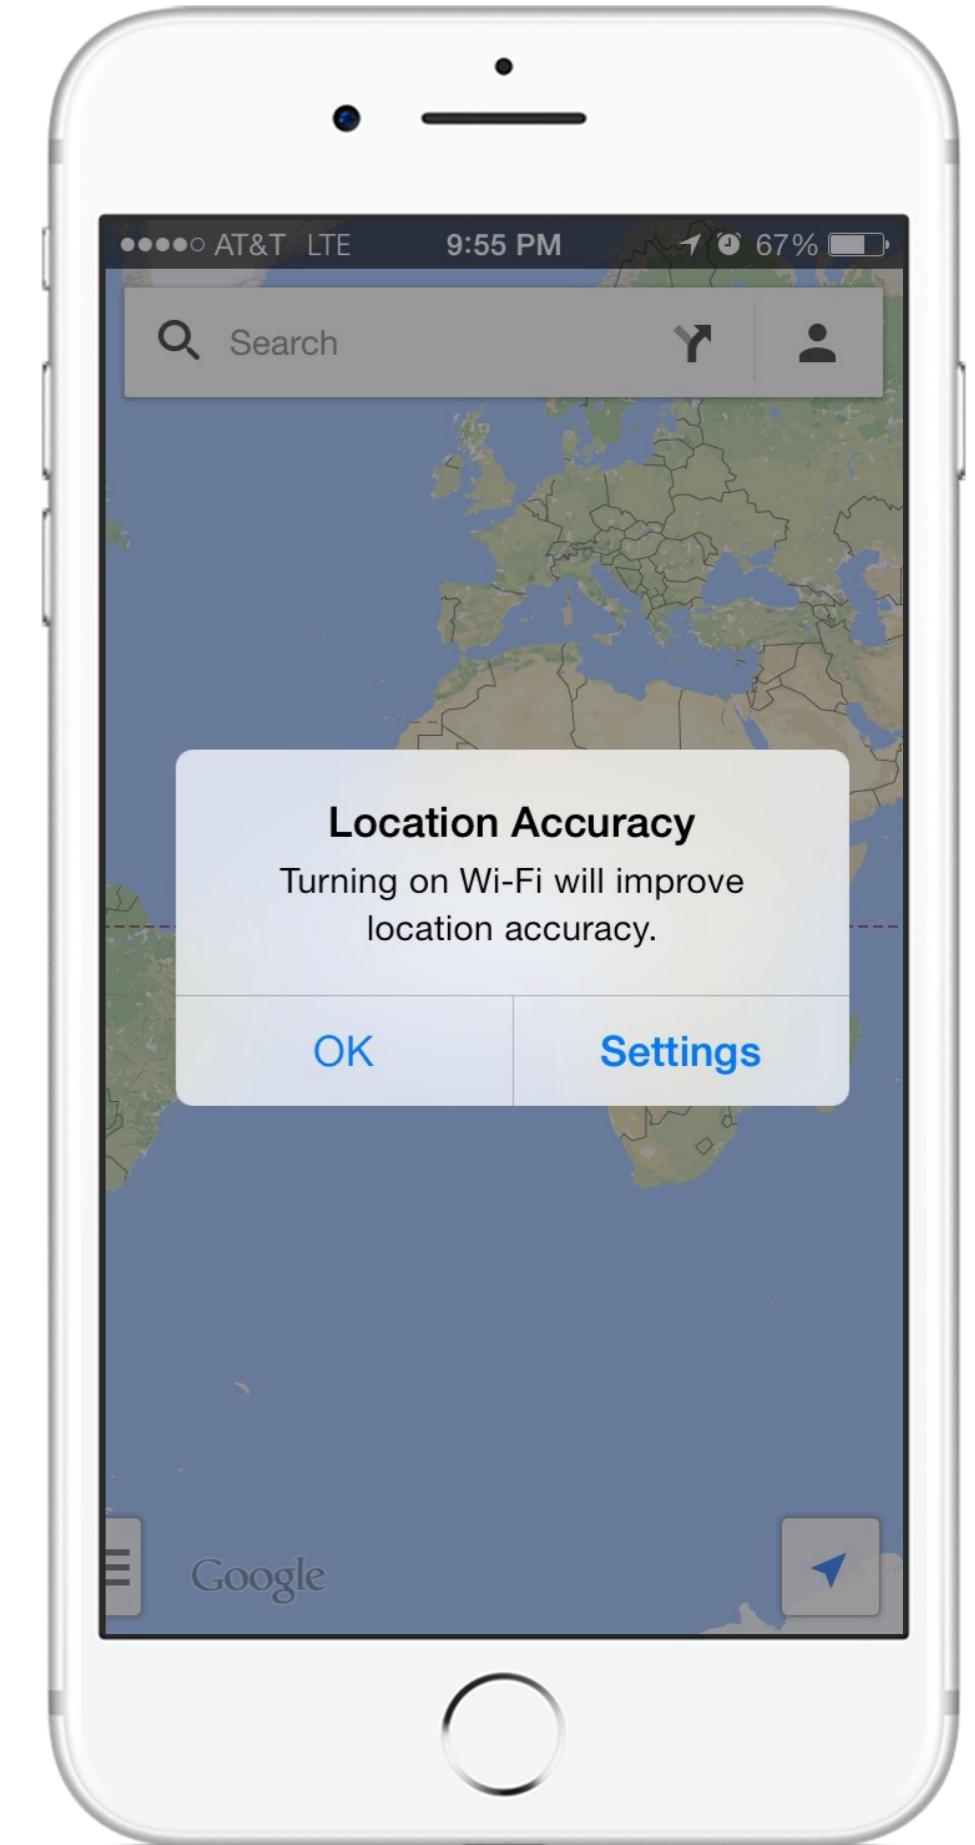

Core Location : Configuration

Add the `NSLocationWhenInUseUsageDescription` key to your app's `Info.plist` file. ("Privacy - Location When In Use Usage Description")

Information Property List		
	Type	Value
Localization native development region	String	United States
Bundle display name	String	Outfit
Executable file	String	<code>\$(EXECUTABLE_NAME)</code>
Get Info string	String	
Bundle identifier	String	com.codebrew.poker
InfoDictionary version	String	6.0
Bundle name	String	<code>\$(PRODUCT_NAME)</code>
Bundle OS Type code	String	APPL
Bundle versions string, short	String	1.0
Bundle creator OS Type code	String	????
▶ URL types	Array	(1 item)
Bundle version	String	1.0
FacebookAppID	String	709337579107040
FacebookDisplayName	String	Photo Collage Maker
Application Category	String	
Application requires iPhone environment	Boolean	YES
View controller-based status bar appearance	Boolean	NO
Copyright (human-readable)	String	
▶ Required device capabilities	Array	(1 item)
▶ Supported interface orientations	Array	(2 items)
NSLocationWhenInUseUsageDescription	String	This application requires location services to work.

Core Location : Configuration

OR both:

- NSLocationWhenInUseUsageDescription
- NSLocationAlwaysAndWhenInUseUsageDescription

keys to your app's Info.plist file.

Core Location : Permissions

Before getting a user's location, they have to have enabled Location Services for your app

```
let manager = CLLocationManager()  
  
if !CLLocationManager.locationServicesEnabled()  
{  
    //ask for user's location  
}
```

Core Location : Permissions

When In Use vs. Always

Allow “Facebook” to access your location while you use the app?

Facebook uses this to help people find places, connect with friends and more.

[Don't Allow](#)

[Allow](#)

Allow “Weather” to access your location even when you are not using the app?

Your location is used to show local weather like in “Weather” app and in Notification Center.

[Don't Allow](#)

[Allow](#)

`manager.requestWhenInUseAuthorization()`

`manager.requestAlwaysAuthorization()`

Core Location : Permissions

Let's say you always want the user's location
Even when not in the app (background)

```
switch CLLocationManager.authorizationStatus() {  
    case .authorizedAlways:  
        break  
    case .notDetermined:  
        manager.requestAlwaysAuthorization()  
    case .authorizedWhenInUse, .restricted, .denied:  
        //prompt notification: see next slides  
}
```

Alerts

```
let alertController = UIAlertController(  
    title: "Background Location Access  
Disabled",  
    message: "In order to ___, please open  
Settings and set location access  
for this app to 'Always'.",  
    preferredStyle: .alert)
```

Alerts

```
let openAction = UIAlertAction(title: "Open Settings",
                               style: .default)
{ (action) in
    if let url = NSURL(string:
UIApplicationOpenSettingsURLString) {
        UIApplication.shared.open(url as URL,
                                  options: [:],
                                  completionHandler: nil)
    }
}

alertController.addAction(openAction)
```

Alerts

```
let cancelAction = UIAlertAction(title:  
"Cancel", style: .cancel, handler: nil)
```

```
alertController.addAction(cancelAction)
```

Alerts

To actually present the alert in your desired context...

```
self.present(alertController,  
            animated: true,  
            completion: nil)
```

Core Location : One Time Location

Fetch user's location once

```
let manager = CLLocationManager()

override func viewDidLoad() {
    super.viewDidLoad()
    // manager is your CLLocationManager
    manager.delegate = self //important!!
    manager.desiredAccuracy =
        kCLLocationAccuracyBest
    manager.requestLocation() //type of update
}
```

Core Location : One Time Location

Calling the method

`manager.requestLocation()`

Will call either:

`locationManager(_:didUpdateLocations:)`

`locationManager(_:didFailWithError:)`

in your `CLLocationManagerDelegate` class
(that's why you must set the delegate!)

Core Location : Location over Time

Standard Location Service

For continuous updates (e.g. Maps)

`manager.startUpdatingLocation()`

Significant-Change Loc. Service

Update only when location changes

`manager.startMonitoringSignificantLocationChanges()`

Core Location : Location over Time

Must implement appropriate delegate method(s) in View Controller to receive data

```
func locationManager(_ manager: CLLocationManager,  
                    didUpdateLocations locations:  
                           [CLLocation]) {  
    // most recent location update at the end of the array  
    let latestLocation = locations.last!  
    // do something  
}
```

Core Location : CLVisit

A period of time a user has spent in a single location, including both a coordinate and start/end timestamps

```
// initiating visit event updates
manager.startMonitoringVisits()
manager.stopMonitoringVisits()
```

```
// receive data via delegate method(s)
func locationManager(manager: CLLocationManager,
didVisit visit: CLVisit) {
}
```

Core Location : CLRegion

Monitor boundary crossings for defined geographical regions (geofencing)

```
// define desired geographical region and radius
let currRegion = CLCircularRegion(center:
    CLLocationCoordinate2D(latitude: 37,
                           longitude: 122),
    radius: 200,
    identifier: "Berkeley")
```

```
// initiating region monitoring
manager.startMonitoring(for: currRegion)
manager.stopMonitoring(for: currRegion)
```

Core Location : CLRegion

Monitor boundary crossings for defined geographical regions (geofencing)

```
//delegate method fires when user enters
func locationManager(_ manager: CLLocationManager,
didEnterRegion region: CLRegion) { ... }
```

```
//delegate method fires when user exits
func locationManager(_ manager: CLLocationManager,
didExitRegion region: CLRegion) { ... }
```

Core Location : Other

CLFloor - get information about what floor your user is on (returns int for floor)

iBeacons: developer.apple.com/ibeacon/

And more...

Core Location : User Trust

Keep location data secure

Do not auto-track user

Only use Location Services when they are needed

Map Kit

MapKit - Overview

API built off of CoreLocation


Embed maps directly to windows or views

Some Features:

Annotate Map & Add Overlays

Plot Location


Jump to coordinates

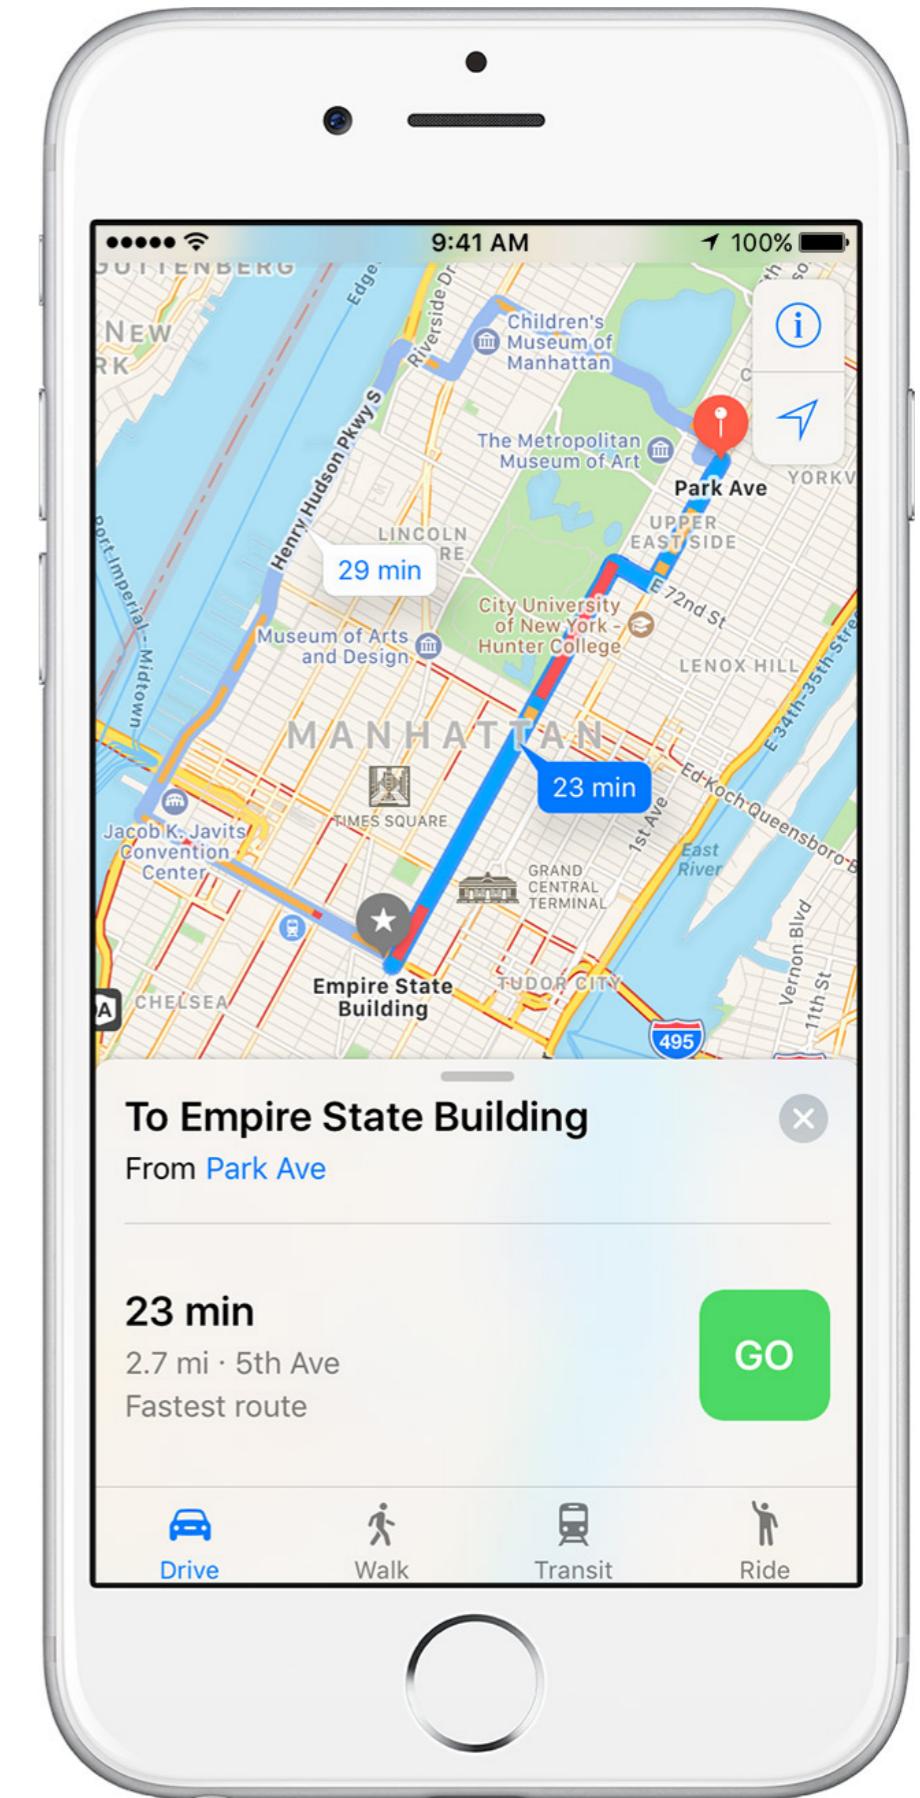

MapKit Example



Easily embed an interactive map within your application with annotations

Example: Yelp

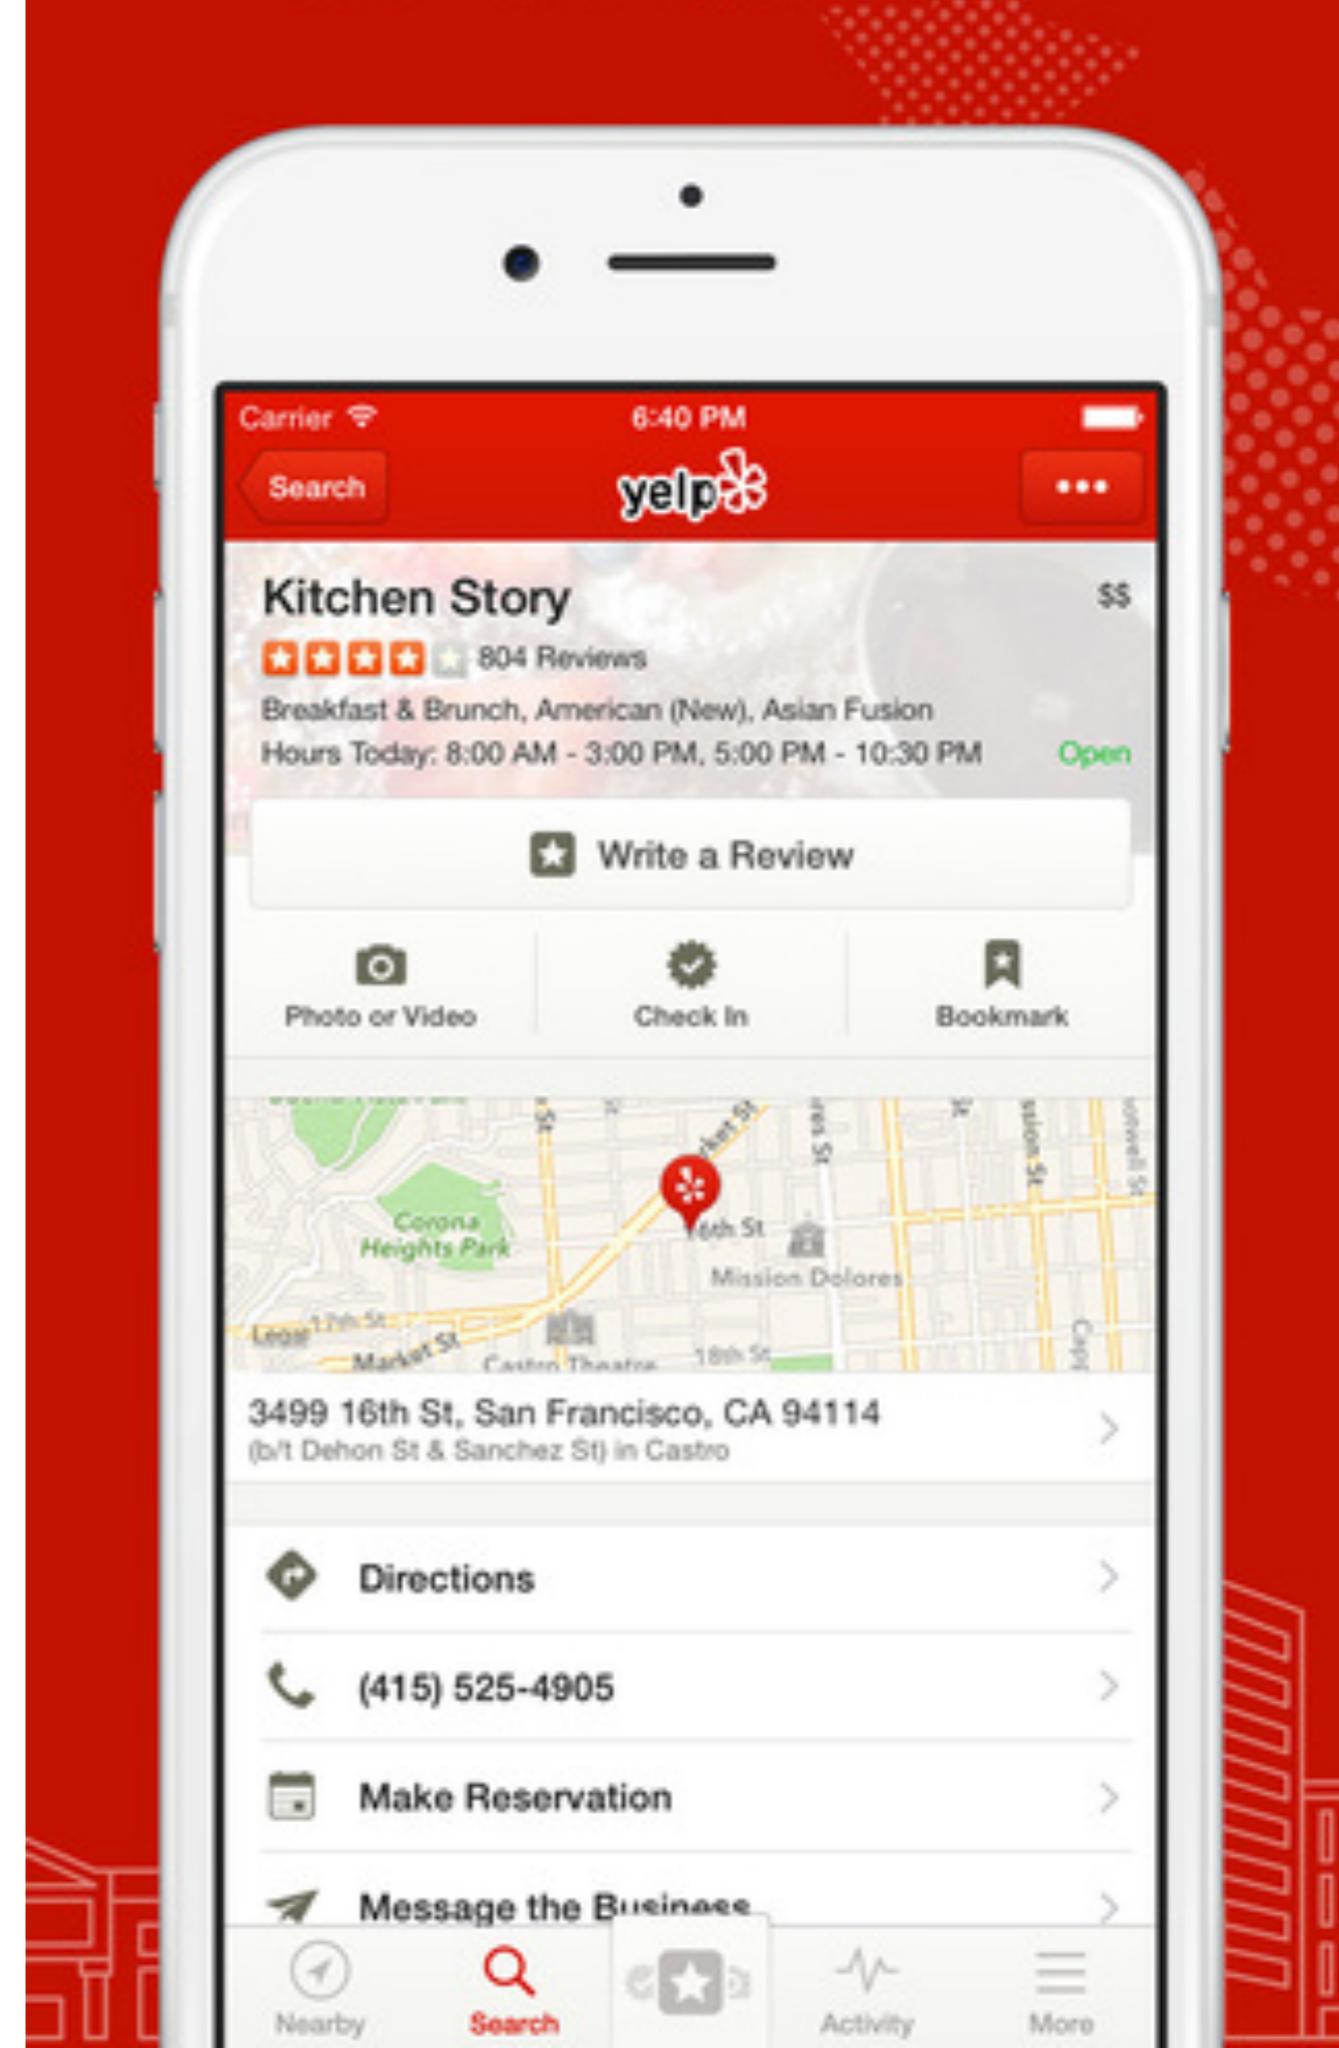

Embedding a Map : Storyboard

Drag a “Map Kit View” from the Object Library into your View Controller.

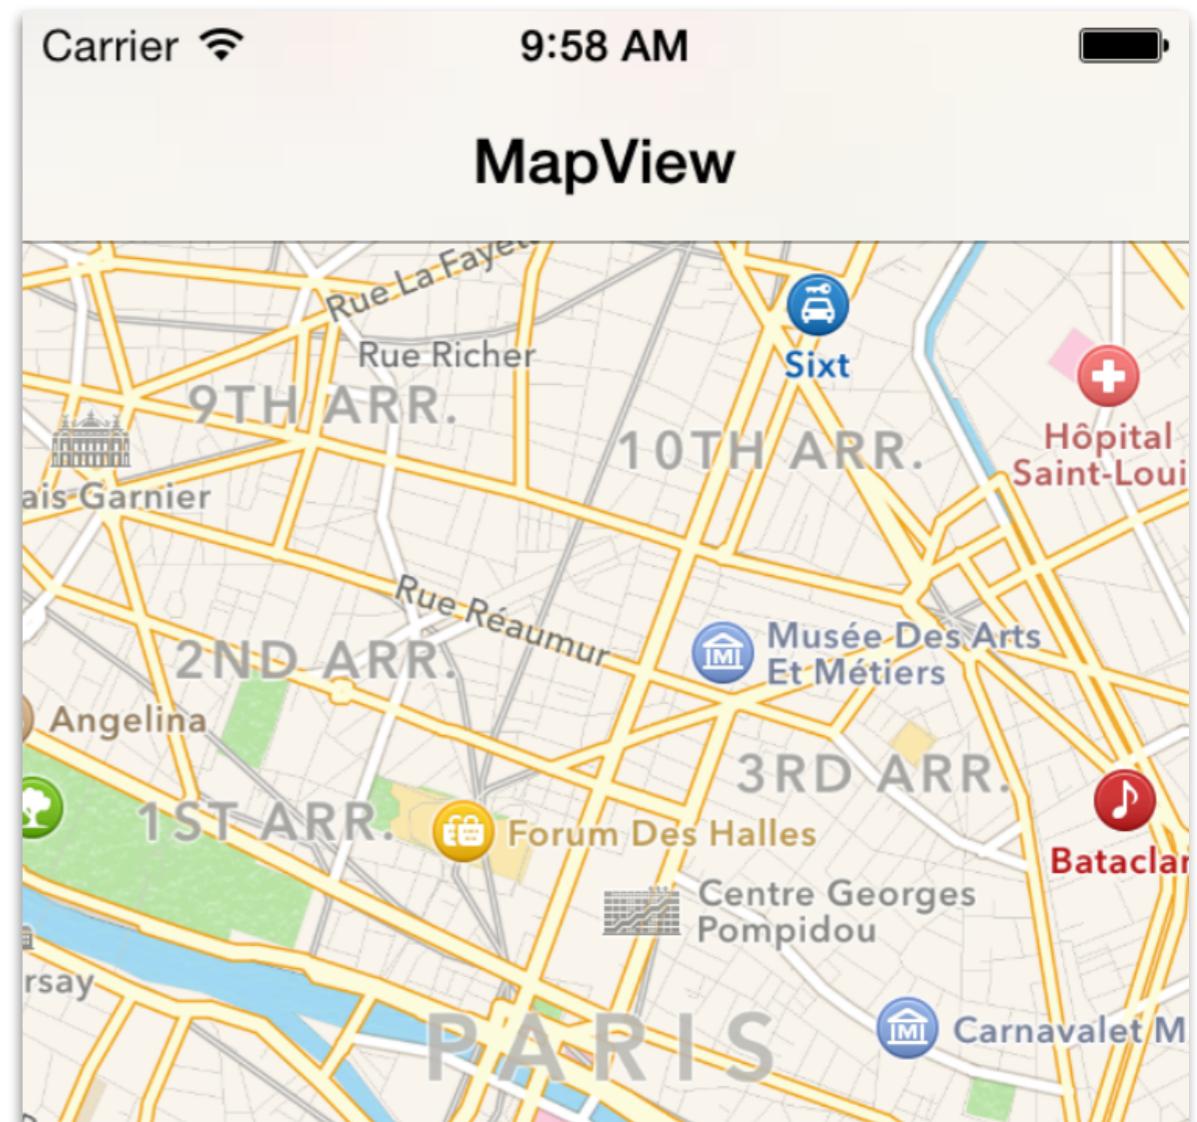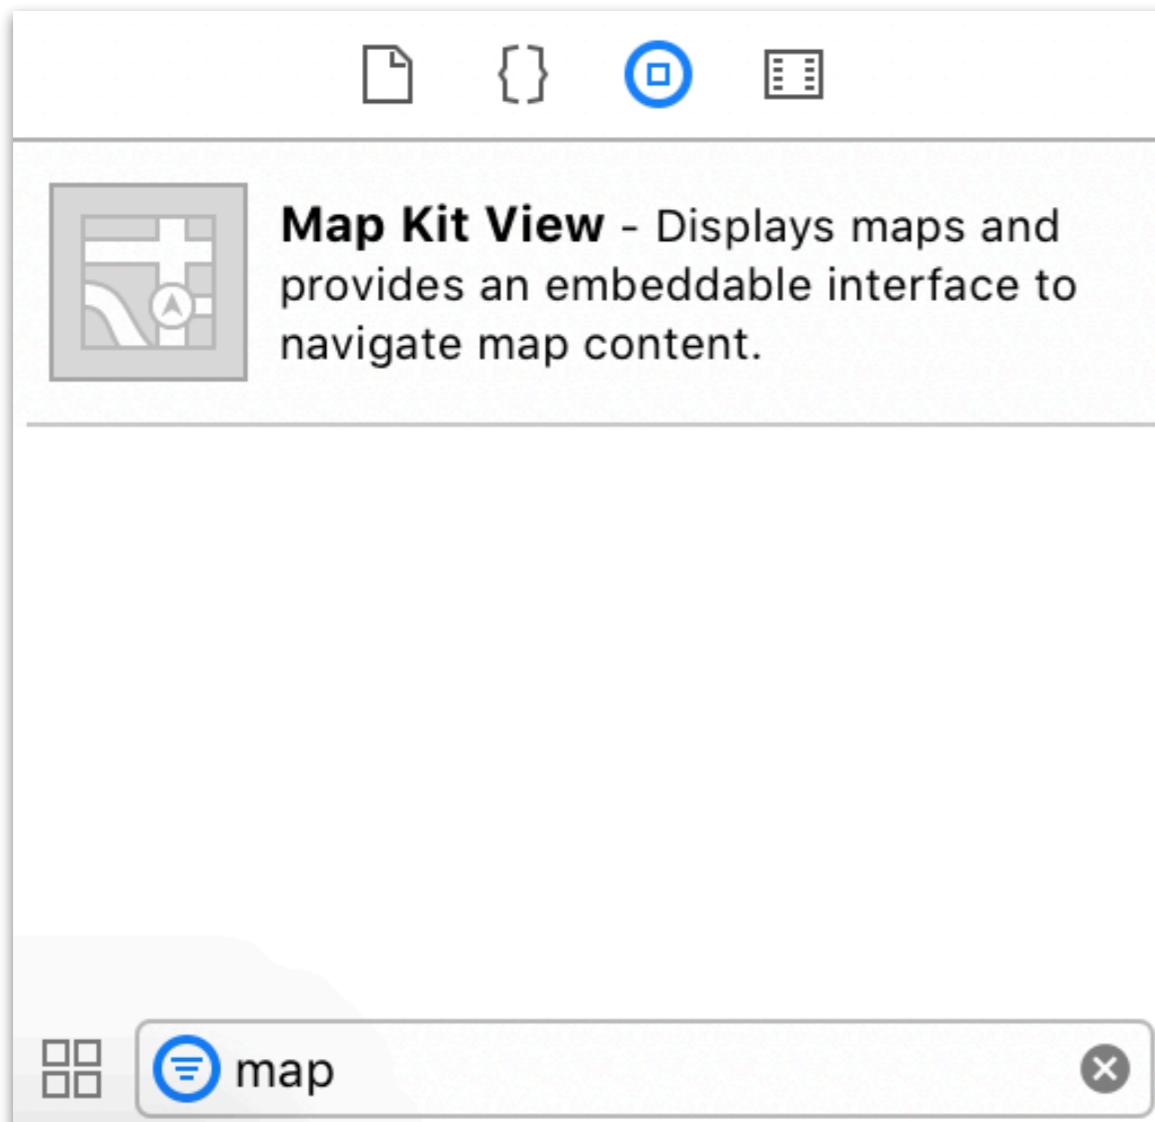

Custom Initial Map View

```
override func viewDidLoad() {  
    super.viewDidLoad()  
    let initialLoc = CLLocation(latitude:38,  
                                  longitude:122)  
    centerMapOnLocation(initialLoc) //custom  
}
```

Custom Initial Map View

```
// in your map's view controller
let regionRadius: CLLocationDistance = 1000

func centerMapOnLocation(location: CLLocation)
{
    let coordinateRegion =
        MKCoordinateRegionMakeWithDistance(
            location.coordinate,
            regionRadius * 2.0,
            regionRadius * 2.0)
    mapView.setRegion(coordinateRegion,
                      animated: true)
}
```

Adding Annotations

```
override func viewDidLoad() {  
    let annotation = MKPointAnnotation()  
    annotation.coordinate =  
        CLLocationCoordinate2D(  
            latitude: 24,  
            longitude: 54)  
    annotation.title = "Big Ben"  
    annotation.subtitle = "London"  
    mapView.addAnnotation(annotation)  
}
```

What we have done so far

Created a Initial Map View
Set a location
Added an Annotation (with a title, subtitle, and coordinates)



Check In

AVFoundation

AVPlayer - Overview


Play audio in your App

Create an **AVAudioPlayer** to play your audio on

Create an **AVPlayerItem** for each sound clip / song

Use the player to play, pause, rewind, and fast forward your

AVPlayerItems

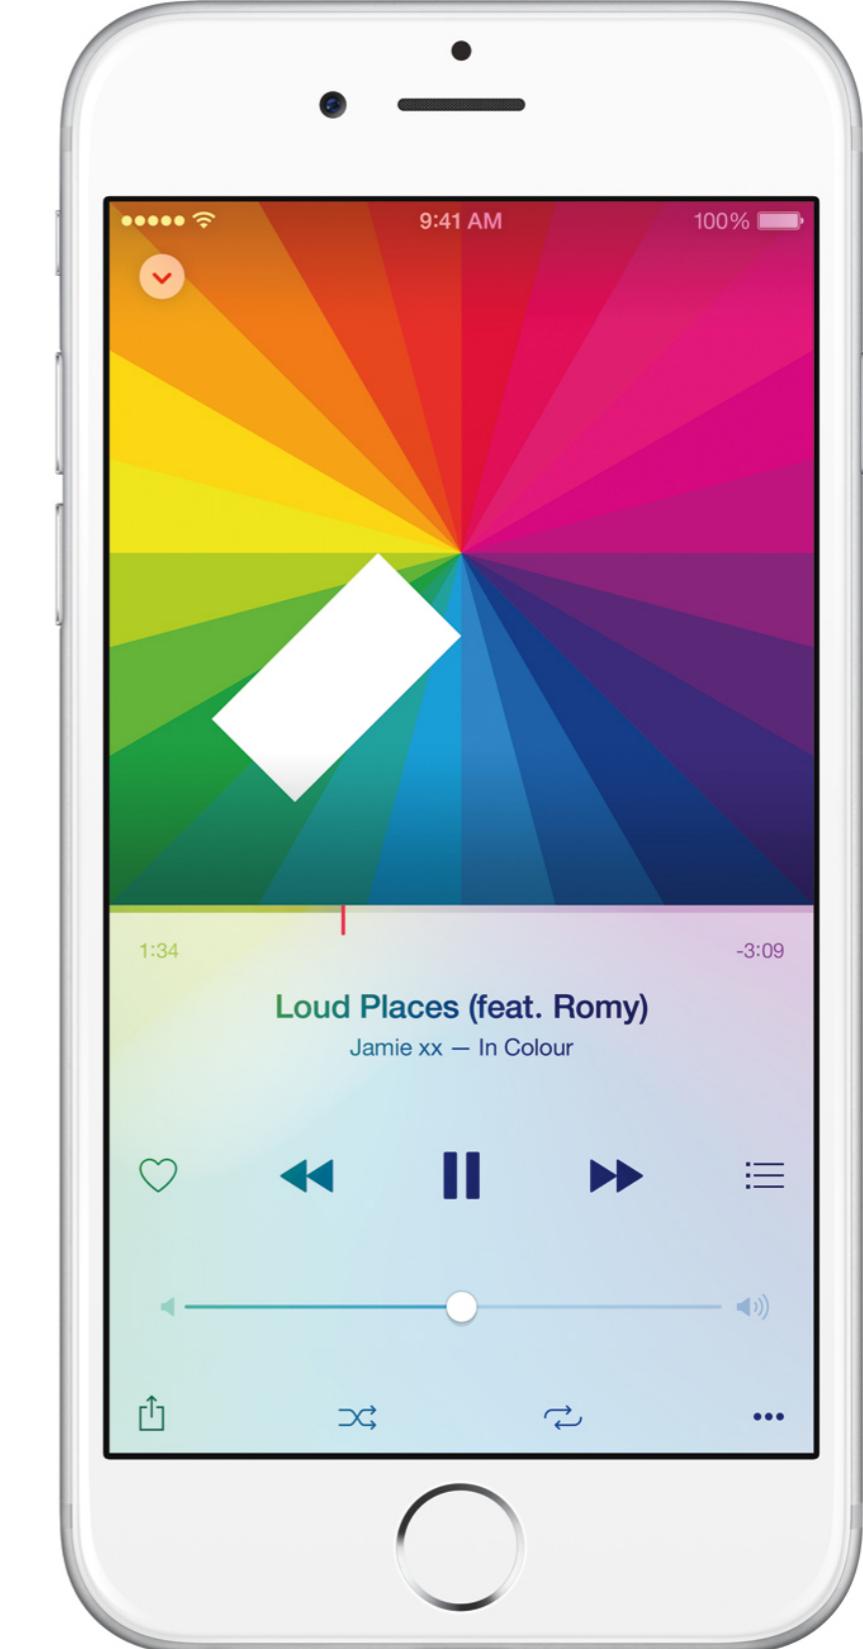

Apple Music

AVPlayerItem - Initialization

Create an **AVPlayerItem** for each song / sound you want played.

Each **AVPlayerItem** is a single instance being played by AVPlayer

```
let item = AVPlayerItem(URL: someURL! )
```

AVPlayer - Initialization

Initialize an **AVPlayer** with or without a Player Item.
You will add items to the player, then use the player
to play these items.

```
let player = AVPlayer()
```

```
let player = AVPlayer(playerItem:  
item)
```

AVPlayer - Playback

Once you've added some AVPlayerItems to your player, you can play, pause, fast forward, replace, etc.

```
let player = AVPlayer(playerItem:  
item)
```

```
player.play()
```

```
player.pause()
```

```
player.seek(to: <CMTime>)
```

```
player.replaceCurrentItem(with:  
newSong)
```

AVPlayer Example

```
import AVFoundation  
...  
  
func playSongFromURL(songURL: URL) {  
    let song = AVPlayerItem(url: songURL)  
    let player = AVPlayer(playerItem: song)  
    if (player.currentItem!.status  
== .readyToPlay) {  
        player.play()  
    }  
}
```

AVPlayer Example

```
import AVFoundation  
...  
  
func playSongFromURL(songURL: URL) {  
    let song = AVPlayerItem(url: songURL)  
    let player = AVPlayer(playerItem: song)  
    if (player.currentItem!.status  
== .readyToPlay) {  
        player.play()  
    }  
}
```

Import the **AVFoundation framework**
at the top of your file

AVPlayer Example

```
import AVFoundation  
...  
  
func playSongFromURL(songURL: URL) {  
    let song = AVPlayerItem(url: songURL)  
    let player = AVPlayer(playerItem: song)  
    if (player.currentItem!.status  
== .readyToPlay) {  
        player.play()  
    }  
}
```

Create an **AVPlayerItem** from a url or file in your application

AVPlayer Example

```
import AVFoundation  
...  
  
func playSongFromURL(songURL: URL) {  
    let song = AVPlayerItem(url: songURL)  
    let player = AVPlayer(playerItem: song)  
    if (player.currentItem!.status  
== .readyToPlay) {  
        player.play()  
    }  
}
```

Add that **AVPlayerItem** to an **AVPlayer** (here, we are initializing the **AVPlayer** with the item)

AVPlayer Example

```
import AVFoundation  
...  
  
func playSongFromURL(songURL: URL) {  
    let song = AVPlayerItem(url: songURL)  
    let player = AVPlayer(playerItem: song)  
    if (player.currentItem!.status  
== .readyToPlay) {  
        player.play()  
    }  
}
```

Now you can play, pause, seek, etc.

AVFoundation - What is it?

**Cocoa framework for
AudioVisual items**

Used to record, edit,
and stream media


Includes Players,
Items, ViewControllers,
etc



AVCapture - Overview

Allows you to capture video, photo, scan barcodes, capture audio etc.


Note: If you just need to capture photo and video without custom formatting, use the UIKit framework instead ([UIImagePickerController](#))

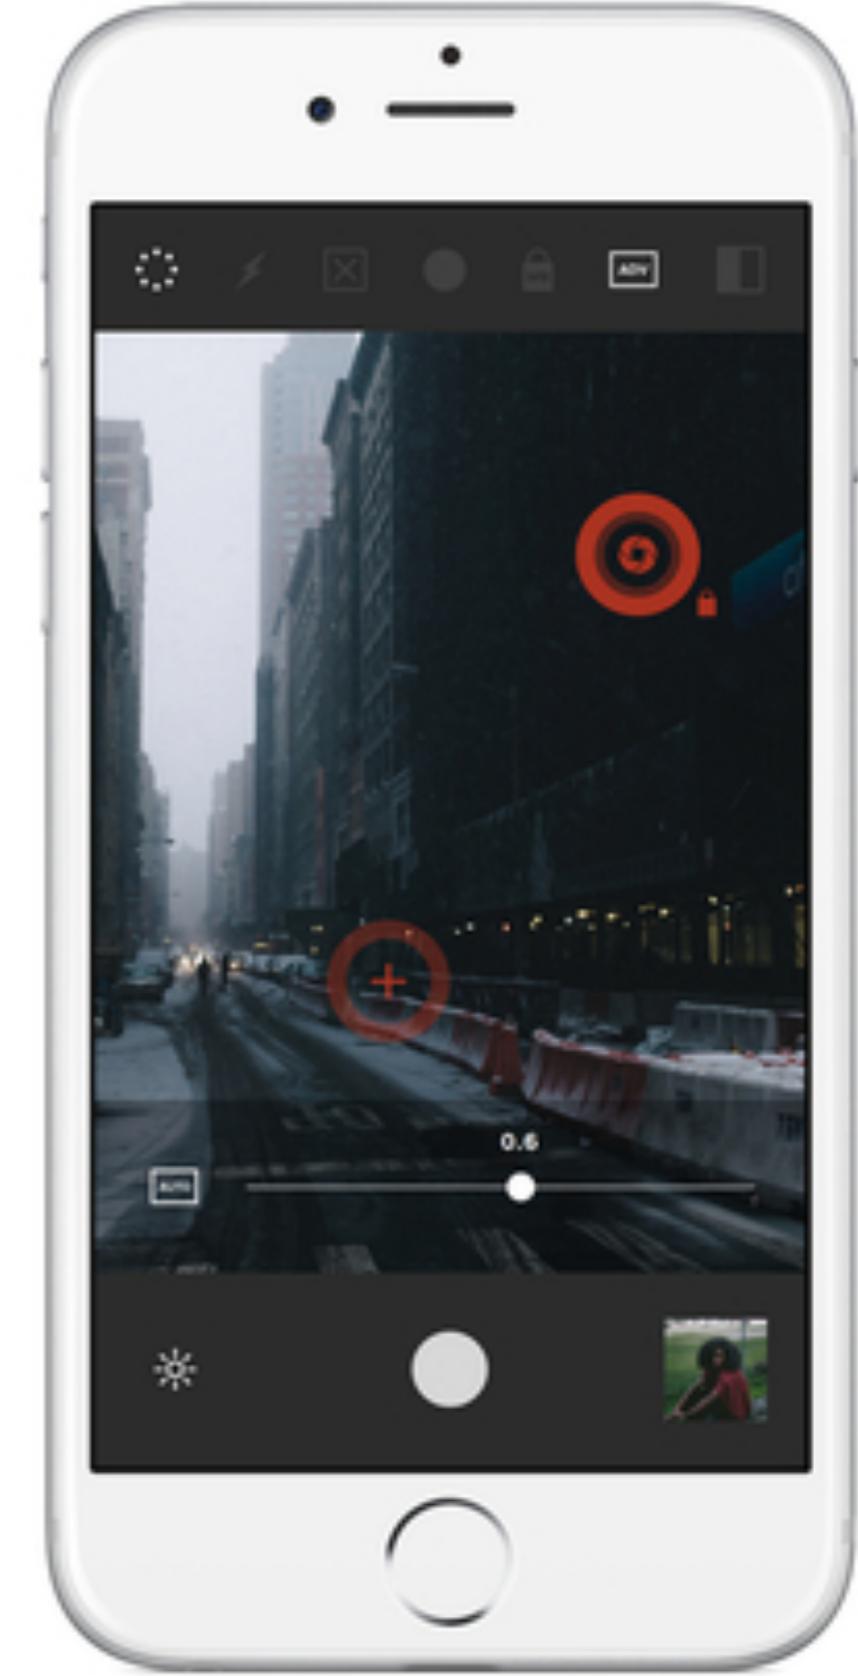

VSCO

to capture AV data....


- Create a **AVCaptureSession**
- Set the **AVCaptureDeviceInput** depending on what you want to capture (video, photo, audio). Use AVCaptureDevice's DiscoverySession to get available inputs
- add outputs save data
- Begin media capture by calling `startRunning()` on your session
- use outputs to capture data from the session

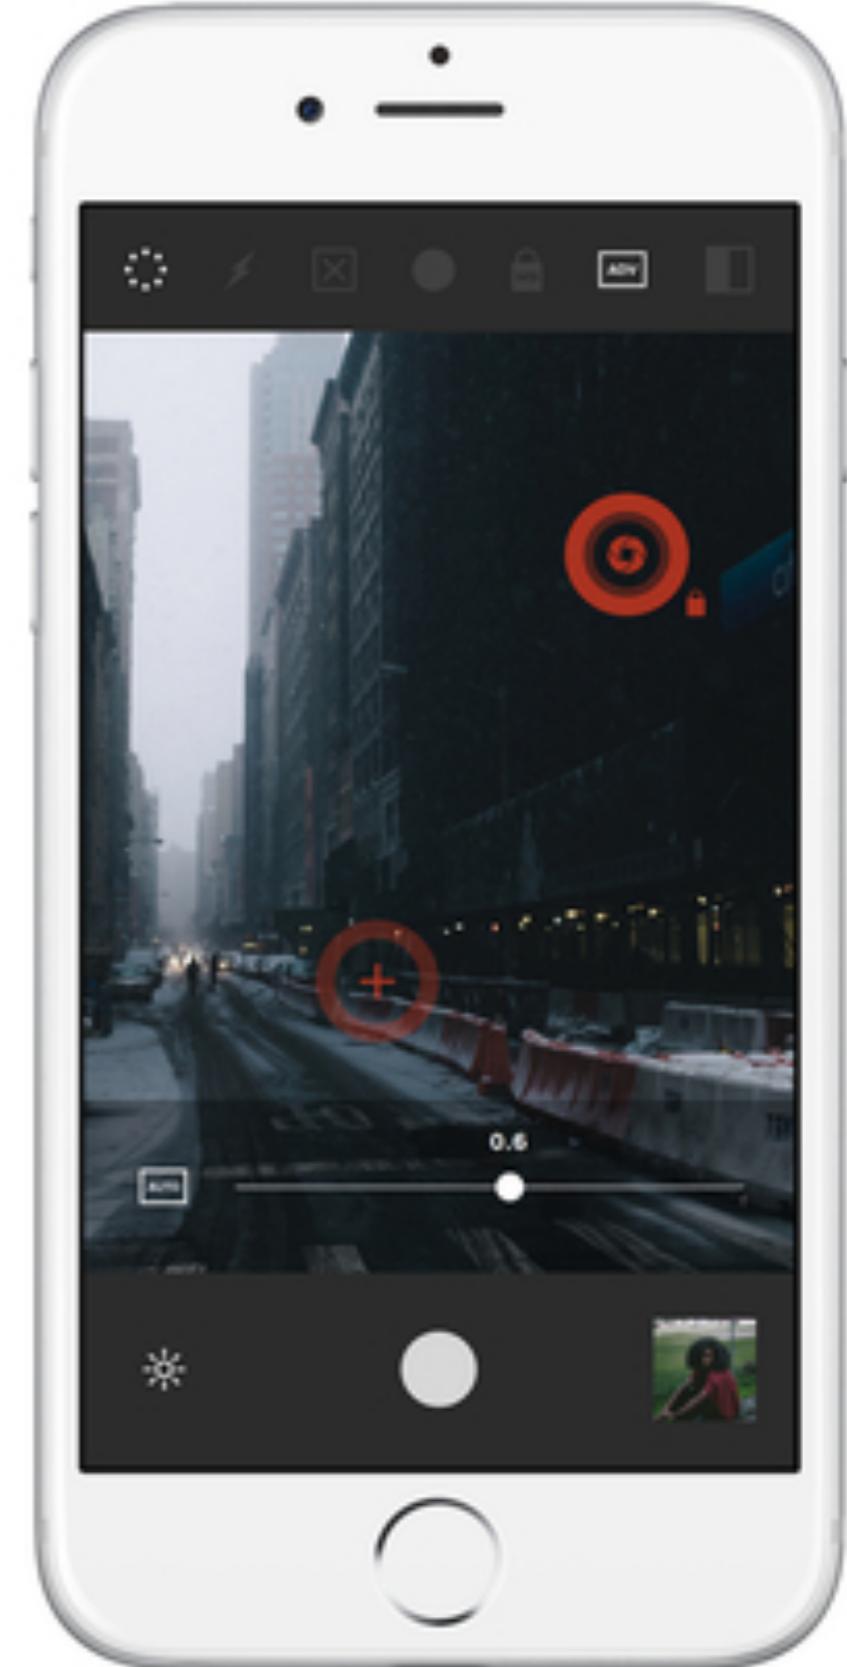

VSCO

to capture AV data....

- Create a **AVCaptureSession**
- Set the **AVCaptureDeviceInput** depending on what you want to capture (video, photo, audio). Use AVCaptureDevice's DiscoverySession to get available inputs
- add outputs save data
- Begin media capture by calling `startRunning()` on your session
- use outputs to capture data from the session

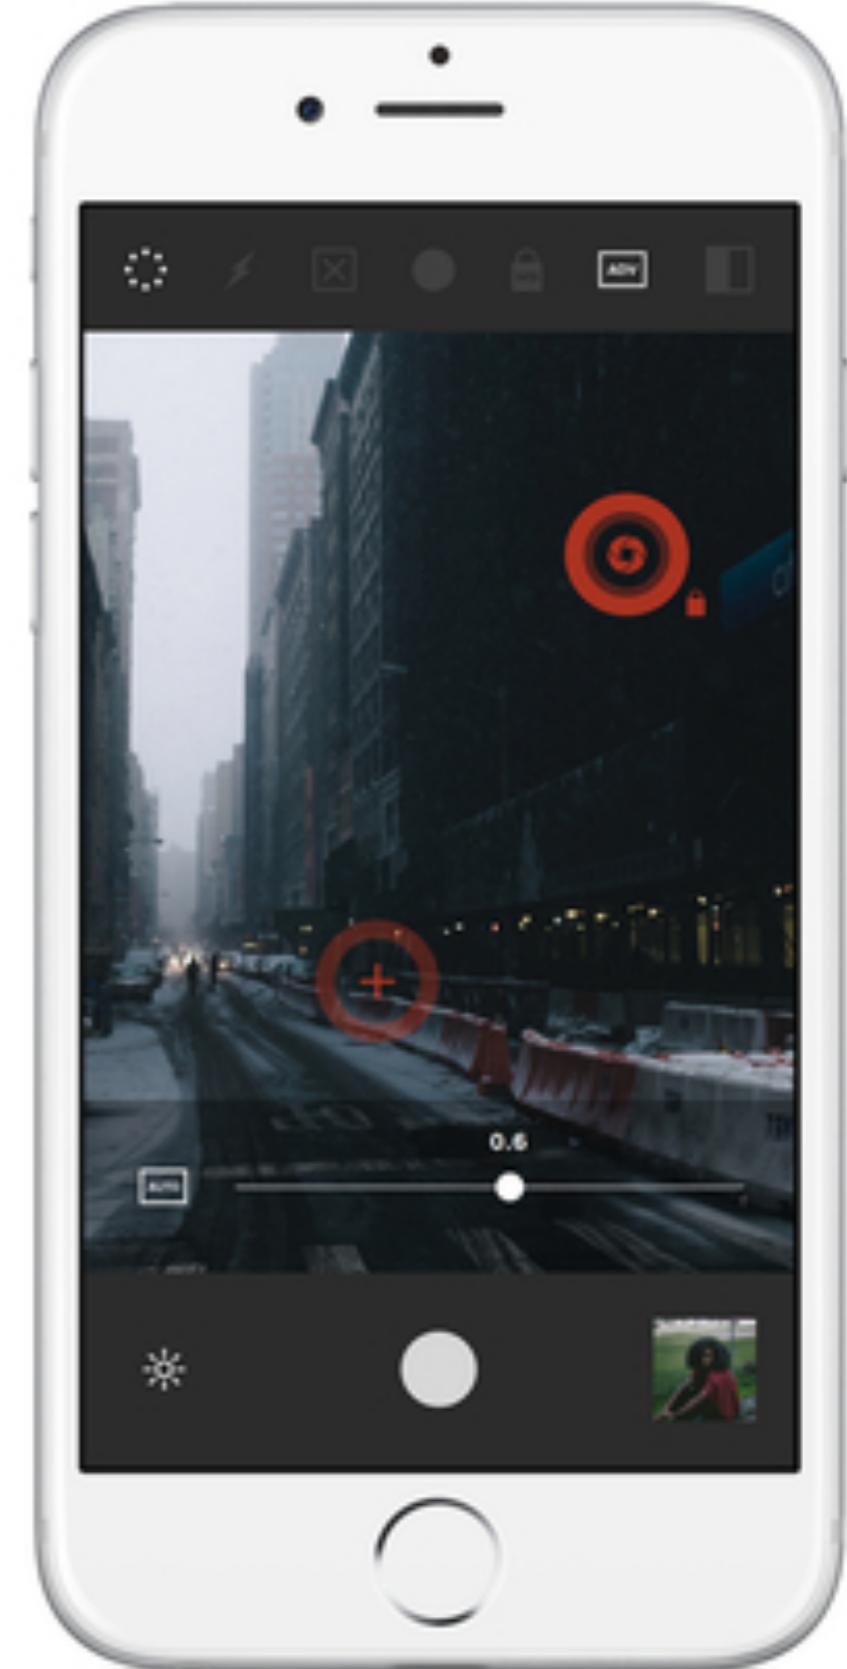

VSCO

AVCaptureSession - creation

Creating a capture session

```
let captureSession = AVCaptureSession()  
  
// set what quality you want to capture  
captureSession.sessionPreset =  
    AVCaptureSession.Preset.high
```

AVCaptureSession - adding Inputs

Find available “devices” using discovery sessions. In this case, we are filtering ones with a wide angle camera

```
let deviceDiscoverySession =  
    AVCaptureDevice.DiscoverySession(deviceTypes:  
        [.builtInWideAngleCamera], mediaType: .video,  
        position: .unspecified)
```

```
// devices will be of type [AVCaptureDevice]  
let devices = deviceDiscoverySession.devices
```

AVCaptureSession - getting a device for input

Use devices as captureSession inputs

```
let input = try  
    AVCaptureDeviceInput(device: device)
```

```
captureSession.addInput(input)
```

Now you're prepared to receive data (but not save) from camera or microphone, depending on what device you are using

AVCaptureSession - getting a device for input

Use devices as captureSession inputs

```
let input = try  
AVCaptureDeviceInput(device: device)
```

```
captureSession.addInput(input)
```

Now you're prepared to receive data (but not save) from camera or microphone, depending on what device you are using

but how do we access that data?? → AVCaptureOutputs

AVCapture - Classes for output (photo)

AVCapturePhotoOutput - class used for outputting photos captured by device camera (still and live)

AVCapturePhotoSettings - pass along into AVCapturePhotoOutput object to set capture settings

- can specify what type to output (JPEG, RAW formats, HEIF, etc.), whether you should use flash, or if you should enable image stabilization.

AVCapturePhotoCaptureDelegate - responsible for receiving the data captured from the camera. This is where you can access the captured image

AVCapture - capturing photos

To actually capture a photo from the device camera:

- create an `AVCapturePhotoOutput` object
- create an `AVCapturePhotoSettings` object
- call the method `capturePhoto` on your `AVCapturePhotoOutput` object

```
func capturePhoto(settings: AVCapturePhotoSettings,  
                  delegate: AVCapturePhotoCaptureDelegate)
```

- this method will use the settings in capturing a photo, and begin calling methods on the delegate passed in (next slide lists some of these delegate methods)

AVCapturePhotoCaptureDelegate - some methods

AVCapturePhotoCaptureDelegate - monitors photo capture progress, including when the photo was finished processing.

```
// photo was taken - do with it what you will
optional func photoOutput(_ output: AVCapturePhotoOutput,
    didFinishProcessingPhoto photo: AVCapturePhoto,
    error: Error?)

// required for capturing live photos
optional func photoOutput(_ output: AVCapturePhotoOutput,
    didFinishProcessingLivePhotoToMovieFileAt outputFileURL: URL,
        duration: CMTime,
        photoDisplayTime: CMTime,
        resolvedSettings: AVCaptureResolvedPhotoSettings,
        error: Error?)
```

AVCapturePhotoCaptureDelegate - some methods

```
// photo was taken - do with it what you will
optional func photoOutput(_ output:
AVCapturePhotoOutput,
didFinishProcessingPhoto photo: AVCapturePhoto,
error: Error?)
```

To get the Image “out of” the AVCapturePhoto object, you can use the following **AVCapturePhoto** method

```
// converts AVCapturePhoto object to a Data object
func fileDataRepresentation() -> Data?
```

Check-in: tinyurl.com/ioscheckin

```
class PhotoViewController: UIViewController {
    // view controller implementation hidden
    let data: Data?


    @IBAction func takePhoto(_ sender: UIButton) {
        let photoSettings = AVCapturePhotoSettings()
        someClass.capturePhoto(with: photoSettings,
                               delegate: self)
    }

    func photoOutput(_ output: AVCapturePhotoOutput,
                     didFinishProcessingPhoto photo:
        AVCapturePhoto, error: Error?) {
        data = photo.fileDataRepresentation()
    }
}
```

Review

to capture AV data....

- Create a **AVCaptureSession**
- Set the **AVCaptureDeviceInput** depending on what you want to capture (video, photo, audio). Use **AVCaptureDevice's** **DiscoverySession** to get available inputs
- add outputs save data
- Begin media capture by calling **startRunning()** on your session
- use outputs to capture data from the session

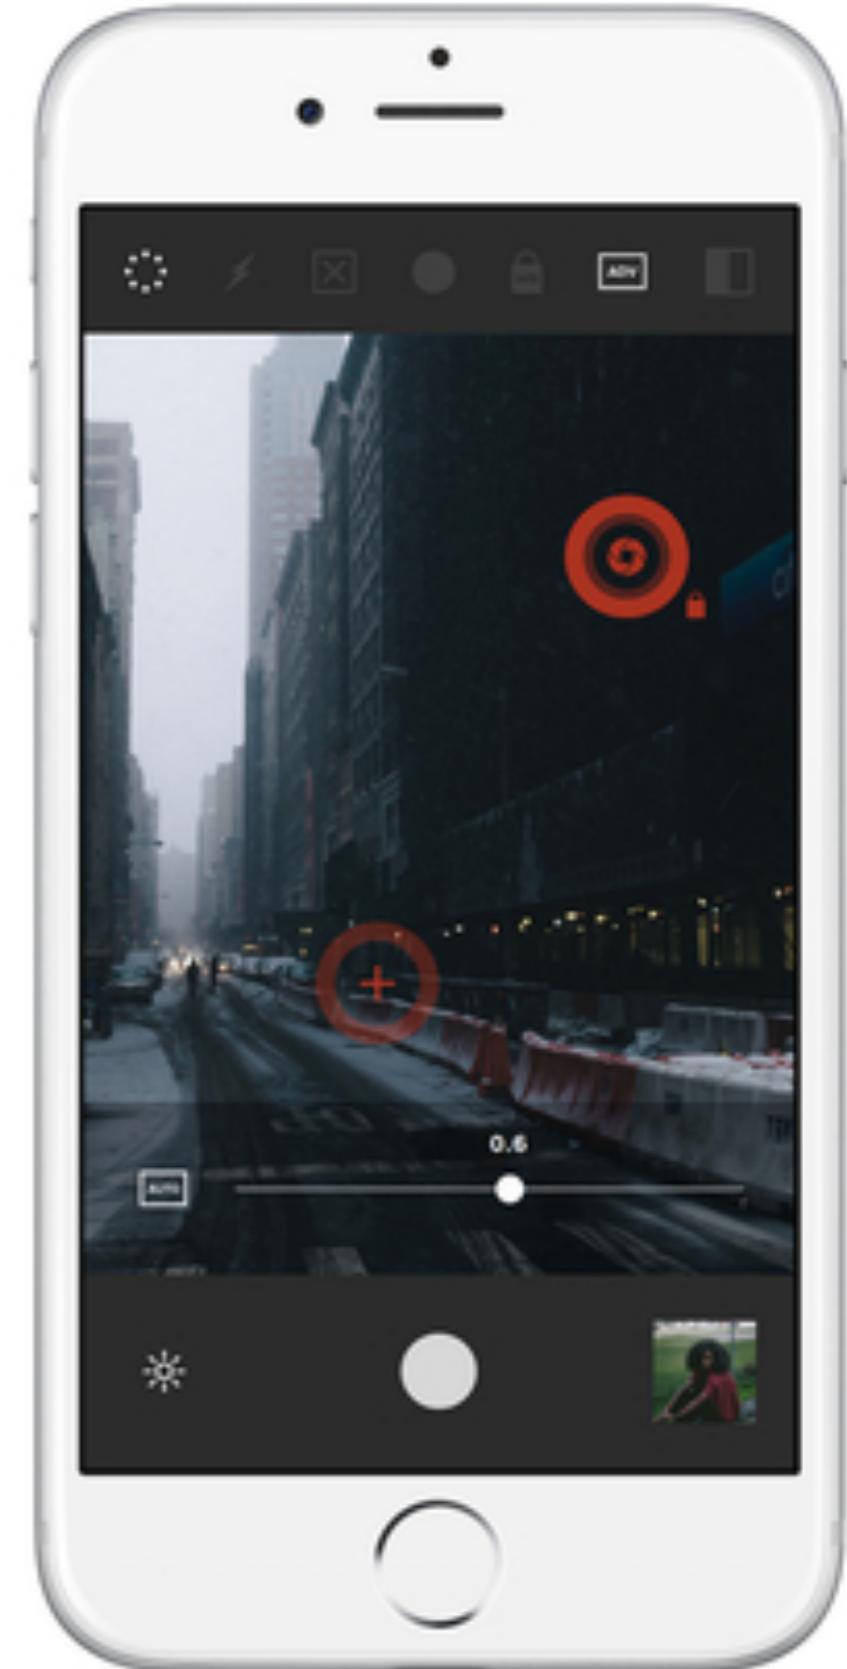

VSCO