

目錄


第一章：Git & GitHub.....	2
註冊與登入	2
初體驗 git.....	4
上傳檔案到 GitHub.....	8
將資料下載還原.....	16
第二章：Git & GitHub 搭配 vscode.....	19
四種不同的檔案狀態：	19
第三章：Conflicts(衝突).....	35
第四章：使用 Git & Github 共同開發 Django.....	55
A 同學先將專案建立與設定好，並發佈到 Github 上。	55
B 同學將 Github 下載下來。	57
假設 B 同學負責的開發完畢.....	60
A 同學也要開發自己負責的程式.....	62
假設 A 同學負責的開發完畢	64
A 與 B 同學負責都完成，假設 A 同學先合併到 master，再由 B 同學 合併到 master。	65
可以邀請 B 同學檢查	67
可以由 A 或 B 同學按 Merge pull request	70
A 同學開發的程式已進入到 master 中	73
回到 B 同學，也想要合併到 master	73
可以由 A 或 B 同學按 Merge pull request	78
補充：Git 的各種指令	84

Git & GitHub 教學

第一章：Git & GitHub


➤ 註冊與登入

Web: <https://github.com/>

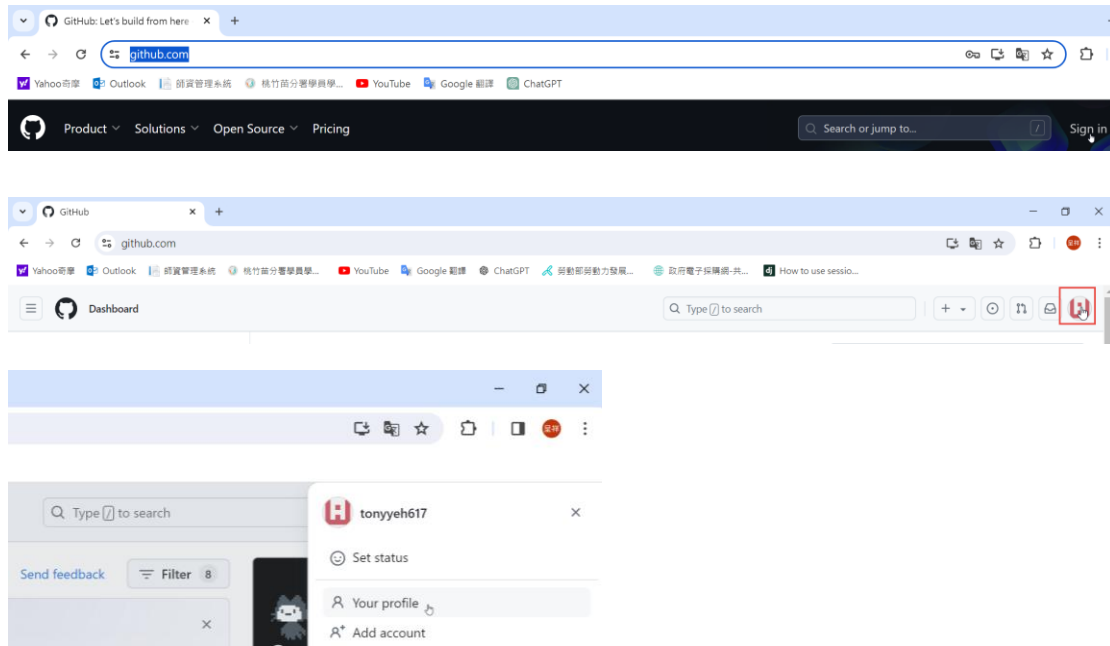

➤ 下載 Git 程式與安裝

<https://git-scm.com/>

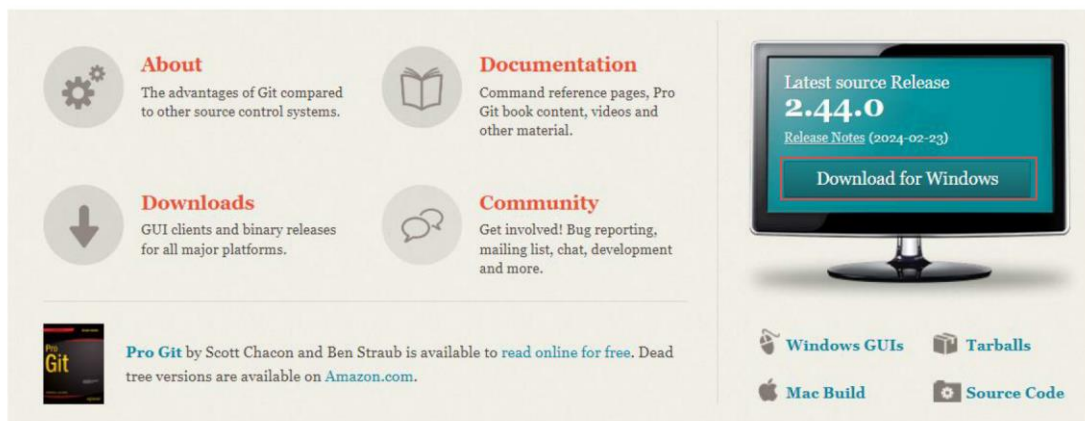

Download for Windows

[Click here to download](#) the latest (2.44.0) 64-bit version of **Git for Windows**. This is the most recent maintained build. It was released 27 days ago, on 2024-02-23.

Other Git for Windows downloads

Standalone Installer
[32-bit Git for Windows Setup.](#)
[64-bit Git for Windows Setup.](#)
Portable ("thumbdrive edition")
[32-bit Git for Windows Portable.](#)
[64-bit Git for Windows Portable.](#)

安裝結果如下




Git：

為版本控制軟體，開發過程中存檔，開發中推出新的版本，也可以回到過去存檔的版本。另外也支援共同同步開發，可融合不同版本。

Git Hub：


就是一個遠端的 host 讓大家可以上面建立 repository(像一個專案)，學就像 google driver 可以上傳檔案存到遠端。Github 就是讓你建立一個 git repository，你可以從上面下載你的 repository，別人也可以從上面下載，下載然後更新或修改這個再推到 repository 更新遠端的檔案。

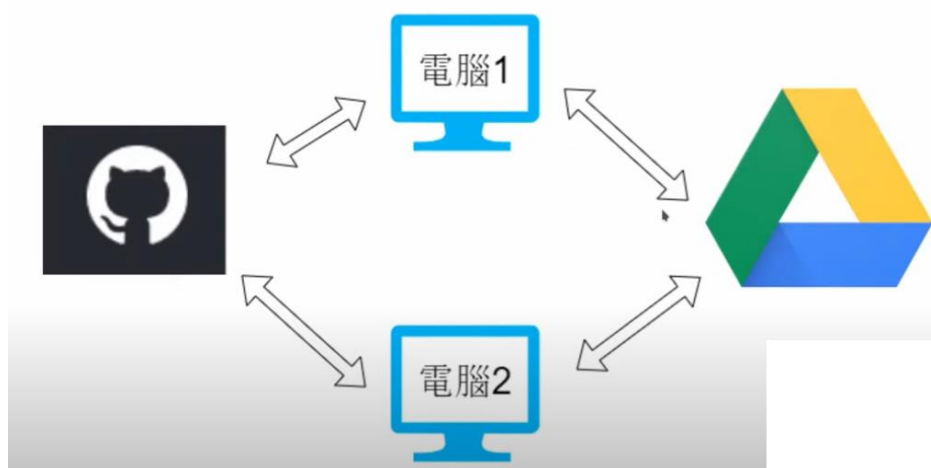


➤ 初體驗 git

四種不同的檔案狀態：

- **未追蹤(Untracked files)**：在版本提交後才又加進來的檔案，這些檔案並沒有被 GIT 所追蹤控管
- **已更改(Changes not staged for commit)**：已提交版本後，卻又再次修改，這些檔案會被丟回工作目錄(WD)
- **等待提交(Changes to be committed)**：在工作目錄(WD)的檔案執行 `git add` 後，會放在暫存區(Stage)。這些放在暫存區的檔案狀態便是等待提交。
- **已提交(Committed)**：在暫存區(Stage)的檔案執行 `git commit` 後，檔案便置於儲存區(Repo)，這些放在儲存區的檔案即是已提交的狀態。

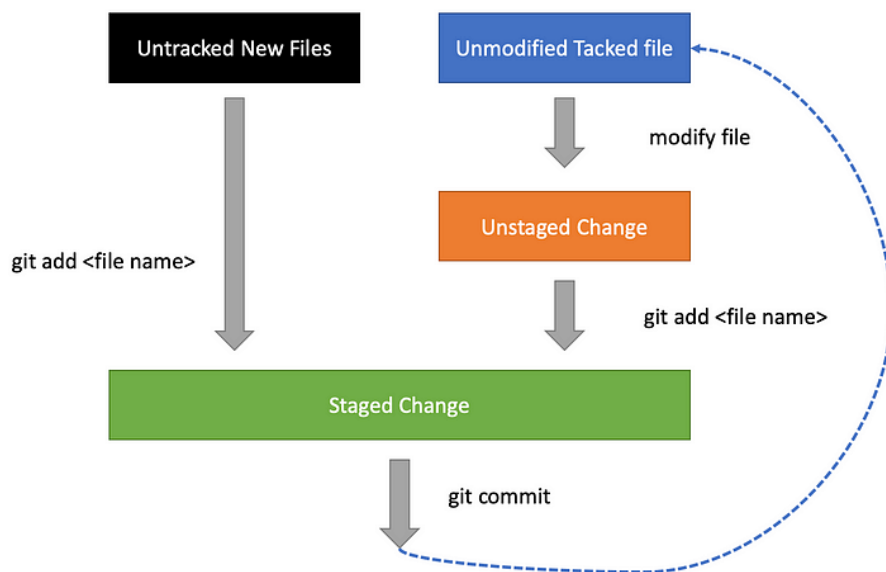

先切到資料夾後，開啟 `git bash`

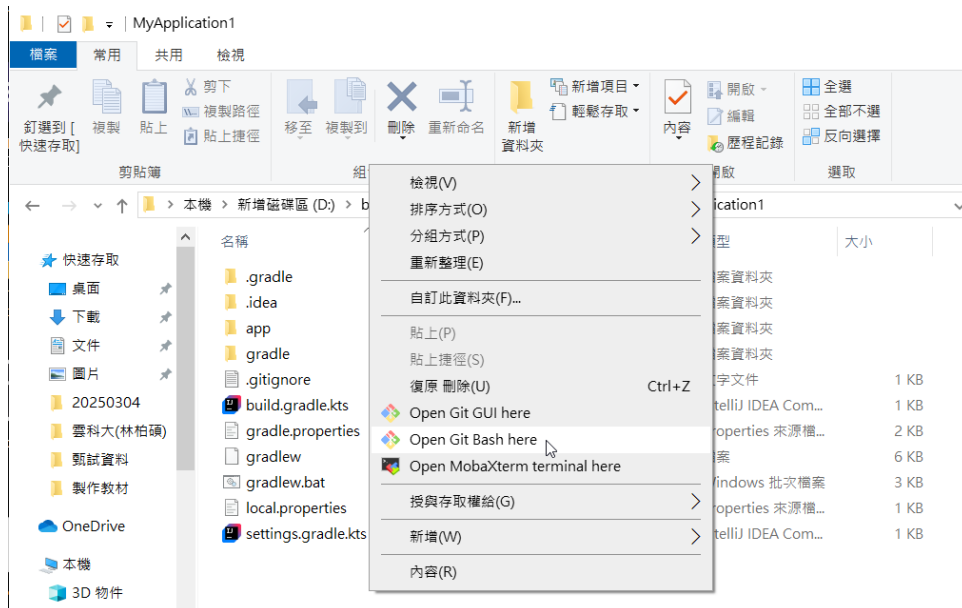

首先設定帳號與名稱


```
# git config --global user.email "you@example.com"
(所有在這台電腦上進行的 Git 操作都會使用這個電子郵件地址)

# git config --global user.name "Your Name"
(所有在這台電腦上進行的 Git 操作都會使用這個名稱)

# git config --list
```

```
MINGW64:/d/backup/AndroidStudioProjects/wsc/MyApplication1
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1
$ git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=openssl
http.sslcainfo=C:/Program Files/Git/mingw64/etc/ssl/certs/ca-bundle.crt
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
safe.directory=D:/backup/dvds/homework4
safe.directory=D:/backup/dvds/ch3_12(使用ORM語法)(20241111)
safe.directory=D:/backup/dvds/ch3_12(使用ORM語法)(20241111)
user.email=tonyyeh617@gmail.com
user.name=tony
gui.recentrepo=D:/backup/dvds/ch3_12(使用ORM語法)(20241111)/.git
push.autosetupremote=true
push.default=current
```

```
# git init
(初始化git repository(儲存庫))
```

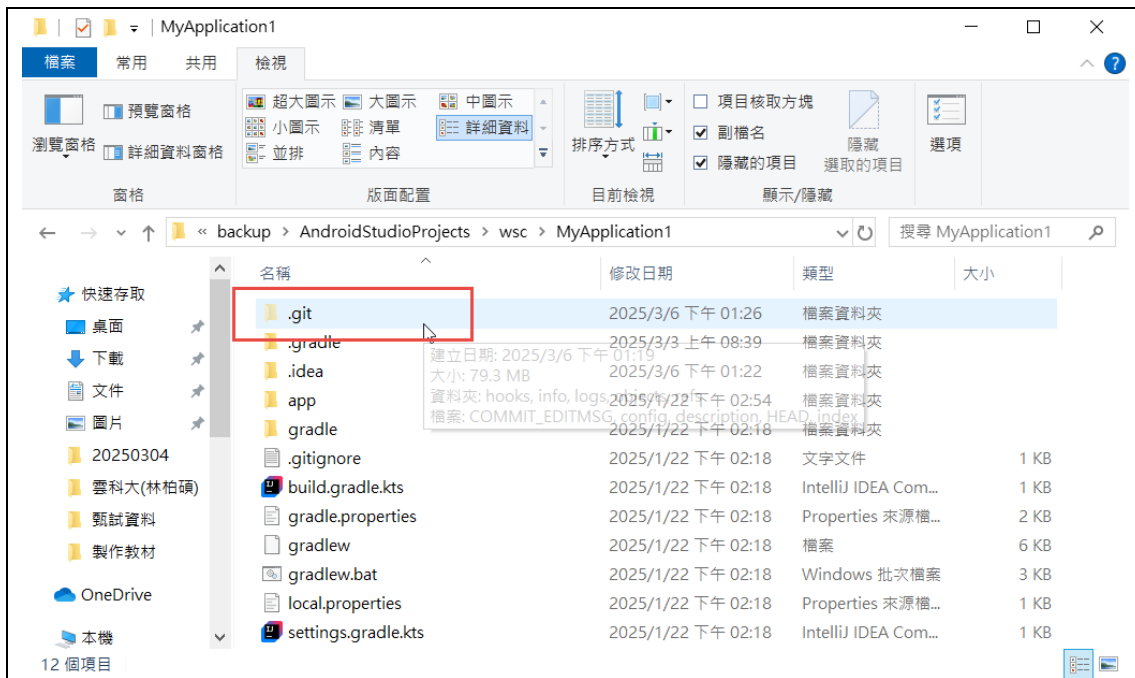

#git status

(未追蹤(Untracked files):檔案未加入到git索引追蹤的檔案內)

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1
(master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore
        .idea/
        app/
        build.gradle.kts
        gradle.properties
        gradle/
        gradlew
        gradlew.bat
        settings.gradle.kts

nothing added to commit but untracked files present (use "git add" to track)
```

git add gradlew.bat (加入某個檔案)

or

git add . (加入全部檔案)

(加入檔案到「等待提交(Changes to be committed)」)

git status (check)

```

tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1
(master)
$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   .gitignore
    new file:   .idea/.gitignore
    new file:   .idea/.name
    new file:   .idea/compiler.xml
    new file:   .idea/gradle.xml
    new file:   .idea/misc.xml
    new file:   .idea/vcs.xml
    new file:   app/.gitignore
    new file:   app/build.gradle.kts
    new file:   app/proguard-rules.pro
    new file:   app/src/androidTest/java/com/example/myapplication/ExampleInstrumentedTest.java
    new file:   app/src/main/AndroidManifest.xml
    new file:   app/src/main/java/com/example/myapplication/MainActivity.java
    new file:   app/src/main/res/drawable/ic_launcher_background.xml
    new file:   app/src/main/res/drawable/ic_launcher_foreground.xml
    new file:   app/src/main/res/layout/activity_main.xml

```

git commit -m "3/6-1"

(已提交(Committed)至儲存區(Repo))

補充:

git commit --amend -m "new name 3/6-2" (若無推送過，想要修正commit訊息)

git log (check 已提交的儲存區)

```

tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1
(master)
$ git log
commit f3f9d4b6b501a7234ae7a7ef6d9a5aa8f1a8584a (HEAD -> master)
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:36:15 2025 +0800

    3/6-1

```

若再修正專案文件檔案

#git status

```

MINGW64/d/backup/AndroidStudioProjects/wsc/MyApplication1

tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git status
On branch master

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   app/src/main/res/layout/activity_main.xml

no changes added to commit (use "git add" and/or "git commit -a")

```

(會將追蹤這個檔案的變化)

(不會在untracked files顯示，除非有改動)

```
# git add .
```

(「.» 指目前所在的資料夾，將所有資料夾內的資料加入「Staged Changes」)

```
#git status
```

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git status
On branch master
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   app/src/main/res/layout/activity_main.xml
```

```
# git commit -m "3/6-2"
```

```
# git log
```

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git log
commit 7f6ef035f57ad37793b966f69d841ec65e174c20 (HEAD -> master)
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:48:20 2025 +0800


    3/6-2



commit f3f9d4b6b501a7234ae7a7ef6d9a5aa8f1a8584a
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:36:15 2025 +0800

    3/6-1
```

➤ 上傳檔案到 GitHub

首先先登入 <https://github.com/>

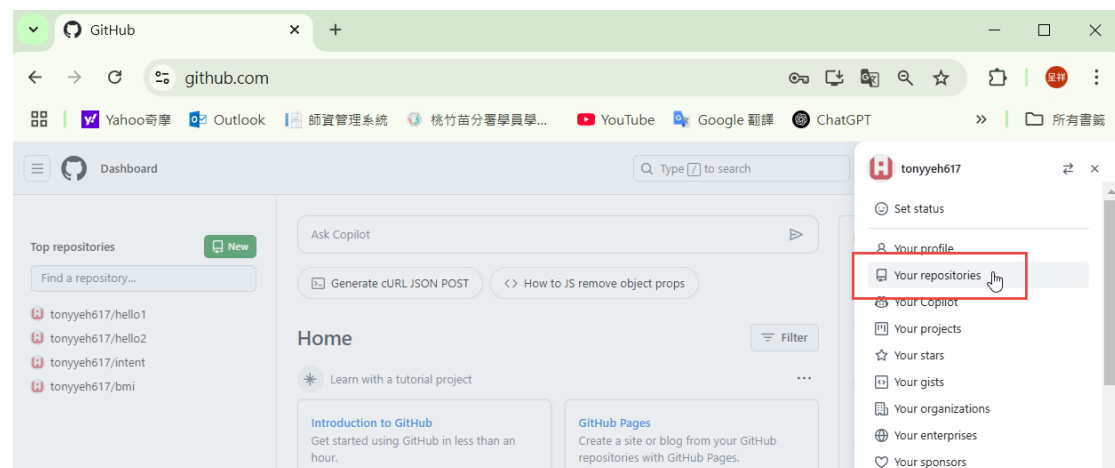

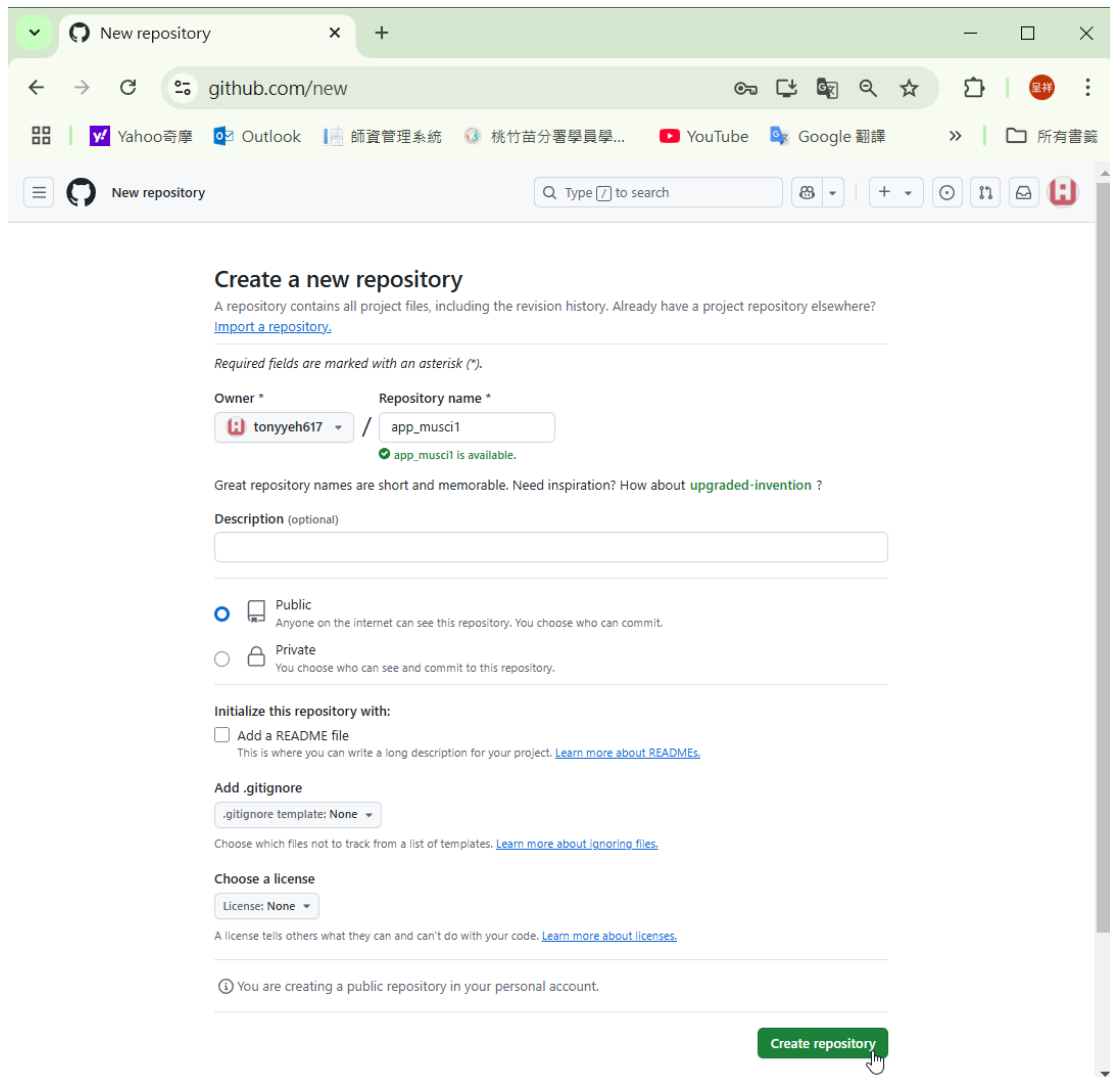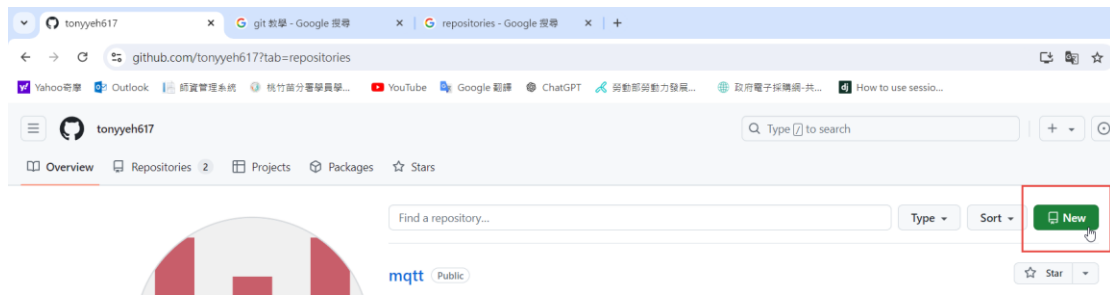

The screenshot shows a web browser window displaying the GitHub repository page for 'tonyyeh617/app_musci1'. The browser's address bar shows the URL 'github.com/tonyyeh617/app_musci1'. The repository page includes a header with the repository name, a search bar, and navigation links for Code, Issues, Pull requests, Actions, Projects, Wiki, Security, Insights, and Settings. Below the header, there are two main sections: 'Set up GitHub Copilot' and 'Add collaborators to this repository'. A 'Quick setup' section follows, providing instructions for setting up the repository on a desktop or via command line. The 'Quick setup' section includes a 'Set up in Desktop' button, a 'HTTPS' button, and a text input field containing the repository URL 'https://github.com/tonyyeh617/app_musci1.git'. Below this, there are two sections for creating a new repository or pushing an existing one from the command line, each with a list of git commands and a copy icon.

tonyyeh617 / app_musci1

Quick setup — if you've done this kind of thing before

Set up in Desktop or HTTPS SSH `https://github.com/tonyyeh617/app_musci1.git`

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# app_musci1" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/tonyyeh617/app_musci1.git
git push -u origin main
```

...or push an existing repository from the command line

```
git remote add origin https://github.com/tonyyeh617/app_musci1.git
git branch -M main
git push -u origin main
```

- 檢查帳號與名稱

```
# git config --list
```

```
MINGW64:/d/backup/AndroidStudioProjects/wsc/MyApplication1
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1
$ git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=openssl
http.sslcainfo=C:/Program Files/Git/mingw64/etc/ssl/certs/ca-bundle.crt
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
safe.directory=D:/backup/dvds/homework4
safe.directory=D:/backup/dvds/ch3_12(使用ORM語法)(20241111)
safe.directory=D:/backup/dvds/ch3_12(使用ORM語法)(20241111)
user.email=tonyyeh617@gmail.com
user.name=tony
gui.recentrepo=D:/backup/dvds/ch3_12(使用ORM語法)(20241111)/.git
push.autosetupremote=true
push.default=current
```

● 上傳資料到 github

git remote add origin https://github.com/tonyyeh617/app_musci1.git
(將repository連接到本地端，其中origin指的就是指此github repository)
(格式：git remote add <自訂名稱><網址>)

git remote set-url origin https://github.com/tonyyeh617/newapp_musci1.git
(重新指定remote)

git remote (列出遠端倉庫的名稱，不包含 URL)

git remote -v (顯示遠端倉庫的名稱以及對應的 URL)

```
tony@DESKTOP-GMHL8UC MINGW64 /d/git_temp/hello1 (master)
$ git remote
origin
```

git push origin master (將 master 分支推送到 origin(github概稱) 遠端儲存庫)


or


git push -u origin new-feature (設定預設推送分支)

(這樣之後可以只用 git push 來推送 new-feature，不用每次都指定 origin new-feature)

or

git push (推送當前分支到其對應的遠端分支)

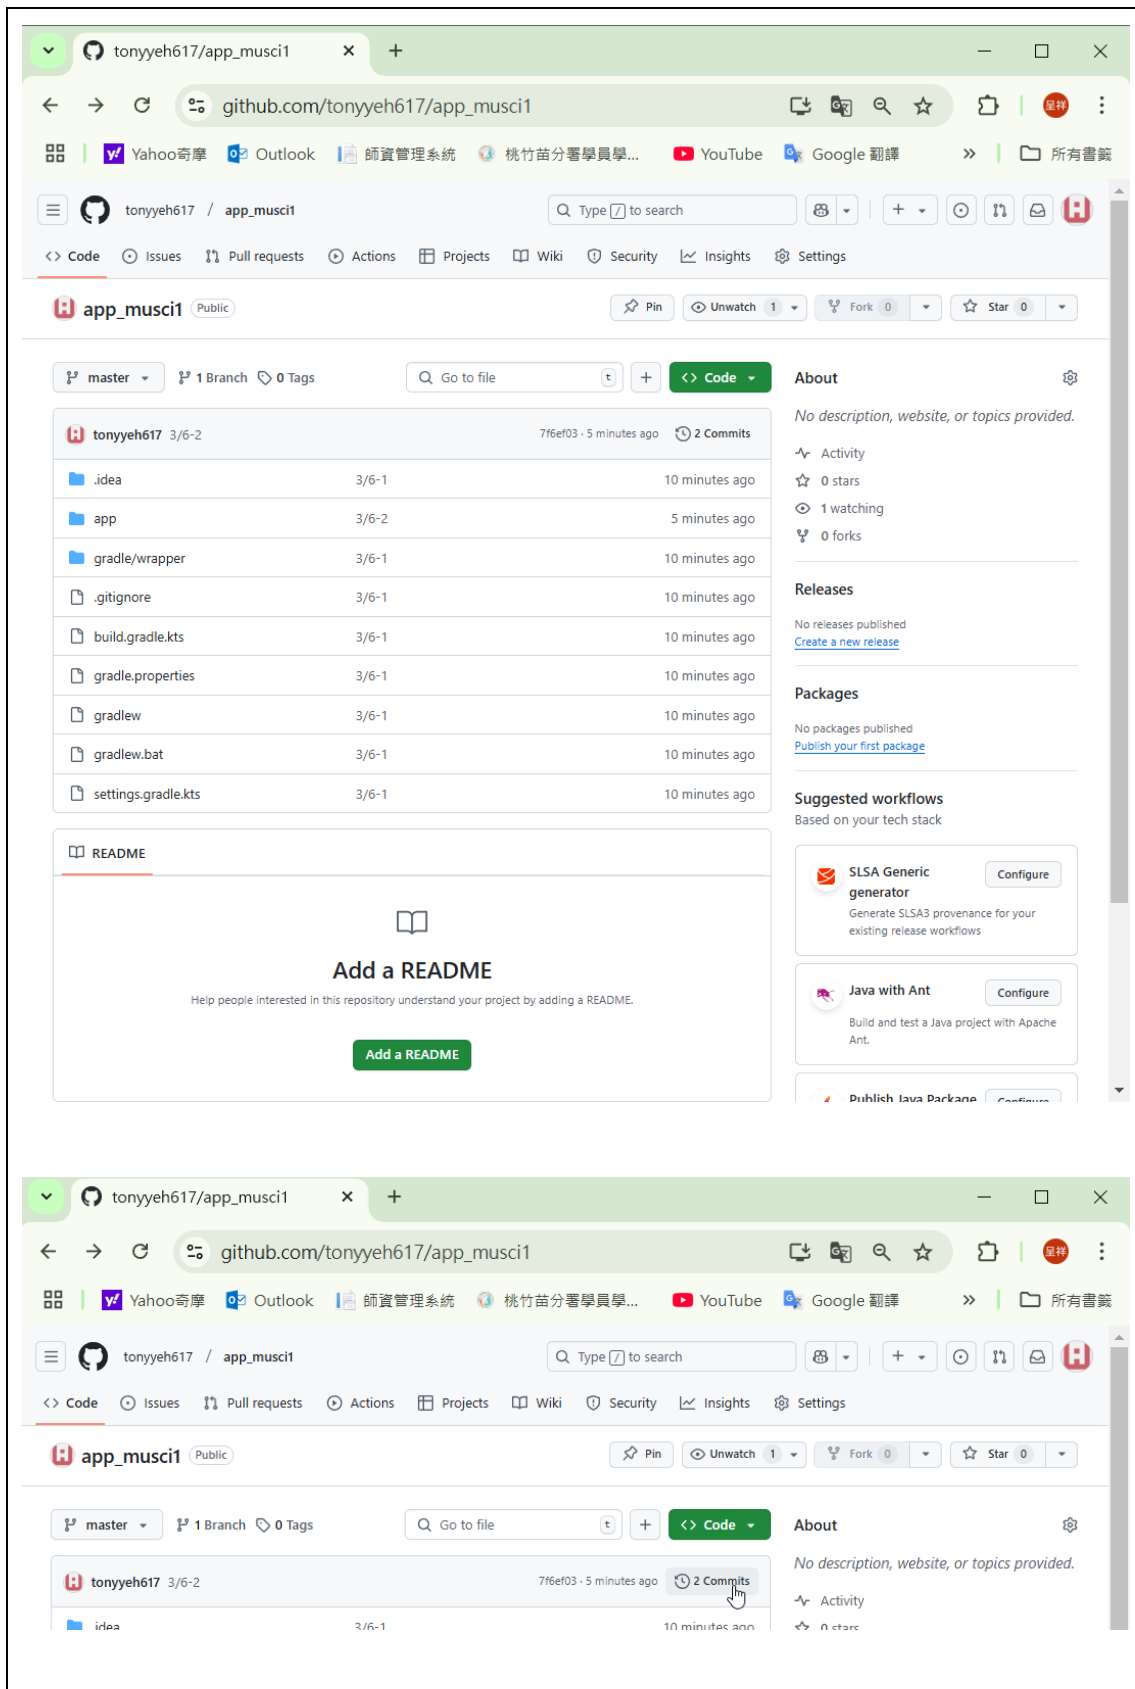

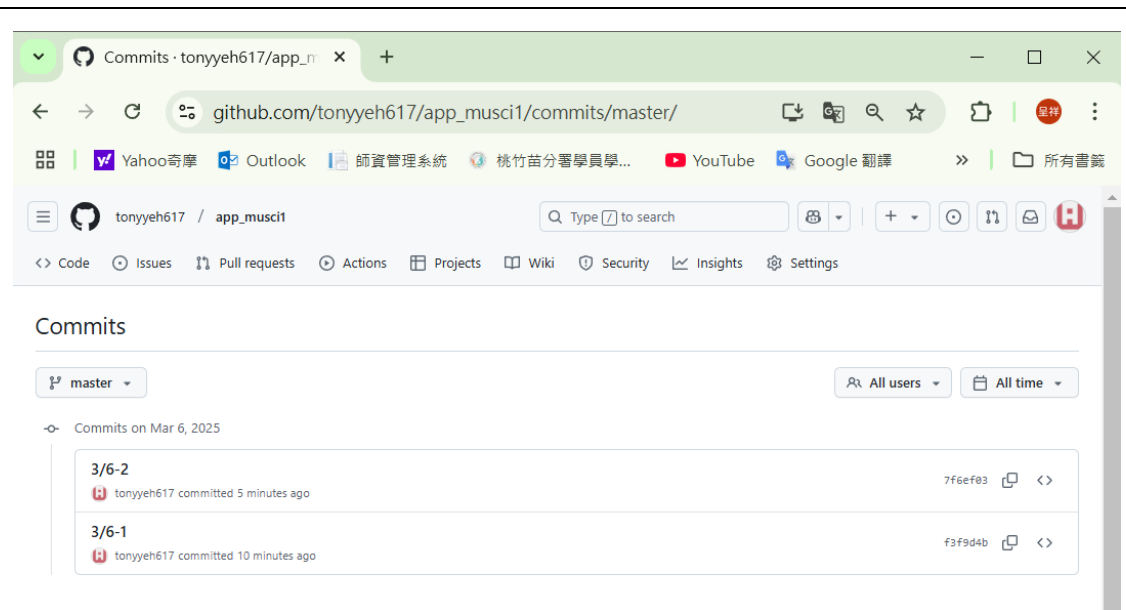

再修正內容

git status

MINGW64;d/backup/AndroidStudioProjects/wsc/MyApplication1

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git status
On branch master
Your branch is up to date with 'origin/master'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   app/src/main/res/layout/activity_main.xml

no changes added to commit (use "git add" and/or "git commit -a")
```

git add .

git status

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git status
On branch master
Your branch is up to date with 'origin/master'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    modified:   app/src/main/res/layout/activity_main.xml
```

git commit -m "3/6-3"

git log

```

tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git log
commit dd680449970776725e3755a472798352518cce (HEAD -> master)
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:57:33 2025 +0800

    "3/6-3"


commit 7f6ef035f57ad37793b966f69d841ec65e174c20 (origin/master)
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:48:20 2025 +0800

    3/6-2

commit f3f9d4b6b501a7234ae7a7ef6d9a5aa8f1a8584a
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:36:15 2025 +0800

```

git push

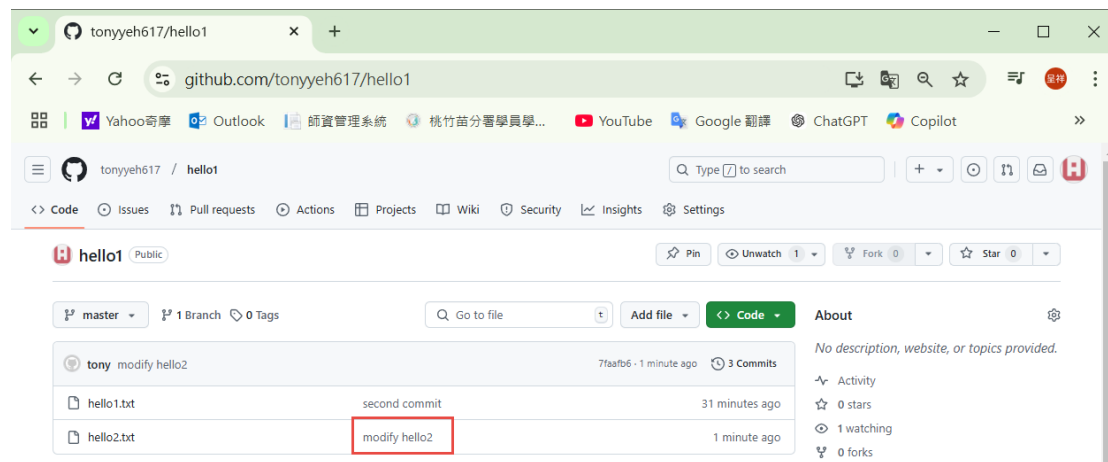

git reset --soft HEAD~1 (其中「1」為回到第「1」幾個commit之前)
(回退最近一次提交，但保留變更內容在「等待提交(Changes to be committed)」內)

```

tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git log
commit 7f6ef035f57ad37793b966f69d841ec65e174c20 (HEAD -> master)
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:48:20 2025 +0800

    3/6-2

commit f3f9d4b6b501a7234ae7a7ef6d9a5aa8f1a8584a
Author: tony <tonyyeh617@gmail.com>
Date: Thu Mar 6 13:36:15 2025 +0800

    3/6-1

tony@DESKTOP-GMHL8UC MINGW64 /d/backup/AndroidStudioProjects/wsc/MyApplication1 (master)
$ git status
On branch master
Your branch is behind 'origin/master' by 1 commit, and can be fast-forwarded.
(use "git pull" to update your local branch)

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   app/src/main/res/layout/activity_main.xml

```

git reset --hard HEAD(將所有變更完全還原)

需求	指令
還原所有變更 (⚠ 不可逆)	<code>git reset --hard HEAD</code>
還原特定檔案	<code>git restore <filename></code>
還原暫存區 (staged)	<code>git reset HEAD</code>
還原所有未 commit 的變更	<code>git restore .</code>

● 在 github 查看修改紀錄

The image displays two screenshots of a GitHub repository page for 'tonyyeh617/hello1'. The top screenshot shows the commit history with a red box highlighting the commit 'modify the second time' (fd5ca94 - 3 minutes ago). The bottom screenshot shows the same page with a red box highlighting the '4 Commits' link next to the commit history.

tonyyeh617 / hello1

master 1 Branch 0 Tags

Go to file Add file <> Code About

tony modify the second time fd5ca94 · 3 minutes ago 4 Commits

hello1.txt second commit 39 minutes ago

hello2.txt modify the second time 3 minutes ago

About


No description, website, or topics provided.

Activity

0 stars

1 watching


0 forks

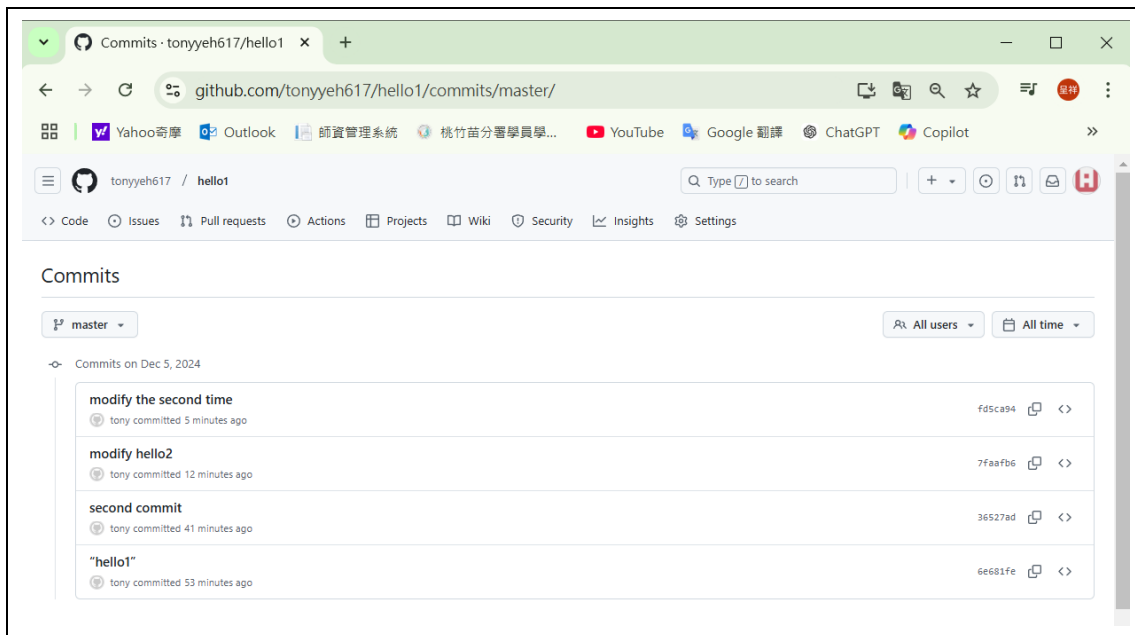


➤ 將資料下載還原

1、將hello1資料夾整個刪除

2、開啟open git bash here

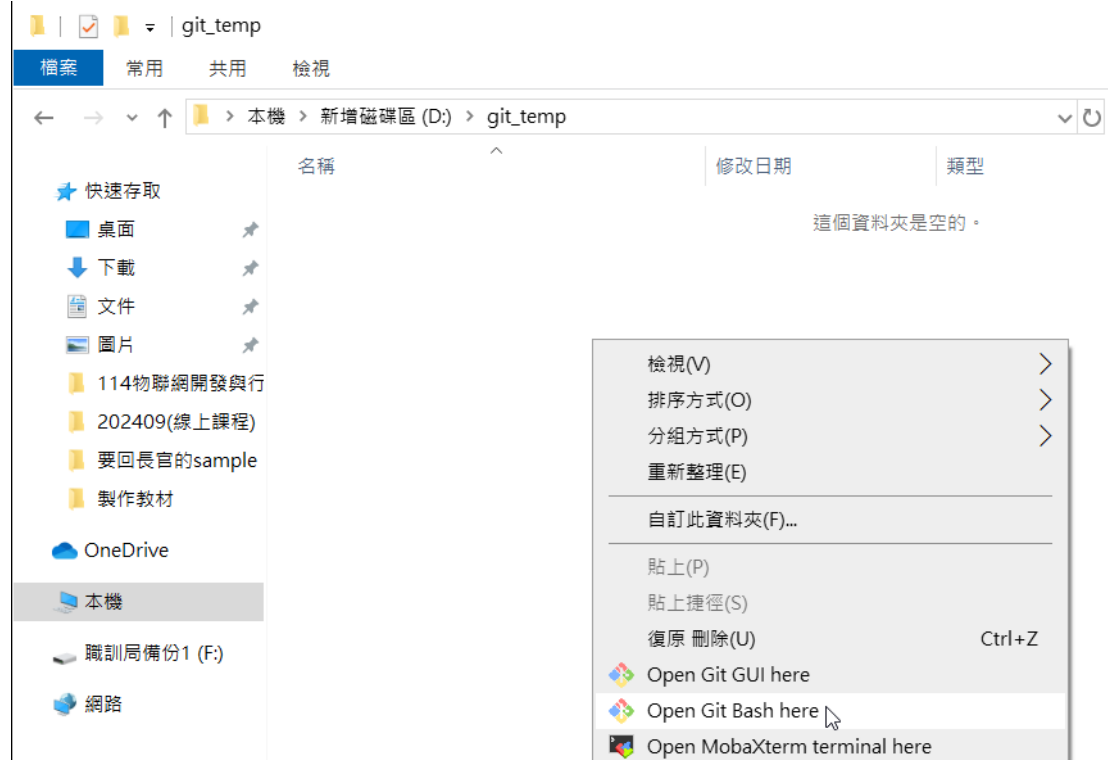

3、複製網址如下:

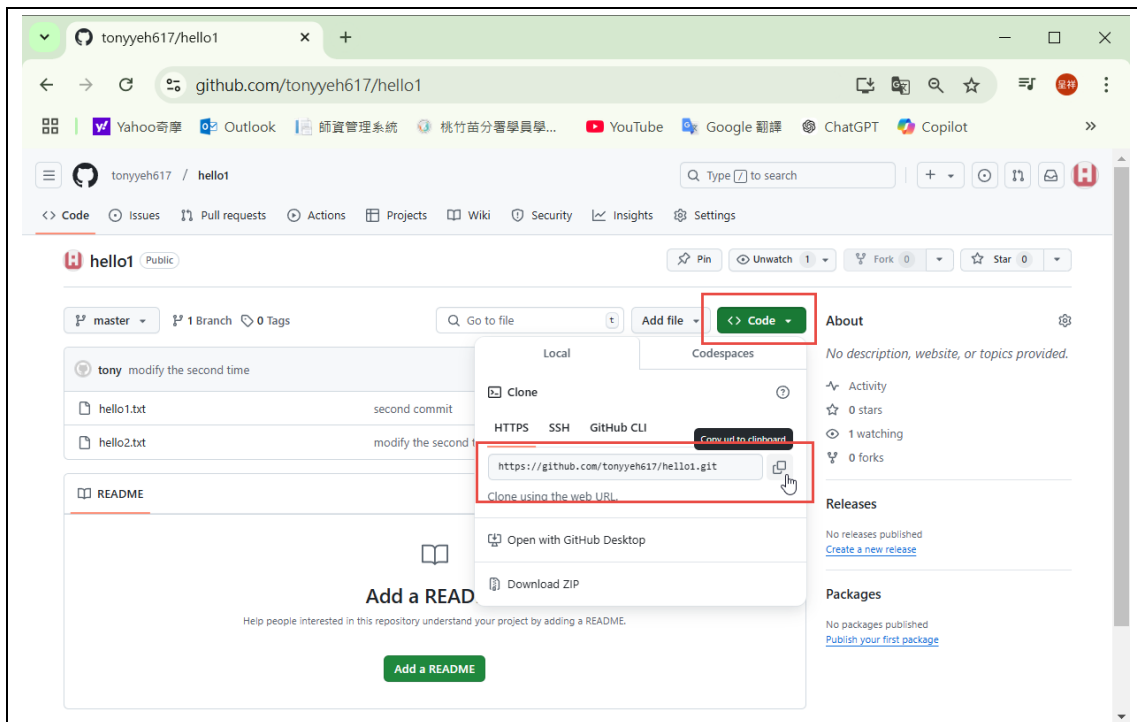


4、

```
# git clone https://github.com/tonyyeh617/hello1.git
```

```
tony@DESKTOP-GMHL8UC MINGW64 /d/git_temp
$ git clone https://github.com/tonyyeh617/hello1.git
Cloning into 'hello1'...
remote: Enumerating objects: 12, done.
remote: Counting objects: 100% (12/12), done.
remote: Compressing objects: 100% (7/7), done.
remote: Total 12 (delta 0), reused 12 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (12/12), done.
```

5、將整個repository下載下來

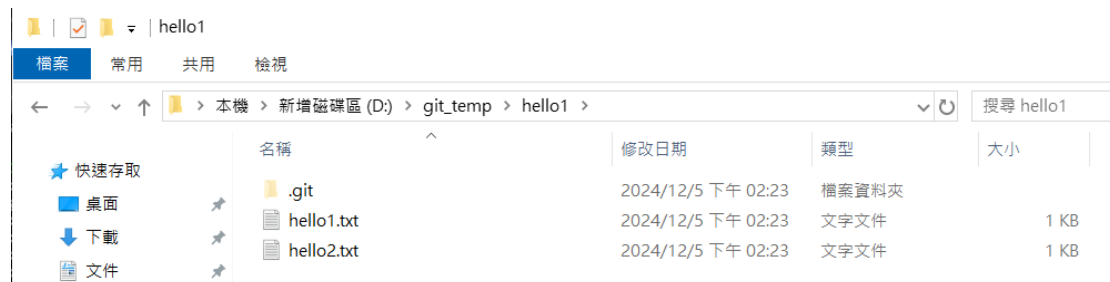

6、載下並看到所有的記錄

```
# cd hello1/
```

```
# git log
```

```
tony@DESKTOP-GMHL8UC MINGW64 /d/git_temp/hello1 (master)
$ git log
commit fd5ca9445746eada63a04194ef31528aaae2be73 (HEAD -> master, origin/master,
origin/HEAD)
Author: tony <"tonyyeh617@gmail.com">
Date: Thu Dec 5 14:10:48 2024 +0800

    modify the second time

commit 7faafb6c57aab7bb4373f8150c80f771f2c4e22d
Author: tony <"tonyyeh617@gmail.com">
Date: Thu Dec 5 14:04:13 2024 +0800

    modify hello2

commit 36527ad2a78c0946db6373461492f2ae7e674bcd
Author: tony <"tonyyeh617@gmail.com">
Date: Thu Dec 5 13:34:55 2024 +0800

    second commit

commit 6e681fe88533b4493c9f37e56a44362f48d565f7
Author: tony <"tonyyeh617@gmail.com">
Date: Thu Dec 5 13:22:31 2024 +0800

    "hello1"
```

Reference:

<https://www.youtube.com/watch?v=Zd5jSDRjWfA>

第二章：Git & GitHub 搭配 vscode


➤ 四種不同的檔案狀態：

1、**Changes**=未追蹤(Untracked files)：在版本提交後才又加進來的檔案，這些檔案並沒有被 GIT 所追蹤控管

2、**Changes(Modified)**=已更改(Changes not staged for commit)：已提交版本後，卻又再次修改，這些檔案會被丟回工作目錄(WD)

3、**Staged Changes**=等待提交(Changes to be committed)：在工作目錄(WD)的檔案執行 `git add` 後，會放在暫存區(Stage)。這些放在暫存區的檔案狀態便是等待提交。

4、已提交(Committed)：在暫存區(Stage)的檔案執行 `git commit` 後，檔案便置於儲存區(Repo)，這些放在儲存區的檔案即是已提交的狀態。

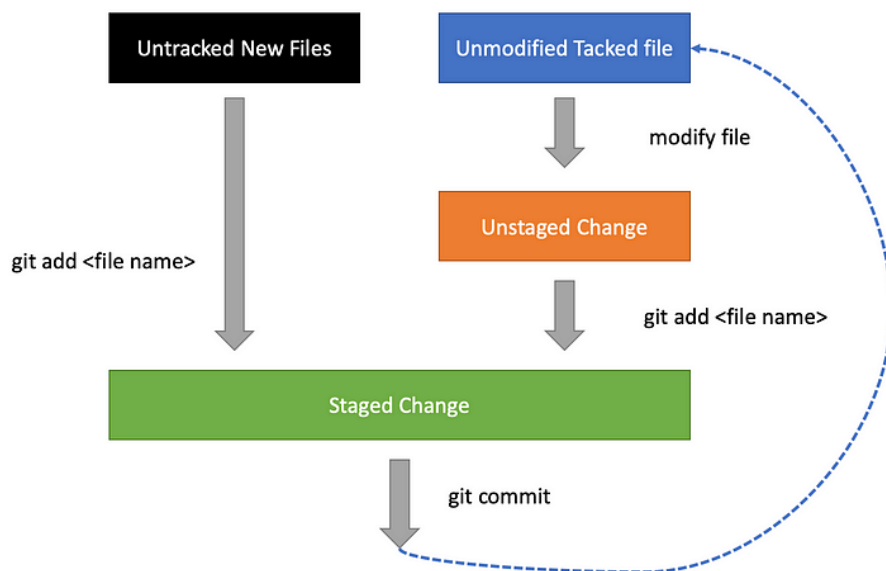

● 將 PowerShell 本地腳本不受限制，可以直接執行。

開啟「PowerShell」，以系統管理員身分執行。



```
# set-executionpolicy remotesigned
```

```
# get-executionpolicy -list
```

```
系統管理員: Windows PowerShell
PS C:\WINDOWS\system32> set-executionpolicy remotesigned

執行原則變更
執行原則有助於防範您不信任的指令碼。如果變更執行原則，可能會使您接觸到 about Execution Policies 說明主題（網址為
https://go.microsoft.com/fwlink/?LinkID=135170）中所述的安全性風險。您要變更執行原則嗎？
[Y] 是(Y) [A] 全部皆是(A) [N] 否(N) [L] 全部皆否(L) [S] 暫停(S) [?] 說明（預設值為 "N"）: A
PS C:\WINDOWS\system32> get-executionpolicy -list

Scope ExecutionPolicy
-----
MachinePolicy Undefined
UserPolicy Undefined
Process Undefined
CurrentUser Undefined
LocalMachine RemoteSigned
```

● 開啟 vscode 的 terminal

```
# git init
tony@DESKTOP-GMHL8UC MINGW64 /d/git_temp/hello2
$ git init
Initialized empty Git repository in D:/git_temp/hello2/.git/
```


ls -Force

```
PS D:\backup\dvds\ch3-14(CookieSession)(20240521)> ls -Force

目錄: D:\backup\dvds\ch3-14(CookieSession)(20240521)

Mode                LastWriteTime         Length Name
----                -
d--h--             2025/3/6 下午 02:28             .git
d-----            2024/9/19 下午 12:14             .vscode
d-----            2024/9/19 下午 12:14             CookieSession
d-----            2024/9/19 下午 12:14             CookieSessionApp
d-----            2021/6/11 下午 02:54             static
d-----            2024/9/19 下午 12:14             templates
-a-----            2024/5/21 下午 02:16          139264 db.sqlite3
-a-----            2021/6/11 下午 02:54             633 manage.py
```

資料夾即會產生「.git」資料夾如下：

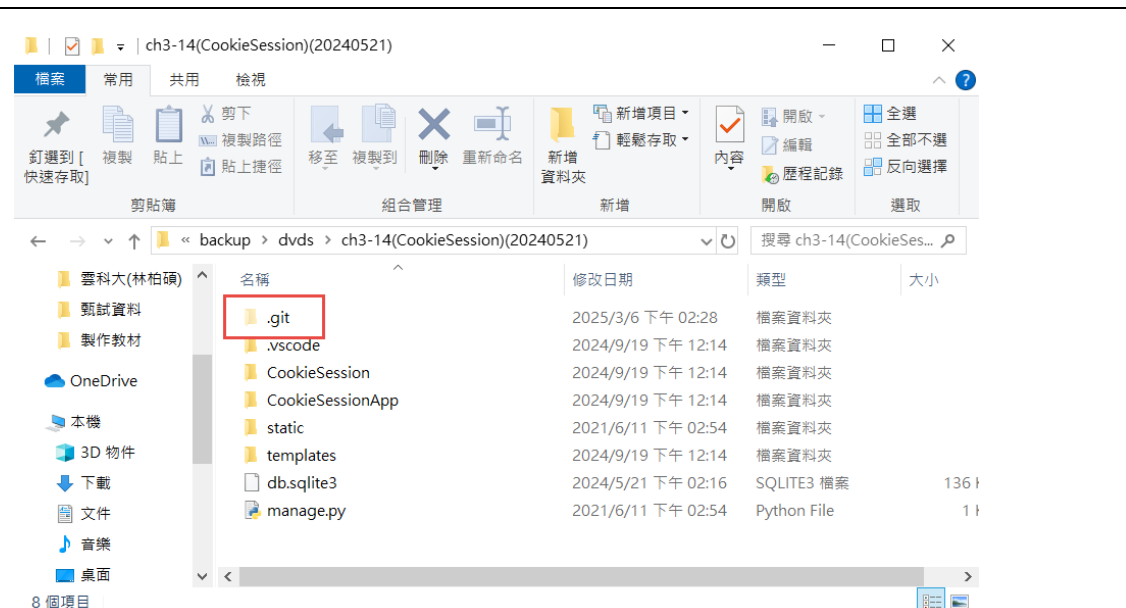

即可在vscode的terminal輸入git指令如下：

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

(dvds) PS D:\backup\dvds\ch3-14(CookieSession)(20240521)> git status
fatal: detected dubious ownership in repository at 'D:/backup/dvds/ch3-14(CookieSession)(20240521)'
'D:/backup/dvds/ch3-14(CookieSession)(20240521)' is owned by:
    (inconvertible) (S-1-5-21-2548415289-401935518-633554039-1001)
but the current user is:
    DESKTOP-GMHL8UC/tony (S-1-5-21-3545604175-3922011878-2623936852-1001)
To add an exception for this directory, call:

    git config --global --add safe.directory 'D:/backup/dvds/ch3-14(CookieSession)(20240521)'
(dvds) PS D:\backup\dvds\ch3-14(CookieSession)(20240521)>
```

(Git 檢測到你的存儲庫 (repository) 是由不同的 Windows 使用者所擁有的)

```
# git config --global --add safe.directory 'D:/backup/dvds/ch3-14(CookieSession)(20240521)'
```

```
# git status
```

```
(dvds) PS D:\backup\dvds\ch3-14(CookieSession)(20240521)> git status
On branch master



No commits yet


Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .vscode/
    CookieSession/
    CookieSessionApp/
    db.sqlite3
    manage.py
    templates/

nothing added to commit but untracked files present (use "git add" to track)
(dvds) PS D:\backup\dvds\ch3-14(CookieSession)(20240521)>
```

```
# ..\Scripts\activate (切到虛擬環境)
```



● 使用圖形介面控制

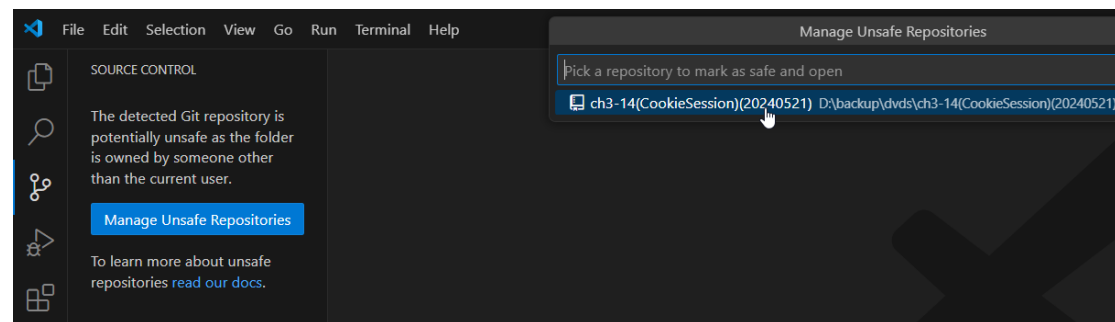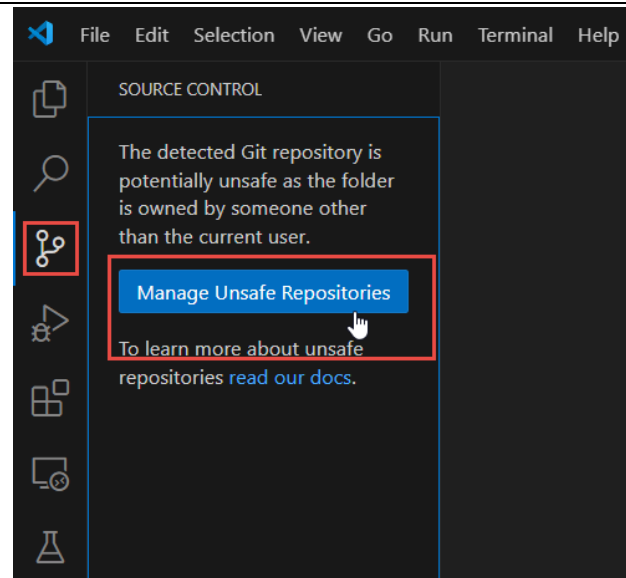

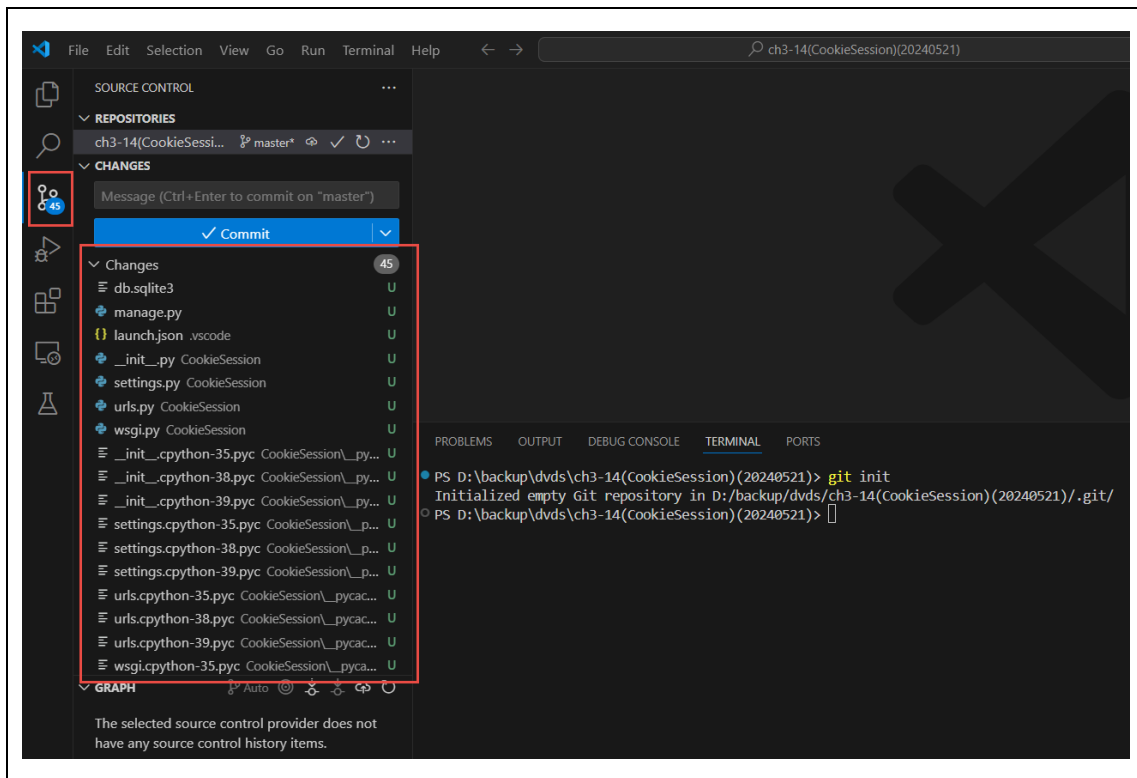


將全部檔案送到 Stage Changes 階段(等待提交(Changes to be committed)區)：

The screenshot shows the Visual Studio Code Source Control panel. The 'CHANGES' section is expanded, showing a list of files with their status (U for Untracked). The 'Stage All Changes' button is highlighted.	<pre># git add . # git status</pre>
將全部檔案送到提交到儲存區	

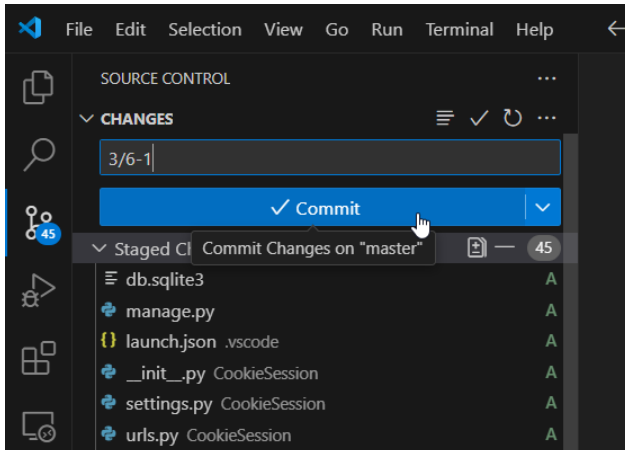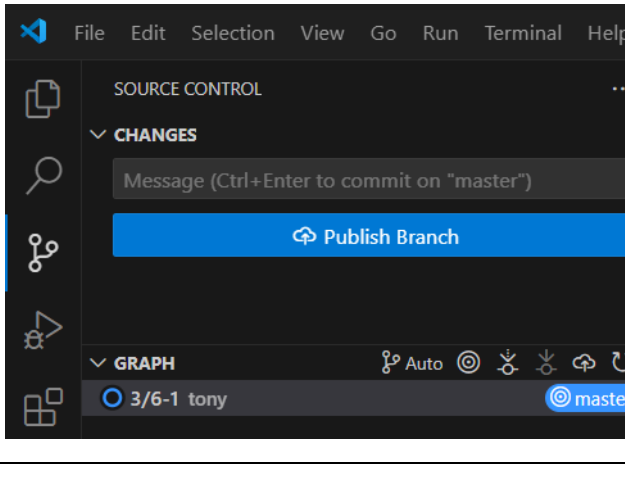	# git commit -m “3/6-1”
	# git log

● 上傳資料到 github

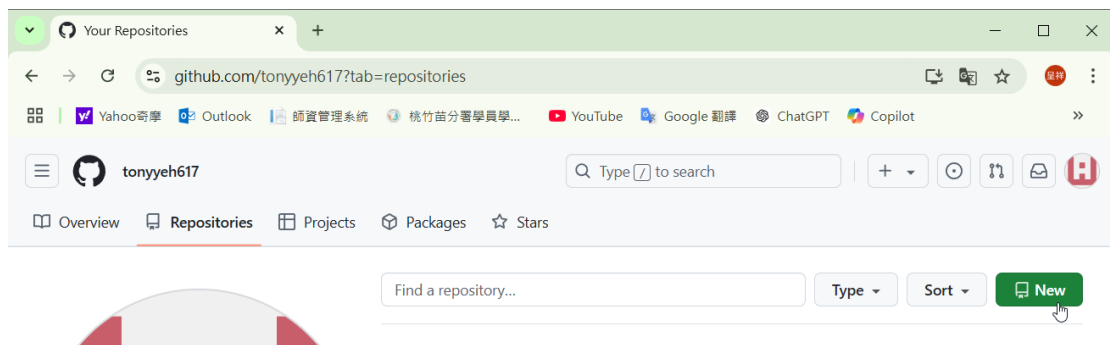

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Required fields are marked with an asterisk ().*

Owner * tonyyeh617 / **Repository name *** CookieSession
CookieSession is available.

Great repository names are short and memorable. Need inspiration? How about [sturdy-guide](#) ?

Description (optional)

☐ **Public**
Anyone on the internet can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:

☐ Add a README file
This is where you can write a long description for your project. [Learn more about READMEs.](#)

Add .gitignore
.gitignore template: None
Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)

Choose a license
License: None
A license tells others what they can and can't do with your code. [Learn more about licenses.](#)

① You are creating a public repository in your personal account.

Create repository

- 首先設定帳號與名稱

```
# git config --global user.email "you@example.com"
(所有在這台電腦上進行的 Git 操作都會使用這個電子郵件地址)


# git config --global user.name "Your Name"
(所有在這台電腦上進行的 Git 操作都會使用這個名稱)

# git config --list
```

```
# git remote add origin https://github.com/tonyyeh617/CookieSession.git
(將repository連接到本地端，其中origin指的就是指此github repository)
(格式：git remote add <自訂名稱><網址>)


# git remote (列出遠端倉庫的名稱，不包含 URL)
# git remote -v (顯示遠端倉庫的名稱以及對應的 URL)
```

```
(dvds) PS D:\backup\dvds\ch3-14(CookieSession)(20240521)> git remote -v
origin https://github.com/tonyyeh617/CookieSession.git (fetch)
origin https://github.com/tonyyeh617/CookieSession.git (push)
```



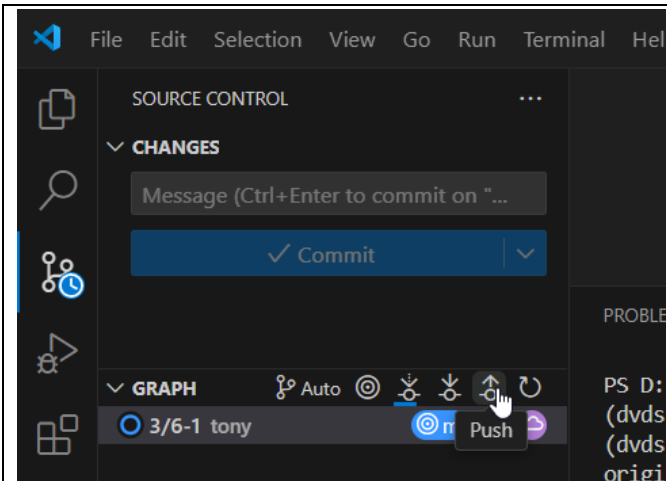



git push

(推送當前分支到其對應的遠端分支)

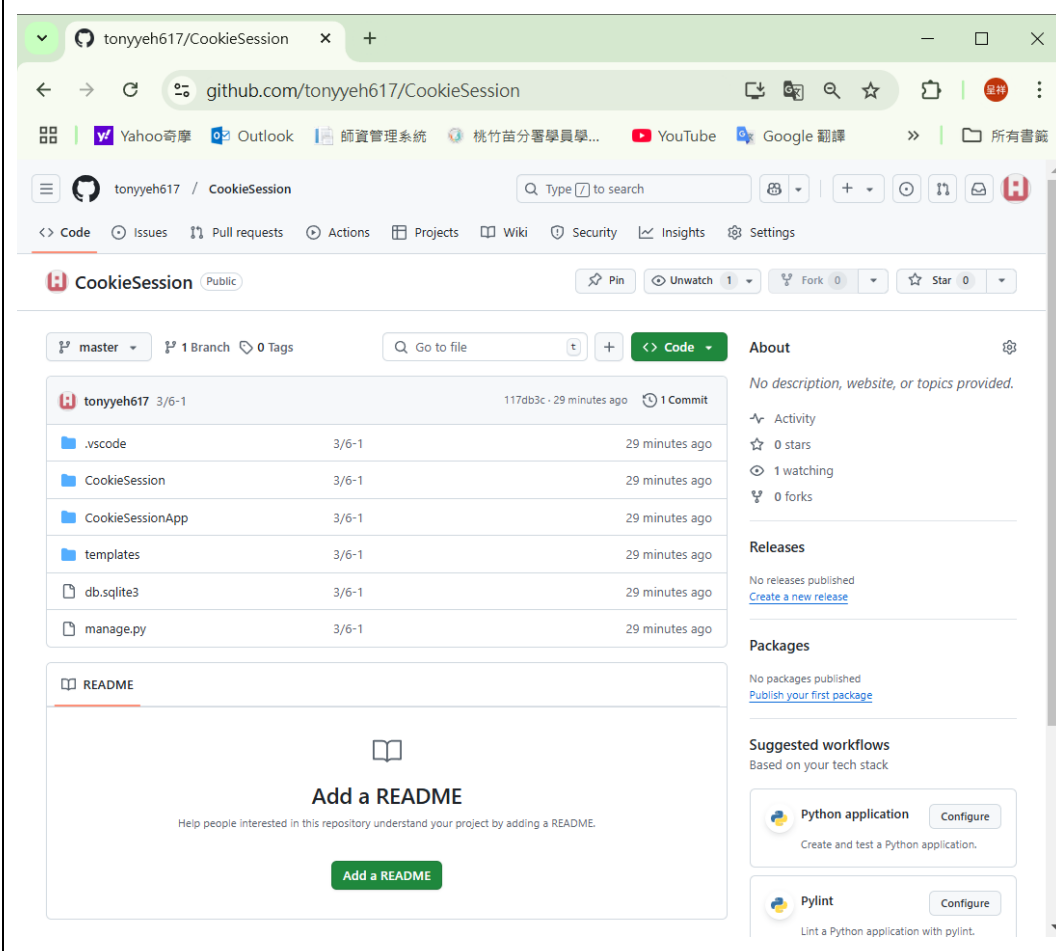



再修改：

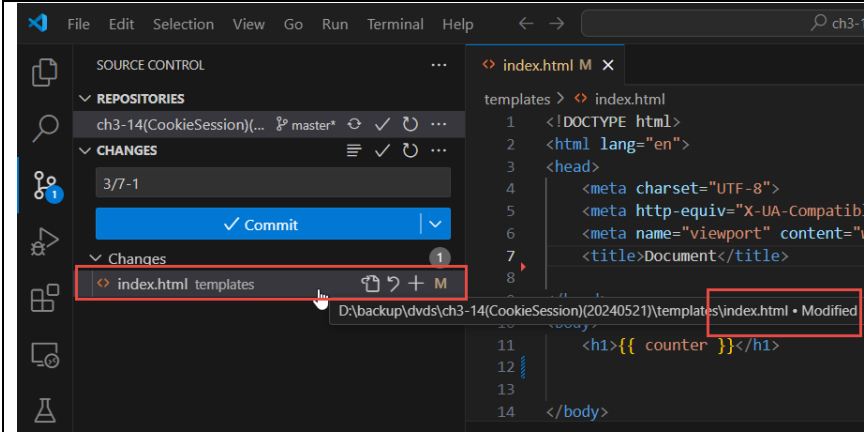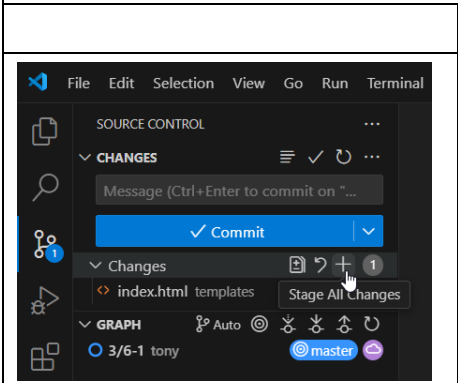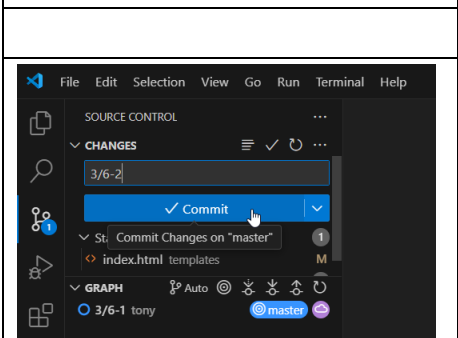	
<pre>PS D:\backup\dvds\ch3-14(CookieSession)(20240521)> git status On branch master Your branch is up to date with 'origin/master'. Changes not staged for commit: (use "git add <file>..." to update what will be committed) (use "git restore <file>..." to discard changes in working directory) modified: templates/index.html no changes added to commit (use "git add" and/or "git commit -a")</pre>	
	<pre># git add . # git status PS D:\backup\dvds\ch3-14(CookieSession)(20240521)> git status On branch master Your branch is up to date with 'origin/master'. Changes to be committed: (use "git restore --staged <file>..." to unstage) modified: templates/index.html</pre>
	<pre># git commit -m 3/6-2</pre>

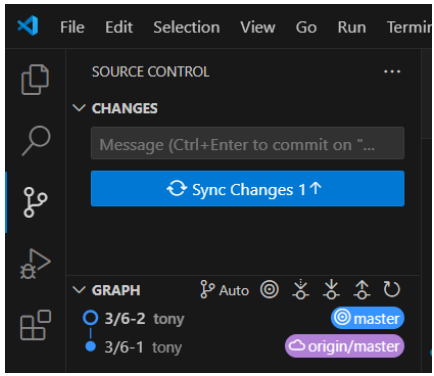	<pre># git log</pre>



● 上傳資料到 github

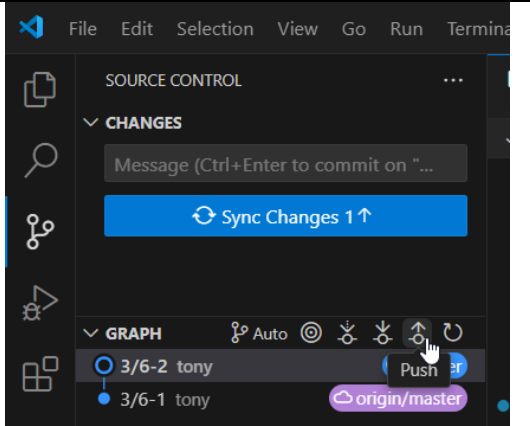	<pre># git push</pre>

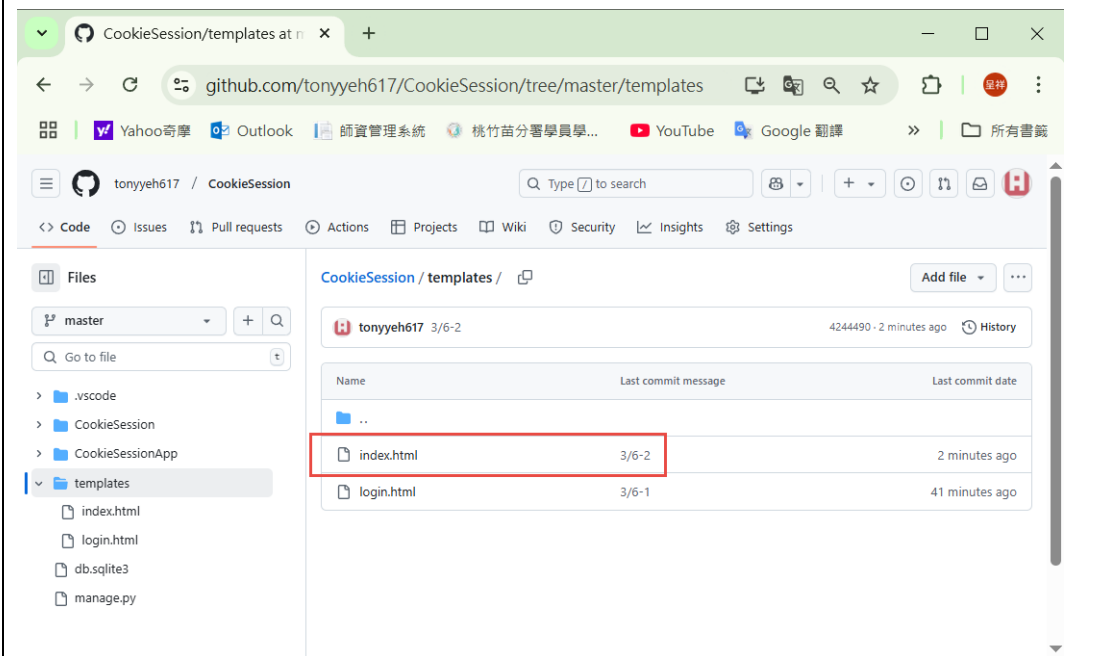


● 恢復到 3/6-1 階段

1、程式想要回到上一個 commit(Undo Last Commit、撤銷上次提交)

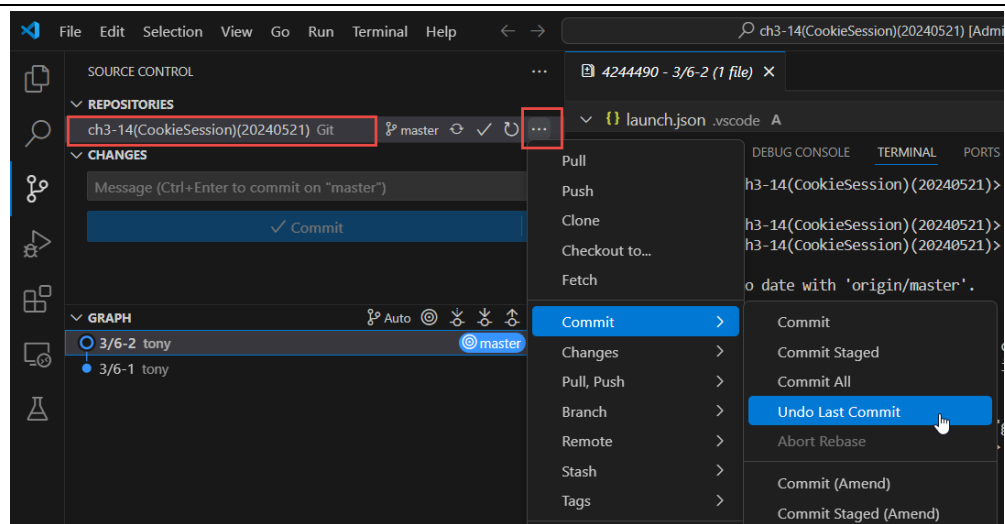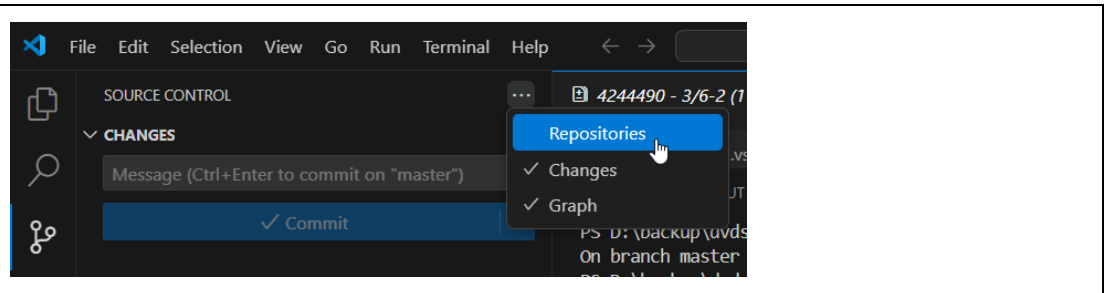


git reset --soft HEAD~1
(其中「1」為回到第「1」幾個 commit 之前)

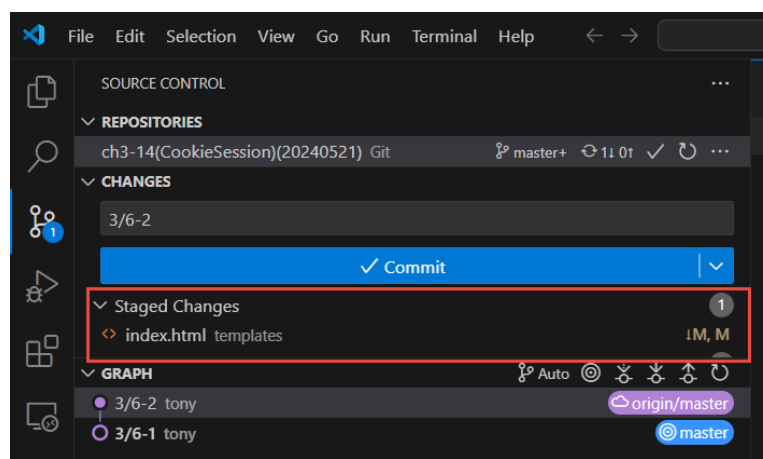


git status

2、staged changes 區，想要反回到 changes 區


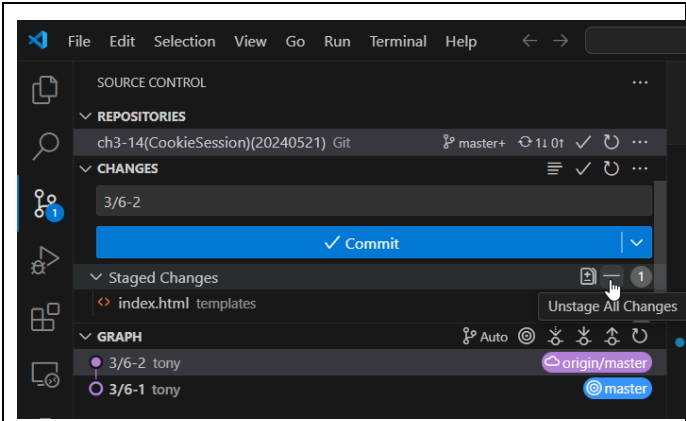


git reset HEAD
or
git reset filename

需求	指令
還原所有變更 (⚠ 不可逆)	<code>git reset --hard HEAD</code>
還原特定檔案	<code>git restore <filename></code>
還原暫存區 (staged)	<code>git reset HEAD</code>
還原所有未 commit 的變更	<code>git restore .</code>



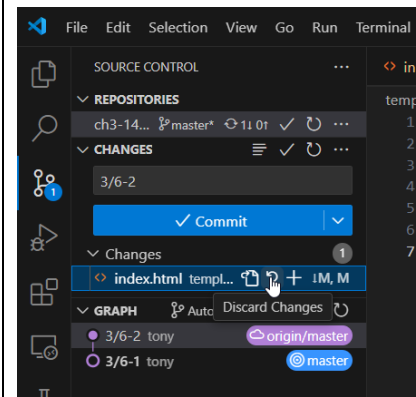





git checkout -- .
or
git checkout -- filename

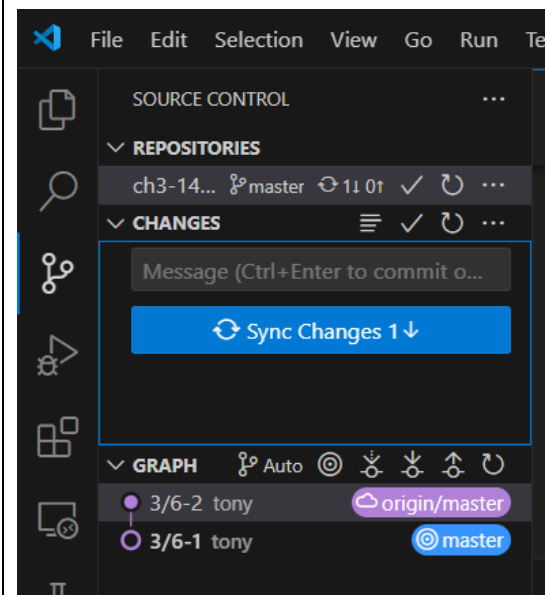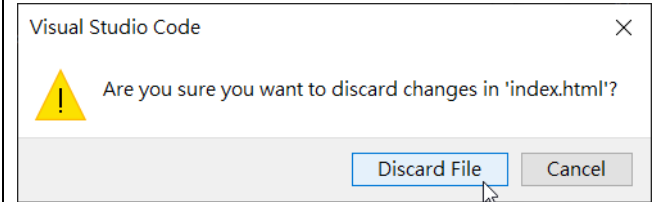




git status

再修改

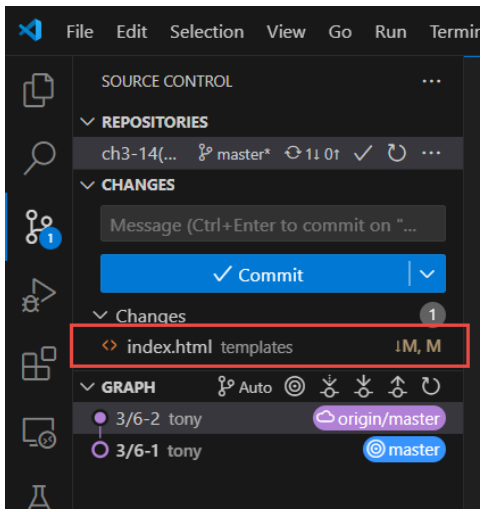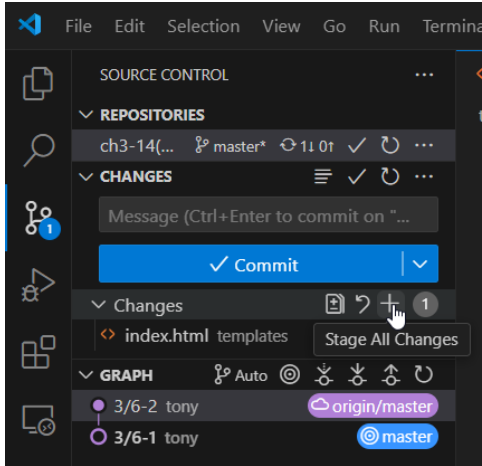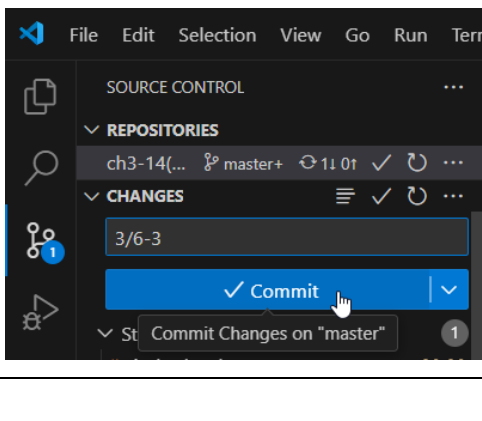 The screenshot shows the VS Code Source Control panel. Under the 'CHANGES' section, the file 'index.html templates' is selected and highlighted with a red rectangle. The 'GRAPH' section below shows a commit history with '3/6-2 tony' and '3/6-1 tony'.	# git status
 The screenshot shows the VS Code Source Control panel. The 'Stage All Changes' button, represented by a plus icon, is highlighted with a mouse cursor. The 'CHANGES' section shows 'index.html templates'.	# git add .
 The screenshot shows the VS Code Source Control panel. The 'Commit' button, represented by a checkmark icon, is highlighted with a mouse cursor. The commit message field contains '3/6-3'. A tooltip 'Commit Changes on "master"' is visible below the button.	# git commit -m 3/6-3

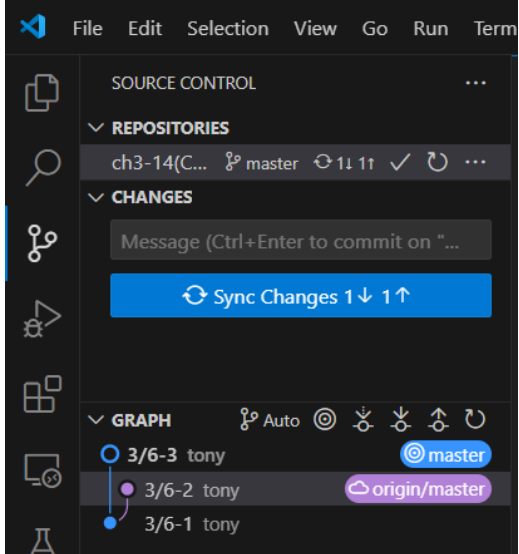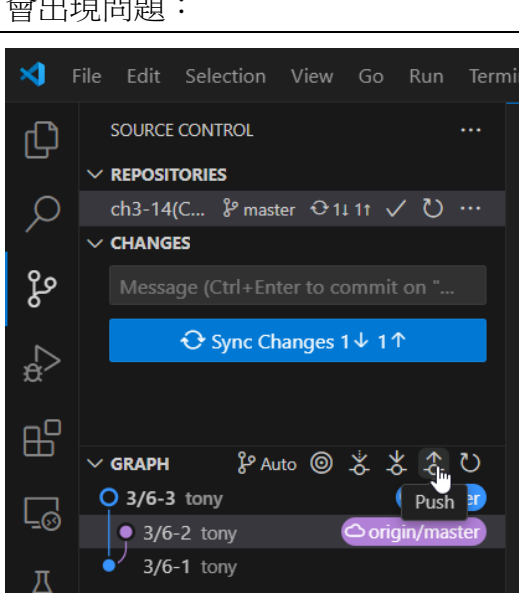
	# git log
會出現問題：	
	# git push
	<pre> To https://github.com/tonyyeh617/CookieSession.git ! [rejected] master -> master (non-fast-forward) error: failed to push some refs to 'https://github.com/tonyyeh617/CookieSession.git' hint: Updates were rejected because the tip of your current branch is behind hint: its remote counterpart. If you want to integrate the remote changes, hint: use 'git pull' before pushing again. hint: See the 'Note about fast-forwards' in 'git push --help' for details. </pre>
這個錯誤訊息表示你的本地 master 分支落後於遠端 master 分支，意思是遠端分支有更新，而你的本地分支沒有這些更新。要解決這個問題，你需要先將遠端分支的變更合併到你的本地分支，或強制 push 或再新增一個 branch。	

將遠端分支的變更合併到你的本地分支：

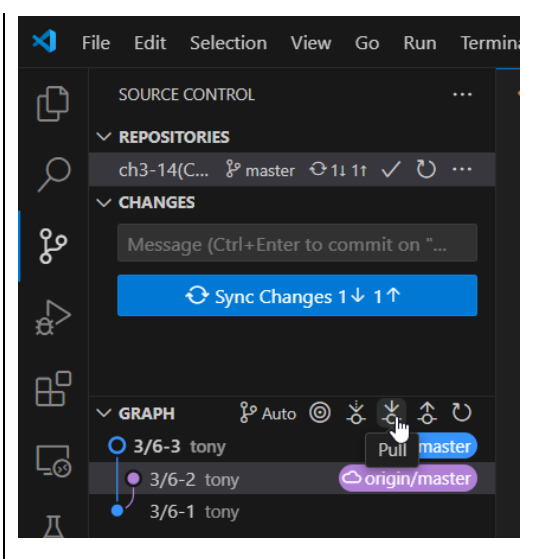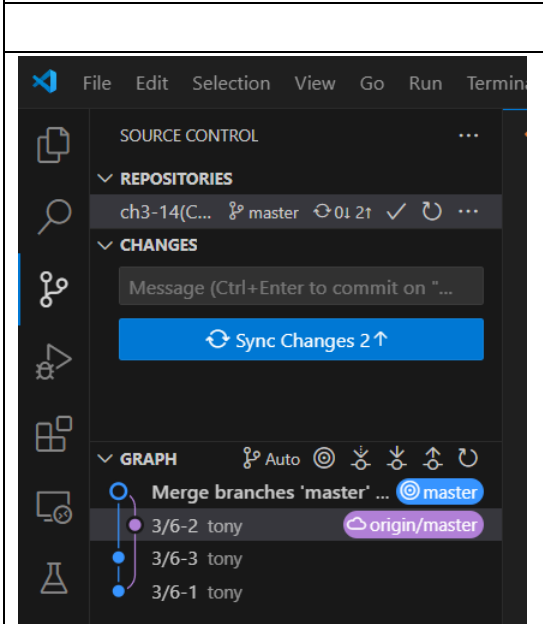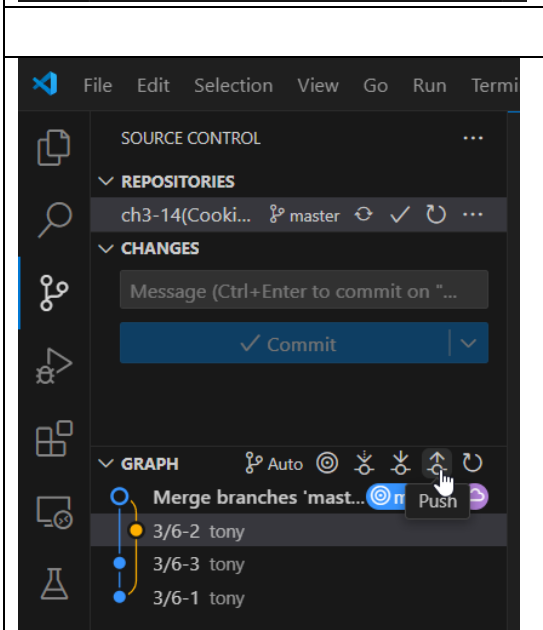 The screenshot shows the Visual Studio Source Control sidebar. Under the 'GRAPH' section, the 'Pull' button is highlighted with a mouse cursor. The button is labeled 'Pull master' and 'origin/master'. The 'CHANGES' section shows a message input field and a 'Sync Changes 1 ↓ 1 ↑' button. The 'REPOSITORIES' section shows 'ch3-14(C...' with 'master' branch and '11' commits.	# git pull (將遠端的更改合併到你的本地分支)
 The screenshot shows the Visual Studio Source Control sidebar. Under the 'GRAPH' section, the 'Merge' button is highlighted with a mouse cursor. The button is labeled 'Merge branches 'master' ...' and 'master'. The 'CHANGES' section shows a message input field and a 'Sync Changes 2 ↑' button. The 'REPOSITORIES' section shows 'ch3-14(Cooki...' with 'master' branch and '21' commits.	# git log
 The screenshot shows the Visual Studio Source Control sidebar. Under the 'GRAPH' section, the 'Push' button is highlighted with a mouse cursor. The button is labeled 'Push' and 'Push'. The 'CHANGES' section shows a message input field and a 'Commit' button. The 'REPOSITORIES' section shows 'ch3-14(Cooki...' with 'master' branch and '21' commits.	# git push

強制 push :




git push --force (強制)

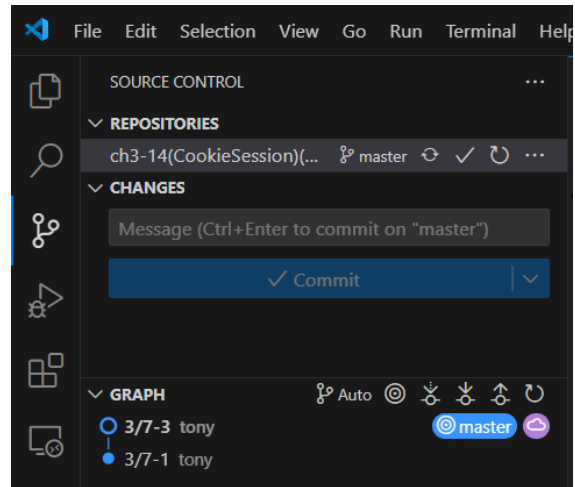


Reference:

<https://www.youtube.com/watch?v=TjHslMeJ8lk&t=161s>


新增資料夾

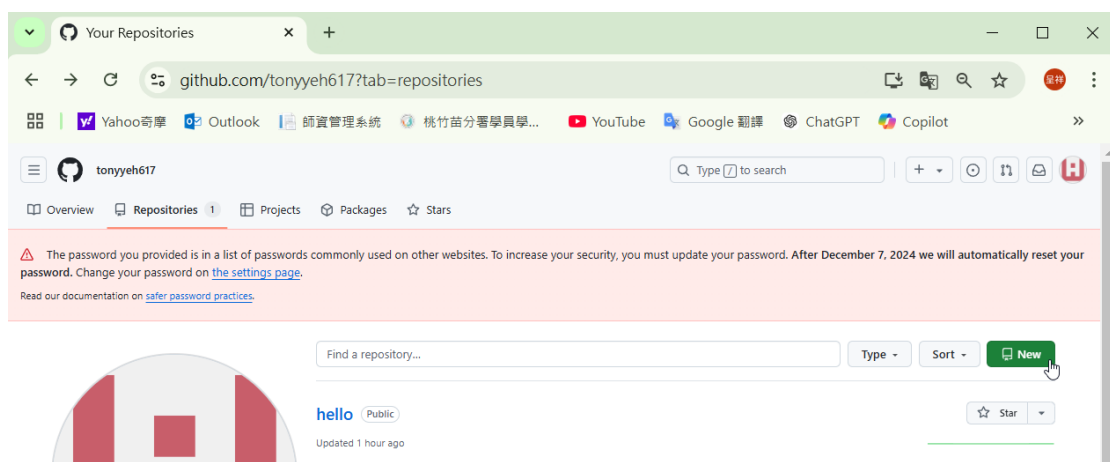

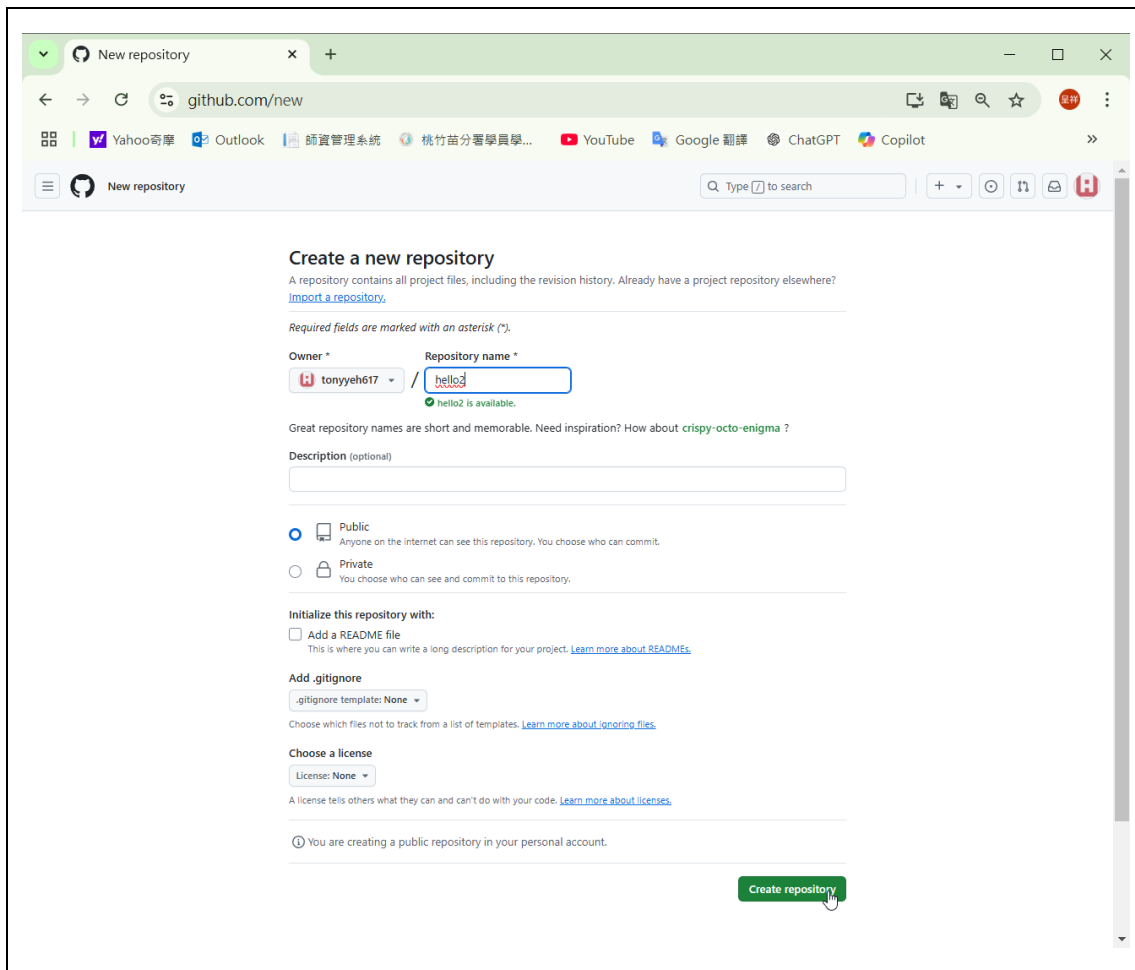

```
# git remote add origin https://github.com/tonyyeh617/hello2.git
```

```
# git push -u origin master
```

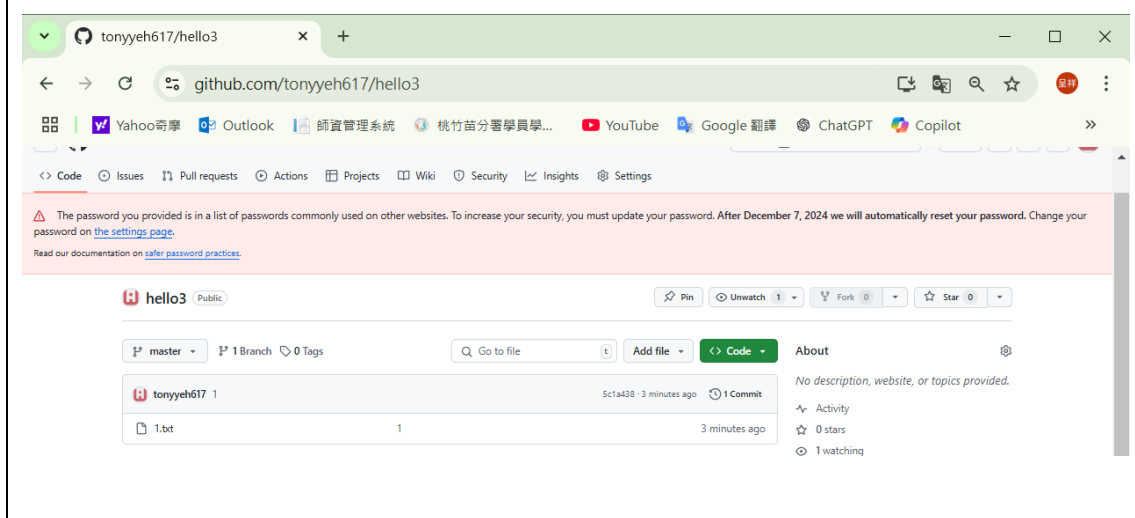


```

PS D:\git_temp\hello2_A> git remote add origin https://github.com/tonyyeh617/hello2.git
PS D:\git_temp\hello2_A>
PS D:\git_temp\hello2_A> git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 204 bytes | 204.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/tonyyeh617/hello2.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
PS D:\git_temp\hello2_A>

```

假設在 B 電腦，利用 git bash 開啟

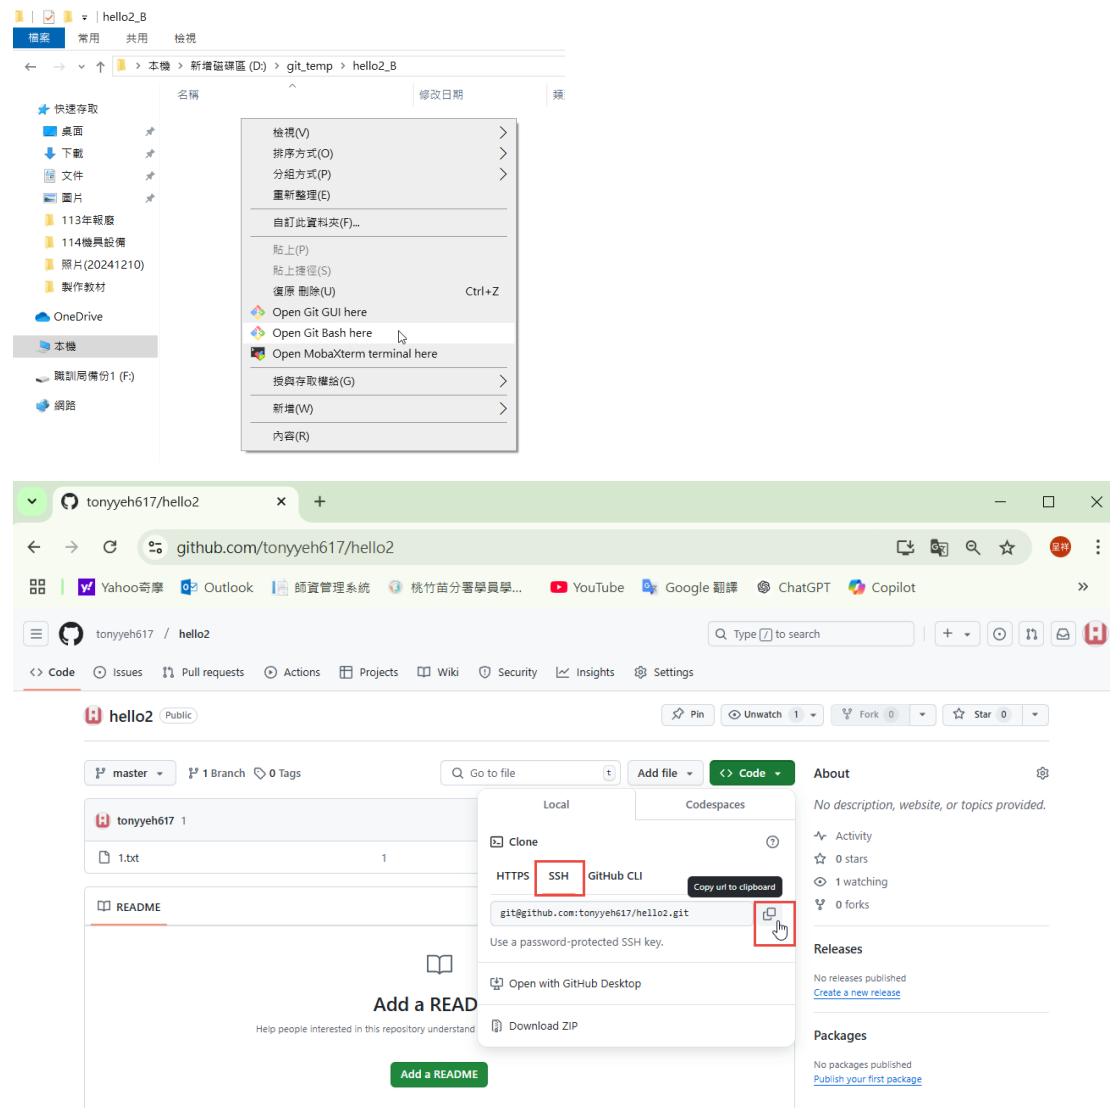

The image shows two screenshots. The top screenshot is a Windows File Explorer window for the directory 'hello2_B'. A right-click context menu is open, and the option 'Open Git Bash here' is highlighted. The bottom screenshot is a web browser showing the GitHub repository page for 'tonyyeh617/hello2'. The 'Code' button is clicked, and a dropdown menu is shown with 'SSH' selected and the URL 'git@github.com:tonyyeh617/hello2.git' copied to the clipboard.

```
# git clone git@github.com:tonyyeh617/hello2.git
```

開啟「git bash」

cd ~/.ssh && ssh-keygen



```
tony@DESKTOP-GMHL8UC MINGW64 ~  
$ cd ~/.ssh && ssh-keygen  
Generating public/private ed25519 key pair.  
Enter file in which to save the key (/c/Users/tony/.ssh/id_ed25519):  
Enter passphrase for "/c/Users/tony/.ssh/id_ed25519" (empty for no passphrase):  
Enter same passphrase again:  
Your identification has been saved in /c/Users/tony/.ssh/id_ed25519  
Your public key has been saved in /c/Users/tony/.ssh/id_ed25519.pub  
The key fingerprint is:  
SHA256:1tHFLAGlI6eb4jHcOiAhnVwTXQ96CVgpP0VHovqxEJY tony@DESKTOP-GMHL8UC  
The key's randomart image is:  
+---[ED25519 256]---+  
|      . = 0 + = . + 0 0 + .      |  
|      = . 0 + . * 0 . . 0      |  
|      o o E + 0 . + * . .      |  
|      . = . 0 0 . = 0      |  
|      . . 0 . . S .      |  
|      . . + = 0      |  
|      . . B +      |  
|      . . =      |  
|      o .      |  
+-----[SHA256]-----+
```

ls


cat id_ed25519.pub


```
tony@DESKTOP-GMHL8UC MINGW64 ~/.ssh  
$ ls  
id_ed25519  id_ed25519.pub  known_hosts  known_hosts.old  
tony@DESKTOP-GMHL8UC MINGW64 ~/.ssh  
$ cat id_ed25519.pub  
ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIL17Wjd0fC1lwy2WCXmZ2p+Vw1Kwg3dCcIC1wVfrw1t4  
tony@DESKTOP-GMHL8UC
```

將public key複製，貼到如下：

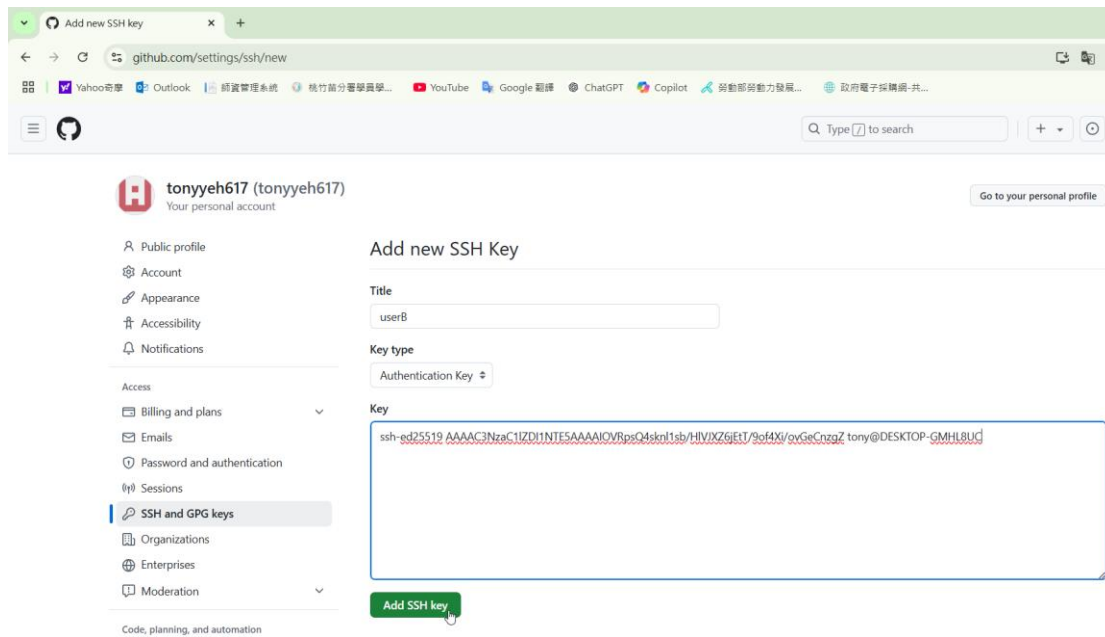
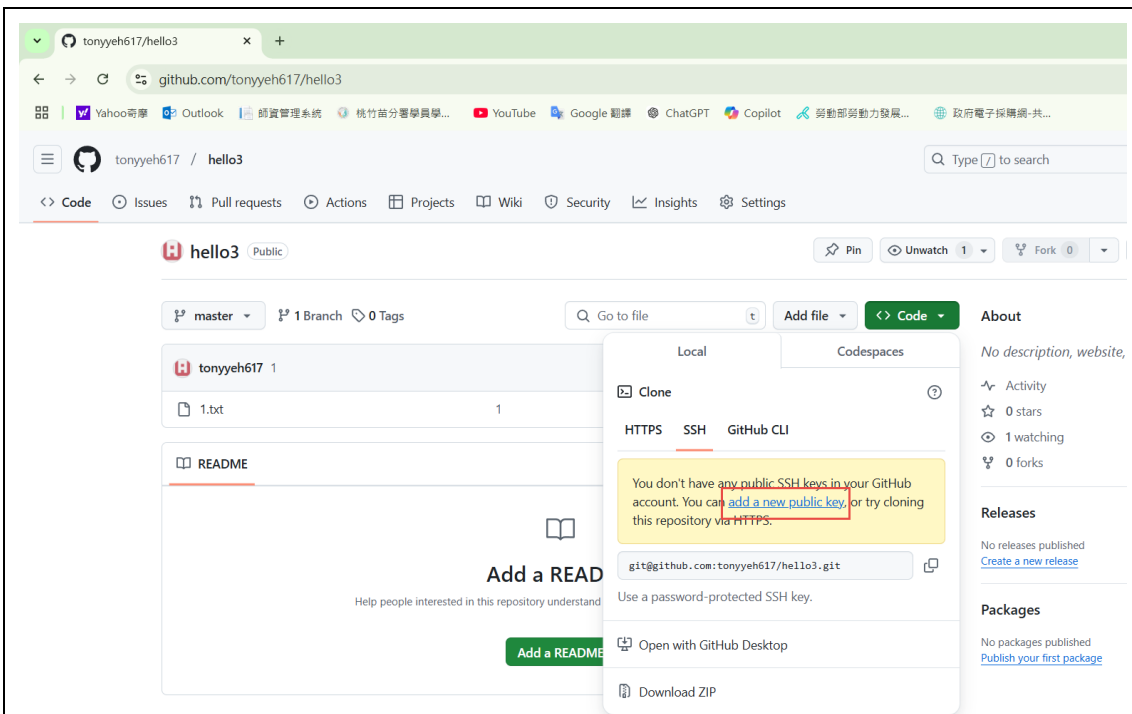


git clone git@github.com:tonyyeh617/hello3.git

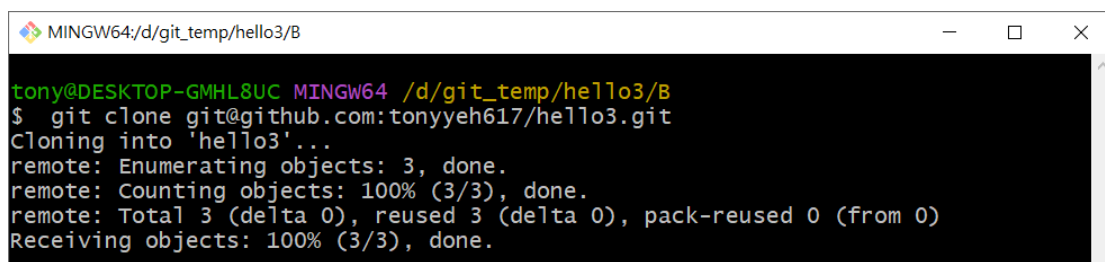



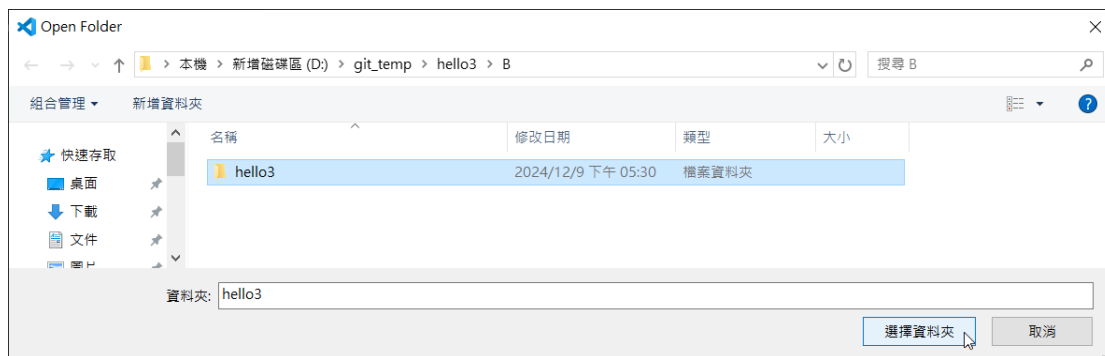






利用vscode開啟此案

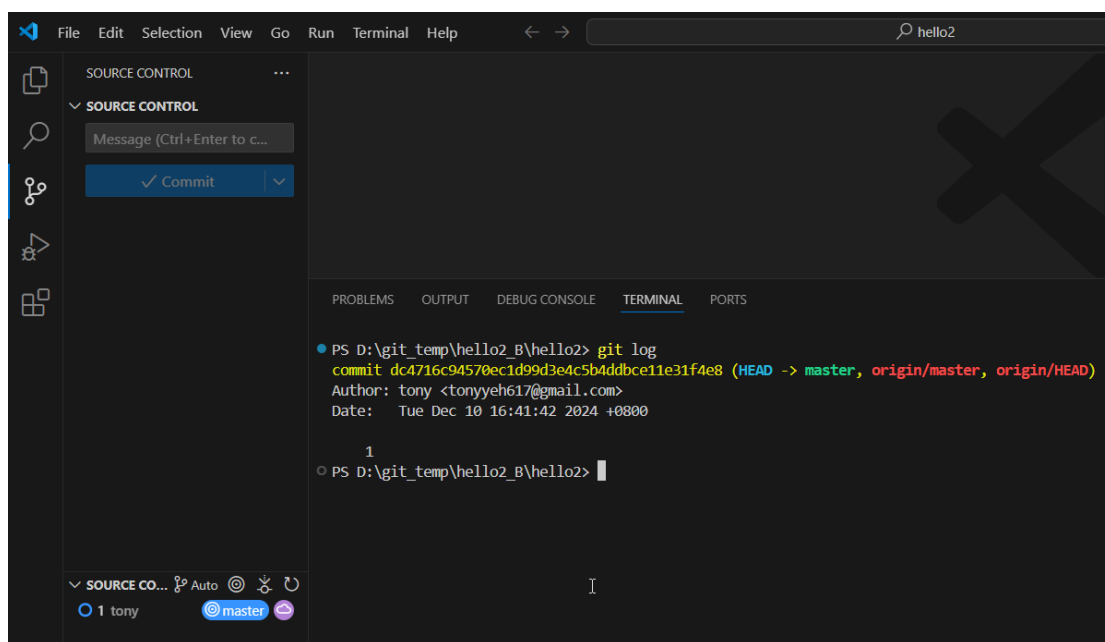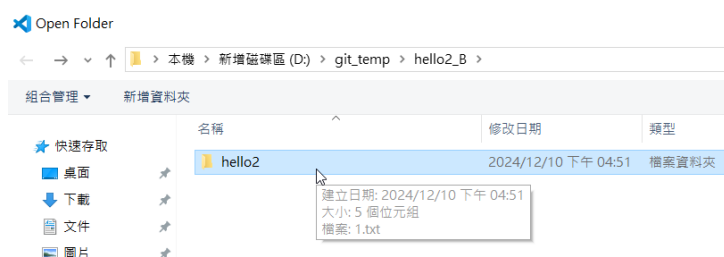

在 A 電腦中:

修正檔案，並按「stage changes」

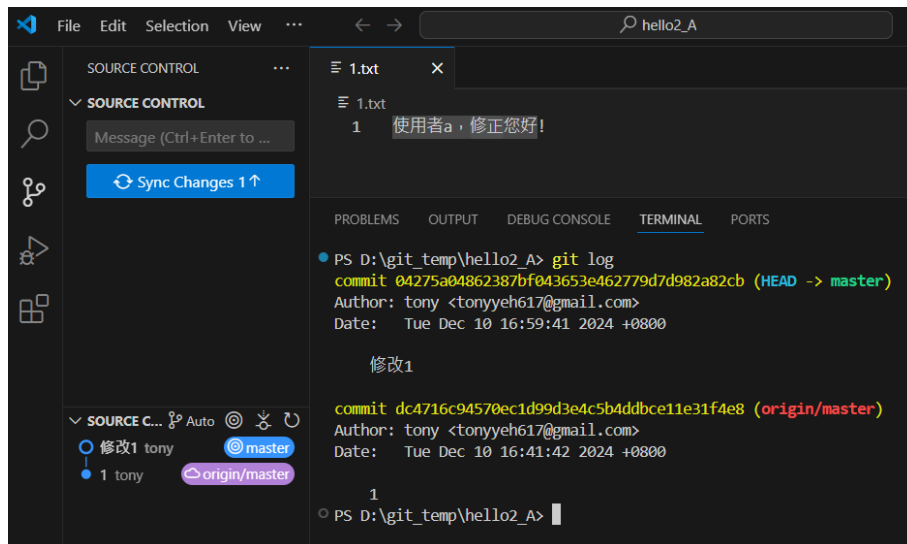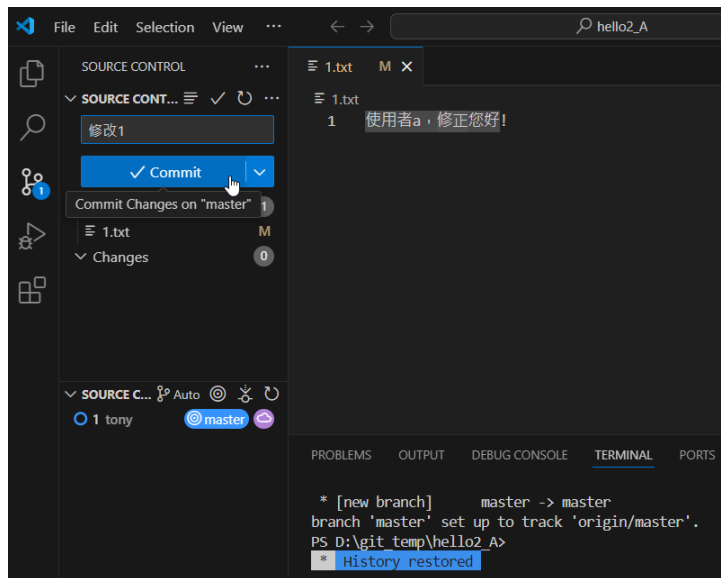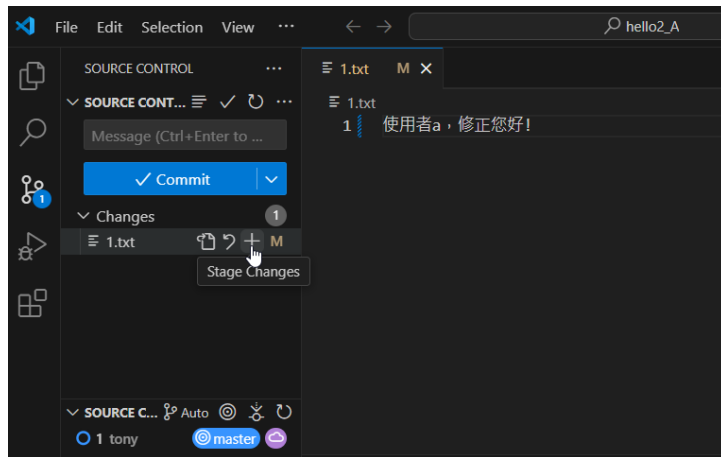

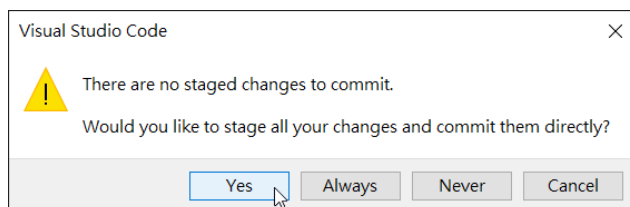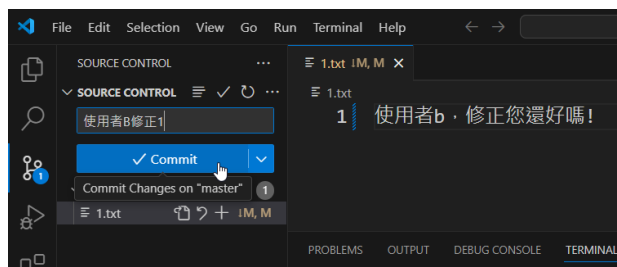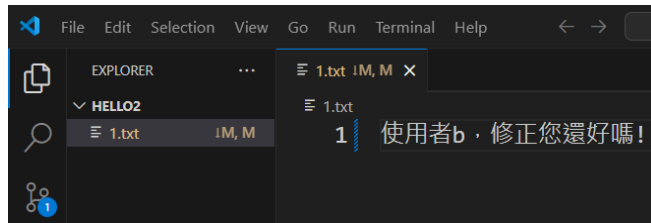

git push

原因：為A紀錄與B紀錄有衝突，稱為「conflicts」，因此有問題如下


解決：要把conflicts檔案都處理完，才可以push上去

```
PS D:\git_temp\hello2_B\hello2> git push
To github.com:tonyyeh617/hello2.git
! [rejected]        master -> master (non-fast-forward)
error: failed to push some refs to 'github.com:tonyyeh617/hello2.git'
hint: Updates were rejected because the tip of your current branch is behind
hint: its remote counterpart. If you want to integrate the remote changes,
hint: use 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
PS D:\git_temp\hello2_B\hello2>
```


git pull

(將更新抓下，git會讓我知曉哪些檔案是衝突，再將衝突修正好，再push上即可)

改成自己的版本

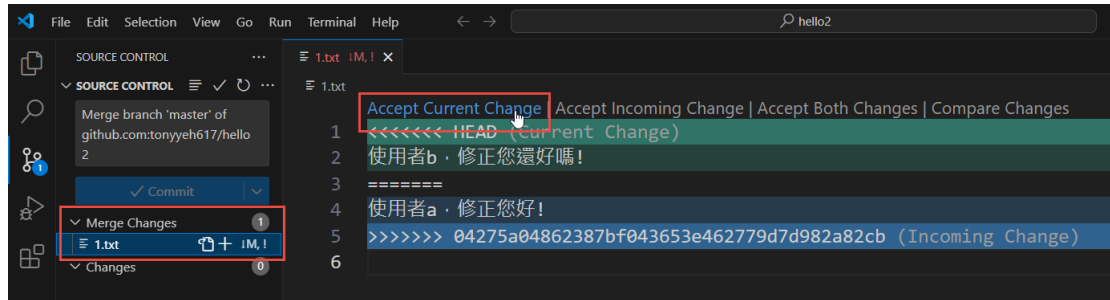

改成A使用者的版本

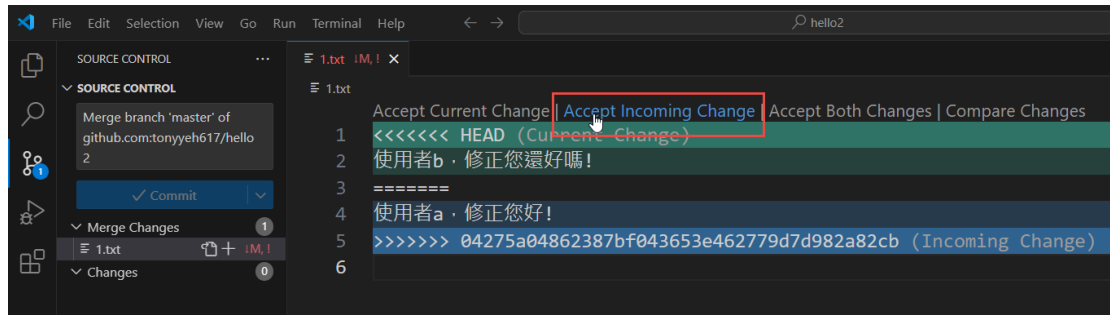

也可以用

#git log (查看)

git status



```
PS D:\git_temp\hello2_B\hello2> git status
On branch master
Your branch and 'origin/master' have diverged,
and have 1 and 1 different commits each, respectively.
(use "git pull" if you want to integrate the remote branch with yours)

You have unmerged paths.
  (fix conflicts and run "git commit")
  (use "git merge --abort" to abort the merge)

Unmerged paths:
  (use "git add <file>..." to mark resolution)
        both modified:   1.txt

no changes added to commit (use "git add" and/or "git commit -a")
```

git add .

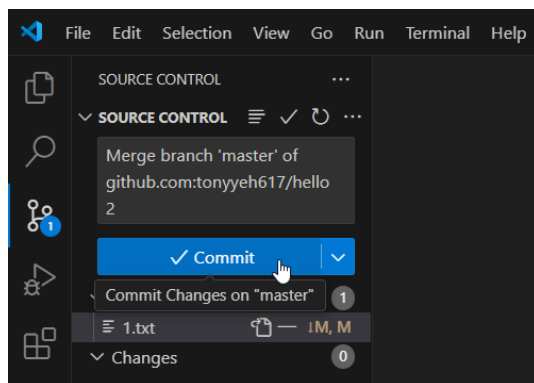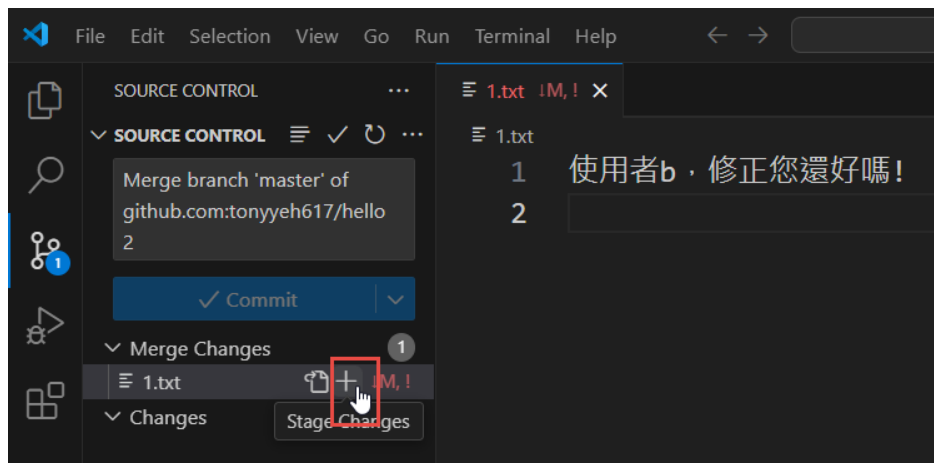

```
PS D:\git_temp\hello2_B\hello2> git status
On branch master
Your branch is ahead of 'origin/master' by 2 commits.
(use "git push" to publish your local commits)

nothing to commit, working tree clean
PS D:\git_temp\hello2_B\hello2>
```

```
PS D:\git_temp\hello2_B\hello2> git log
commit 221f4c101ad2df7aebbb889abdfdb08c65ca9dee (HEAD -> master)
Merge: c1263b1 04275a0
Author: tony <tonyyeh617@gmail.com>
Date: Tue Dec 10 17:20:14 2024 +0800

    Merge branch 'master' of github.com:tonyyeh617/hello2

commit c1263b184559de9529f75a39509ef1f978a1c1f4
Author: tony <tonyyeh617@gmail.com>
Date: Tue Dec 10 17:09:22 2024 +0800

    使用者B修正1

commit 04275a04862387bf043653e462779d7d982a82cb (origin/master, origin/HEAD)
Author: tony <tonyyeh617@gmail.com>
Date: Tue Dec 10 16:59:41 2024 +0800

    修改1

commit dc4716c94570ec1d99d3e4c5b4ddbce11e31f4e8
Author: tony <tonyyeh617@gmail.com>
Date: Tue Dec 10 16:41:42 2024 +0800
```

git push

```
PS D:\git_temp\hello2_B\hello2> git push
Enumerating objects: 10, done.
Counting objects: 100% (10/10), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (6/6), 587 bytes | 587.00 KiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:tonyyeh617/hello2.git
04275a0..221f4c1 master -> master
```

The screenshot shows the GitHub repository page for 'tonyyeh617/hello2'. The repository is public and has 1 branch (master) and 0 tags. The main branch 'master' is selected. The repository has 4 commits, 0 stars, 1 watching, and 0 forks. The repository description is 'No description, website, or topics provided.' The repository contains a file named '1.txt' and a 'README' file. The 'README' file is currently empty, with a message 'Add a README' and a button 'Add a README'.

URL: <https://github.com/tonyyeh617/hello2/commits/master/>

The screenshot shows the 'Commits' page for the repository 'tonyyeh617/hello2'. The repository is public and has 1 branch (master) and 0 tags. The main branch 'master' is selected. The repository has 4 commits, 0 stars, 1 watching, and 0 forks. The repository description is 'No description, website, or topics provided.' The repository contains a file named '1.txt' and a 'README' file. The 'README' file is currently empty, with a message 'Add a README' and a button 'Add a README'.

Commits on Dec 10, 2024

Commit Message	Commit Hash	Author	Time Ago
Merge branch 'master' of github.com:tonyyeh617/hello2	221f4c1	tonyyeh617	3 minutes ago
使用者B修正1	c1263b1	tonyyeh617	13 minutes ago
修改1	04275a0	tonyyeh617	23 minutes ago
1	dc4716c	tonyyeh617	41 minutes ago

Reference:

<https://www.youtube.com/watch?v=B-SZqdlU59g>

<https://www.youtube.com/watch?v=P-nbNgIzlYE&t=325s>

➤ 建立 repositories(儲存庫)

The image shows a sequence of three browser screenshots illustrating how to create a new repository on GitHub.

Top Screenshot: The user is on the GitHub profile page for 'tonyyeh617'. The 'Repositories' tab is selected and highlighted with a hand cursor. The repository count is shown as '2'.


Middle Screenshot: The user is on the 'repositories' page. A red box highlights the 'New' button in the top right corner, which is used to initiate the creation of a new repository.

Bottom Screenshot: The 'Create a new repository' page. The form is filled with the following information:

- Owner:** tonyyeh617
- Repository name:** homework4
- Description (optional):** homework4
- Visibility:** Public (selected)
- Initialize this repository with:** Add a README file (selected)
- .gitignore template:** None
- License:** None

At the bottom right, there is a green 'Create repository' button.

在要上傳程式資料夾根目錄按右鍵「open git bash here」

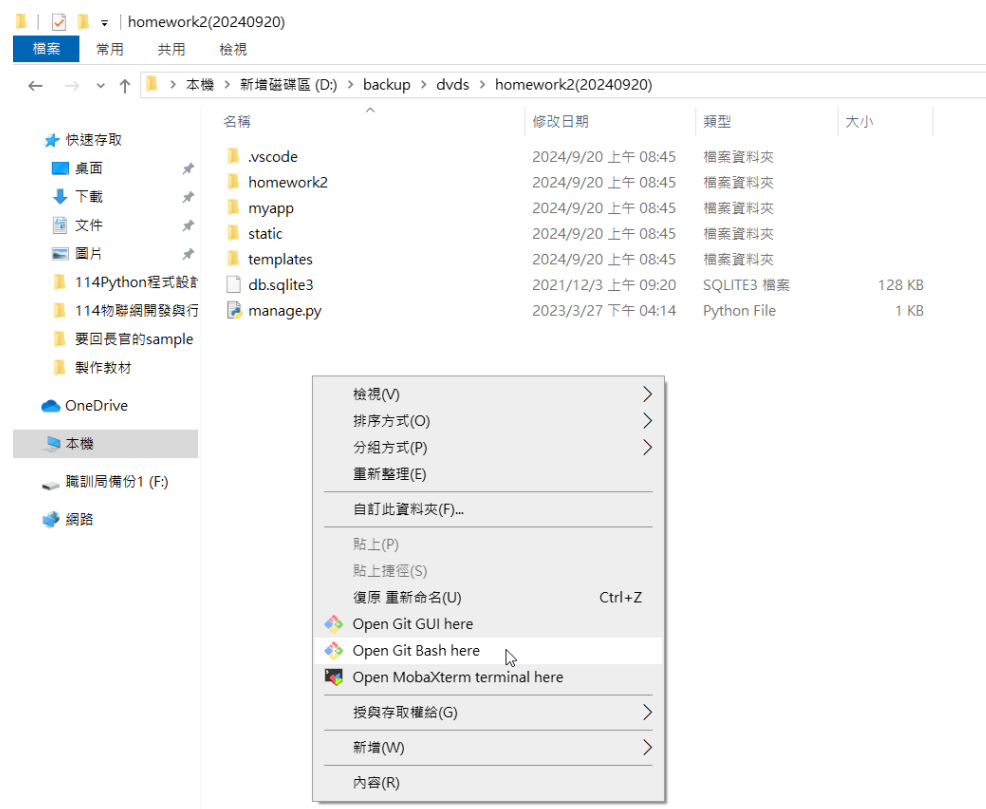

或是使用指令切換：

```
# cd /d/backup/dvds/homework2/  
# ls -l
```

```
MINGW64:/d/backup/dvds/homework2(20240920)  
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920)  
$ cd /d/backup/dvds/homework2\ (20240920) \  
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920)  
$ ls -l  
total 133  
-rw-r--r-- 1 tony 197121 131072 Dec  3  2021 db.sqlite3  
drwxr-xr-x 1 tony 197121      0 Sep 20 08:45 homework2/  
-rwxr-xr-x 1 tony 197121   687 Mar 27  2023 manage.py*  
drwxr-xr-x 1 tony 197121      0 Sep 20 08:45 myapp/  
drwxr-xr-x 1 tony 197121      0 Sep 20 08:45 static/  
drwxr-xr-x 1 tony 197121      0 Sep 20 08:45 templates/  
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920)  
$ |
```

Run

```
# git config --global user.email "you@example.com"  
(所有在這台電腦上進行的 Git 操作都會使用這個電子郵件地址)  
# git config --global user.name "Your Name"  
(所有在這台電腦上進行的 Git 操作都會使用這個名稱)
```

Check

```
# git config --global user.name
# git config --global user.email
# git config --list
# git status
# git log
# git branch
```

➤ 上傳測試

...or create a new repository on the command line

```
echo "# homework2" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/tonyyeh617/homework2.git
git push -u origin main
```

...or push an existing repository from the command line

```
git remote add origin https://github.com/tonyyeh617/homework2.git
git branch -M main
git push -u origin main
```

```
# echo "# homework2" >> README.md
```

(如果 README.md 檔案不存在，則會創建該檔案)

```
# git init
```

(初始化一個新的 Git 儲存庫)

```
# git add README.md
```

(這條指令將 README.md 檔案添加到暫存區，準備提交)

```
# git commit -m "first commit"
```

(提供此次提交的訊息，說明這次提交的内容)

```
# git log (檢查)
```

```
# git branch -M main
```

(分支重命名為 main，-M 選項用於強制移動分支，即使有同名的分支存在)

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920) (main)
$ git status
On branch main
Untracked files:
```

```
# git remote add origin https://github.com/tonyyeh617/homework2.git
```

(添加一個名為 origin 的遠端儲存庫，該儲存庫的 URL如上)

```
# git push -u origin main
```


(將本地儲存庫中的變更推送到遠端儲存庫的 main 分支)

```
MINGW64/d:/backup/dvds/mqtt1(20240805)

tony@DESKTOP-PACDUHG MINGW64 /d:/backup/dvds/mqtt1(20240805) (main)
$ echo "# mqtt" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/tonyyeh617/mqtt.git
git push -u origin main
Reinitialized existing Git repository in D:/backup/dvds/mqtt1(20240805)/.git/
warning: in the working copy of 'README.md', LF will be replaced by CRLF the next time Git touches it
[main 7671cea] first commit
1 file changed, 1 insertion(+)
error: remote origin already exists.
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (6/6), 428 bytes | 428.00 KiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/tonyyeh617/mqtt.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.

tony@DESKTOP-PACDUHG MINGW64 /d:/backup/dvds/mqtt1(20240805) (main)
$
```

結果如下:

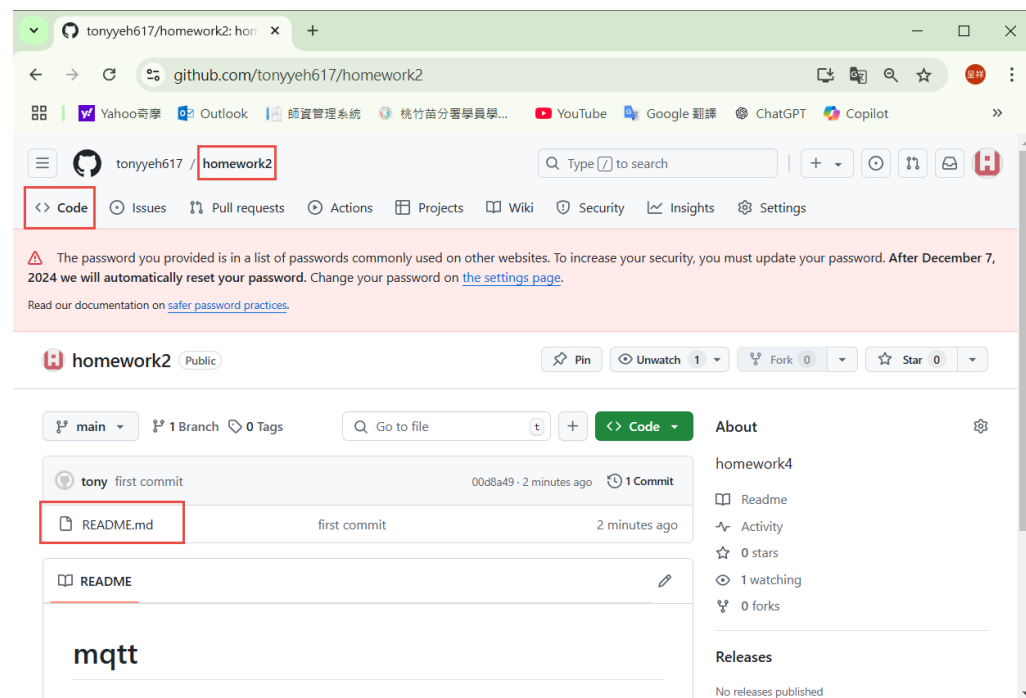

➤ 上傳資料

目標：將全部資料推送到 github

git init

(做用過就不用)

git remote add origin https://github.com/tonyyeh617/homework2.git

(做用過就不用)

git add .

(添加所有文件到暫存區)

git status

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920) (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   .vscode/launch.json
    new file:   db.sqlite3
    new file:   homework2/__init__.py
    new file:   homework2/__pycache__/__init__.cpython-38.pyc
    new file:   homework2/__pycache__/__init__.cpython-39.pyc
    new file:   homework2/__pycache__/settings.cpython-38.pyc
    new file:   homework2/__pycache__/settings.cpython-39.pyc
    new file:   homework2/__pycache__/urls.cpython-38.pyc
    new file:   homework2/__pycache__/urls.cpython-39.pyc
    new file:   homework2/__pycache__/wsgi.cpython-38.pyc
    new file:   homework2/__pycache__/wsgi.cpython-39.pyc
    new file:   homework2/asgi.py
    new file:   homework2/settings.py
    new file:   homework2/urls.py
    new file:   homework2/wsgi.py
    new file:   manage.py
    new file:   myapp/__init__.py
    new file:   myapp/__pycache__/__init__.cpython-38.pyc
    new file:   myapp/__pycache__/__init__.cpython-39.pyc
    new file:   myapp/__pycache__/admin.cpython-38.pyc
```

git commit -m "first commit"

(提交變更)

git branch -M version1

(重命新的分支、若沿用，可以不用做)

git push -u origin main(or version1)

(推送到遠端儲存庫 github)

目標：更新資料後再推送 github

git add .

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920) (main)
$ git status
On branch main
Your branch is behind 'origin/main' by 1 commit, and can be fast-forwarded.
  (use "git pull" to update your local branch)

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    modified:   templates/lotto2.html
```

git commit -m "8/7 更新"

git log

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920) (main)
$ git log
commit ce2779bea0909ef2222e852337664940310692f9 (HEAD -> main)
Author: tony <"tonyyeh617@gmail.com">
Date: Wed Dec 4 10:20:24 2024 +0800
```

8/7更新

git commit --amend -m "12/4 更新"

(修正 commit)

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920) (main)
$ git commit --amend -m "12/4更新"
[main 1e55048] 12/4更新
Date: Wed Dec 4 10:20:24 2024 +0800
1 file changed, 1 insertion(+)
```

```
tony@DESKTOP-GMHL8UC MINGW64 /d/backup/dvds/homework2(20240920) (main)
$ git log
commit 1e55048c5a63b4c22ae81502b3addc23440e66f4 (HEAD -> main)
Author: tony <"tonyyeh617@gmail.com">
Date: Wed Dec 4 10:20:24 2024 +0800
```

12/4更新

git push origin main

(如果您之前已經使用 `git push -u origin version1` 設定了預設上游分支，只需要使用 `git push` 即可)

主要差異

指令	功能	適用場合
<code>git push -u origin version1</code>	推送並設定本地分支與遠端分支的「上游關聯」	第一次推送新分支，或需要指定上游關聯時使用
<code>git push origin version1</code>	只推送本地分支到遠端分支，不設定上游關聯	用於已經關聯上游，進行普通推送操作時使用

結果如下:

tonyyeh617/mqtt at version1 · ChatGPT

github.com/tonyyeh617/mqtt/tree/version1

tonyyeh617 / mqtt

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

mqtt Public

version1 had recent pushes 1 minute ago [Compare & pull request](#)

version1 2 Branches 0 Tags

Go to file Add file <> Code

Contribute

Switch branches/tags

Find or create a branch...

Branches Tags

main default

✓ version1

View all branches


static/images

templates

7c3547e · 2 minutes ago	3 Commits
first commit	2 minutes ago
first commit	2 minutes ago
first commit	2 minutes ago
first commit	2 minutes ago
first commit	2 minutes ago

第四章：使用 Git & Github 共同開發 Django

➤ A 同學先將專案建立與設定好，並發佈到 Github 上。

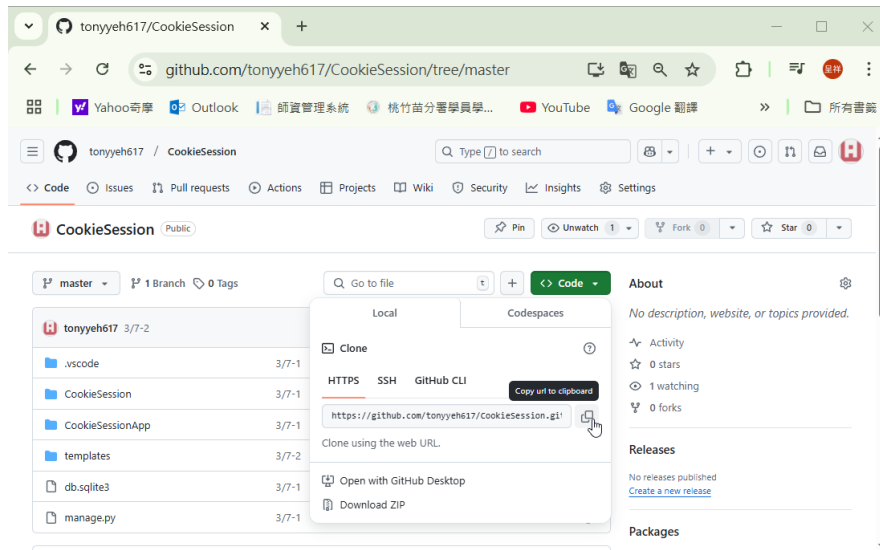

```
# git config --global user.email "you@example.com"
```

(所有在這台電腦上進行的 Git 操作都會使用這個電子郵件地址)

```
# git config --global user.name "Your Name"
```

(所有在這台電腦上進行的 Git 操作都會使用這個名稱)

Check




```
# git config --global user.name
# git config --global user.email
# git config --list
```


```
# git init
```

```
(dvs) PS D:\backup\dvs\A_student\CookieSession> git init
Initialized empty Git repository in D:/backup/dvs/A_student/CookieSession/.git/
(dvs) PS D:\backup\dvs\A_student\CookieSession> git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .vscode/
    CookieSession/
    CookieSessionApp/
    db.sqlite3
    manage.py
    templates/
```

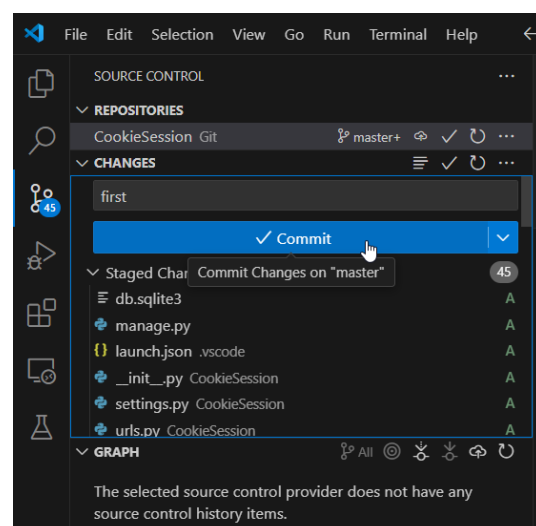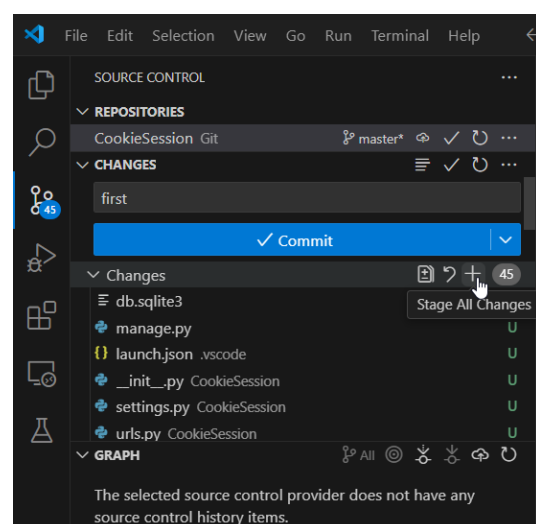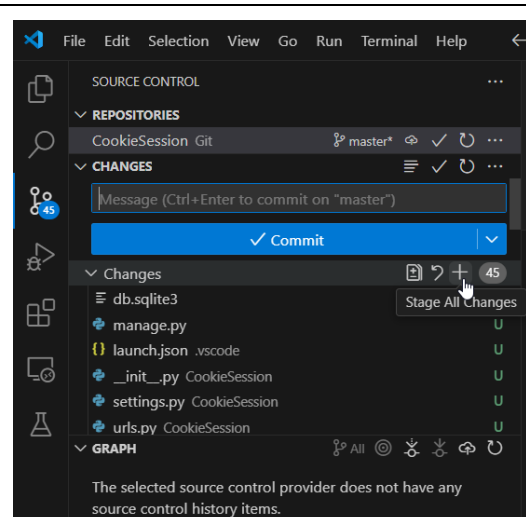


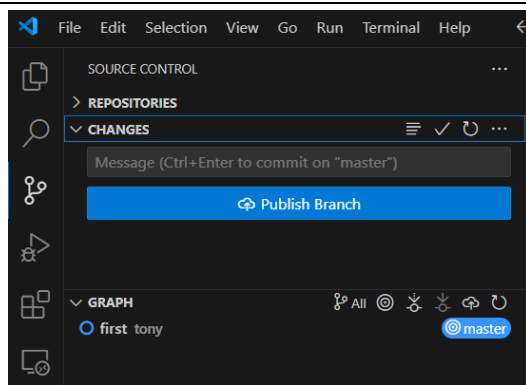

```
# git remote add origin https://github.com/tonyyeh617/CookieSession.git  
# git remote -v
```

```
(dvds) PS D:\backup\dvds\A_student\CookieSession> git remote -v  
• origin https://github.com/tonyyeh617/CookieSession.git (fetch)  
origin https://github.com/tonyyeh617/CookieSession.git (push)
```

```
# git push origin master
```

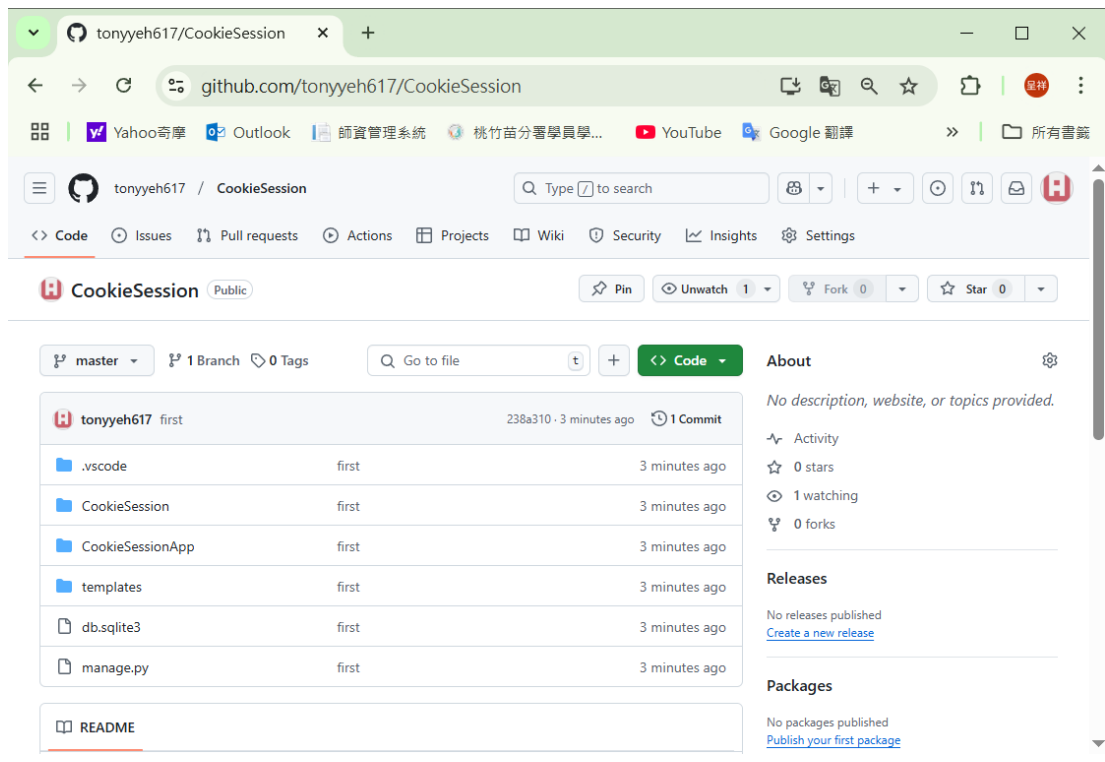


➤ B 同學將 Github 下載下來。

```
# git clone https://github.com/tonyyeh617/CookieSession.git  
# git checkout -b B-branch (建立一個新的分支「B-branch」)  
# git branch -m newname (重新命名分支)  
# git branch (check)
```


```
(dvds) PS D:\backup\dvds\B_student\CookieSession> git branch
* B-branch
master
```

新增 url 與 views

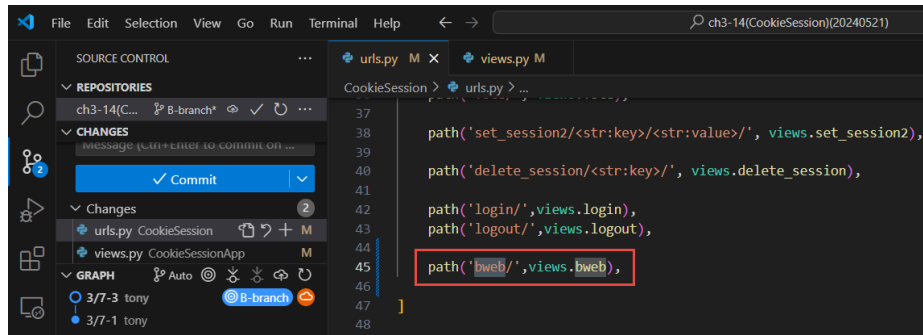


The screenshot shows the Visual Studio Code interface for the CookieSessionApp project. The left sidebar displays the SOURCE CONTROL panel with the B-branch selected. The main editor area shows the urls.py file with the following code:



```
37 .....
38 .....
39 .....
40 .....
41 .....
42 path('login/', views.login),
43 path('logout/', views.logout),
44 .....
45 path('bweb/', views.bweb),
46 .....
47 .....
48 .....
```

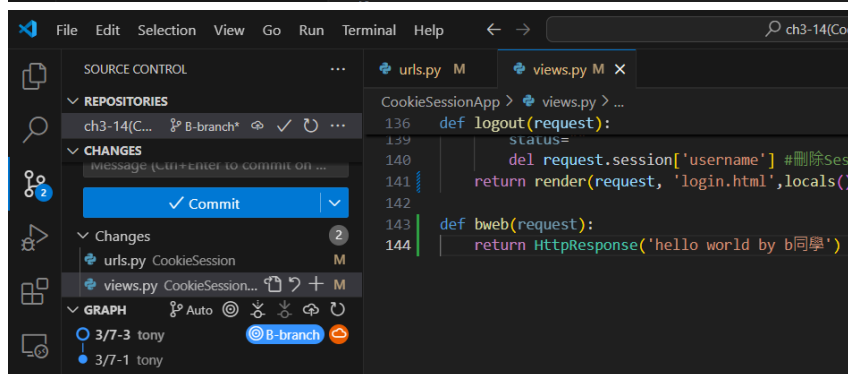


The screenshot shows the Visual Studio Code interface for the CookieSessionApp project. The left sidebar displays the SOURCE CONTROL panel with the B-branch selected. The main editor area shows the views.py file with the following code:



```
136 def logout(request):
137     status=
138     del request.session['username'] #刪除Ses
139     return render(request, 'login.html', locals())
140 .....
141 .....
142 .....
143 def bweb(request):
144     return HttpResponse('hello world by b同學')
```

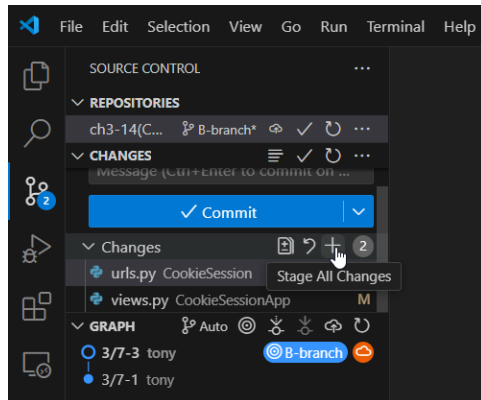

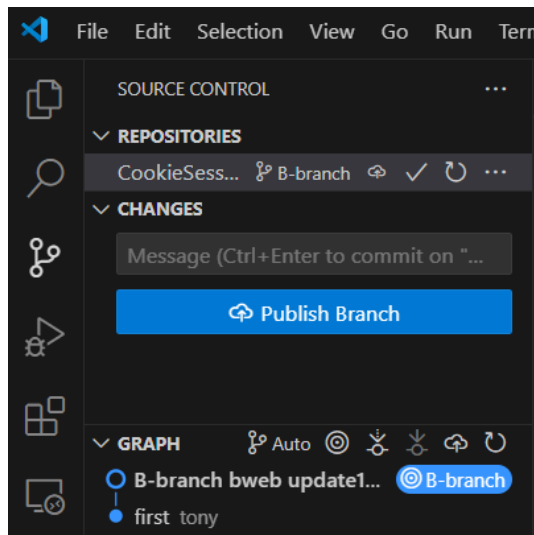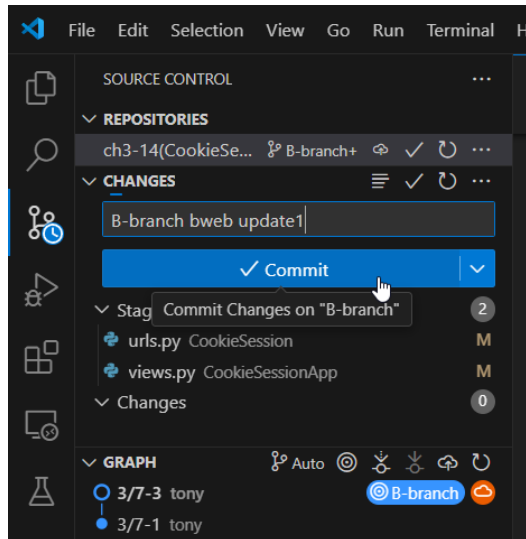

再修正内容:

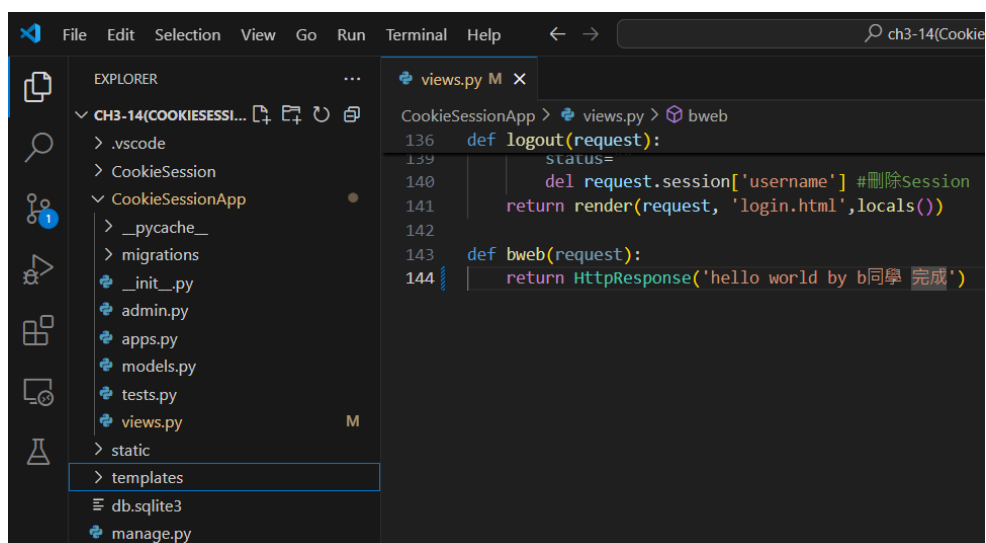

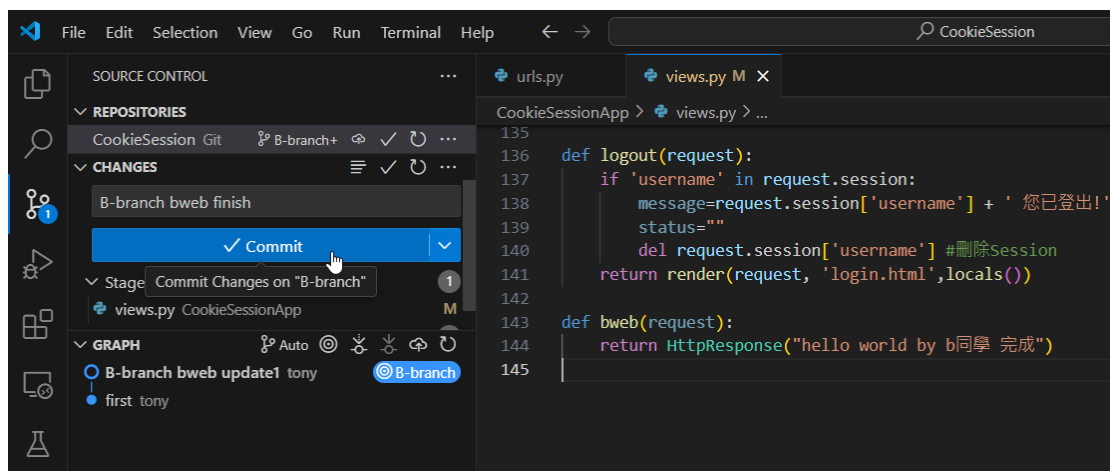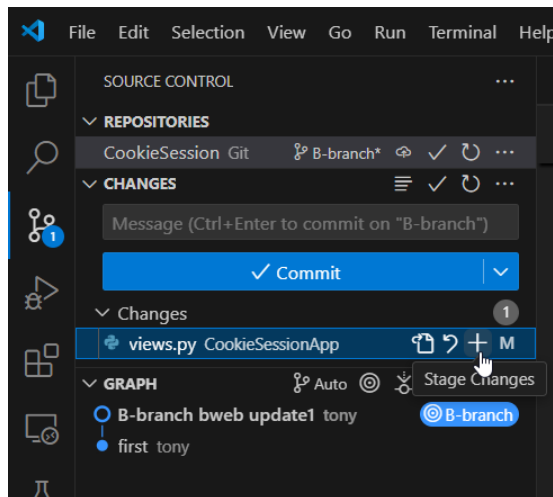

➤ 假設 B 同學負責的開發完畢

git push -u origin B-branch (將B-branch push 到github)
 (在 Git 中，-u 是 --set-upstream 的縮寫，用來將本地分支關聯到遠端分支 (tracking branch)，這樣之後可以直接使用 git push 和 git pull，而不用每次都指定遠端分支。)




- A 同學也要開發自己負責的程式


git checkout -b A-branch (建立一個新的分支「A-branch」)

git branch (check)



```
(dvds) PS D:\backup\dvds\A_student\CookieSession> git branch
* master
• (dvds) PS D:\backup\dvds\A_student\CookieSession> git checkout -b A-branch
Switched to a new branch 'A-branch'
• (dvds) PS D:\backup\dvds\A_student\CookieSession> git branch
* A-branch
  master
```



新增 url 與 views

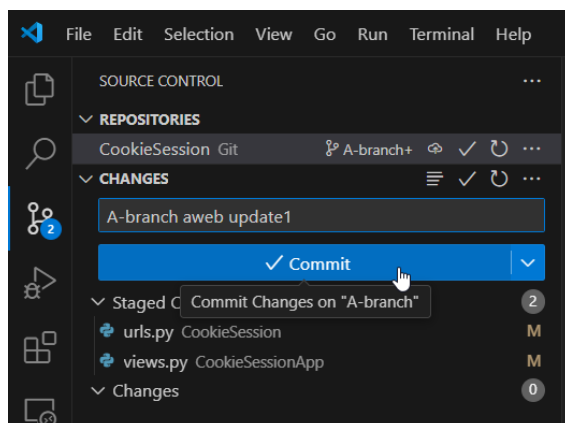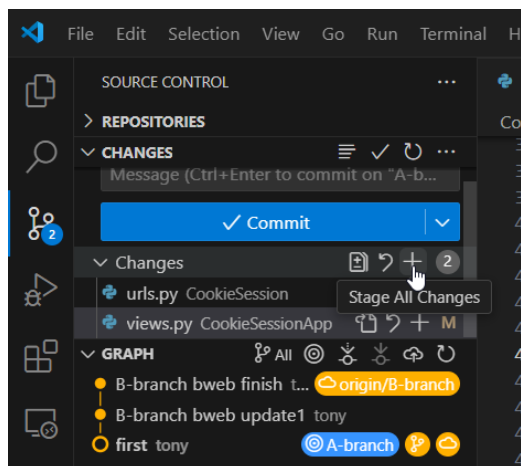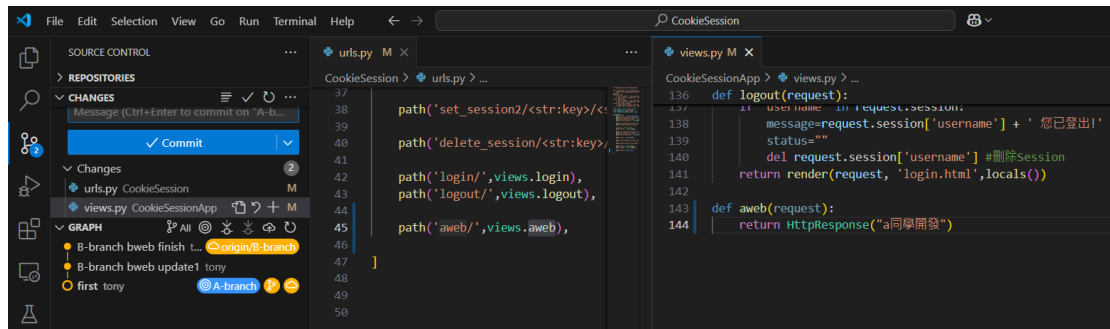

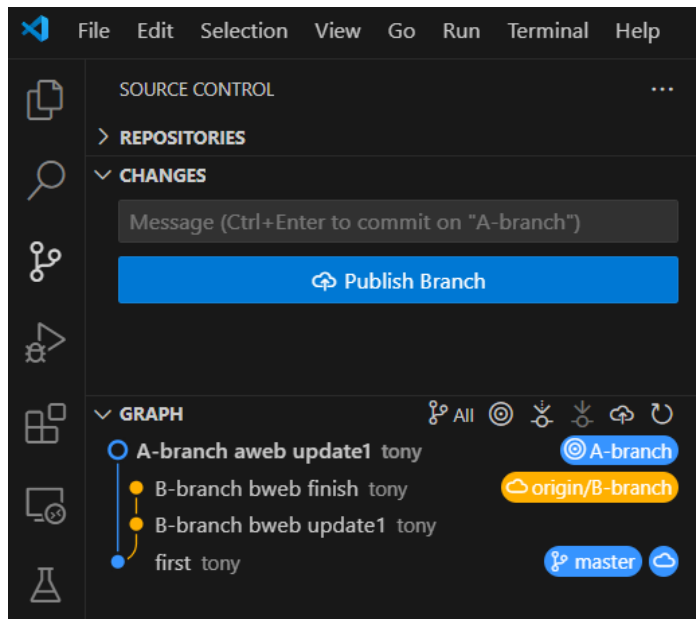

再修改:

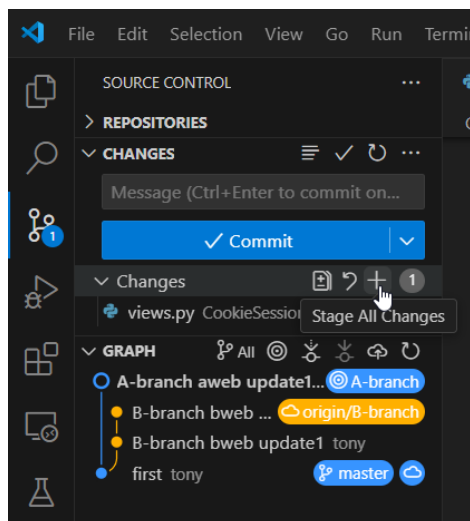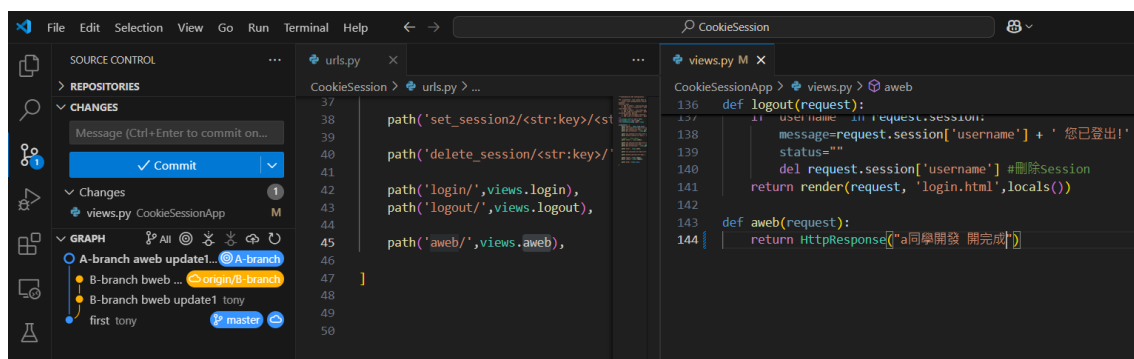

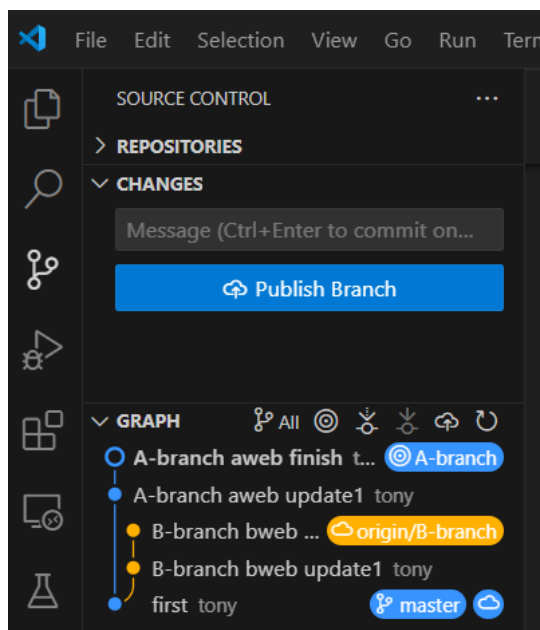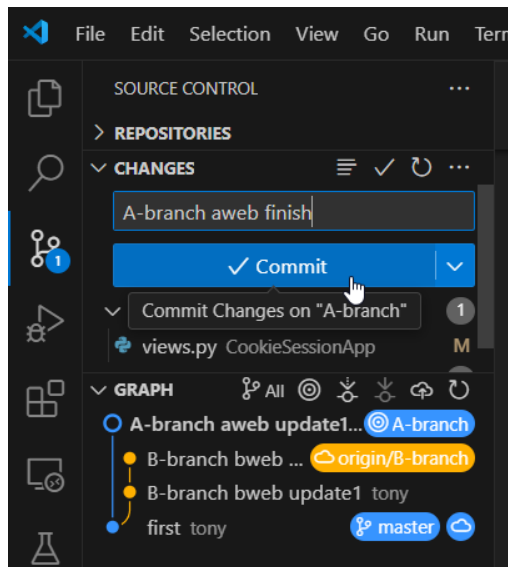

➤ 假設 A 同學負責的開發完畢

```
# git push -u origin A-branch (將B-branch push 到github)
```

```

• (dvds) PS D:\backup\dvds\A_student\CookieSession> git push -u origin A-branch
Enumerating objects: 15, done.
Counting objects: 100% (15/15), done.
Delta compression using up to 8 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (10/10), 964 bytes | 964.00 KiB/s, done.
Total 10 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 4 local objects.
remote:
remote: Create a pull request for 'A-branch' on GitHub by visiting:
remote:   https://github.com/tonyyeh617/CookieSession/pull/new/A-branch
remote:
To https://github.com/tonyyeh617/CookieSession.git
 * [new branch]      A-branch -> A-branch
branch 'A-branch' set up to track 'origin/A-branch'.

• (dvds) PS D:\backup\dvds\A_student\CookieSession> git push -u origin A-branch
Enumerating objects: 15, done.
Counting objects: 100% (15/15), done.
Delta compression using up to 8 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (10/10), 964 bytes | 964.00 KiB/s, done.
Total 10 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 4 local objects.
remote:
remote: Create a pull request for 'A-branch' on GitHub by visiting:
remote:   https://github.com/tonyyeh617/CookieSession/pull/new/A-branch
remote:
To https://github.com/tonyyeh617/CookieSession.git
 * [new branch]      A-branch -> A-branch
branch 'A-branch' set up to track 'origin/A-branch'.

```

- A 與 B 同學負責都完成，假設 A 同學先合併到 master，再由 B 同學合併到 master。

使用 pull request 功能來整合：

- 1、先 A 同學的 A-branch 整合到 master

tonyyeh617/CookieSession at x +

github.com/tonyyeh617/CookieSession/tree/A-branch

tonyyeh617 / CookieSession

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

CookieSession (Public) Pin Unwatch 1

A-branch 3 Branches 0 Tags Go to file Add file <> Code

This branch is 2 commits ahead of master.

tonyyeh617 A-branch aweb finish 6cfbb19 · yesterday 3 Commits

.vscode	first	yesterday
CookieSession	A-branch aweb update1	yesterday
CookieSessionApp	A-branch aweb finish	yesterday
templates	first	yesterday
db.sqlite3	first	yesterday
manage.py	first	yesterday

Comparing master...A-branch x +

github.com/tonyyeh617/CookieSession/compare/master...A-branch

tonyyeh617 / CookieSession

Type to search

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also [compare across forks](#) or [learn more about diff comparisons](#).


base: master ← compare: A-branch ✓ Able to merge. These branches can be automatically merged.

Discuss and review the changes in this comparison with others. [Learn about pull requests](#) Create pull request


2 commits 2 files changed 1 contributor

Commits on Mar 11, 2025

A-branch aweb update1	eecc713 <>
tonyyeh617 committed yesterday	
A-branch aweb finish	6cfbb19 <>
tonyyeh617 committed yesterday	

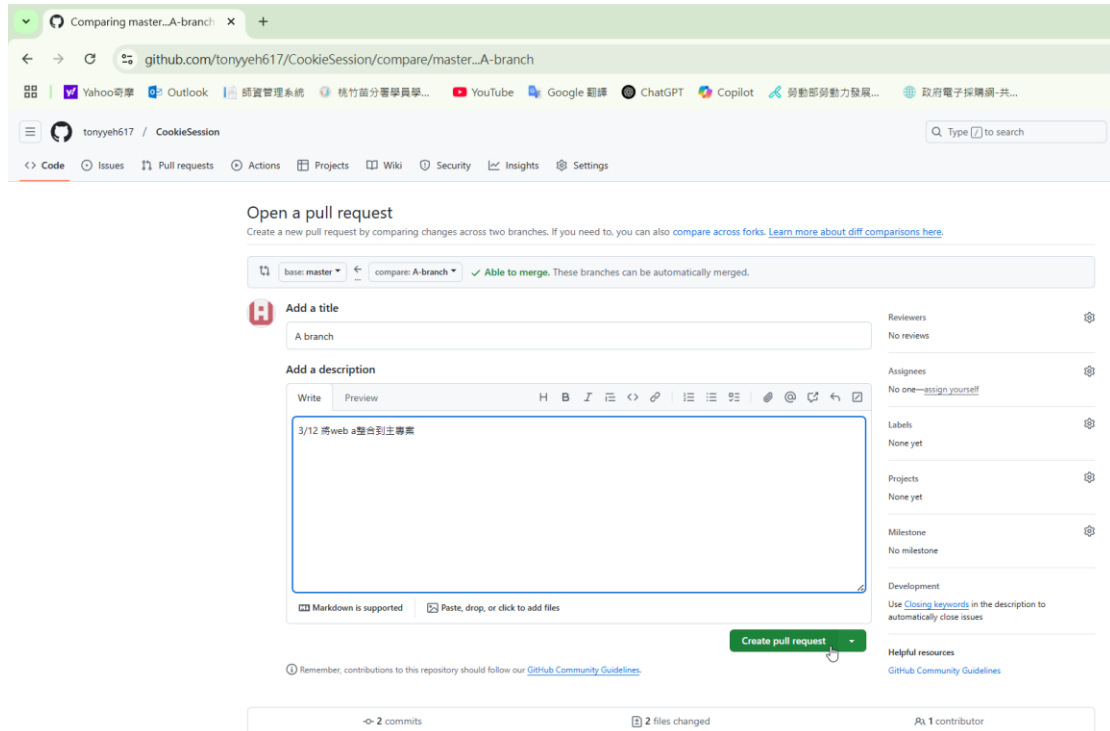

➤ 可以邀請 B 同學檢查

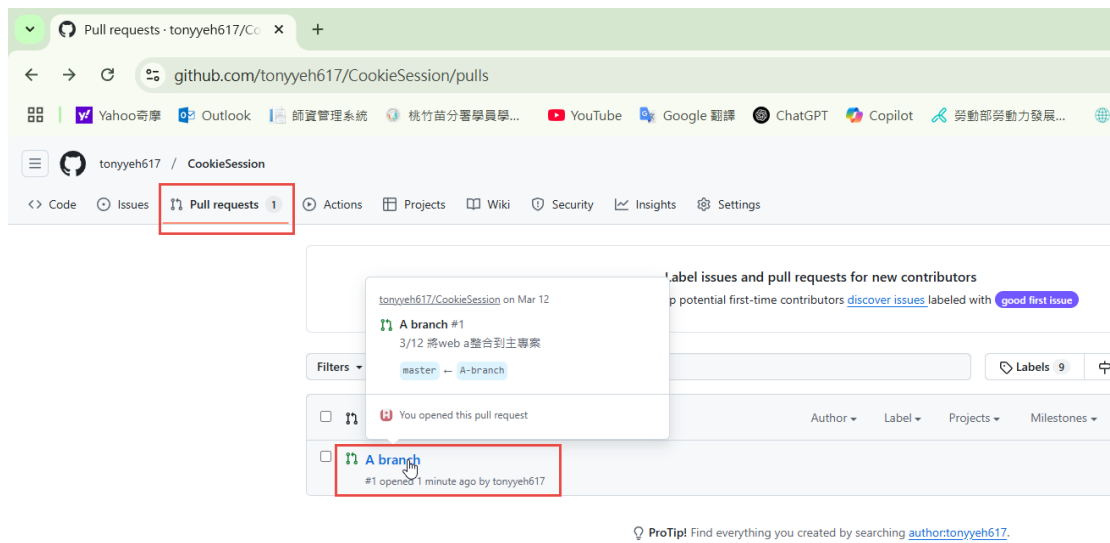

A branch by tonyeh617 · Pull request · CookieSession

tonyeh617 wants to merge 2 commits into master from A-branch

Files changed 2

Changes from all commits

Filter changed files

CookieSession

urls.py

CookieSessionApp

views.py

CookieSession/urls.py

41 41
42 42 path('login/', views.login),
43 43 path('logout/', views.logout),
44 -
45 -
46 +
47 + path('web/', views.web),
48 +
49]
50 50

CookieSessionApp/views.py

140 140 @login_required
141 141 def login(request):
142 142 return render(request, 'login.html', locals())
143 143
144 144 def web(request):
145 145 return HttpResponseRedirect("a等學期 開始")

Viewed Comment on this file

A branch by tonyeh617 · Pull request · CookieSession

tonyeh617 wants to merge 2 commits into master from A-branch

Files changed 2

Changes from all commits

Filter changed files

CookieSession

urls.py

CookieSessionApp

views.py

CookieSession/urls.py

41 41
42 42 path('login/', views.login),
43 43 path('logout/', views.logout),
44 -
45 -
46 +
47 + path('web/', views.web),
48 +
49]
50 50

CookieSessionApp/views.py

140 140 @login_required
141 141 def login(request):
142 142 return render(request, 'login.html', locals())
143 143
144 144 def web(request):
145 145 return HttpResponseRedirect("a等學期 開始")

Write Preview

我的意見:

Markdown is supported Paste, drop, or click to add files

Cancel Add single comment Start a review

A branch by tonyeh617 · Pull request · CookieSession

tonyeh617 wants to merge 2 commits into master from A-branch

Files changed: 2

CookieSession

- url.py
- CookieSessionApp
- views.py

tonyeh617 (Pending) 高幹德好!

Reply...

```
@@ -41,8 +41,9 @@
41 41
42 42     path("login/", views.login),
43 43     path("logout/", views.logout),
44 44
45 45
46 46 +     path("search/", views.search),
47 47 ]
48 48
```

CookieSessionApp/views.py

tonyeh617 (Pending) 才編了!

Reply...

A branch by tonyeh617 · Pull request · CookieSession

tonyeh617 wants to merge 2 commits into master from A-branch

Files changed: 2

CookieSession

- url.py
- CookieSessionApp
- views.py

tonyeh617 (Pending) 高幹德好!

Reply...

```
@@ -41,8 +41,9 @@
41 41
42 42     path("login/", views.login),
43 43     path("logout/", views.logout),
44 44
45 45
46 46 +     path("search/", views.search),
47 47 ]
48 48
```

CookieSessionApp/views.py

tonyeh617 (Pending) 才編了!

Reply...

1/2 files viewed Review in code space **Source changes 2** Viewed

A branch by tonyeh617 - Pull

github.com/tonyeh617/CookieSession/pull/1/files

tonyeh617 / CookieSession

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

A branch #1

tonyeh617 wants to merge 2 commits into master from A-branch

Conversation Commits Checks Files changed 2

Changes from all commits

Filter changed files

CookieSession

url.py

CookieSessionApp

views.py

cookiesession/urls.py

tonyeh617 Pending

請於這裡
@

Reply...

```
41 41  
42 42 path("login/", views.login),  
43 43 path("logout/", views.logout),  
44 -  
45 +  
46 + path("web/", views.web),  
47 47 }  
48 48  
49 49
```

cookiesession/rviews.py

Finish your review

Write Preview H B I T C P L E S D E

可以合併了!

Markdown is supported Paste, drop, or click to add files

Comment

Submit general feedback without explicit approval.

Approve

Full request authors can't approve their own pull request.

Request changes

Full request authors can't request changes on their own pull request.

2 pending comments Abandon review Submit review

➤ 可以由A或B同學按 Merge pull request

tonyeh617/CookieSession at

github.com/tonyeh617/CookieSession/tree/A-branch

tonyeh617 / CookieSession

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

CookieSession (Public)

A-branch 3 Branches 0 Tags

Go to file Add file Code

This branch is 2 commits ahead of master.

tonyeh617 A-branch aweb finish 6c6bb19 · yesterday 3 Commits

.vscode	first	yesterday
CookieSession	A-branch aweb update1	yesterday
CookieSessionApp	A-branch aweb finish	yesterday
templates	first	yesterday
db.sqlite3	first	yesterday
manage.py	first	yesterday

Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also [compare across forks](#) or [learn more about diff comparisons](#).

Browser tabs and address bar: The browser shows a single tab titled "A branch by tonyyh617 · Pull request · GitHub". The address bar displays the URL "github.com/tonyyh617/CookieSession/pull/1".

Open

A branch #1

tonyyeh617 wants to merge 2 commits into master from A-branch

太棒了!

Reply...

Resolve conversation

tonyyeh617 commented now

OwnerAuthor...

3/12 嗨 web 会併到 master

No conflicts with base branch

Merging can be performed automatically.

Merge pull request

You can also merge this with the command line. [View command line instructions.](#)

Add a comment

WritePreview

HBI<>@⌨

3/12 嗨 web 会併到 master

Markdown is supported

Paste, drop, or click to add files

Close with comment

Comment

Remember, contributions to this repository should follow our [GitHub Community Guidelines](#).

💡 **ProTip!** Add `.patch` or `.diff` to the end of URLs for Git's plaintext views.

A branch by tonyyeh617 · Pull x +

github.com/tonyyeh617/CookieSession/pull/1

Yahoo奇摩 Outlook 師資管理系統 桃竹苗分署學員學... YouTube Google 翻譯 ChatGPT Copilot 勞動部勞動力發展... 政府電

A branch #1
tonyyeh617 wants to merge 2 commits into `master` from `A-branch`

太棒了!

Reply...

Resolve conversation

tonyyeh617 commented 4 minutes ago Owner Author

3/12將web a合併到master


No conflicts with base branch
Merging can be performed automatically.

Merge pull request You can also merge this with the command line [View command line instructions](#).


Add a comment

Write Preview H B I `< > @ # / x y z a b c d e f g h i j k l m n o p q r s t u v w`

➤ A 同學開發的程式已進入到 master 中

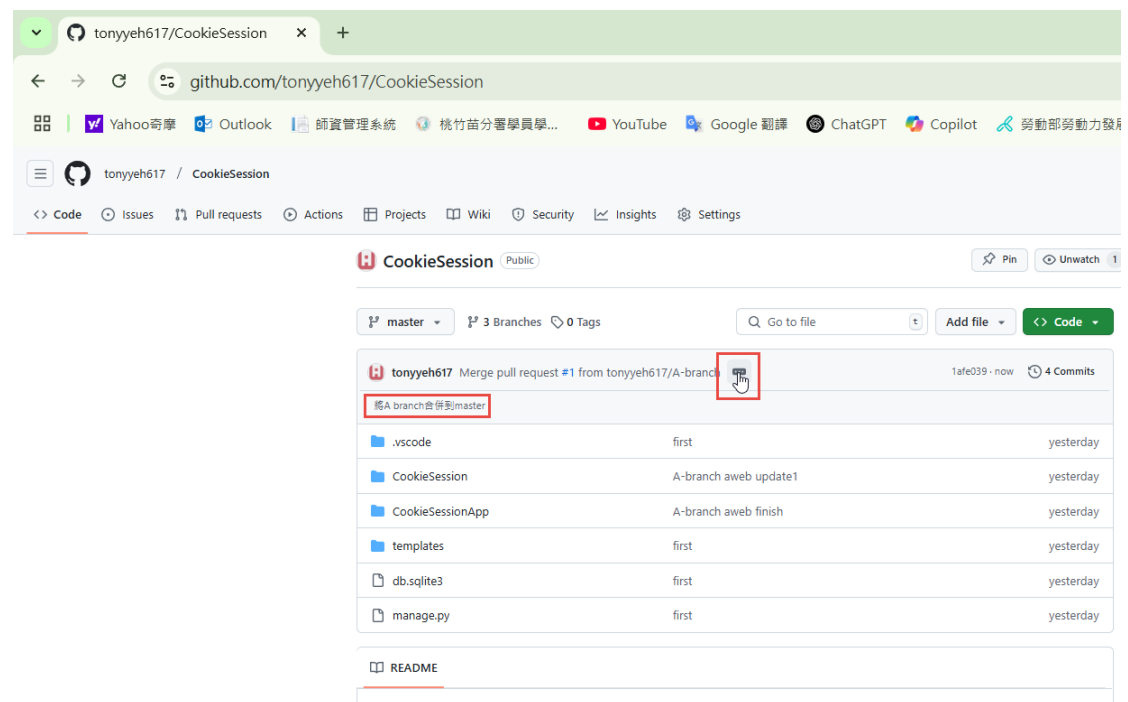

在 A 同學開發平台中:

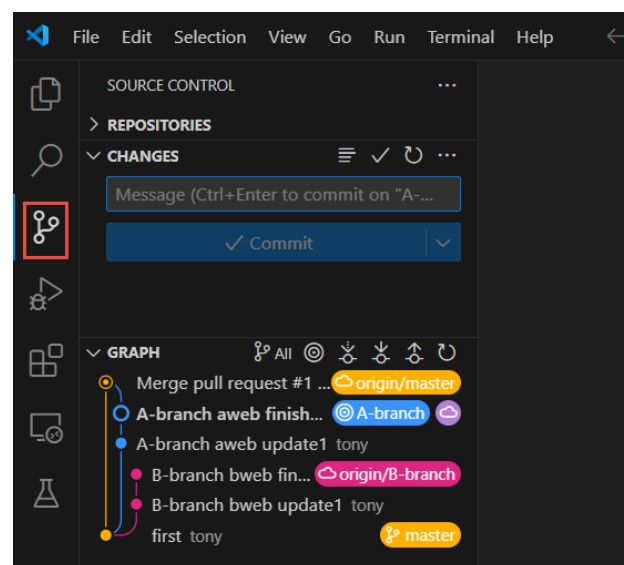

➤ 回到 B 同學，也想要合併到 master

tonyyeh617/CookieSession at x +

github.com/tonyyeh617/CookieSession/tree/B-branch

tonyyeh617 / CookieSession

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

CookieSession (Public)

Pin Unwatch 1

B-branch 3 Branches 0 Tags

Go to file Add file <> Code

This branch is 2 commits ahead of, 3 commits behind master.

Contribute

tonyyeh617 B-branch bweb finish 451fab8 · yesterday 3 Commits

.vscode	first	yesterday
CookieSession	B-branch bweb update1	yesterday
CookieSessionApp	B-branch bweb finish	yesterday
templates	first	yesterday
db.sqlite3	first	yesterday
manage.py	first	yesterday

README

Comparing master...B-branch x +

github.com/tonyyeh617/CookieSession/compare/master...B-branch

tonyyeh617 / CookieSession

<> Code Issues Pull requests Actions Projects Wiki Security Insights Settings

Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also [compare across forks](#) or [learn more about diff comparisons](#).

base: master ← compare: B-branch × Can't automatically merge. Don't worry, you can still create the pull request.

Discuss and review the changes in this comparison with others. [Learn about pull requests](#)

Create pull request




2 commits 2 files changed 1 contributor




Commits on Mar 11, 2025

B-branch bweb update1	3415431 <>
tonyyeh617 committed yesterday	
B-branch bweb finish	451fab8 <>
tonyyeh617 committed yesterday	

git rebase origin/master (更新本地的 origin/master 參照，但不會影響你的當前分支)

- (dvds) PS D:\backup\dvds\B_student\CookieSession> git rebase origin/master
Successfully rebased and updated refs/heads/master.
- (dvds) PS D:\backup\dvds\B_student\CookieSession>

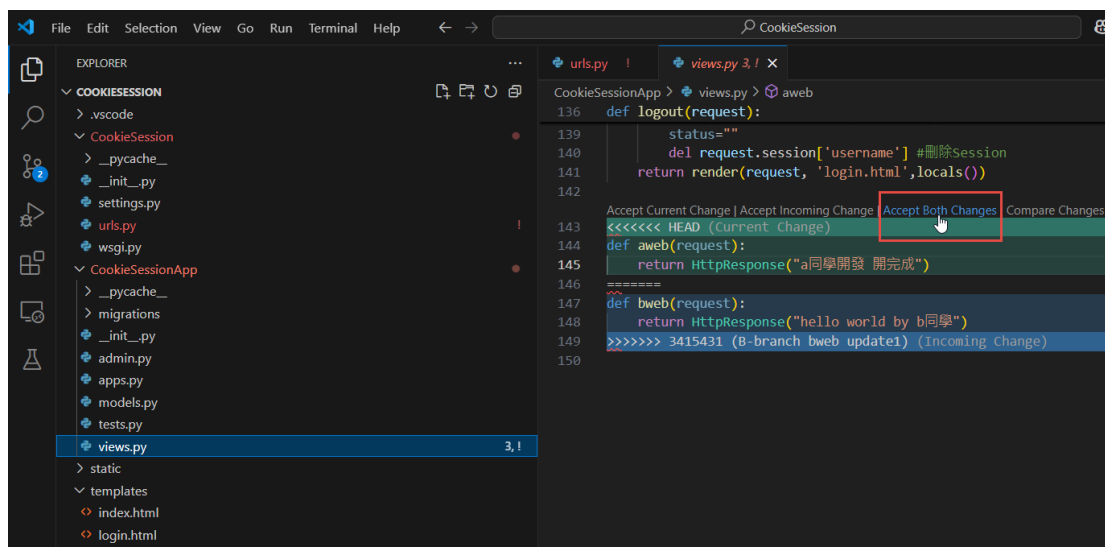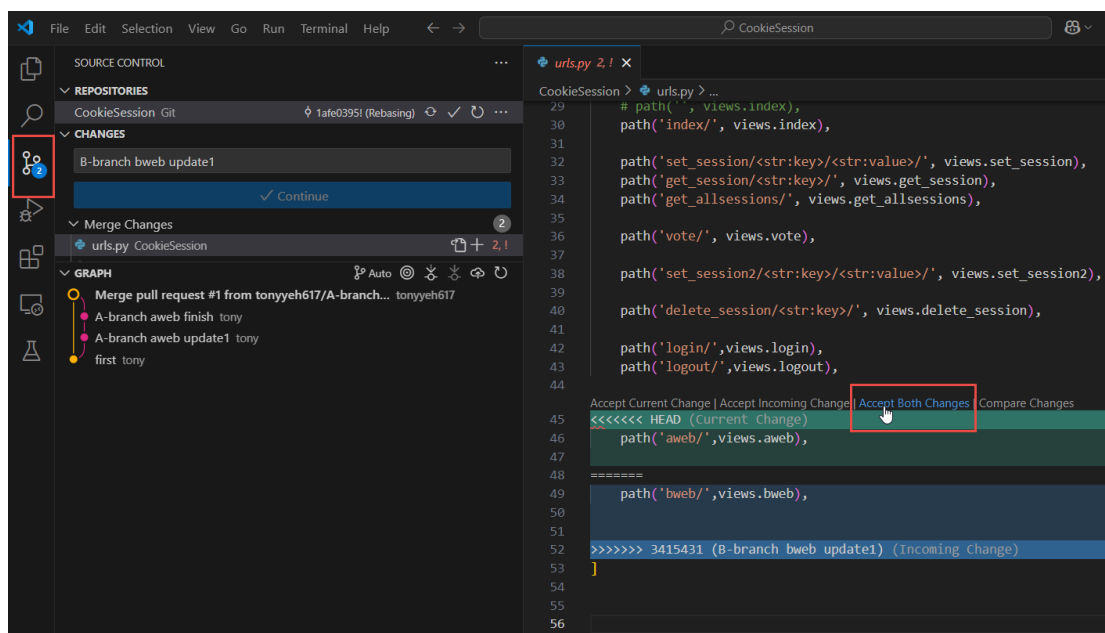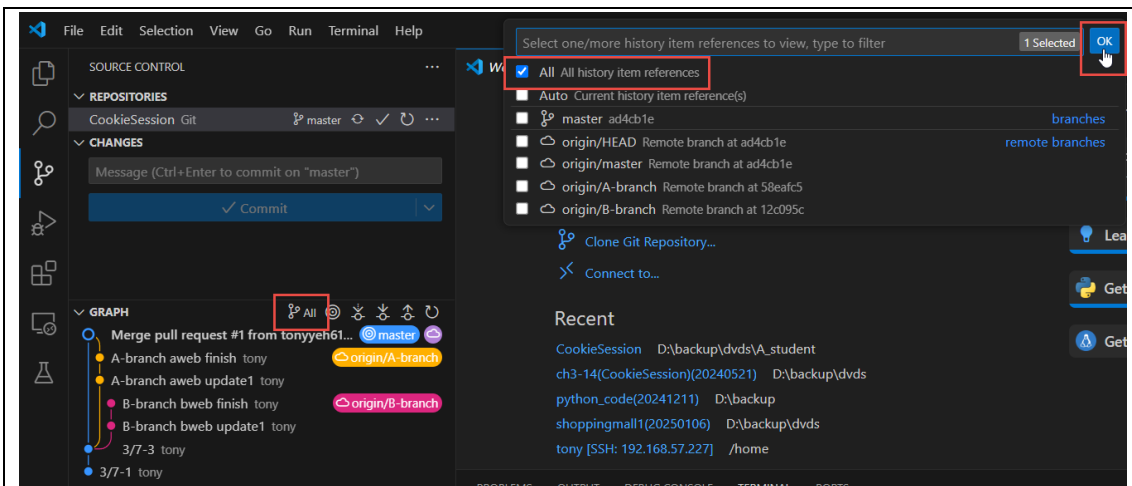

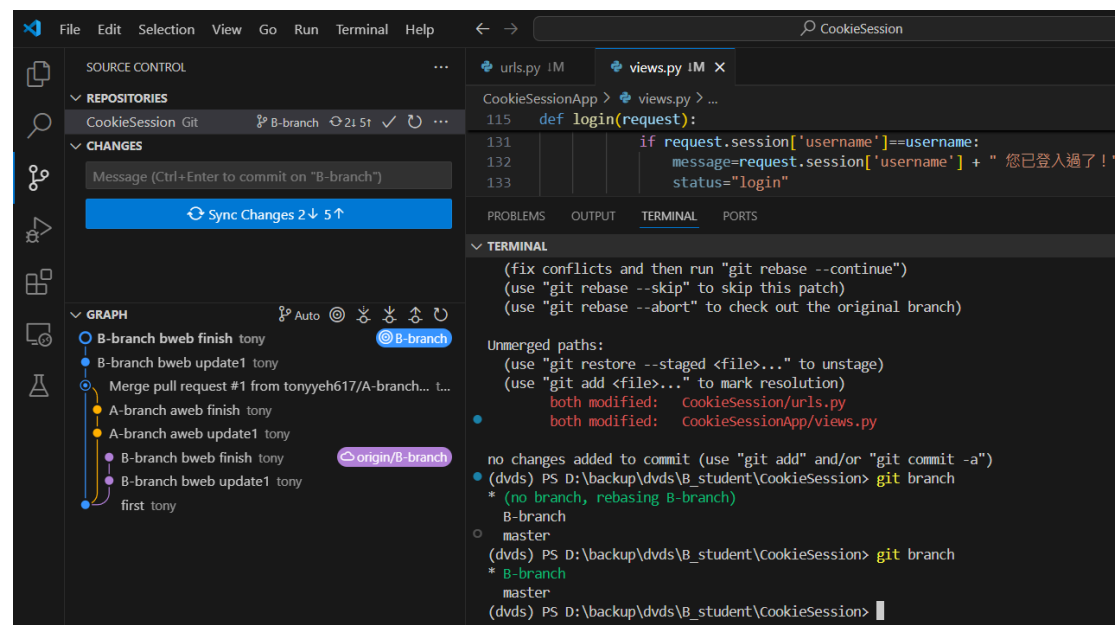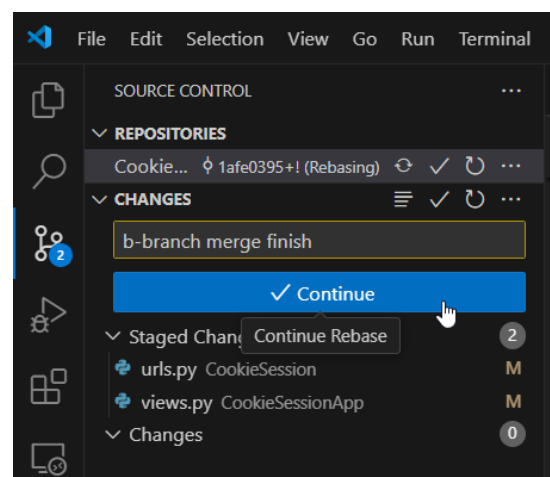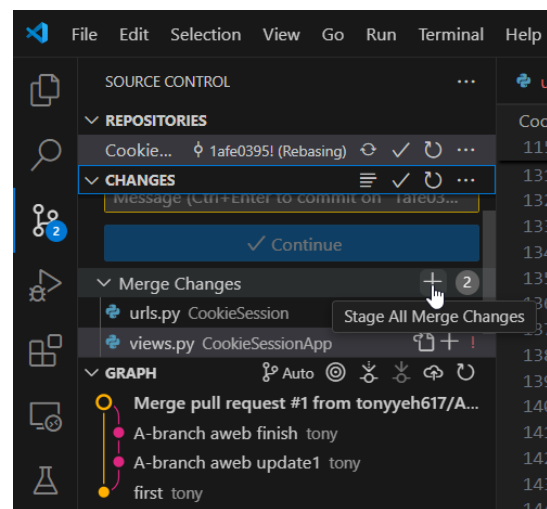

git branch

git push -f

```
(dvds) PS D:\backup\dvds\B_student\CookieSession> git branch
* B-branch
  master

(dvds) PS D:\backup\dvds\B_student\CookieSession> git push -f
Enumerating objects: 15, done.
Counting objects: 100% (15/15), done.
Delta compression using up to 8 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (10/10), 973 bytes | 973.00 KiB/s, done.
Total 10 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 4 local objects.
To https://github.com/tonyyeh617/CookieSession.git
+ 451fab8...aa73ccc B-branch -> B-branch (forced update)

(dvds) PS D:\backup\dvds\B_student\CookieSession> 
```

tonyyeh617/CookieSession

github.com/tonyyeh617/CookieSession/tree/master

tonyyeh617 / CookieSession

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

CookieSession Public

B-branch had recent pushes 1 minute ago

Compare & pull request

master 3 Branches 0 Tags

Go to file

Code

tonyyeh617 Merge pull request #1 from tonyyeh617/A-branch 1afe039 · 54 minutes ago 4 Commits

.vscode	first	yesterday
CookieSession	A-branch aweb update1	yesterday
CookieSessionApp	A-branch aweb finish	yesterday
templates	first	yesterday
db.sqlite3	first	yesterday
manage.py	first	yesterday

README

About

No description, website, or topics provided.

Activity

0 stars

1 watching

0 forks

Releases

No releases published

Create a new release


Packages

No packages published

Publish your first package

Languages

Python 90.2% HTML 9.8%

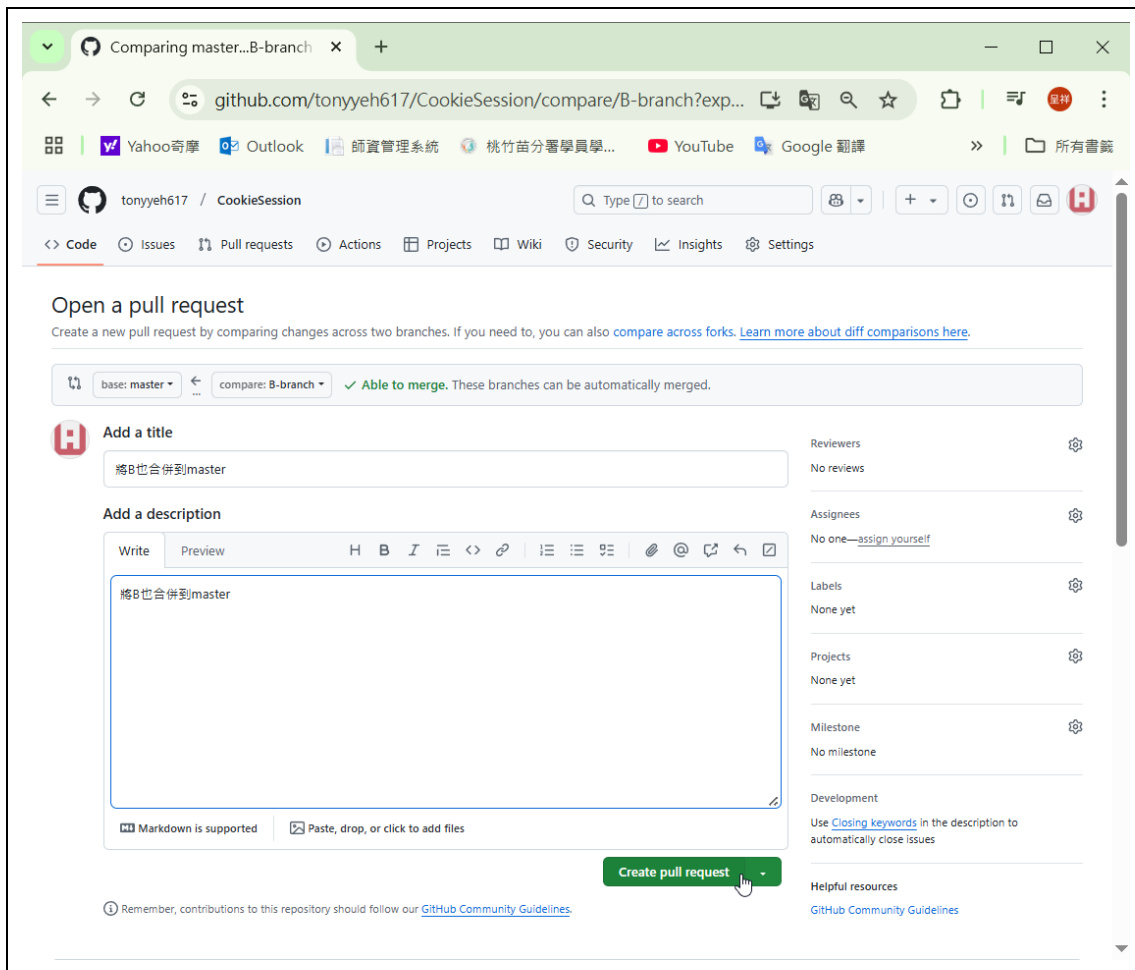

- 可以由A或B同學按 Merge pull request

將B也合併到master by tonyyeh617

github.com/tonyyeh617/CookieSession/pull/2

Yahoo奇摩 Outlook 師資管理系統 桃竹苗分署學員學... YouTube Google 翻譯 所有書籤

Code Issues Pull requests 1 Actions Projects Wiki Security Insights Settings

將B也合併到master #2

Open

tonyyeh617 wants to merge 2 commits into master from 8-branch

Edit Code

Conversation 0 Commits 2 Checks 0 Files changed 2 +7 -1

tonyyeh617 commented now

Owner

將B也合併到master

tonyyeh617 added 2 commits 5 minutes ago

8-branch bweb update1 98a7c25

8-branch bweb finish aa73ccc

No conflicts with base branch

Merging can be performed automatically.

Merge pull request You can also merge this with the command line. [View command line instructions.](#)

Add a comment

Write Preview H B I

Add your comment here...

Reviewers

No reviews

Still in progress? [Convert to draft](#)

Assignees

No one—[assign yourself](#)

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

None yet

Notifications

Customize

Unsubscribe

將B也合併到master by tonyyeh617 x +

github.com/tonyyeh617/CookieSession/pull/2

將B也合併到master #2
tonyyeh617 wants to merge 2 commits into master from B-branch

Commit message
Merge pull request #2 from tonyyeh617/B-branch

Extended description
將B也合併到master

This commit will be authored by 150008626+tonyyeh617@users.noreply.github.com.

Confirm merge Cancel

Add a comment

Write Preview H B I

Add your comment here...

Markdown is supported Paste, drop, or click to add files

Close pull request Comment

Labels
None yet

Projects
None yet

Milestone
No milestone

Development
Successfully merging this pull request may close these issues.
None yet

Notifications
Customize
Unsubscribe
You're receiving notifications because you're watching this repository.

1 participant

Lock conversation

github.com/tonyyeh617/CookieSession/pulls

tonyyeh617 / CookieSession

Type to search

Code Issues Pull requests 1 Actions Projects Wiki Security Insights Settings

Dismiss

Tests for new contributors
Discover issues labeled with good first issue

Filters is:pr is:open

Labels 9 Milestones 0 New pull request

1 Open 2 Closed You opened this pull request

Merge pull request #2 from tonyyeh617/B-branch
#3 opened 1 minute ago by tonyyeh617

ProTip! Exclude everything labeled bug with -label:bug.

tonyyeh617 / CookieSession

Merge pull request #2 from tonyyeh617/B-branch #3

tonyyeh617 wants to merge 1 commit into `B-branch` from `master`

Conversation 0 Commits 1 Checks 0 Files changed 0 +0 -0

tonyyeh617 commented 1 minute ago

將B也合併到master

Merge pull request #2 from tonyyeh617/B-branch

No conflicts with base branch
Merging can be performed automatically.

Merge pull request

Add a comment

Write Preview

Add your comment here...

Reviews

No reviews

Still in progress? [Convert to draft](#)

Assignees

No one—[assign yourself](#)

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these

github.com/tonyyeh617/CookieSession/pull/3

Merge pull request #2 from tonyyeh617/B-branch #3

tonyyeh617 wants to merge 1 commit into `B-branch` from `master`

Conversation 0 Commits 1 Checks 0 Files changed 0 +0 -0

tonyyeh617 commented 1 minute ago

將B也合併到master

Merge pull request #2 from tonyyeh617/B-branch

Commit message

Merge pull request #3 from [tonyyeh617/master](#)

Extended description

Merge pull request #2 from tonyyeh617/B-branch

This commit will be authored by 150008626+tonyyeh617@users.noreply.github.com.

Confirm merge Cancel

Reviews

No reviews

Still in progress? [Convert to draft](#)

Assignees

No one—[assign yourself](#)

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Successfully merging this pull request may close these issues.

None yet

Notifications

Customize

將 A 與 B 同學都更新

git branch


git checkout master

git branch

```
PS D:\backup\dvds\A_student\CookieSession> git branch
* A-branch
  master
PS D:\backup\dvds\A_student\CookieSession> git checkout master
Switched to branch 'master'
PS D:\backup\dvds\A_student\CookieSession> git branch
A-branch
* master
```

git pull origin master

```
PS D:\backup\dvds\A_student\CookieSession> git branch
* A-branch
  master
PS D:\backup\dvds\A_student\CookieSession> git checkout master
Switched to branch 'master'
PS D:\backup\dvds\A_student\CookieSession> git branch
A-branch
* master
PS D:\backup\dvds\A_student\CookieSession> git pull origin master
From https://github.com/tonyyeh617/CookieSession
* branch          master      -> FETCH_HEAD
Updating 238a310..35e20af
Fast-forward
 CookieSession/urls.py      | 4 ++++
 CookieSessionApp/views.py | 5 +++++
 2 files changed, 9 insertions(+)
```

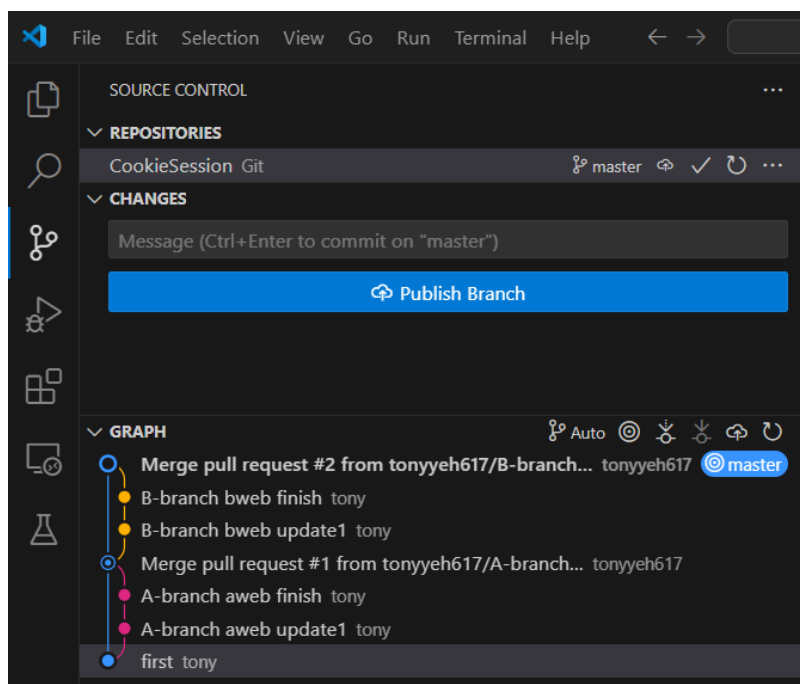

Reference:

<https://www.youtube.com/watch?v=AFMoQqH6t3A>


補充：Git 的各種指令

本機指令

- `cd` (chang directory)：指定下層資料夾位置。
- `cd ..`：回到上層資料夾。
- `mkdir` (make directory)：建立資料夾。
- `rm` (remove file)：刪除檔案。
- `rm -rf`：強制刪除資料夾（包含裡面檔案）。
- `dir / ls`：顯示資料夾內所有檔案。
- `touch index.html`：建立檔案，`index.html` 可替換。
- `code project`：打開指定 `project`。
- `git config --global user .name "你的姓名"`：建立 `git` 創建人姓名。
- `git config --global user .email "email"`：建立 `git` 創建人 `email`。
- `git config --list`：查詢 `git` 資料。
- `git --version`：`git` 版本。
- `ctrl+L`：刪除指令碼，但能找出前面打的指令。

專案本地端指令：


上傳流程圖：

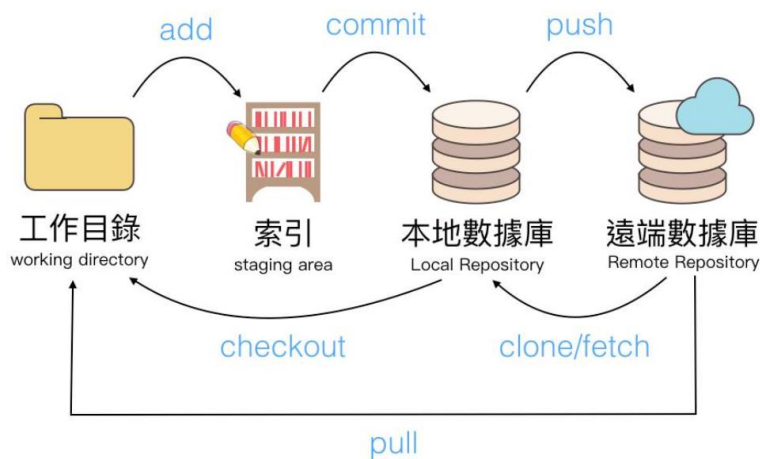



- `git init`：建立 `.git` 資料夾進行追蹤（`.git` 資料夾是隱藏起來的）。
- `git status`：`git` 狀態。
- `git add index.html`：上傳單一檔案到 `staging area`。
- `git add .`：上傳全部檔案到 `staging area`。
- `git add -u`：只上傳修改過的檔案到 `staging area`。
- `git commit -m "填寫此版本資訊"`：`commit` 到 `Local Repository`。
- `git log`：`commit` 的歷史。

- `git reflog`：commit 的歷史（包含被 `reset` 過的檔案）。
- `git reset HEAD^`：還原 commit 並將檔案退回到工作目錄，一個[^]代表退回一個，也可用數字 `HEAD^2`。
- `git reset HEAD^ --hard`：還原 commit 並刪除檔案。
- `git reset <commit 編號>`：可以還原已被刪除的 commit。
- `git branch`：查看分支。
- `git branch name`：新增分支。
- `git branch - <old name><new name>`：更改分支名字。
- `git checkout`：移動分支。
- `git merge`：合併分支，有兩種情況。

1. 快轉分支

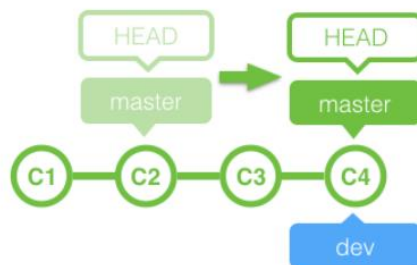


2. 無快轉分支

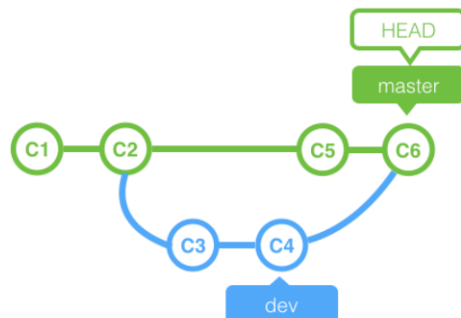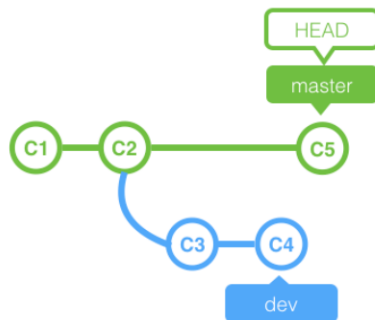




專案遠端指令：


- `git remote`：查看遠端數據庫列表。
- `git remote -v`：查看遠端數據庫列表（含 `url`）。
- `git remote add <遠端數據庫名稱><遠端數據庫 url>`：建立遠端數據庫。
- `git push origin <數據庫名稱，預設為 origin>`：上傳到遠端數據庫。
- `git pull <數據庫名稱><分支名稱>`：下載同步更新本地數據庫。
- `git clone "url"`：下載遠端數據庫。

有問題時可以清空：

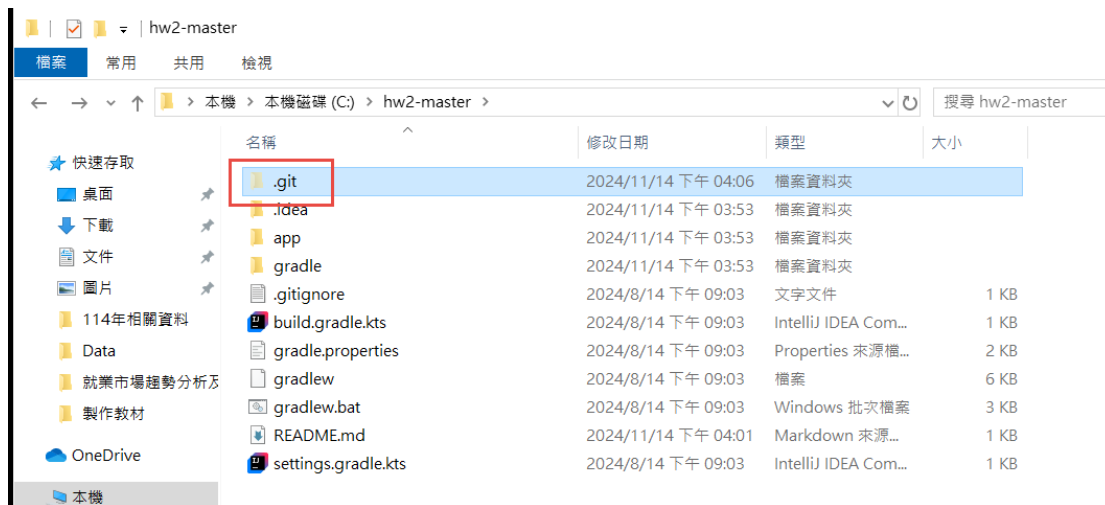

➤ 刪除 repositories(儲存庫)

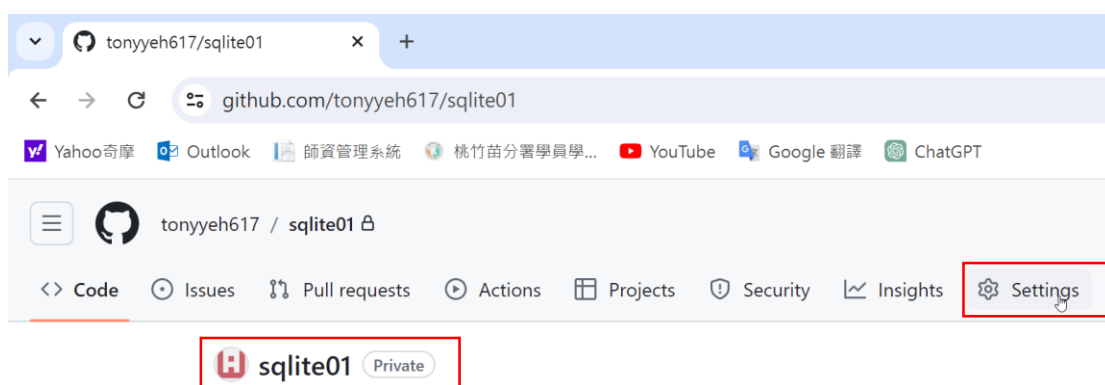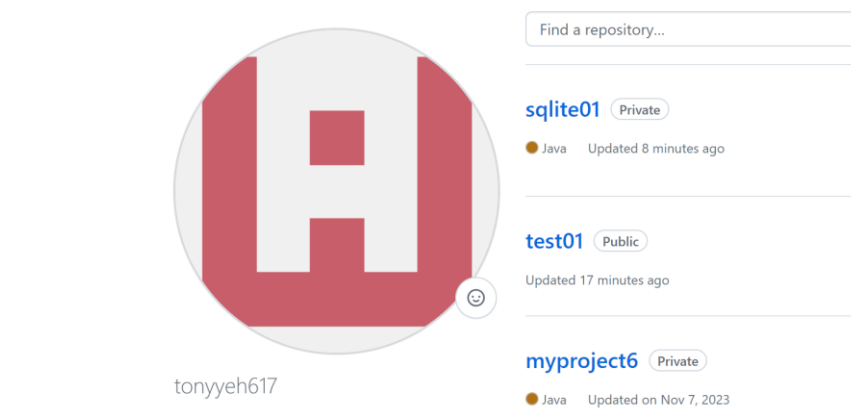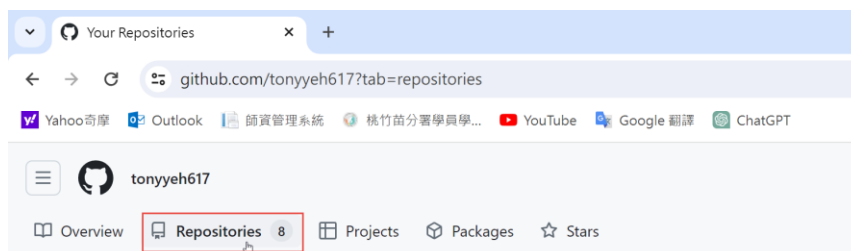


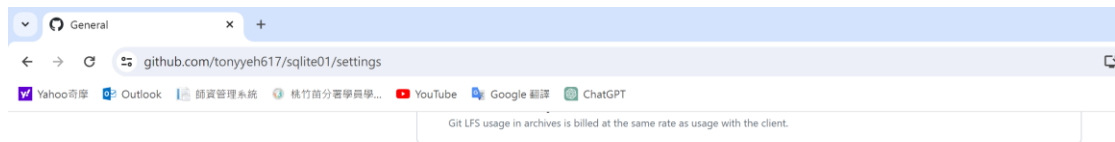


Pushes

- ☐ Limit how many branches and tags can be updated in a single push [Beta](#)
Pushes will be rejected if they attempt to update more than this. [Learn more about this setting](#), and send us your [feedback](#).

Danger Zone

- Change repository visibility**
This repository is currently private. [Change visibility](#)
- Disable branch protection rules**
Disable branch protection rules enforcement and APIs. [Disable branch protection rules](#)
- Transfer ownership**
Transfer this repository to another user or to an organization where you have the ability to create repositories. [Transfer](#)
- Archive this repository**
Mark this repository as archived and read-only. [Archive this repository](#)
- Delete this repository**
Once you delete a repository, there is no going back. Please be certain. [Delete this repository](#)

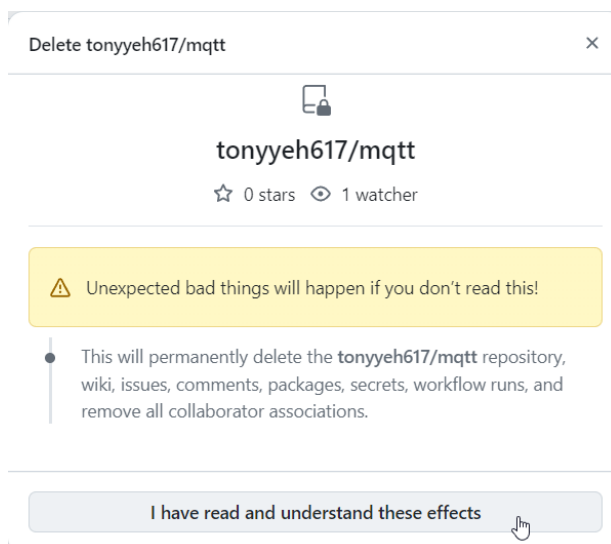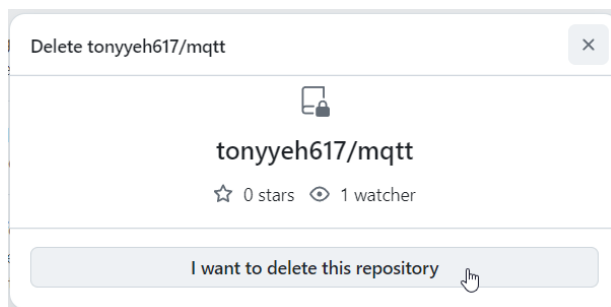

Delete tonyyeh617/mqtt



tonyyeh617/mqtt

☆ 0 stars 👁 1 watcher

To confirm, type "tonyyeh617/mqtt" in the box below

Delete this repository



git 的版本控管 每次 git push 就會有一筆 commit 記錄

合併指令 git add . { . 代表全部 }

git commit -m "202411131529" {commit 是提交記錄}

git push {提交電腦端內容}

git pull 是拉取

完整提交指令及流程 由上而下

git pull

git add .

git commit -m "202411131529"

git push

一次指令

git pull && git add . && git commit -m "202411131529" && git push

git remote -v

可以列出目前的倉庫路徑，

git remote 可以新增、刪減

參考網站:

https://www.youtube.com/watch?v=E_Nd0anNI6M

reference:

- 1、<https://www.youtube.com/watch?v=Zd5jSDRjWfA>
- 2、<https://www.youtube.com/watch?v=TjHslMeJ81k>
- 3、<https://www.youtube.com/watch?v=B-SZqdlU59g&t=17s>
- 4、<https://www.youtube.com/watch?v=P-nbNgIzlYE>