

第六章 第三方平台(Django 與 PostgreSQL)	2
詢問 chatgpt.....	2
刪資服務.....	31

第六章 第三方平台(Django 與 PostgreSQL)

➤ 詢問 chatgpt

我有django+mysql的程式，我要怎麼發佈到免費平台？

要將 Django + MySQL 程式發佈到免費的平台，以下是詳細步驟與建議平台：

1. 選擇免費平台

以下是一些支持 Django 的免費雲平台：

- **Render:** 提供免費的 Web Service 支持，且能輕鬆設定 Django。
- **Railway:** 支持 Django 應用程式和 MySQL。
- **Vercel (與 Django Rest Framework 搭配):** 可用於部署 API。
- **Heroku:** 免費方案支援 Django，但 MySQL 需透過外部插件連接。

➤ **Railway:**支持 Django 應用程式和 MySQL

Wep: <https://railway.app/>

➤ **Render:** 提供免費的 Web Service 支持，且能輕鬆設定 Django


Wep: <https://dashboard.render.com/>

Reference:

<https://www.youtube.com/watch?v=wczWm8j4v9w>

➤ 建立 PostgreSQL

註冊與登入 Render，按「New」➡「PostgreSQL」

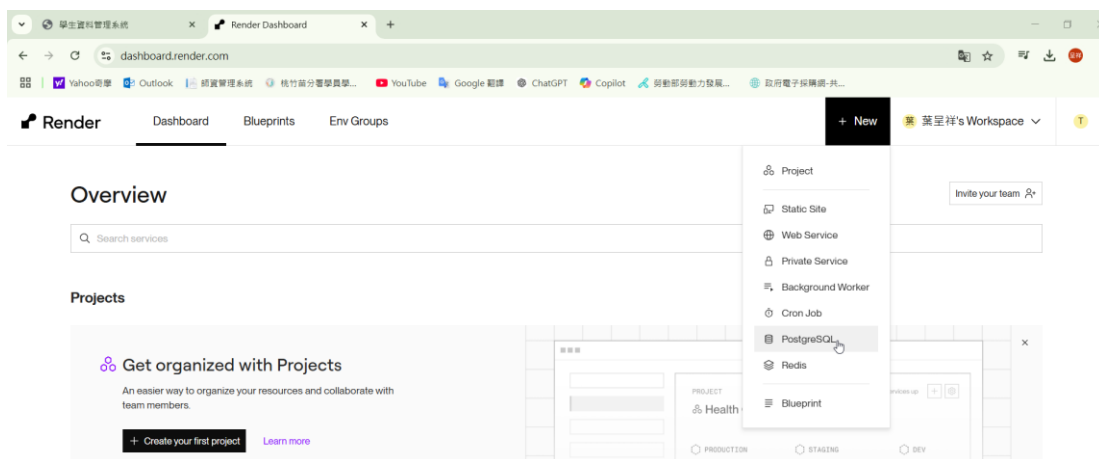

輸入 Name(唯一性)

The screenshot shows the 'New PostgreSQL' form in the Render dashboard. The 'Name' field is highlighted with a red box and contains the text 'ch3_12-django-render'. Below it, the 'Project' section is shown, which prompts the user to 'Create a new project to add this to?' and includes a '+ Create a project' button. The 'Database' field is optional and contains a placeholder 'randomly generated unless specified'.

New PostgreSQL [View docs](#)

Name
A unique name for your PostgreSQL instance.

Project Optional
Add this database to a [project](#) once it's created.

Create a new project to add this to?
You don't have any projects in this workspace. [Projects](#) allow you to group resources into environments so you can better manage related resources.

[+ Create a project](#)

Database Optional
The PostgreSQL `dbname`.

The screenshot shows the second part of the 'New PostgreSQL' form. The 'Region' dropdown is highlighted with a red box and shows 'Oregon (US West)'. Below it, the 'PostgreSQL Version' is set to '16'. The 'Datadog API Key' field is optional. The 'Plan Options' section is expanded, showing the 'Free' plan selected with a red box. The 'Free' plan details are: 256 MB (RAM), 0.1 CPU, and 1 GB (Storage).

Region
Your services in the same [region](#) can communicate over a [private network](#).

PostgreSQL Version

Datadog API Key Optional
The API key to use for sending metrics to Datadog. Setting this will enable Datadog monitoring.


Plan Options

Instance Type
Set your database's RAM and CPU. You can change your instance type later.


[New](#)
You can now set your database's storage separately from its instance type. [Learn more](#).


Free For testing out PostgreSQL on Render

Free	256 MB (RAM)
\$0 / month	0.1 CPU
	1 GB (Storage)

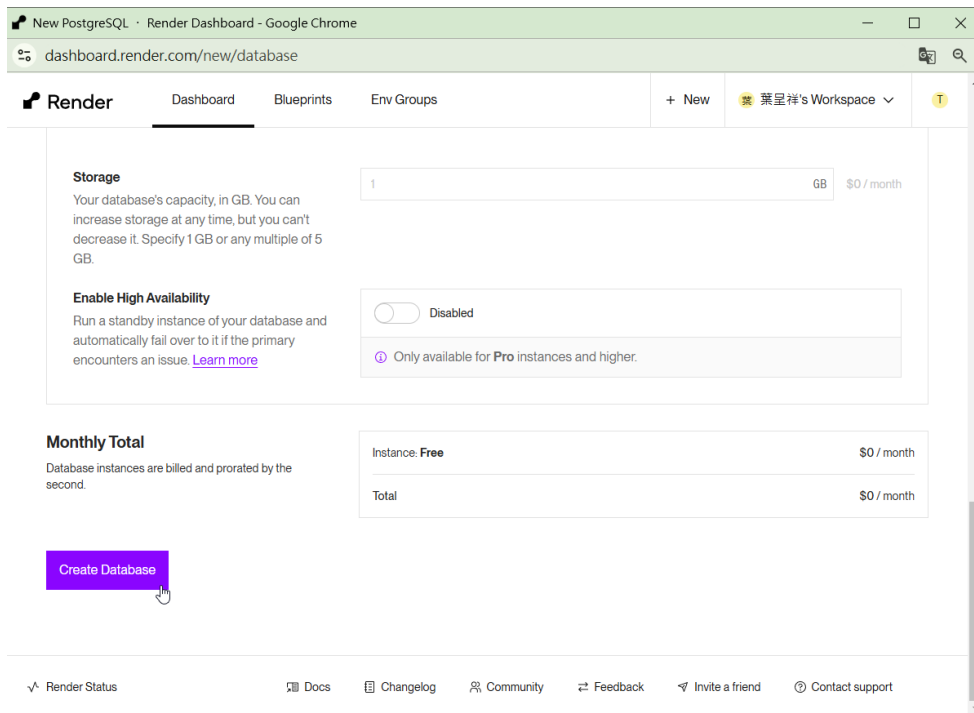

選擇 Connect，即可顯示「External Database URL」與「PSQL Command」

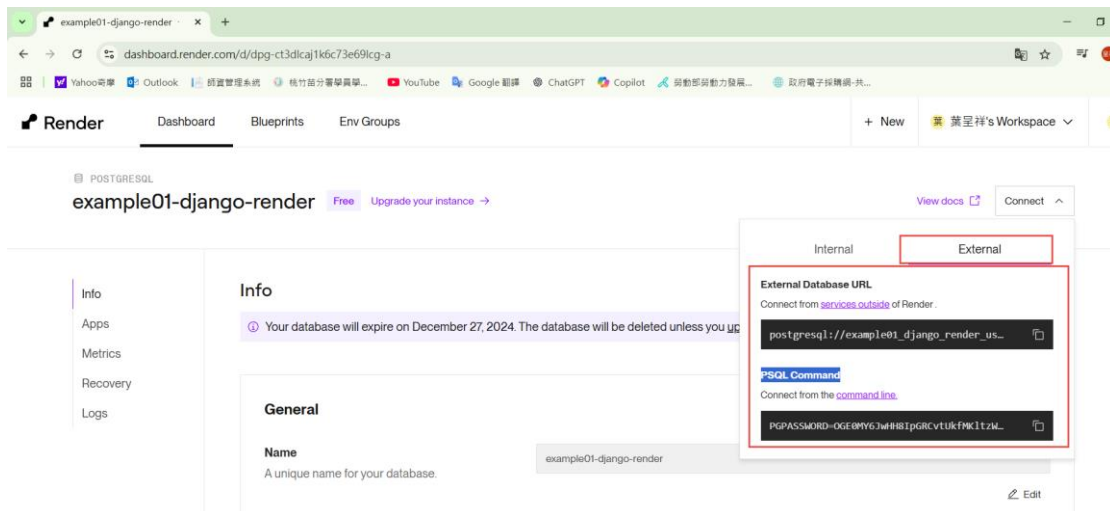

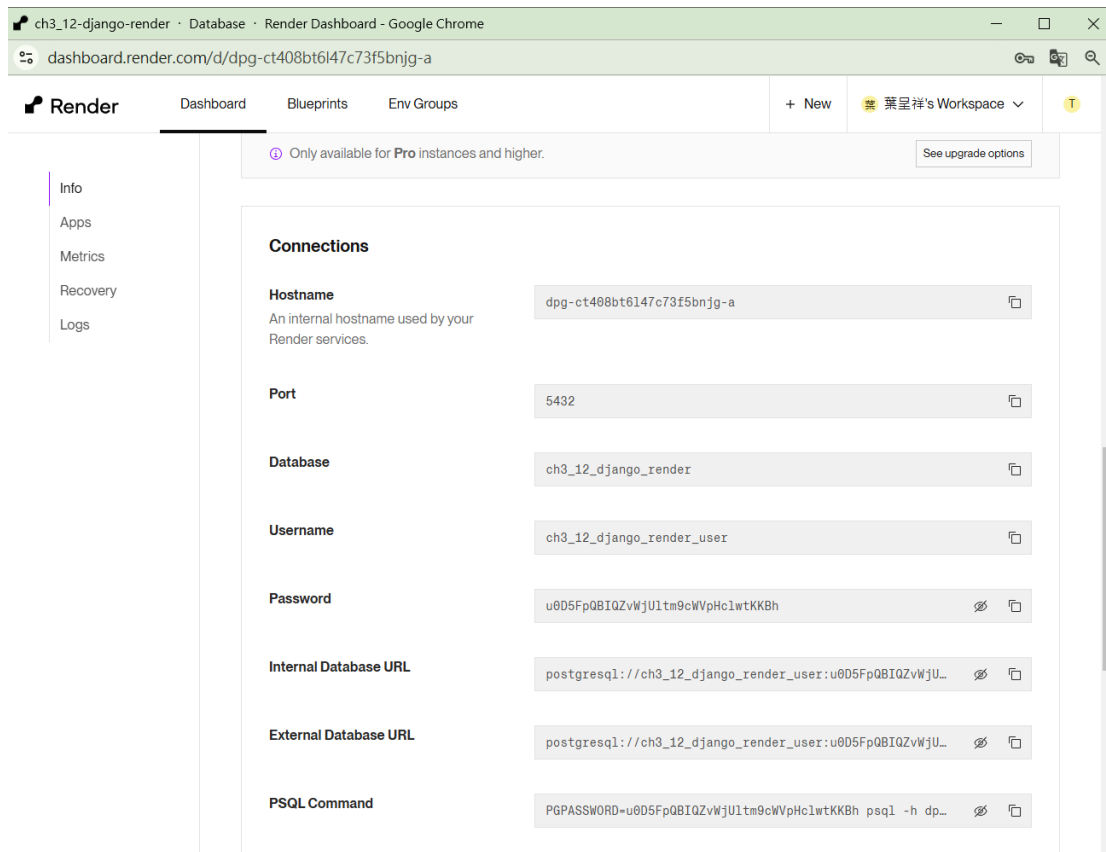**External Database URL:**

postgresql://example01_django_render_user:OGE0MY6JwHH8lpGRCvtUkfMKltzW6m4Q@dpg-ct3dlcaj1k6c73e69lcg-a.oregon-postgres.render.com/example01_django_render

PSQL Command:

PGPASSWORD=OGE0MY6JwHH8lpGRCvtUkfMKltzW6m4Q psql -h dpg-ct3dlcaj1k6c73e69lcg-a.oregon-postgres.render.com -U example01_django_render_user example01_django_render

➤ 將專案的資料庫修正成線上服務的 postgresql

```
# pip install dj-database-url
```

在 Django 中的 settings.py 輸入:

```
import dj_database_url
```

```
settings.py x
ch3_12 > settings.py > ...
1  """
2  Django settings for sample01 project.
3
4  Generated by 'django-admin startproject' using Django 4.1.
5
6  For more information on this file, see
7  https://docs.djangoproject.com/en/4.1/topics/settings/
8
9  For the full list of settings and their values, see
10 https://docs.djangoproject.com/en/4.1/ref/settings/
11 """
12 import dj_database_url
13
14 from pathlib import Path
15 import os
16
```

在 Django 中的 settings.py 輸入:

import dj_database_url

DATABASES["default"]=dj_database_url.parse("postgresql://example01_django_render_user:OGE0MY6JwHH8IpGRCvtUkfMKltzW6m4Q@dpg-ct3dlcaj1k6c73e69lcg-a.oregon-postgres.render.com/example01_django_render")

其中"""內為 External Database URL



```
settings.py x
ch3_12 > settings.py > ...
91 }
92 }
93
94 DATABASES["default"]=dj_database_url.parse("postgresql://example01_django_render_user:OGE0MY6JwHH8IpGRCvtUkfMKltzW6m4Q@dpg-ct3dlcaj1k6c73e69lcg-a.oregon-postgres.render.com/example01_django_render")
95
96 # Password validation
97 # https://docs.djangoproject.com/en/4.1/ref/settings/#auth-password-validators
98
99 AUTH_PASSWORD_VALIDATORS = [
100     {
101         'NAME': 'django.contrib.auth.password_validation.UserAttributeSimilarityValidator',
102     },
103     {
104         'NAME': 'django.contrib.auth.password_validation.MinimumLengthValidator',
105     },
106     {
107         'NAME': 'django.contrib.auth.password_validation.CommonPasswordValidator',
108     },
109     {
110         'NAME': 'django.contrib.auth.password_validation.NumericPasswordValidator',
111     },
112 ]
```

```
# pip install psycopg2-binary
# python .\manage.py makemigrations
# python .\manage.py migrate
```

- 下載並安裝 DBserver Community

<https://dbeaver.io/>

設定如下:

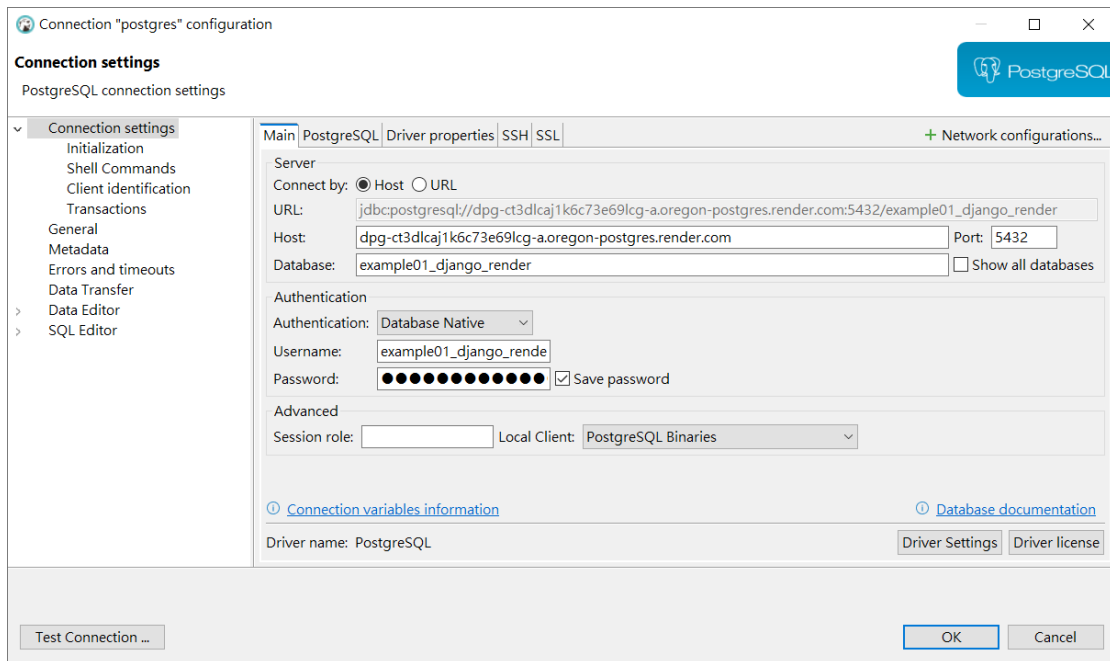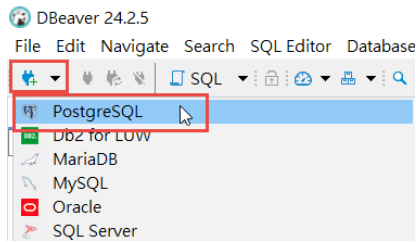

External Database URL:

postgresql://ch3_12_django_render_user(username):u0D5FpQBIQZvWjUItm9cWVpHclwtKKBh(password)@dpg-ct408bt6l47c73f5bnjg-a.oregon-postgres.render.com(host)/ch3_12_django_render(Database)

PSQL Command:


PGPASSWORD=u0D5FpQBIQZvWjUItm9cWVpHclwtKKBh psql -h dpg-ct408bt6l47c73f5bnjg-a.oregon-postgres.render.com -U ch3_12_django_render_user ch3_12_django_render

Host: dpg-ct408bt6l47c73f5bnjg-a.oregon-postgres.render.com

Database: ch3_12_django_render


Username: ch3_12_django_render_user

Password: u0D5FpQBIQZvWjUItm9cWVpHclwtKKBh

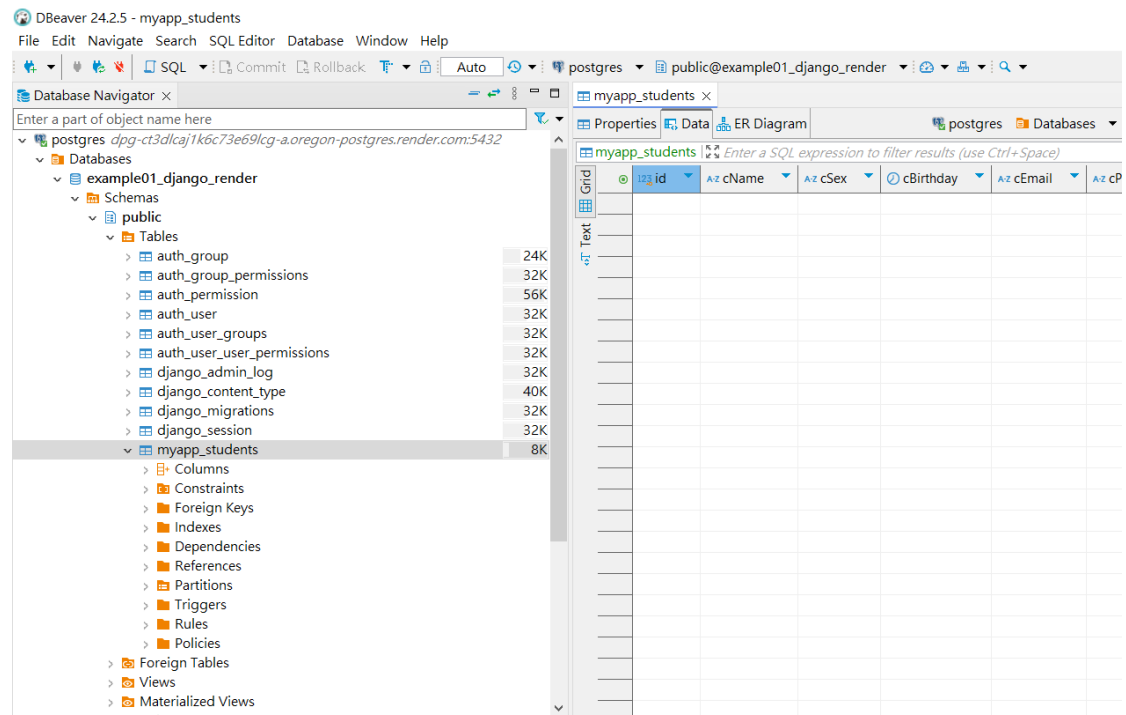

● 資料庫資料轉移(若平台已有資料)

將資料匯出成 csv 檔

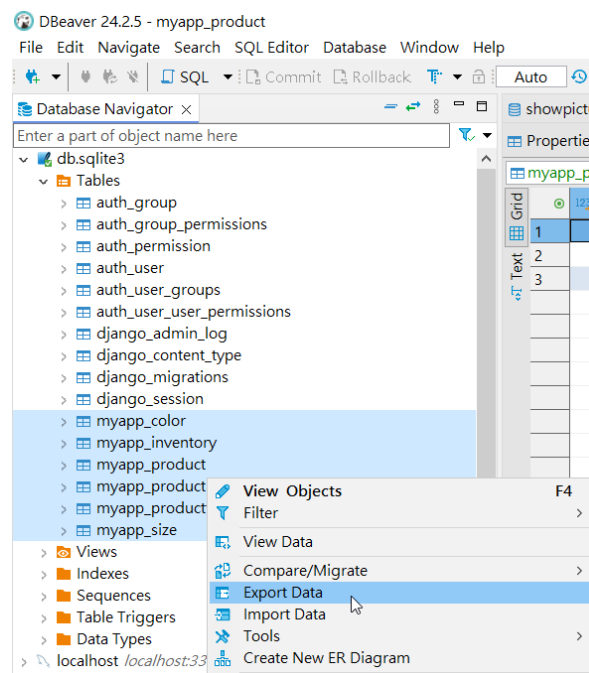

Database

CSV

DbUnit

HTML

JSON

Markdown

SQL

Source code

TXT

XML

Database table(s)

Export to CSV file(s)

Export to DbUnit XML file(s)

Export to HTML file(s)

Export to JSON file(s)

Export to markdown file(s)

Export to SQL INSERT statements

Export to source code array

Export to plain text format

Export to XML file(s)

myapp_color

myapp_inventory

myapp_product

myapp_productimage

myapp_producttype

myapp_size

Save task

< Back

Next >

Proceed

Cancel

The screenshot shows the 'Data Transfer' dialog box with the 'Extraction settings' tab selected. The 'Database table(s) extraction settings' section is visible. The 'Export target' section is on the left, and the 'Progress' section is on the right. The 'Maximum threads' is set to 1, 'Extract type' is 'Single query', 'Segment size' is 100000, 'Fetch size' is 10000, and 'Open new connection(s)' and 'Select row count' are unchecked. The 'Next >' button is highlighted with a mouse cursor.

Data Transfer

Extraction settings

Database table(s) extraction settings

✓ Export target
Extraction settings
 Format settings
 Output
 Confirm

Progress

Maximum threads: 1

Extract type: Single query

Segment size: 100000

☐ Open new connection(s)

☐ Select row count

Fetch size: 10000

Save task

< Back **Next >** Proceed Cancel

Data Transfer

Format settings
File format settings

☒ Export target
☒ Extraction settings
☒ **Format settings**
☐ Output
☐ Confirm

Formatting: <Connection's default> [Edit ...](#)

Advanced settings

Exporter settings

Name	Value
File extension	csv
Delimiter	,
Row delimiter	default
Header	top
Header format	label
Header case	as is
Characters escape	quotes
Quote character	"
Quote always	disabled
Quote never	[]
NULL string	
Format numbers	[]

Save task

[< Back](#)
[Next >](#)
[Proceed](#)
[Cancel](#)

Data Transfer

Output
Configure export output parameters

☒ Export target
☒ Extraction settings
☒ Format settings
☒ **Output**
☐ Confirm

General

☐ Copy to clipboard
 Directory: C:\Users\tony\Desktop [Global Settings](#)
 File name pattern: \${table}_\${timestamp}
 Encoding: UTF-8 Timestamp pattern: yyyyMMddHHmm ☐ Insert BOM
☐ Write to the single file
☐ Compress
☐ Split output file Maximum file size: 10000000
 On object data file name conflict: Ask; On blob value file name conflict: Ask
[You can use variables in output parameters.](#)

Results


☒ Show finish message ☐ Show exported file in system explorer
☐ Execute process [Configure](#) ☒ Delete export file if export fails

See how you can [export files to external storage](#) on our wiki


Save task



[< Back](#)
[Next >](#)
[Proceed](#)
[Cancel](#)

匯入前，先到 ER Diagram 查看資料庫關連狀況，排序匯入順序如下：

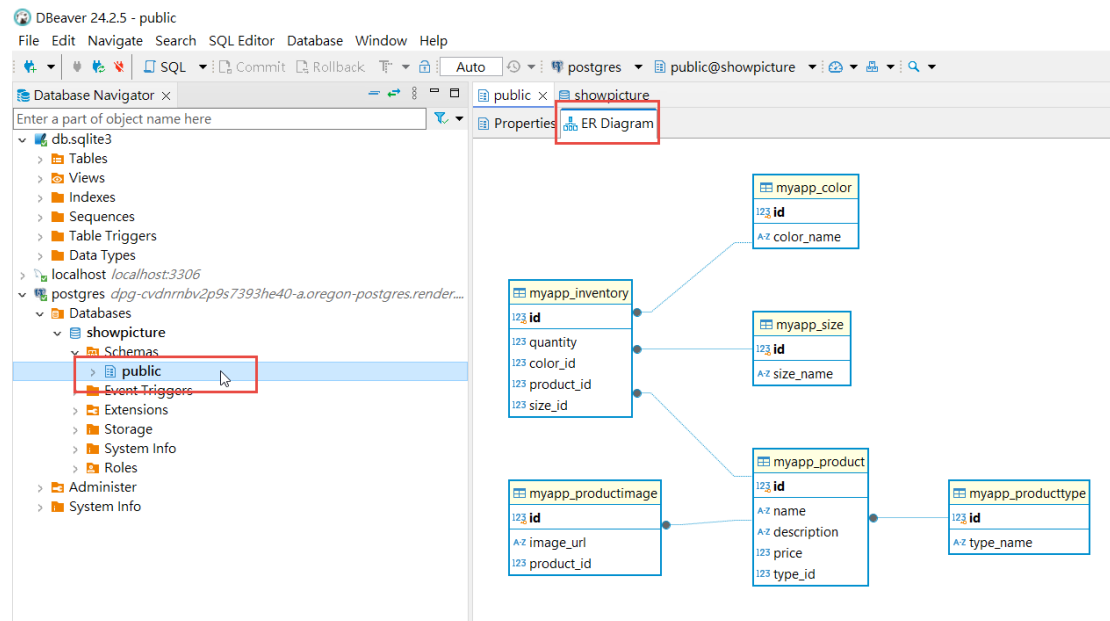

- 1、myapp_color, myapp_size, myapp_prodcuttype
- 2、myapp_prodcut, myapp_inventory
- 3、myapp_productimage

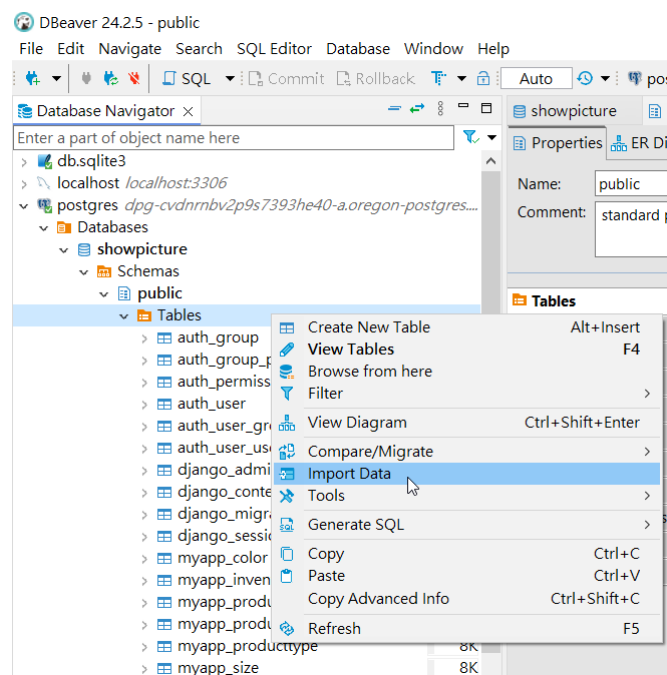

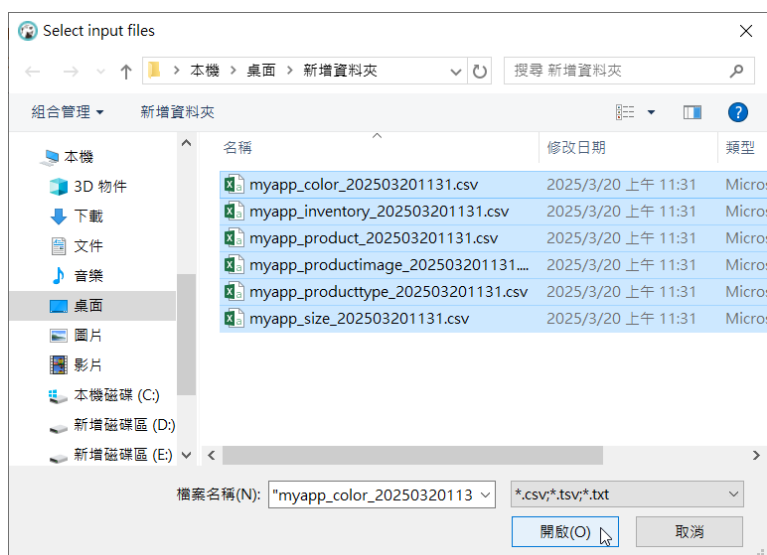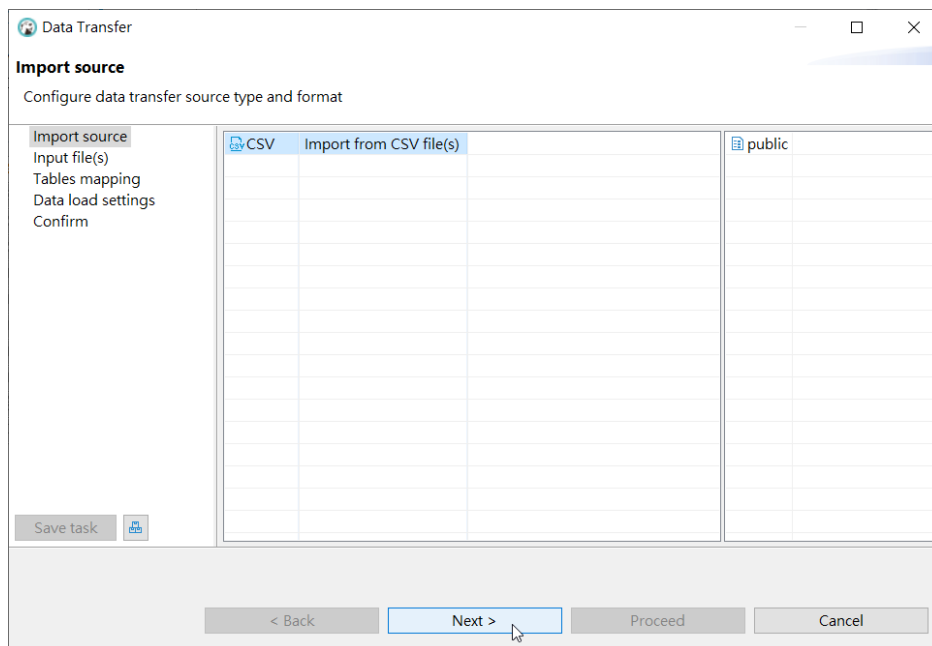

Data Transfer

Input file(s)
Configure input files or directories

✓ Import source
Input file(s)
Tables mapping
Data load settings
Confirm

Input files:

Browse

Source

- C:\Users\tony\Desktop\新增資料夾\myapp_color_202503201131.csv
- C:\Users\tony\Desktop\新增資料夾\myapp_inventory_202503201131.csv
- C:\Users\tony\Desktop\新增資料夾\myapp_product_202503201131.csv
- C:\Users\tony\Desktop\新增資料夾\myapp_productimage_202503201131.csv
- C:\Users\tony\Desktop\新增資料夾\myapp_producttype_202503201131.csv
- C:\Users\tony\Desktop\新增資料夾\myapp_size_202503201131.csv

Importer settings:

Name	Value
▼ Properties	
Extension	csv,tsv,txt
Encoding	utf-8
Column delimiter	,
Header position	top
Quote char	"
Escape char	\
NULL value mark	
Set empty strings to NULL	[]
Date/time format	yyyy-MM-dd[HH:mm:ss[.SSS]]
Trim whitespaces	[]

Save task

You can find [more information about individual settings](#) on our wiki

< Back Next > Proceed Cancel

Data Transfer

Tables mapping
Map tables and columns transfer

✓ Import source
✓ Input file(s)
Tables mapping
✓ Data load settings
Confirm

Target container: showpicture.public [postgres] Choose ...


Source	Target	Mapping	Transform
> myapp_color_202503201131.csv	myapp_color	existing	
> myapp_size_202503201131.csv	myapp_size	existing	
> myapp_producttype_202503201131.csv	myapp_producttype	existing	
> myapp_product_202503201131.csv	myapp_product	existing	
> myapp_inventory_202503201131.csv	myapp_inventory	existing	
> myapp_productimage_202503201131.csv	myapp_productimage	existing	


Browse ...
Configure ...
Preview data
^ Up
Moves the mapping cl
Mapping Rules
* Auto assign

Save task

* DEL - skip column(s) SPACE - map existing(s) INSERT - edit name

< Back Next > Proceed Cancel

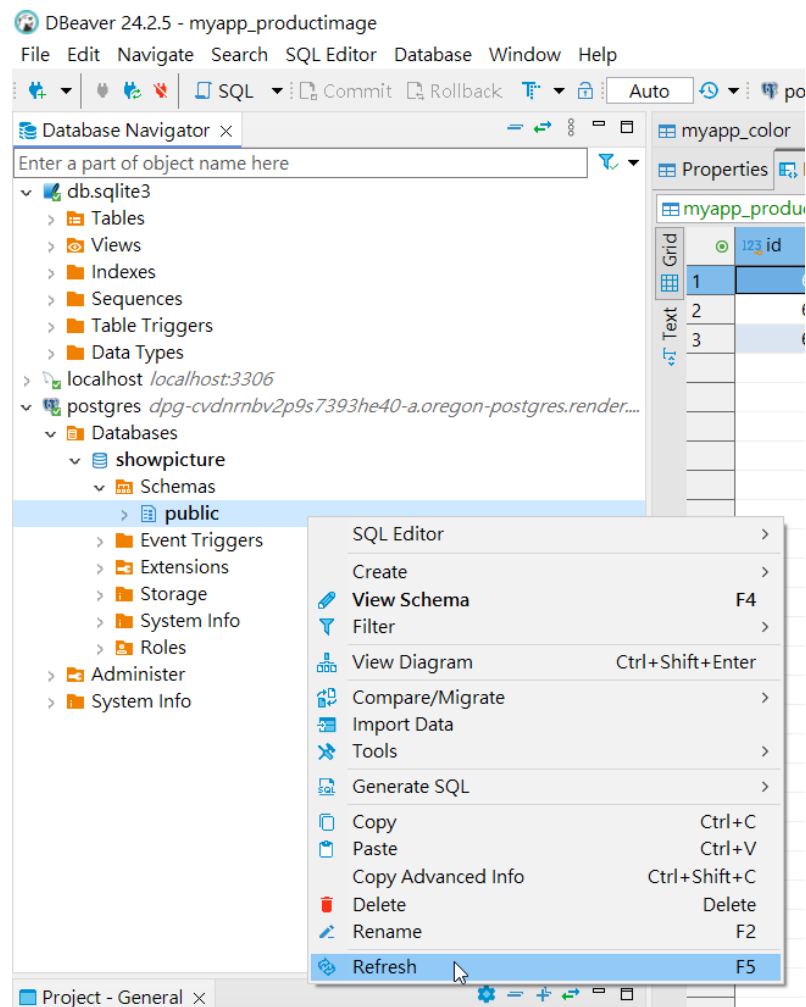


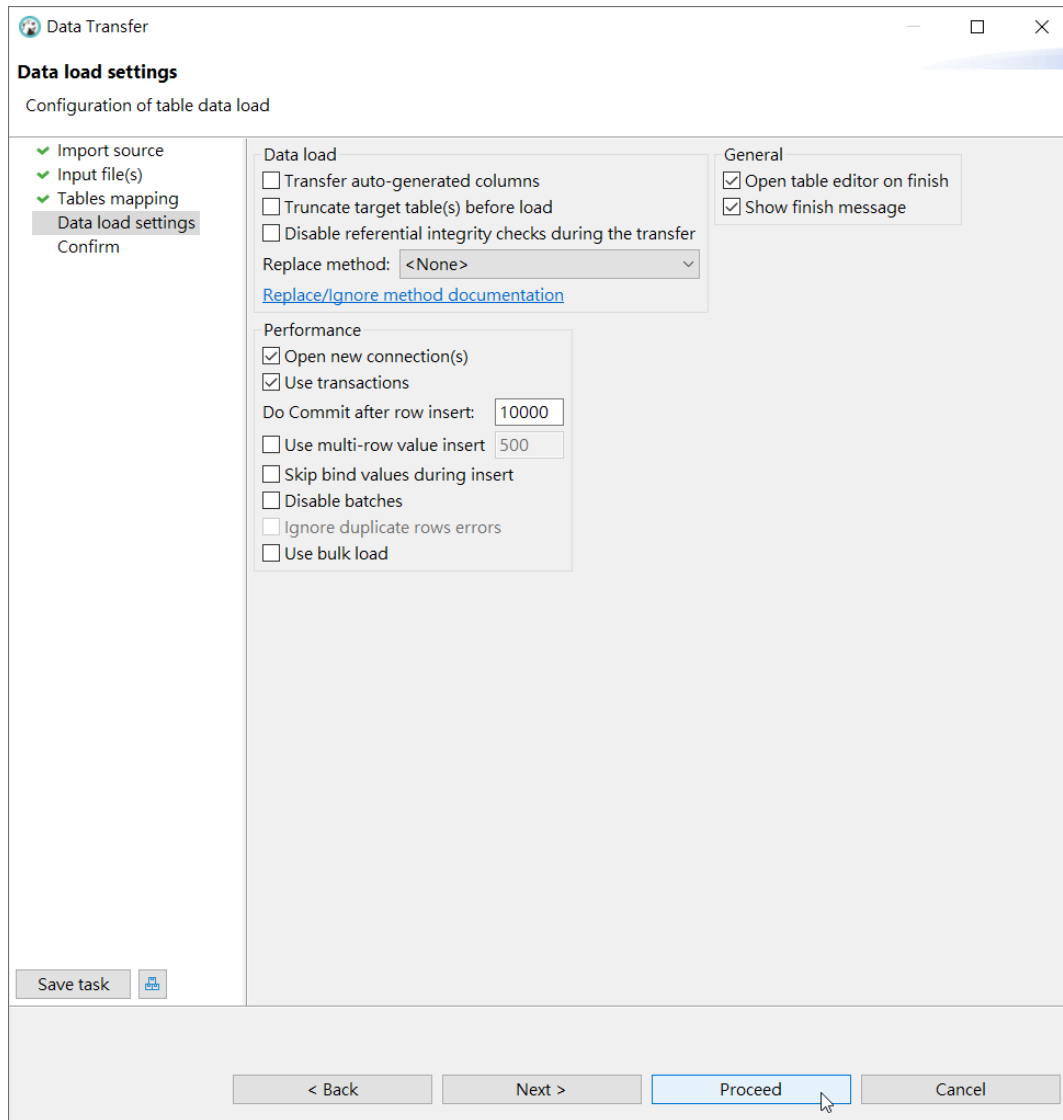

The image shows a 'Data Transfer' window with the title bar 'Data Transfer' and standard window controls. The main content area is titled 'Data load settings' with the subtitle 'Configuration of table data load'. On the left, a sidebar contains a tree view with the following items: 'Import source' (checked), 'Input file(s)' (checked), 'Tables mapping' (checked), 'Data load settings' (selected and highlighted), and 'Confirm'. The main area is divided into three sections: 'Data load', 'Performance', and 'General'. The 'Data load' section contains: 'Transfer auto-generated columns' (unchecked), 'Truncate target table(s) before load' (unchecked), 'Disable referential integrity checks during the transfer' (unchecked), 'Replace method: <None>' (dropdown menu), and a link 'Replace/Ignore method documentation'. The 'Performance' section contains: 'Open new connection(s)' (checked), 'Use transactions' (checked), 'Do Commit after row insert: 10000' (text input), 'Use multi-row value insert 500' (checkbox and text input), 'Skip bind values during insert' (unchecked), 'Disable batches' (unchecked), 'Ignore duplicate rows errors' (unchecked), and 'Use bulk load' (unchecked). The 'General' section contains: 'Open table editor on finish' (checked) and 'Show finish message' (checked). At the bottom left, there is a 'Save task' button and a small icon. At the bottom right, there are four buttons: '< Back', 'Next >', 'Proceed' (highlighted with a mouse cursor), and 'Cancel'.

● 執行 Django 專案結果

```
# python manage.py runserver 0.0.0.0:8080
```

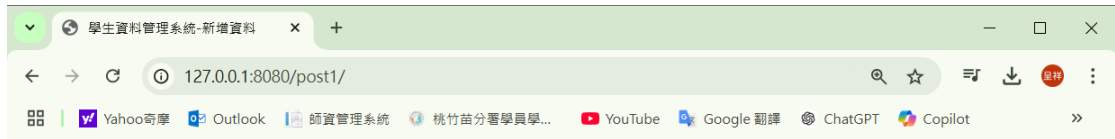

學生資料管理系統-新增資料

[回首頁](#)

*姓名	a2
*性別	☐ 男 ☒ 女
*生日	2024/10/31
*信箱	a2@yahoo.com.tw
電話	04444
地址	台北
儲存 清除	

已載入樣板




學生資料管理系統

目前的資料筆數:2 · [新增學生資料](#)

搜尋關鍵字:

學號	姓名	性別	生日	信箱	電話	地址	編輯
1	a1	男	2024-11-12	a1@yahoo.com.tw	092222	新竹市	編輯1 編輯2 刪除
2	a2	女	2024-10-31	a2@yahoo.com.tw	04444	台北	編輯1 編輯2 刪除

已載入樣板

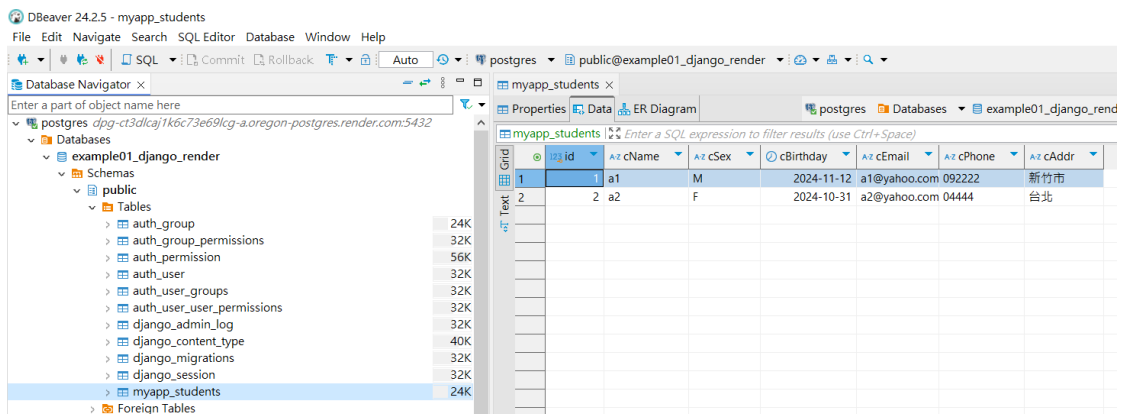

➤ 將專案上傳至 github

- 下載 Git 程式與安裝

<https://git-scm.com/>



Download for Windows

Click [here](#) to download the latest (2.44.0) 64-bit version of Git for Windows. This is the most recent maintained build. It was released 27 days ago, on 2024-02-23.

Other Git for Windows downloads

Standalone Installer

32-bit Git for Windows Setup.

64-bit Git for Windows Setup.

Portable ("thumbdrive edition")

32-bit Git for Windows Portable.


64-bit Git for Windows Portable.

安裝結果如下：



- 註冊、登入與新增 github 專案

Web: <https://github.com/>

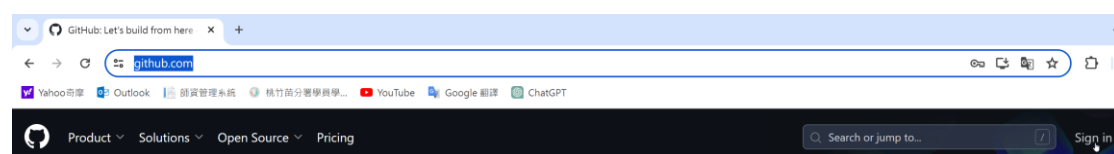



github.com/new

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Required fields are marked with an asterisk (*).

Owner * tonyyeh617 / Repository name * ch3_12
ch3_12 is available.

Great repository names are short and memorable. Need inspiration? How about [urban-octo-succotash](#) ?

Description (optional)

☒ **Public**
Anyone on the internet can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:

☐ **Add a README file**
This is where you can write a long description for your project. [Learn more about READMEs.](#)

Add .gitignore

.gitignore template: None

Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)


Choose a license

License: None

A license tells others what they can and can't do with your code. [Learn more about licenses.](#)

🔔 You are creating a public repository in your personal account.

[Create repository](#)

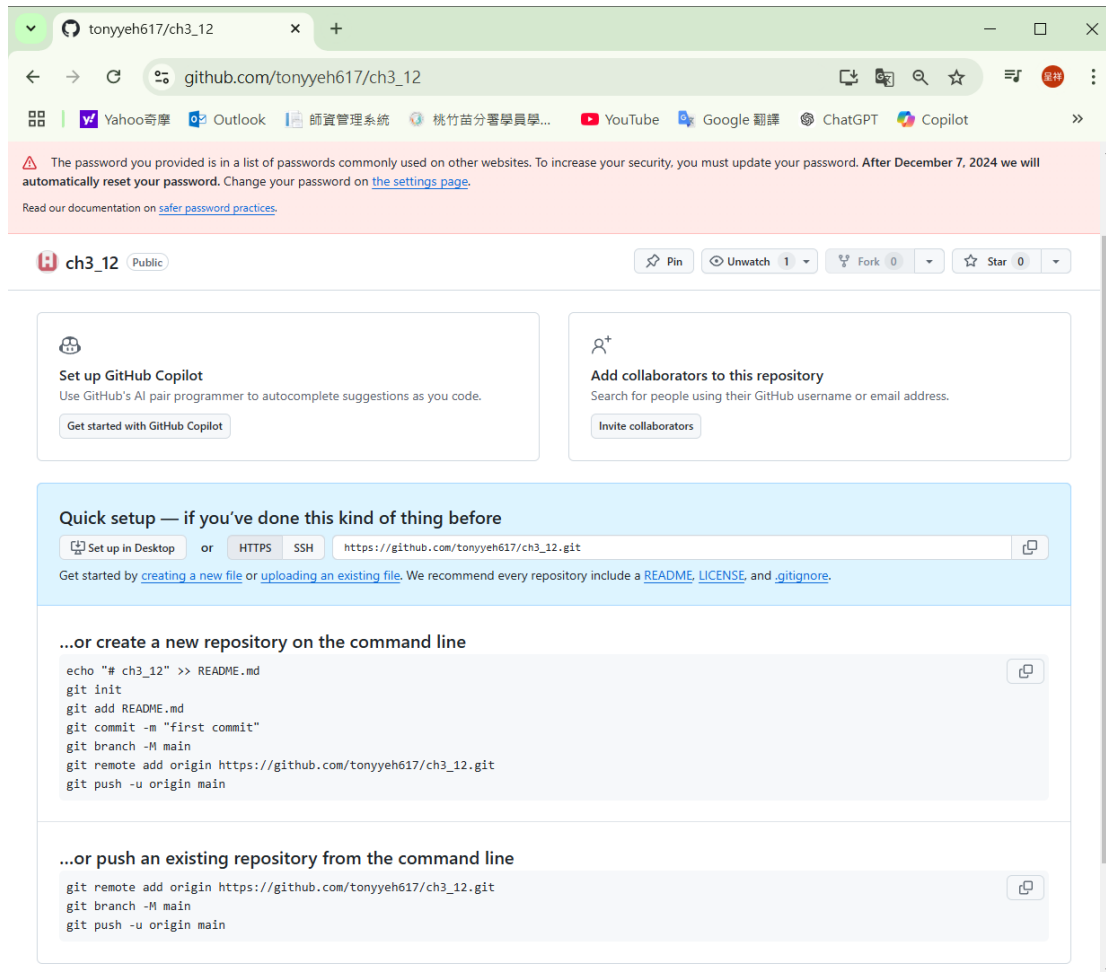

● 將資料上傳側 github

先切到資料夾後，開啟 git bash

首先設定帳號與名稱

```
# git config --global user.email "you@example.com"
```

(所有在這台電腦上進行的 Git 操作都會使用這個電子郵件地址)

```
# git config --global user.name "Your Name"
```

(所有在這台電腦上進行的 Git 操作都會使用這個名稱)

```
# git config --list
```

```
# git init
```

(用於初始化一個新的 Git 存儲庫 (repository)，執行後，Git 會在當前資料夾中建立一個隱藏的 .git 資料夾，用於跟蹤版本控制的變化)

```
# git add .
```

(這個指令將當前目錄下的所有變更(新增、修改或刪除的檔案)加入到 Git 的暫存區)

```
(dvds) PS D:\backup\dvds\ch3_12(使用ORM語法)(20241111)> git add .
fatal: detected dubious ownership in repository at 'D:/backup/dvds/ch3_12(使用ORM語法)(20241111)'
'D:/backup/dvds/ch3_12(使用ORM語法)(20241111)' is owned by:
  (inconvertible) (S-1-5-21-2548415289-401935518-633554039-1001)
but the current user is:
  DESKTOP-GMHL8UC/tony (S-1-5-21-3545604175-3922011878-2623936852-1001)
To add an exception for this directory, call:

git config --global --add safe.directory 'D:/backup/dvds/ch3_12(使用ORM語法)(20241111)'
```

發生該錯誤的原因是 Git 偵測到儲存庫所有權不符。若要解決此問題，您可以將儲存庫新增為 Git 中的「安全目錄」。請依照下列步驟操作：

```
# git config --global --add safe.directory
'D:/backup/dvds/ch3_12(使用 ORM 語法)(20241111)'
```

(將指定的目錄添加到 Git 的安全目錄列表中。)

```
# git rm --cached -r .\
```

(從 Git 的暫存區(index) 中遞歸地移除當前目錄及其所有子目錄的檔案，但不刪除本地檔案，Git 不再跟蹤這些檔案。)

```
# git add .
```

(將當前目錄及其子目錄中的所有檔案加入到暫存區)

```
# git commit -m "first commit"
```

(提交暫存區中的所有變更到 Git 的本地存儲庫，並附加一個描述性的訊息("first commit")。)

```
# git remote add origin https://github.com/tonyyeh617/ch3_12.git
```

(將遠端的 Git 存儲庫(repository)與本地存儲庫連接起來)

```
# git push -u origin master
```

(將本地的 master 分支推送(push)到遠端的 origin 存儲庫)

tonyyeh617/ch3_12

github.com/tonyyeh617/ch3_12

ch3_12 Public

master 1 Branch 0 Tags

tonyyeh617 first commit becfb8d - 9 minutes ago 1 Commit

File	Commit	Time
.vscode	first commit	9 minutes ago
ch3_12	first commit	9 minutes ago
myapp	first commit	9 minutes ago
templates	first commit	9 minutes ago
.gitignore	first commit	9 minutes ago
db.sqlite3	first commit	9 minutes ago
manage.py	first commit	9 minutes ago
requirements.txt	first commit	9 minutes ago
sql(insert).txt	first commit	9 minutes ago

README

Add a README

Help people interested in this repository understand your project by adding a README.

Add a README

About

No description, website, or topics provided.

Activity

0 stars

1 watching

0 forks

Releases

No releases published

Create a new release

Packages

No packages published

Publish your first package

Languages

Python 55.7% HTML 44.3%

Suggested workflows

Based on your tech stack

Python package

Configure

Create and test a Python package on multiple Python versions.

```
# pip freeze > requirements.txt
```

(將當前 Python 虛擬環境中已安裝的所有依賴包及其版本資訊輸出到 requirements.txt 檔案中)

```
# git add .
```

```
# git commit -m "add requirements"
```

```
# git push -u origin master
```

tonyyeh617 / ch12_12

ch12_12 Public

master 1 Branch 0 Tags

tonyyeh617 add requirements 0a31629 · 3 minutes ago 3 Commits

File	Commit	Time
.vscode	first commit	24 minutes ago
ch3_12	first commit	24 minutes ago
myapp	first commit	24 minutes ago
templates	first commit	24 minutes ago
.gitignore	removed env	14 minutes ago
db.sqlite3	first commit	24 minutes ago
manage.py	first commit	24 minutes ago
requirements.txt	add requirements	3 minutes ago
sql(insert).txt	first commit	24 minutes ago

README

Add a README

Help people interested in this repository understand your project by adding a README.

Add a README

About

No description, website, or topics provided.

Activity

0 stars

1 watching

0 forks

Releases

No releases published

Create a new release

Packages

No packages published

Publish your first package

Languages

Python 55.8% HTML 44.2%

Suggested workflows

Based on your tech stack



Python application Configure



Create and test a Python application.



Python Package using Configure

```
# pip install gunicorn  
(安裝 Gunicorn (Green Unicorn) 這個 WSGI 伺服器。)  
# pip freeze > requirements.txt  
# git add .  
# git commit -m "add gunicorn"  
# git push -u origin master
```

● 建立 Web Service 與 GitHub 連接
進入 render 網站，按「New」➡「Web Service」

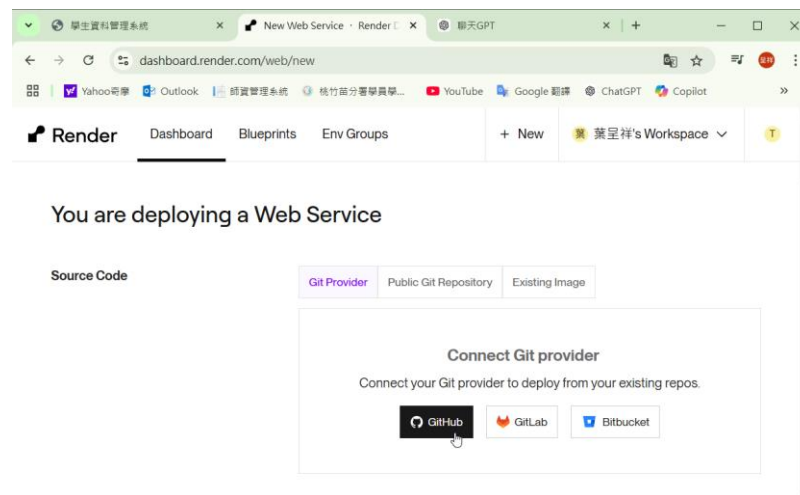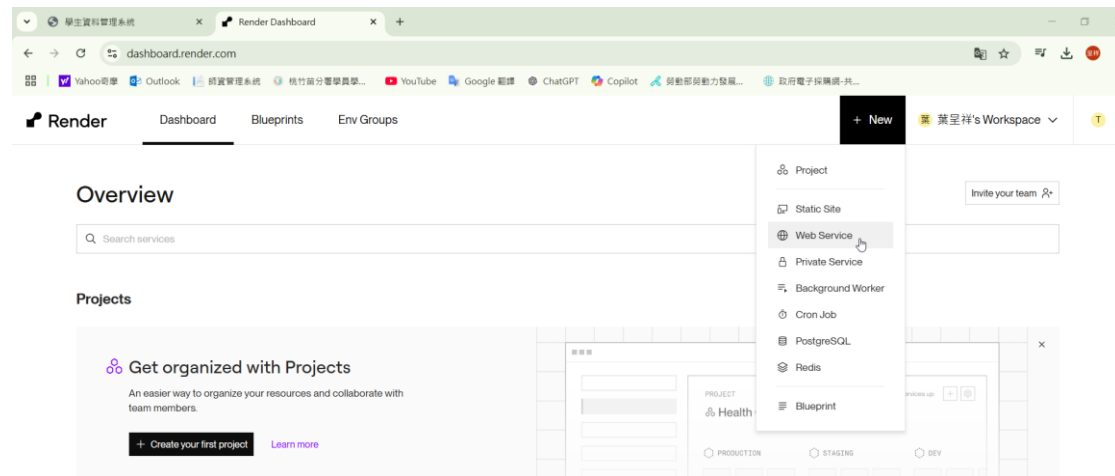

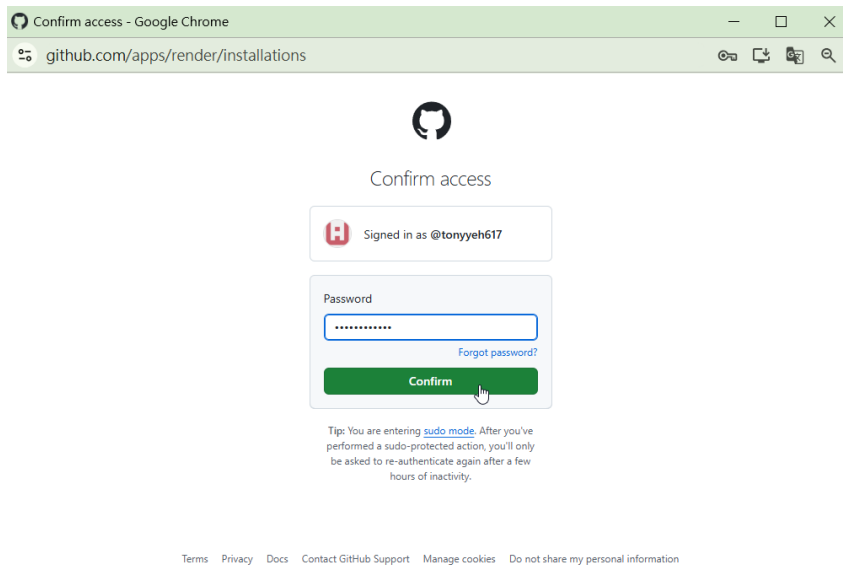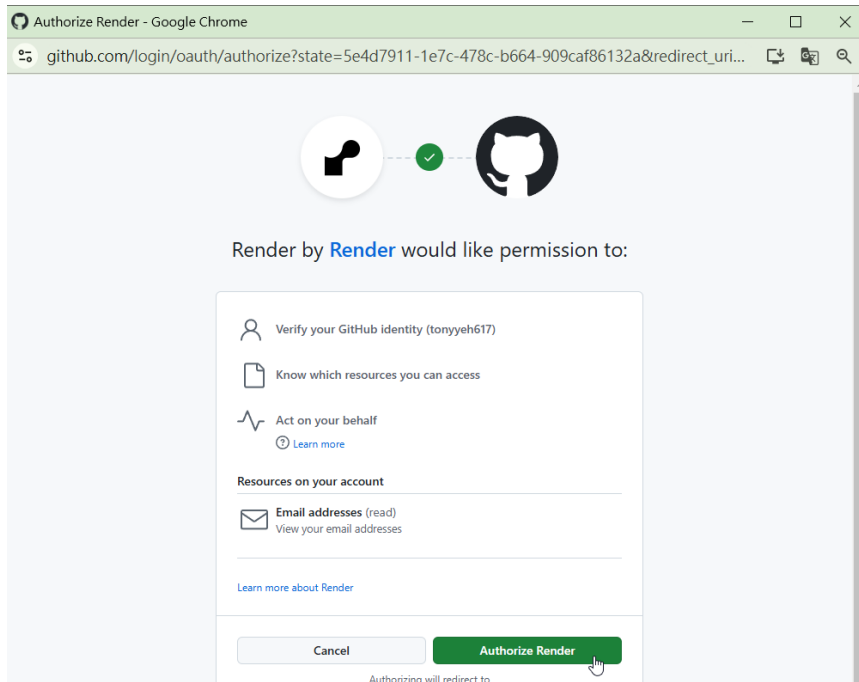

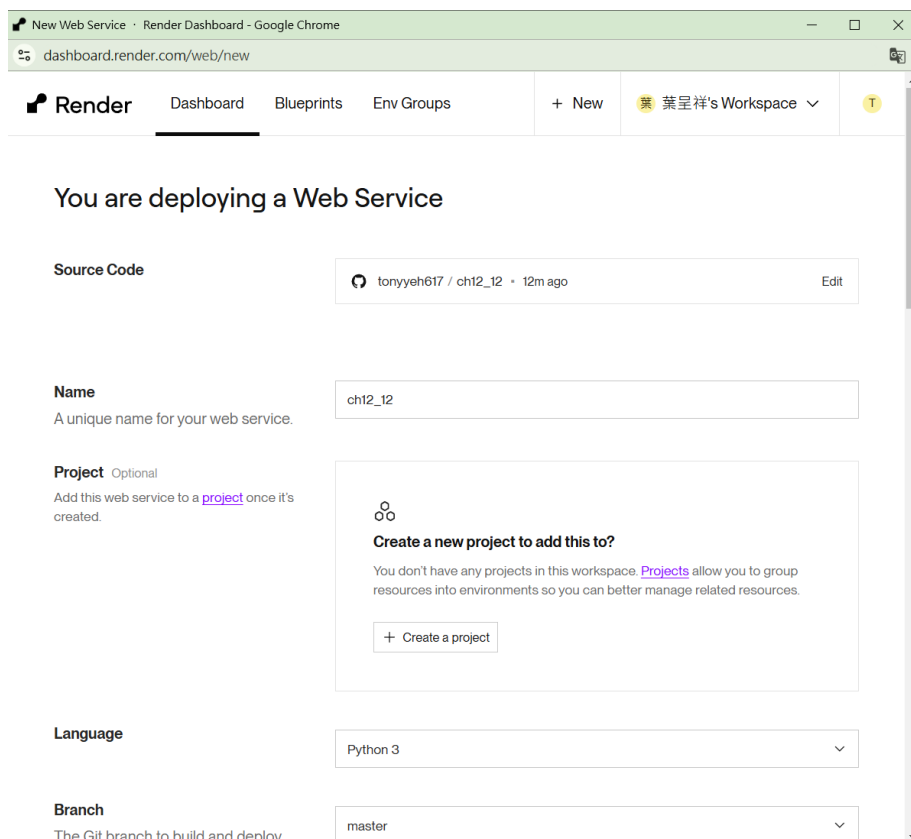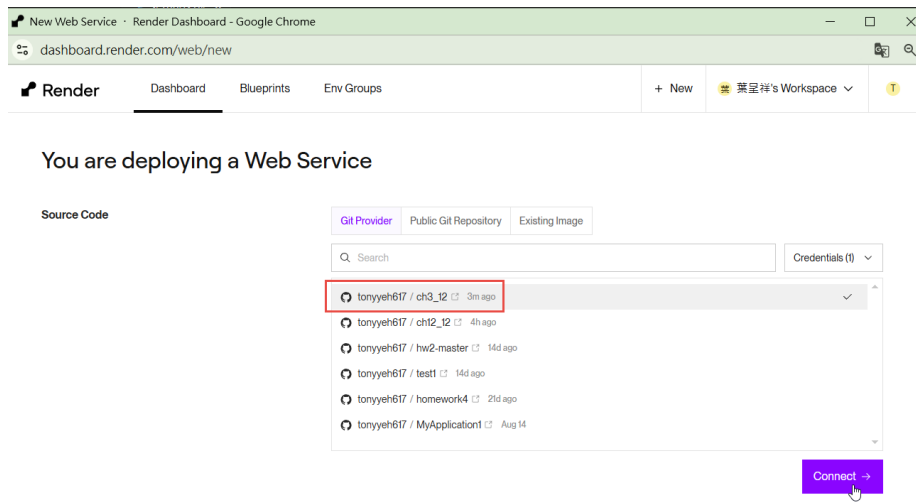

New Web Service · Render Dashboard - Google Chrome

dashboard.render.com/web/new

Render Dashboard Blueprints Env Groups + New 葉星祥's Workspace

For hobby projects

Free
\$0 / month

512 MB (RAM)
0.1 CPU

Upgrade to enable more features
Free instances spin down after periods of inactivity. They do not support SSH access, scaling, one-off jobs, or persistent disks. Select any paid instance type to enable these features.

For professional use
For more power and to get the most out of Render, we recommend using one of our paid instance types. All paid instances support:

- Zero Downtime
- SSH Access
- Scaling
- One-off jobs
- Support for persistent disks

Starter \$7 / month	512 MB (RAM) 0.5 CPU	Standard \$25 / month	2 GB (RAM) 1 CPU
Pro \$85 / month	4 GB (RAM) 2 CPU	Pro Plus \$175 / month	8 GB (RAM) 4 CPU
Pro Max \$225 / month	16 GB (RAM) 4 CPU	Pro Ultra \$450 / month	32 GB (RAM) 8 CPU

Need a [custom instance type](#)? We support up to 512 GB RAM and 64 CPUs.

Environment Variables
Set environment-specific config and secrets (such as API keys), then read those values from your code. [Learn more](#).

NAME_OF_VARIABLE value [Generate](#) [Delete](#)

+ Add Environment Variable [Add from .env](#)

Advanced

Deploy Web Service

由專案查看 app 名稱，修改如下：

ch3_12 · Web Service · Render Dashboard - Google Chrome

dashboard.render.com/web/srv-ct414323esus73fbqe90/settings

Render Dashboard Blueprints Env Groups + New 葉星祥's Workspace

Events
Logs
Disks
Environment
Shell
Previews
Jobs
Metrics
Scaling
Settings



Build Command
Render runs this command to build your app before each deploy.
\$ pip install -r requirements.txt [Edit](#)

Pre-Deploy Command Optional
Render runs this command before the start command. Useful for database migrations and static asset uploads.
\$ [Edit](#)

Start Command
Render runs this command to start your app with each deploy.
\$ gunicorn ch3_12.wsgi [Cancel](#) [Save Changes](#)

Auto-Deploy
By default, Render automatically deploys your service whenever you update its code or configuration. Disable to handle deploys manually. [Learn more](#).
Yes [Edit](#)

Deploy hook
Your private URL to trigger a deploy for this server. Remember to keep this a secret.
..... [Regenerate hook](#)

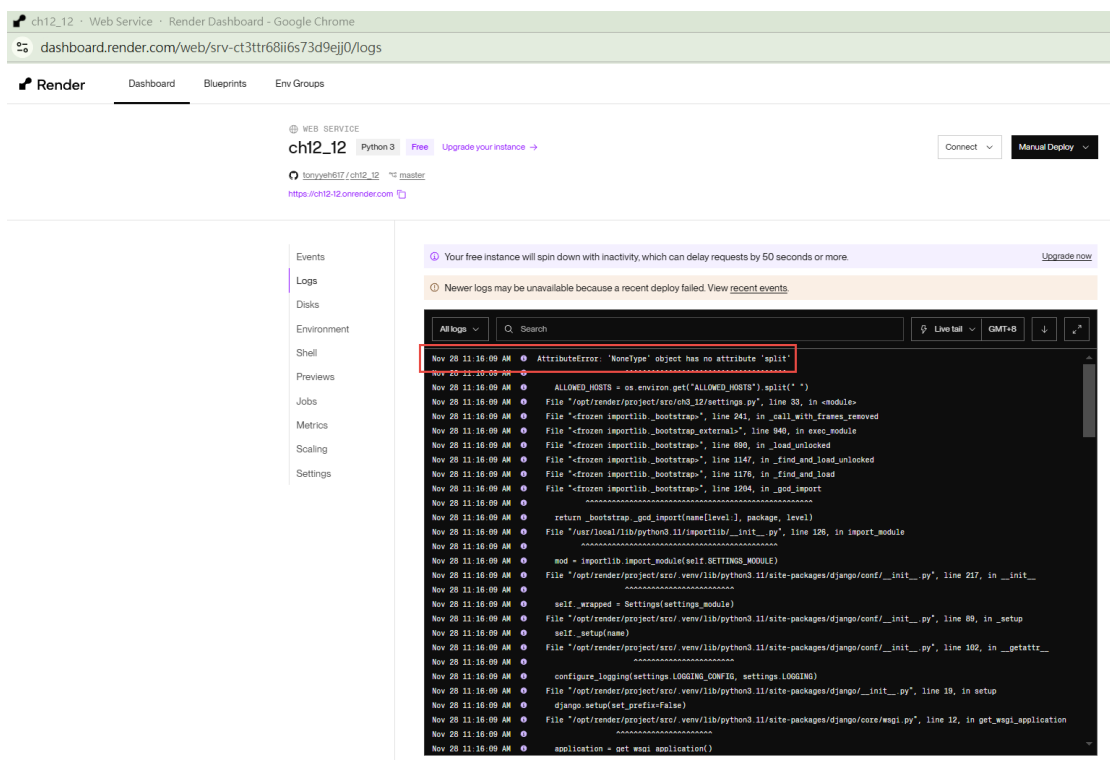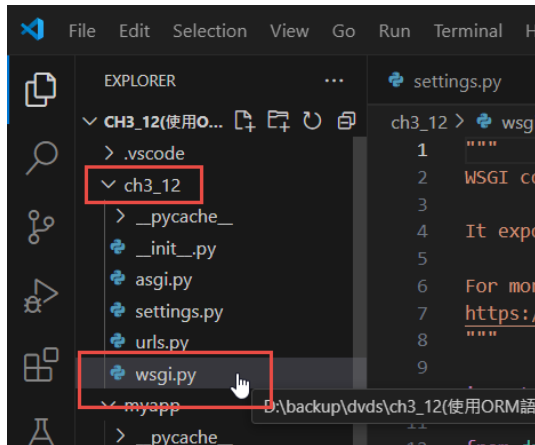

ch12_12 · Web Service · Render Dashboard - Google Chrome

dashboard.render.com/web/srv-ct3tr68iif6s73d9ejj0/logs

Render Dashboard Blueprints Env Groups

WEB SERVICE
ch12_12 Python 3 Free Upgrade your instance → Connect Manual Deploy

lonyyeh617 / ch12_12 master
https://ch12-12.onrender.com

Events
Logs
Disks
Environment
Shell
Previews
Jobs
Metrics
Scaling
Settings

Your free instance will spin down with inactivity, which can delay requests by 50 seconds or more. Upgrade now

Newer logs may be unavailable because a recent deploy failed. View recent events.

```
Nov 28 11:15:58 AM ● .....
Nov 28 11:15:58 AM ● self.callable = self.load()
Nov 28 11:15:58 AM ● File "/opt/render/project/src/.venv/lib/python3.11/site-packages/gunicorn/app/base.py", line 66, in wsgi
Nov 28 11:15:58 AM ● self.app.wsgi()
Nov 28 11:15:58 AM ● self.app.wsgi()
Nov 28 11:15:58 AM ● File "/opt/render/project/src/.venv/lib/python3.11/site-packages/gunicorn/arbiter.py", line 117, in setup
Nov 28 11:15:58 AM ● self.setup(app)
Nov 28 11:15:58 AM ● File "/opt/render/project/src/.venv/lib/python3.11/site-packages/gunicorn/arbiter.py", line 67, in __init__
Nov 28 11:15:58 AM ● .....
Nov 28 11:15:58 AM ● Arbiter(self).run()
Nov 28 11:15:58 AM ● File "/opt/render/project/src/.venv/lib/python3.11/site-packages/gunicorn/app/base.py", line 71, in run
Nov 28 11:15:58 AM ● super().run()
Nov 28 11:15:58 AM ● File "/opt/render/project/src/.venv/lib/python3.11/site-packages/gunicorn/arbiter.py", line 235, in run
Nov 28 11:15:58 AM ● WSGIApplication(["wsgiref.handlers"], prog=prog).run()
Nov 28 11:15:58 AM ● File "/opt/render/project/src/.venv/lib/python3.11/site-packages/gunicorn/app/wsgiapp.py", line 66, in run
Nov 28 11:15:58 AM ● .....
Nov 28 11:15:58 AM ● sys.exit(run())
Nov 28 11:15:58 AM ● File "/opt/render/project/src/.venv/bin/gunicorn", line 8, in <module>
Nov 28 11:15:58 AM ● Traceback (most recent call last):
Nov 28 11:15:58 AM ● == Running 'gunicorn ch12_wsgi'
Nov 28 11:15:58 AM ● == Deploying...
Nov 28 11:15:58 AM ● bash: line 1: gunicorn: command not found
Nov 28 11:15:58 AM ● == Running 'gunicorn ch12_wsgi'
Nov 28 11:15:58 AM ● == Common ways to troubleshoot your deploy: https://render.com/docs/troubleshooting-deploys
Nov 28 11:15:58 AM ● == Exited with status 127
Nov 28 11:15:58 AM ● bash: line 1: gunicorn: command not found
Nov 28 11:15:58 AM ● == Running 'gunicorn ch12_wsgi'
Nov 28 11:15:58 AM ● == Deploying...
```

ch12_12 · Web Service · Render Dashboard - Google Chrome

dashboard.render.com/web/srv-ct3tr68iif6s73d9ejj0/events

Render Dashboard Blueprints Env Groups + New 李冠霖's Workspace

WEB SERVICE
ch12_12 Python 3 Free Upgrade your instance → Connect Manual Deploy

lonyyeh617 / ch12_12 master
https://ch12-12.onrender.com

Events
Logs
Disks
Environment
Shell
Previews
Jobs
Metrics
Scaling
Settings


Your free instance will spin down with inactivity, which can delay requests by 50 seconds or more. Upgrade now

Deploy started for c38388f: add gunicorn
dep-ct3u93jtq21c738v8lag



Deploy failed for c38388f: add gunicorn
Exited with status 1 while running your code. Check your [deploy logs](#) for more information.
November 28, 2024 at 11:15 AM Rollback

Deploy started for c38388f: add gunicorn
Start command updated
November 28, 2024 at 11:14 AM


新增完成後可以在 Events 查看狀態

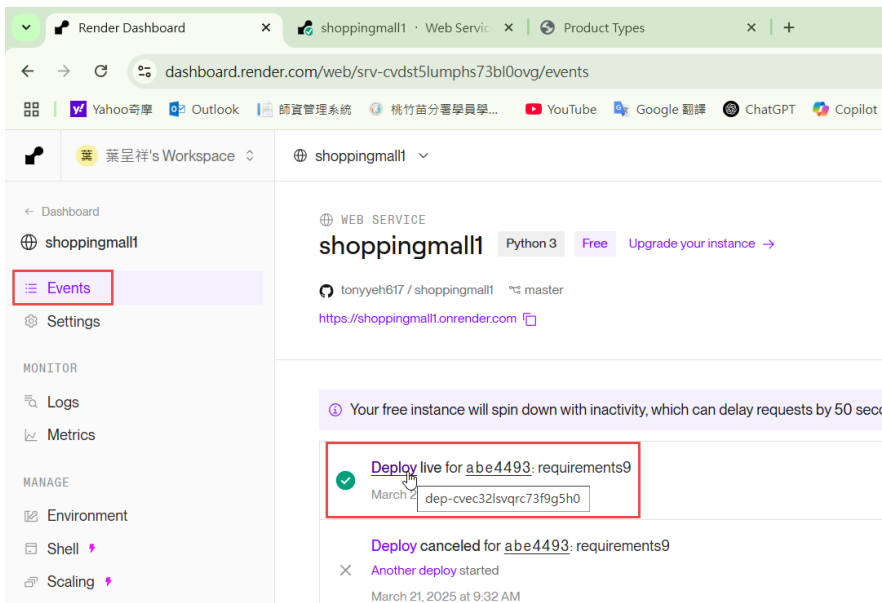

或是點選到專案內查看

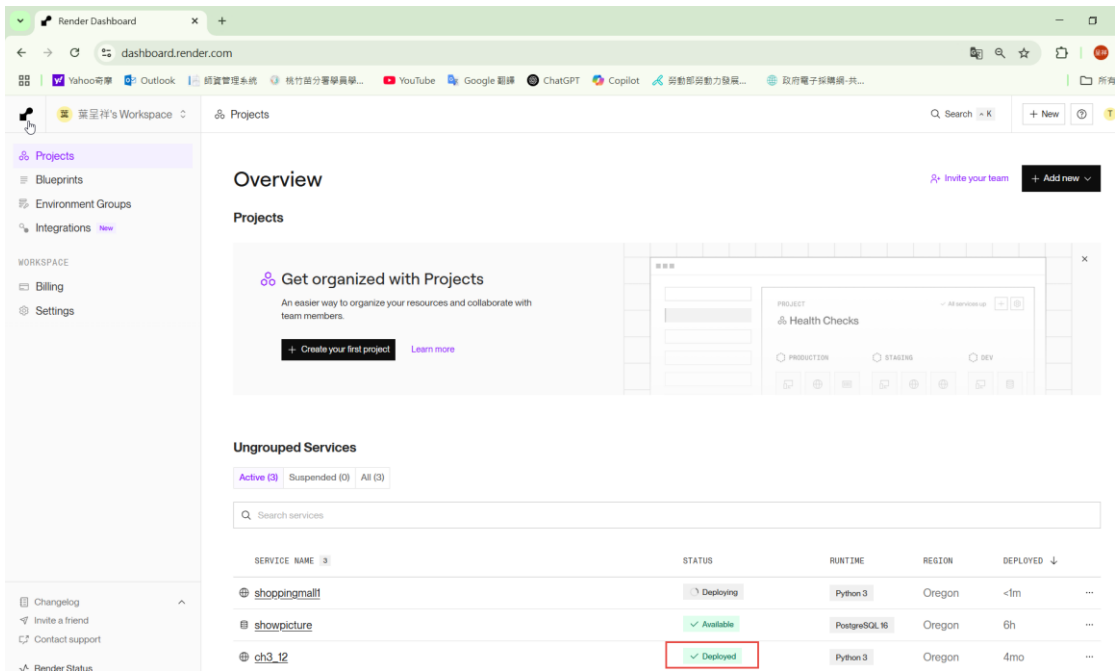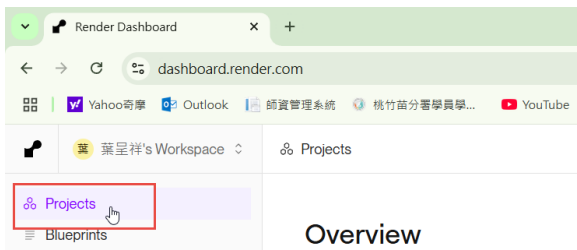

若執行失敗，請點 **deploy logs**，查看錯誤，如下圖：

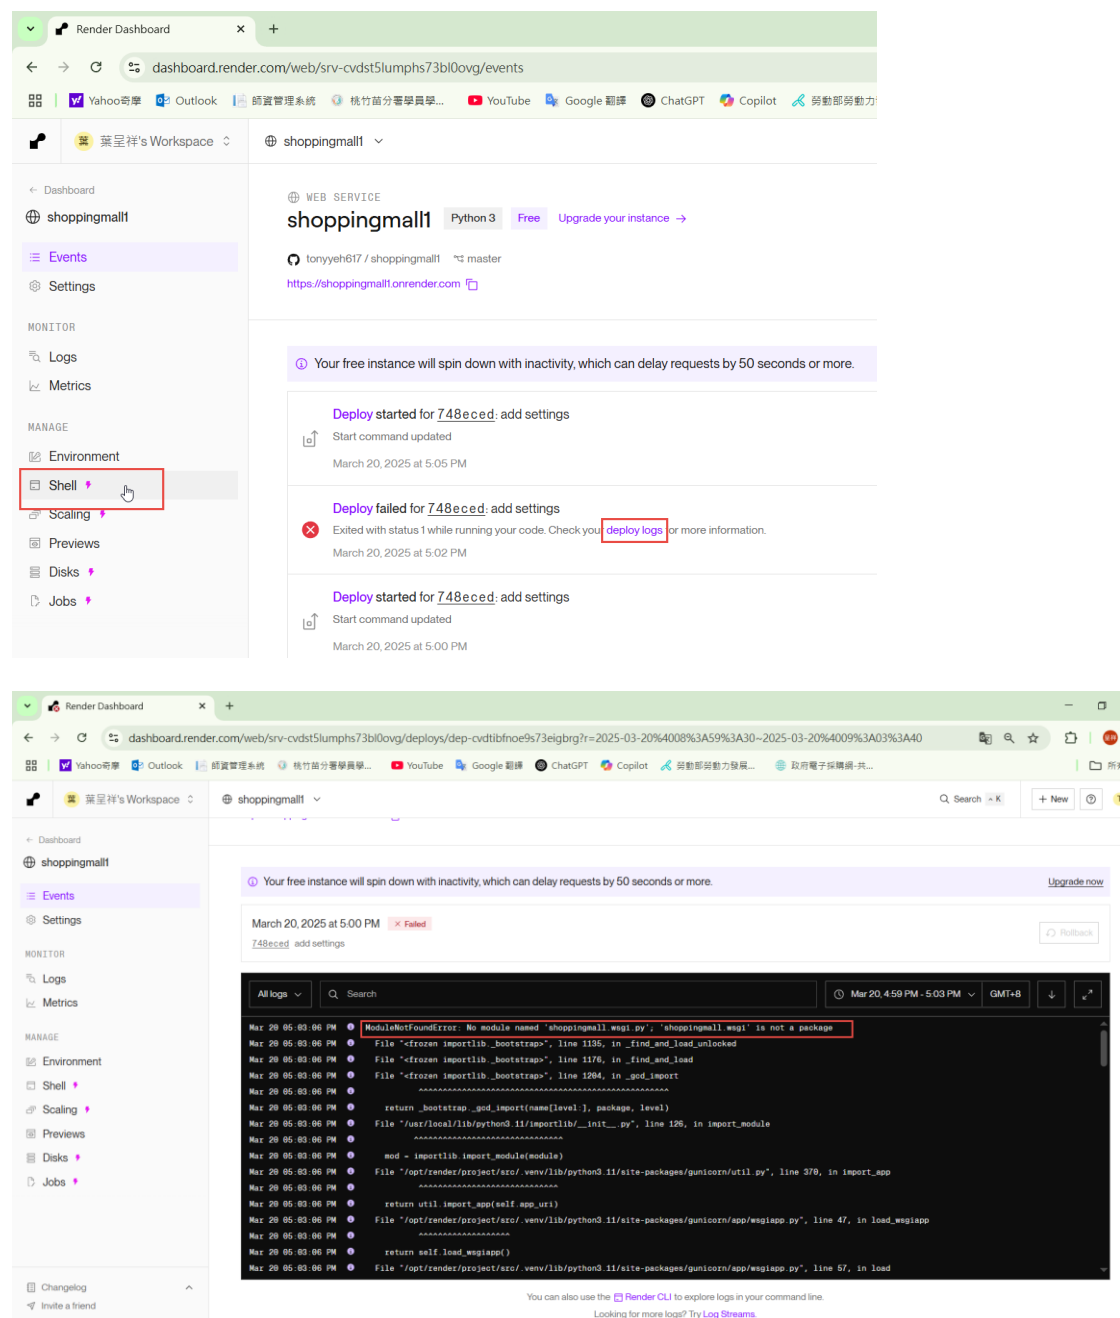



更改完後，再按一次提交：

```
# git add.
```

```
# git commit -m "update"
```

```
# git push
```

再將 render deploy latest commit

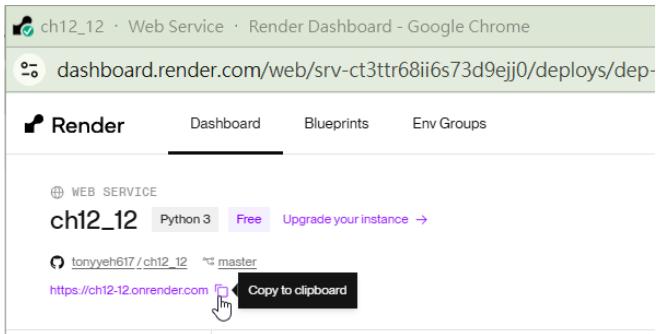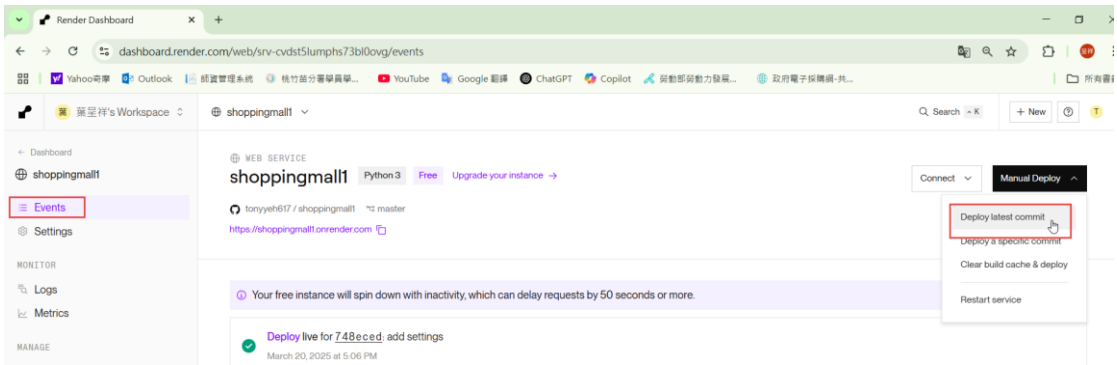

結果如下：



學生資料管理系統

目前的資料筆數:2 · [新增學生資料](#)


搜尋關鍵字: 搜尋

學號	姓名	性別	生日	信箱	電話	地址	編輯
1	a1	男	2024-11-12	a1@yahoo.com.tw	092222	新竹市	編輯1 編輯2 刪除
2	a2	女	2024-10-31	a2@yahoo.com.tw	04444	台北	編輯1 編輯2 刪除

已載入樣板

➤ 刪資服務

點選要刪除的服務

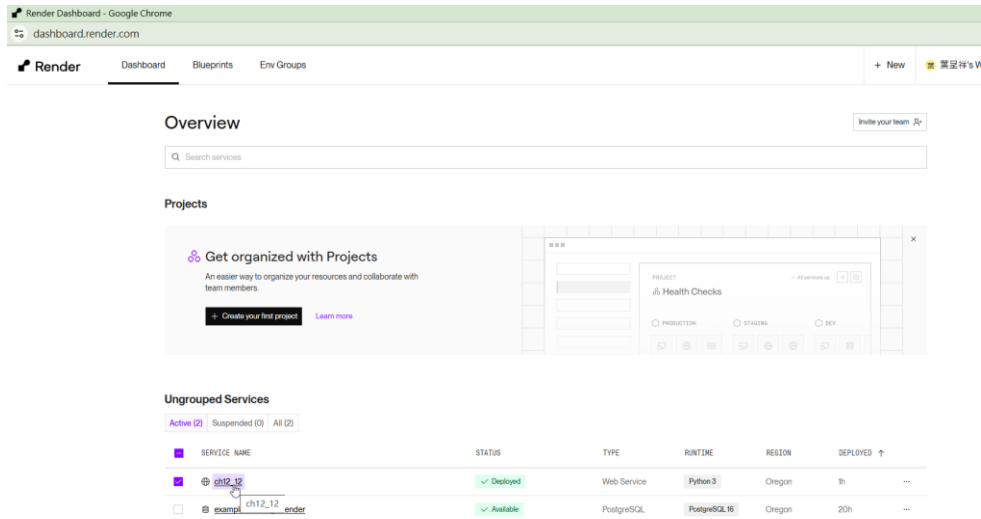

按 settings → Delete Web Service

