

EXPLORES

OPEN EDITORS

PROJECT2

.vscode

launch.json

myapp

__pycache__

migrations

__init__.py

admin.py

apps.py

models.py

tests.py

views.py

project2

__pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

static

templates

hello2.html

hello3.html

hello4.html

db.sqlite3

manage.py

views.py

myapp > views.py > dice1

19

20 def hello3(request, user

21 print(username)

22 now = datetime.now()

23 print(now)

24 # return HttpResponse

25 return render(reques

26

27 def hello4(request, user

28 print(f"username1:{u

29 return HttpResponse(

30

31 import random

32 def dice1(request):

33 no1=random.randint(1

34 no2=random.randint(1

35 no3=random.randint(1

36 print(f"no1:{no1},no

37 return HttpResponse(

38 # now = datetime.now(

39 # print(now)

40 # return HttpResponse

41 # return render(reque

42

hello4.html

templates > hello4.html

1 {% load static %}

2 <!DOCTYPE html>

3 <html lang="en">

4 <head>

5 <meta charset="UTF-8

6 <meta name="viewport

7 <title>Document</tit

8 <link rel="stylesheet

9

10

11 </head>

12 <body>

13 <div>

14 <img class="logo

15 </div>

16 <h1>歡迎光臨：{{ user

17 <h2>現在時間：{{ now

18 <!-- 西元/月/日 時:分

19 <h2>現在時間：{{ now|

20

21 </body>

22 </html>

urls.py

project2 > urls.py > ...

1 """

2 URL configuration for pr

3

4 The `urlpatterns` list r

5 <https://docs.djangoproject.com/en/3.2/ref/urls/>

6 Examples:

7 Function views

8 1. Add an import: f

9 2. Add a URL to urlp

10 Class-based views

11 1. Add an import: f

12 2. Add a URL to urlp

13 Including another URLcon

14 1. Import the includ

15 2. Add a URL to urlp

16 """

17 from django.contrib impo

18 from django.urls import

19 from myapp import views

20

21 urlpatterns = [

22 path('admin/', admin

23 # path('', views.say

24 path('hello1/<str:us

25 path('hello2/<str:us

26 path('hello3/<str:us

27 path('hello4/<str:us

28 path('dice1/', views.

29

30]

31

Python Debug Console

er\AppData\Local\Programs\Python\Python314\python.exe 'c:\User

s\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\

bundled\libs\debugpy\launcher' '51467' '--' 'C:\S\Python\python

code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

...

from myapp import views

File "C:\S\Python\python_code\class_0708\project2\myapp\views

.py", line 37

return HttpResponse(f"Dice1!")

SyntaxError: f-string: single '}' is not allowed

C:\S\Python\python_code\class_0708\project2\myapp\views.py chan

ged, reloading.

Watching for file changes with StatReloader

Performing system checks...

System check identified no issues (0 silenced).

July 14, 2026 - 09:30:26

Django version 6.0.7, using settings 'project2.settings'

Starting development server at http://0.0.0.0:8080/

Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a produ

ction setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: [https://docs.dj](https://docs.djangoproject.com/en/6.0/howto/deployment/)

angoproject.com/en/6.0/howto/deployment/

PS C:\S\Python\python_code\class_0708\project2> c:; cd 'C:\S\P

ython\python_code\class_0708\project2'; & 'C:\Users\User\AppData

a\Local\Programs\Python\Python314\python.exe' 'c:\Users\User.v

scode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundled\l

ibs\debugpy\launcher' '51551' '--' 'C:\S\Python\python_code\cla

ss_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

Watching for file changes with StatReloader

Performing system checks...

System check identified no issues (0 silenced).

July 14, 2026 - 09:30:32

Django version 6.0.7, using settings 'project2.settings'

Starting development server at http://0.0.0.0:8080/

Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a produ

ction setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: [https://docs.dj](https://docs.djangoproject.com/en/6.0/howto/deployment/)

angoproject.com/en/6.0/howto/deployment/

abc

2026-07-14 09:30:38.528147

[14/Jul/2026 09:30:38] "GET /hello3/abc/ HTTP/1.1" 200 540

Not Found: /favicon.ico

[14/Jul/2026 09:30:38] "GET /favicon.ico HTTP/1.1" 404 3070

[14/Jul/2026 09:30:57] "GET /dice1 HTTP/1.1" 301 0

no1:2,no2:6,no3:6

[14/Jul/2026 09:30:57] "GET /dice1/ HTTP/1.1" 200 12

```
views.py x
myapp > views.py > ...
19
20 def hello3(request, username):
21     print(username)
22     now = datetime.now() #取得當前時間
23     print(now)
24     # return HttpResponse("Hello!")
25     return render(request, "hello3.html", locals())
26
27 def hello4(request, username1, username2):
28     print(f"username1:{username1}, username2:{username2}")
29     return HttpResponse(f"<b>Hello! {username1} and {username2}!<b>")
30
31 import random
32 def dice1(request):
33     no1=random.randint(1,6)
34     no2=random.randint(1,6)
35     no3=random.randint(1,6)
36     print(f"no1:{no1}, no2:{no2}, no3:{no3}")
37     return HttpResponse(f"<b>Dice1!<b>")
38     # now = datetime.now() #取得當前時間
39     # print(now)
40     # return HttpResponse("Hello!")
41     # return render(request, "hello3.html", locals())
42
```



Dice1!

F5 start Debug :執行架構
不能用RUN for Python

<> hello4.html X



templates > <> hello4.html

```
1  {% load static %}
2  <!DOCTYPE html>
3  <html lang="en">
4  <head>
5      <meta charset="UTF-8">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7      <title>Document</title>
8      <link rel="stylesheet" href="{% static 'css/style.css' %}">
9
10
11 </head>
12 <body>
13     <div>
14         
15     </div>
16     <h1>歡迎光臨 : {{ username }}</h1>
17     <h2>現在時間 : {{ now }}</h2>
18     <!-- 西元/月/日 時:分秒 -->
19     <h2>現在時間 : {{ now|date:"Y/m/d H:i:s" }}</h2>
20
21 </body>
22 </html>
```


```
1  """
2  URL configuration for project2 project.
3
4  The `urlpatterns` list routes URLs to views. For more information please see:
5  |   https://docs.djangoproject.com/en/6.0/topics/http/urls/
6  |   Examples:
7  |   Function views
8  |       1. Add an import:  from my_app import views
9  |       2. Add a URL to urlpatterns:  path('', views.home, name='home')
10 |   Class-based views
11 |       1. Add an import:  from other_app.views import Home
12 |       2. Add a URL to urlpatterns:  path('', Home.as_view(), name='home')
13 |   Including another URLconf
14 |       1. Import the include() function: from django.urls import include, path
15 |       2. Add a URL to urlpatterns:  path('blog/', include('blog.urls'))
16 |   """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22     path('admin/', admin.site.urls),
23     # path('', views.sayhello),
24     path('hello1/<str:username>', views.hello1),
25     path('hello2/<str:username>', views.hello2),
26     path('hello3/<str:username>', views.hello3),
27     path('hello4/<str:username1>/<str:username2>', views.hello4),
28     path('dice1/', views.dice1),
29
30 ]
```


views.py dice1.html X

templates > <> dice1.html

```
1 {% load static %}
2 <!DOCTYPE html>
3 <html lang="en">
4 <head>
5     <meta charset="UTF-8">
6     <meta name="viewport" content="width=device-width, initial-scale=1.0">
7     <title>Document</title>
8     <link rel="stylesheet" href="{% static 'css/style.css' %}">
9
10
11 </head>
12 <body>
13     test
14
15 </body>
16 </html>
```

F5

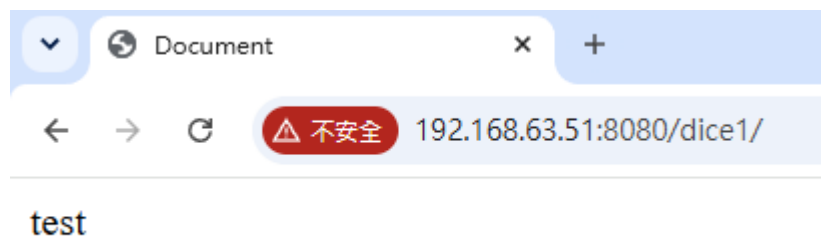

```
19
20 def hello3(request, username):
21     print(username)
22     now = datetime.now() #取得當前時間
23     print(now)
24     # return HttpResponse("Hello!")
25     return render(request, "hello3.html", locals())
26
27 def hello4(request, username1, username2):
28     print(f"username1:{username1}, username2:{username2}")
29     return HttpResponse(f"<b>Hello! {username1} and {username2}!<b>")
30
31 import random
32 def dice1(request):
33     no1=random.randint(1,6)
34     no2=random.randint(1,6)
35     no3=random.randint(1,6)
36     print(f"no1:{no1},no2:{no2},no3:{no3}")
37     #return HttpResponse(f"<b>Dice1!<b>")
38     return render(request, "dice1.html", {'no1':no1, 'no2':no2, 'no3':no3})
39     # now = datetime.now() #取得當前時間
40     # print(now)
41     # return HttpResponse("Hello!")
42     # return render(request, "hello3.html", locals())
43
```

點數一:1

點數二:1

點數三:6

```
1 {% load static %}
2 <!DOCTYPE html>
3 <html lang="en">
4
5 <head>
6     <meta charset="UTF-8">
7     <meta name="viewport" content="width=device-width, initial-scale=1.0">
8     <title>Document</title>
9     <link rel="stylesheet" href="{% static 'css/style.css' %}">
10
11
12 </head>
13
14 <body>
15     <h1>點數一:{{no1}}</h1>
16     <h1>點數二:{{no2}}</h1>
17     <h1>點數三:{{no3}}</h1>
18
19
20 </body>
21 </html>
```

F5

Python Debug Console

```
PS C:\S\Python\python_code\class_0708\project2> & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundle\libs\debugpy\launcher' '51980' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
```


Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
July 14, 2026 - 09:43:33
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: <https://docs.djangoproject.com/en/6.0/howto/deployment/>
no1:1,no2:1,no3:6
[14/Jul/2026 09:43:34] "GET /dice1/ HTTP/1.1" 200 338

```
views.py x urls.py <> dice1.html
myapp > views.py > dice2
19
20 def hello3(request, username):
21     print(username)
22     now = datetime.now() #取得當前時間
23     print(now)
24     # return HttpResponse("Hello!")
25     return render(request, "hello3.html", locals())
26
27 def hello4(request, username1, username2):
28     print(f"username1:{username1}, username2:{username2}")
29     return HttpResponse(f"<b>Hello! {username1} and {username2}!<b>")
30
31 import random
32 def dice1(request):
33     no1=random.randint(1,6)
34     no2=random.randint(1,6)
35     no3=random.randint(1,6)
36     print(f"no1:{no1},no2:{no2},no3:{no3}")
37     #return HttpResponse(f"<b>Dice1!<b>")
38     return render(request, "dice1.html", {'no1':no1, 'no2':no2, 'no3':no3})
39     # now = datetime.now() #取得當前時間
40     # print(now)
41     # return HttpResponse("Hello!")
42     # return render(request, "hello3.html", locals())
43
44 def dice2(request):
45     return HttpResponse(f"<b>Dice2!<b>")
```

F5

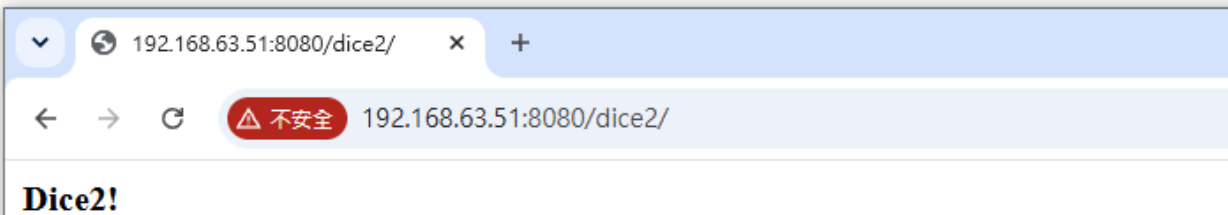

```
Python Debug Console + v
PS C:\S\Python\python_code\class_0708\project2> & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundle\libs\debugpy\launcher' '53929' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
July 14, 2026 - 10:17:29
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
[14/Jul/2026 10:17:31] "GET /dice2/ HTTP/1.1" 200 12
```




```
views.py x urls.py <> dice2.html
myapp > views.py > dice2
19
20 def hello3(request, username):
21     print(username)
22     now = datetime.now() #取得當前時間
23     print(now)
24     # return HttpResponse("Hello!")
25     return render(request, "hello3.html", locals())
26
27 def hello4(request, username1, username2):
28     print(f"username1:{username1}, username2:{username2}")
29     return HttpResponse(f"<b>Hello! {username1} and {username2}!<b>")
30
31 import random
32 def dice1(request):
33     no1=random.randint(1,6)
34     no2=random.randint(1,6)
35     no3=random.randint(1,6)
36     print(f"no1:{no1},no2:{no2},no3:{no3}")
37     #return HttpResponse(f"<b>Dice1!<b>")
38     return render(request, "dice1.html", {'no1':no1, 'no2':no2, 'no3':no3})
39 # now = datetime.now() #取得當前時間
40 # print(now)
41 # return HttpResponse("Hello!")
42 # return render(request, "hello3.html", locals())
43
44 def dice2(request):
45     student = {'id':1234, 'name':'John', 'sex':'M'}
46     fruit = ['apple', 'banana', 'orange']
47     #return HttpResponse(f"<b>Dice2!<b>")
48     return render(request, "dice2.html", {'s':student, 'f':fruit})
```

```
PS C:\S\Python\python_code\class_0708\project2> & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundle\libs\debugpy\launcher' '54042' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
```

Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
July 14, 2026 - 10:21:34
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: <https://docs.djangoproject.com/en/6.0/howto/deployment/>
[14/Jul/2026 10:21:34] "GET /dice2/ HTTP/1.1" 200 278

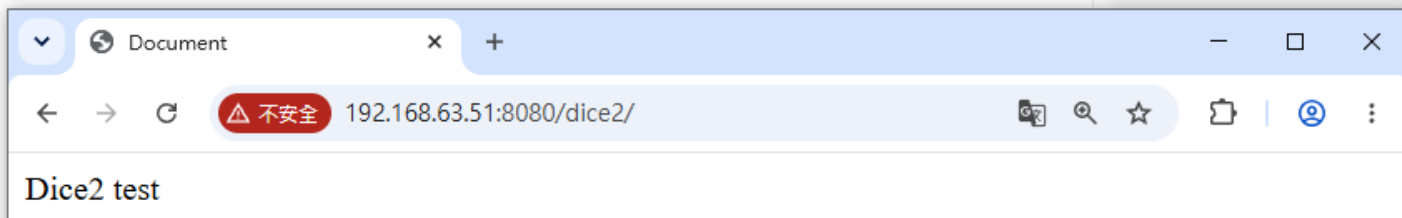

```

dice2.html x
templates > <> dice2.html > html
1 {% load static %}
2 <!DOCTYPE html>
3 <html lang="en">
4
5 <head>
6     <meta charset="UTF-8">
7     <meta name="viewport" content="width=device-width, initial-scale=1">
8     <title>Document</title>
9     <link rel="stylesheet" href="{% static 'css/style.css' %}">
10
11
12 </head>
13
14 <body>
15     <h1>學號:{{s.id}}</h1>
16     <h1>姓名:{{s.name}}</h1>
17     <h1>性別:{{s.sex}}</h1>
18     <h1>水果1:{{f.0}}</h1>
19     <h1>水果2:{{f.1}}</h1>
20     <h1>水果3:{{f.2}}</h1>
21 </body>
22
23 </html>

```

Document

← → ↻ 不安全 192.168.63.51:8000

學號:1234

姓名:John

性別:M

水果1:apple

水果2:banana

水果3:orange

```

views.py x urls.py
myapp > views.py > dice2
19
20 def hello3(request, username):
21     print(username)
22     now = datetime.now() #取得當前時間
23     print(now)
24     # return HttpResponse("Hello!")
25     return render(request, "hello3.html", locals())
26
27 def hello4(request, username1, username2):
28     print(f"username1:{username1},username2:{username2}")
29     return HttpResponse(f"<b>Hello! {username1} and {username2}</b>")
30
31 import random
32 def dice1(request):
33     no1=random.randint(1,6)
34     no2=random.randint(1,6)
35     no3=random.randint(1,6)
36     print(f"no1:{no1},no2:{no2},no3:{no3}")
37     #return HttpResponse(f"<b>Dice1!<b>")
38     return render(request, "dice1.html", {'no1':no1, 'no2':no2, 'no3':no3})
39     # now = datetime.now() #取得當前時間
40     # print(now)
41     # return HttpResponse("Hello!")
42     # return render(request, "hello3.html", locals())
43
44 def dice2(request):
45     student = {'id':1234, 'name':'John', 'sex':'M'}
46     fruit = ['apple', 'banana', 'orange']
47     #return HttpResponse(f"<b>Dice2!<b>")
48     return render(request, "dice2.html", {'s':student, 'f':fruit})

```

Python Debug Console

```

PS C:\S\Python\python_code\class_0708\project2> & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundle\libs\debugpy\launcher' '54139' '-.' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
July 14, 2026 - 10:27:09
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
[14/Jul/2026 10:27:10] "GET /dice2/ HTTP/1.1" 200 418

```

EXPLORES

views.py

urls.py

templates> dice3.html

OPEN EDITORS

myapp > views.py > ...

PROJECT2

.vscode

launch.json

myapp

__pycache__

migrations

__init__.py

admin.py

apps.py

models.py

tests.py

views.py

project2

__pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

static

templates

dice1.html

dice2.html

dice3.html

hello2.html

hello3.html

hello4.html

db.sqlite3

manage.py

32 quest):

36 no1:{no1},no2:{no2},no3:{no3}"

37 HttpResponse(f"Dice1!")

38 ender(request, "dice1.html",{ 'no1':no1, 'no2':no2, 'no3':no3

39 atetime.now() #取得當前時間

40 ow)

41 HttpResponse("Hello!")

42 render(request, "hello3.html",locals())

43

44 quest):

45 = {'id':1234,'name':'John','sex':'M'}

46 ['apple','banana','orange']

47 HttpResponse(f"Dice2!")

48 ender(request, "dice2.html",{ 's':student, 'f':fruit})

49

50 quest):

51 = {'name':'John','phone':'09111111','age':20}

52 = {'name':'Mary','phone':'09222222','age':31}

53 = {'name':'Tom','phone':'09333333','age':42}

54 = [person1, person2, person3]

55 =[]

56 rsons)

57 HttpResponse(f"Dice3!")

58 ender(request, "dice3.html",{ 'persons':persons})

59

templates> dice3.html

3 <html lang="en">

4

5 <head>

6 <meta charset="UTF-8">

7 <meta name="viewport" content="width=device-width,initial-scale=1">

8 <title>Document</title>

9 <link rel="stylesheet" href="{% static 'css/main.css' %}" %>

10 </head>

11

12 <body>

13 {% for data in persons %}

14 <h2>第{{forloop.counter}}位員工</h2>

15

16 姓名:{{data.name}}

17 電話:{{data.phone}}

18 年齡:{{data.age}}

19

20 {% empty %}

21 <p>沒有員工資料</p>

22

23 {% endfor %}

24 </body>

25

26 </html>

Python Debug Console

PS C:\S\Python\python_code\class_0708\project2> & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundle\libs\debugpy\launcher' '56764' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

PS C:\S\Python\python_code\class_0708\project2> c::c d 'c:\S\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundle\libs\debugpy\launcher' '56832' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

Watching for file changes with StatReloader

Performing system checks...

System check identified no issues (0 silenced).

July 14, 2026 - 11:10:55

Django version 6.0.7, using settings 'project2.settings'

Starting development server at http://0.0.0.0:8080/

Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/

[{'name': 'John', 'phone': '09111111', 'age': 20}, {'name': 'Mary', 'phone': '09222222', 'age': 31}, {'name': 'Tom', 'phone': '09333333', 'age': 42}]

[14/Jul/2026 11:10:59] "GET /dice3/ HTTP/1.1" 200 685

Document

192.168.63.51:8080/...

第1位員工

- 姓名:John
- 電話:09111111
- 年齡:20

第2位員工

- 姓名:Mary
- 電話:09222222
- 年齡:31

第3位員工

- 姓名:Tom
- 電話:09333333
- 年齡:42

	GET	POST
網址差異	網址會帶有 HTML Form 表單的參數與資料。	資料傳遞時，網址並不會改變。
資料傳遞量	由於是透過 URL 帶資料，所以有長度限制。	由於不透過 URL 帶參數，所以不受限於 URL 長度限制。
安全性	表單參數與填寫內容可在 URL 看到。	透過 HTTP Request 方式，故參數與填寫內容不會顯示於 URL。

3-8 以 GET 及 POST 傳送資料

133

網頁最常用來傳送資料的方式就是 GET 及 POST。HTTP Method: 表單中的 GET 與 POST 有什麼差別？先舉個例子，如果 HTTP 代表現在我們現實生活中寄信的機制，那麼信封的撰寫格式就是 HTTP。我們姑且將信封外的內容稱為 http-header，信封內的書信稱為 message-body，那麼 HTTP Method 就是你要告訴郵差的寄信規則。

假設 GET 表示信封內不得裝信件的寄送方式，如同是明信片一樣，你可以把要傳遞的資訊寫在信封(http-header)上，寫滿為止，價格比較便宜，但看的到不安全。

然而 POST 就是信封內有裝信件的寄送方式（信封有內容物），不但信封可以寫東西，信封內 (message-body) 還可以置入你想要寄送的資料或檔案，價格較貴，包在裡面安全看不到。


使用 GET 的時候我們直接將要傳送的資料以 Query String（一種 Key/Value 的編碼方式）加在我們要寄送的地址(URL)後面，然後交給郵差傳送。使用 POST 的時候則是將寄送地址(URL)寫在信封上，另外將要傳送的資料寫在另一張信紙後，將信紙放到信封裡面，交給郵差傳送(message-body)。

接著我來介紹一下實際的運作情況：

```

views.py x urls.py
myapp > views.py > get1
32 def dice1(request):
36     print(f"no1:{no1},no2:{no2},no3:{no3}")
37     #return HttpResponse(f"<b>Dice1!<b>")
38     return render(request, "dice1.html", {'no1':no1,'no2':
39 # now = datetime.now() #取得當前時間
40 # print(now)
41 # return HttpResponse("Hello!")
42 # return render(request, "hello3.html",locals())
43
44 def dice2(request):
45     student = {'id':1234,'name':'John','sex':'M'}
46     fruit = ['apple','banana','orange']
47     #return HttpResponse(f"<b>Dice2!<b>")
48     return render(request, "dice2.html", {'s':student,'f':
49
50 def dice3(request):
51     person1 = {'name':'John','phone':'09111111','age':20}
52     person2 = {'name':'Mary','phone':'09222222','age':31}
53     person3 = {'name':'Tom','phone':'09333333','age':42}
54     persons = [person1, person2, person3]
55     #persons=[]
56     print(persons)
57     #return HttpResponse(f"<b>Dice3!<b>")
58     return render(request, "dice3.html", {'persons':person
59
60 def get1(request):
61     return HttpResponse(f"<b>Get1!<b>")

```

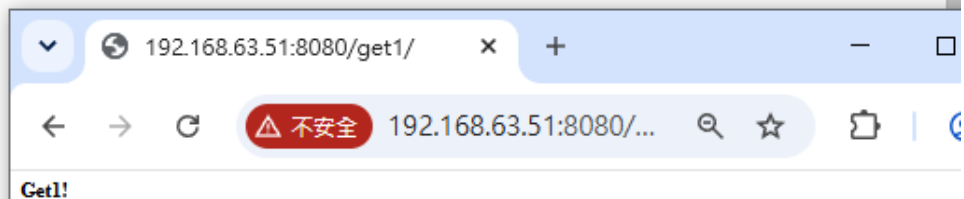

```

views.py x urls.py x
project2 > urls.py > ...
10 Class-based views
11     1. Add an import: from other_app.views import Home
12     2. Add a URL to urlpatterns: path('', Home.as_view()),
13 Including another URLconf
14     1. Import the include() function: from django.urls imp
15     2. Add a URL to urlpatterns: path('blog/', include('b
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22     path('admin/', admin.site.urls),
23     # path('', views.sayhello),
24     path('hello1/<str:username>/', views.hello1),
25     path('hello2/<str:username>/', views.hello2),
26     path('hello3/<str:username>/', views.hello3),
27     path('hello4/<str:username1>/<str:username2>/', views.
28     path('dice1/',views.dice1),
29     path('dice2/',views.dice2),
30     path('dice3/',views.dice3),
31
32     path('get1/',views.get1),
33
34 ]
35

```

EXPLORER

OPEN EDITORS

PROJECT2

- .vscode
 - launch.json
- myapp
 - __pycache__
 - migrations
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - views.py
- project2
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - static
 - templates
 - dice1.html
 - dice2.html
 - dice3.html
 - hello2.html
 - hello3.html
 - hello4.html
 - db.sqlite3
 - manage.py

urls.py

- 10 Class-based views
- 11 1. Add an import: from
- 12 2. Add a URL to urlpatterns
- 13 Including another URLconf
- 14 1. Import the include()
- 15 2. Add a URL to urlpatterns
- 16 ""
- 17 from django.contrib import
- 18 from django.urls import pat
- 19 from myapp import views
- 20
- 21 urlpatterns = [
- 22 path('admin/', admin.si
- 23 # path('', views.sayhel
- 24 path('hello1/<str:userr
- 25 path('hello2/<str:userr
- 26 path('hello3/<str:userr
- 27 path('hello4/<str:userr
- 28 path('dice1/', views.dic
- 29 path('dice2/', views.dic
- 30 path('dice3/', views.dic
- 31
- 32 path('get1/', views.get1
- 33
- 34]
- 35

views.py

- 32 def dice1(request):
- 36 print(f"no1:{no1},no2:{no2},no3:{no3}")
- 37 #return HttpResponse(f"Dice1!")
- 38 return render(request, "dice1.html")
- 39 # now = datetime.now() #取得當前時間
- 40 # print(now)
- 41 # return HttpResponse("Hello!")
- 42 # return render(request, "hello3.html")
- 43
- 44 def dice2(request):
- 45 student = {'id':1234,'name':'John'}
- 46 fruit = ['apple','banana','orange']
- 47 #return HttpResponse(f"Dice2!")
- 48 return render(request, "dice2.html")
- 49
- 50 def dice3(request):
- 51 person1 = {'name':'John','phone':'0912345678'}
- 52 person2 = {'name':'Mary','phone':'0987654321'}
- 53 person3 = {'name':'Tom','phone':'0901234567'}
- 54 persons = [person1, person2, person3]
- 55 #persons=[]
- 56 print(persons)
- 57 #return HttpResponse(f"Dice3!")
- 58 return render(request, "dice3.html")
- 59
- 60 def get1(request):
- 61 if request.method == 'GET':
- 62 name = request.GET["name"]
- 63 city = request.GET["city"]
- 64 print(f"name:{name},city:{city}")
- 65 return HttpResponse(f"Get1!")

dice3.html

- 1 {% load static %}
- 2 <!DOCTYPE html>
- 3 <html lang="en">
- 4
- 5 <head>
- 6 <meta charset="UTF-8">
- 7 <meta name="viewport" content="width=device-width, initial-scale=1">
- 8 <title>Document</title>
- 9 <link rel="stylesheet" href="{% static 'css/main.css' %}">
- 10 </head>
- 11
- 12 <body>
- 13 {% for data in persons %}
- 14 <h2>第{{forloop.counter}}位員工</h2>
- 15
- 16 姓名:{{data.name}}
- 17 電話:{{data.phone}}
- 18 年齡:{{data.age}}
- 19
- 20 {% empty %}
- 21 <p>沒有員工資料</p>
- 22
- 23 {% endfor %}
- 24 </body>
- 25
- 26 </html>

Python Debug Console

- PS C:\S\Python\python_code\class_0708\project2> c:; cd 'c:\S\Python\python_code\class_0708\project2'; & 'C:\U\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
- WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead. For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
- name:bill,city:台中
- [14/Jul/2026 11:24:29] "GET /get1/?name=bill&city=%E5%8F%B0%E4%B8%AD HTTP/1.1" 200 11
- Watching for file changes with StatReload
- Performing system checks...
- System check identified no issues (0 silenced).
- July 14, 2026 - 11:25:02
- Django version 6.0.7, using settings 'project2.settings'
- Starting development server at http://0.0.0.0:8080/
- Quit the server with CTRL-BREAK.
- WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead. For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
- name:bill,city:台中
- [14/Jul/2026 11:25:06] "GET /get1/?name=bill&city=%E5%8F%B0%E4%B8%AD HTTP/1.1" 200 11

192.168.63.51:8080/get1/?name=...

← → ↺ 不安全 192.168.63.51:8080/get1/?name=bill&city=台中

Get1!

EXPLORER

OPEN EDITORS

project2 > urls.py > ...

views.py > dice3

templates > dice3.html

urls.py

views.py

dice3.html

10 Class-based views

11 1. Add an import: from django.contrib import admin

12 2. Add a URL to urlpatterns

13 Including another URLconf

14 1. Import the include() function: from django.urls import include

15 2. Add a URL to urlpatterns

16 """

17 from django.contrib import admin

18 from django.urls import path

19 from myapp import views

20

21 urlpatterns = [

22 path('admin/', admin.site.urls),

23 # path('', views.say_hello),

24 path('hello1/<str:username>', views.hello1),

25 path('hello2/<str:username>', views.hello2),

26 path('hello3/<str:username>', views.hello3),

27 path('hello4/<str:username>', views.hello4),

28 path('dice1/', views.dice1),

29 path('dice2/', views.dice2),

30 path('dice3/', views.dice3),

31

32 path('get1/', views.get1),

33

34]

35

32 def dice1(request):

36 print(f"no1:{no1},no2:{no2},no3:{no3}")

37 #return HttpResponse(f"Dice1: {no1}, {no2}, {no3}")

38 return render(request, "dice1.html", {"no1": no1, "no2": no2, "no3": no3})

39 # now = datetime.now() #取得當前時間

40 # print(now)

41 # return HttpResponse("Hello!")

42 # return render(request, "hello.html", {"name": "Hello!"})

43

44 def dice2(request):

45 student = {'id':1234,'name':'John','phone':'123456789'} #取得當前時間

46 fruit = ['apple','banana','orange']

47 #return HttpResponse(f"Dice2: {student}, {fruit}")

48 return render(request, "dice2.html", {"student": student, "fruit": fruit})

49

50 def dice3(request):

51 person1 = {'name':'John','phone':'123456789'}

52 person2 = {'name':'Mary','phone':'123456789'}

53 person3 = {'name':'Tom','phone':'123456789'}

54 persons = [person1, person2, person3]

55 #persons=[]

56 print(persons)

57 #return HttpResponse(f"Dice3: {persons}")

58 return render(request, "dice3.html", {"persons": persons})

59

60 def get1(request):

61 if request.method == 'GET':

62 name = request.GET["name"]

63 city = request.GET["city"]

64 print(f"name:{name},city:{city}")

65 return HttpResponse(f"Get1!")

1 {% load static %}

2 <!DOCTYPE html>

3 <html lang="en">

4

5 <head>

6 <meta charset="UTF-8">

7 <meta name="viewport" content="width=device-width, initial-scale=1">

8 <title>Document</title>

9 <link rel="stylesheet" href="{% static 'css/main.css' %}">

10 </head>

11

12 <body>

13 {% for data in persons %}

14 <h2>第{{forloop.counter}}位員工

15

16 姓名:{{data.name}}

17 電話:{{data.phone}}

18 年齡:{{data.age}}

19

20 {% empty %}

21 <p>沒有員工資料</p>

22

23 {% endfor %}

24 </body>

25

26 </html>

192.168.63.51:8080/get1/?city=台中

192.168.63.51:8080/get1/?city=台中&name=bill

Get1!

Python Debug Console

PS C:\S\Python\python_code\class_0708\project2> cd 'c:\S\Python\python_code\class_0708\project2' & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

Performing system checks...

System check identified no issues (0 silenced).

July 14, 2026 - 11:26:08

Django version 6.0.7, using settings 'project2.settings'

Starting development server at http://0.0.0.0:8080/

Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/

name:bill,city:台中

[14/Jul/2026 11:26:12] "GET /get1/?city=%E5%8F%B0%E4%B8%AD HTTP/1.1" 200 1

1

PS C:\S\Python\python_code\class_0708\project2> cd 'c:\S\Python\python_code\class_0708\project2' & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

Watching for file changes with StatReloader

Performing system checks...

System check identified no issues (0 silenced).

July 14, 2026 - 11:26:29

Django version 6.0.7, using settings 'project2.settings'

Starting development server at http://0.0.0.0:8080/

Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/

name:bill,city:台中

[14/Jul/2026 11:26:32] "GET /get1/?name=bill&city=%E5%8F%B0%E4%B8%AD HTTP/1.1" 200 11

Not Found: /favicon.ico

[14/Jul/2026 11:26:32] "GET /favicon.ico HTTP/1.1" 404 3516


```

urls.py
project2 > urls.py > ...
12 2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
13 Including another URLconf
14 1. Import the include() function: from django.urls import include,
15 2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22     path('admin/', admin.site.urls),
23     # path('', views.sayhello),
24     path('hello1/<str:username>', views.hello1),
25     path('hello2/<str:username>', views.hello2),
26     path('hello3/<str:username>', views.hello3),
27     path('hello4/<str:username1>/<str:username2>', views.hello4),
28     path('dice1/', views.dice1),
29     path('dice2/', views.dice2),
30     path('dice3/', views.dice3),
31
32     path('get1/', views.get1),
33
34 ]
--

```

```

views.py
myapp > views.py > dice3
44 def dice2(request):
45     student = {'id':1234,'name':'John','sex':'M'}
46     fruit = ['apple','banana','orange']
47     #return HttpResponse(f"<b>Dice2!<b>")
48     return render(request, "dice2.html", {'s':student, 'f':fruit})
49
50 def dice3(request):
51     person1 = {'name':'John','phone':'09111111','age':20}
52     person2 = {'name':'Mary','phone':'09222222','age':31}
53     person3 = {'name':'Tom','phone':'09333333','age':42}
54     persons = [person1, person2, person3]
55     #persons=[]
56     print(persons)
57     #return HttpResponse(f"<b>Dice3!<b>")
58     return render(request, "dice3.html", {'persons':persons})
59
60 def get1(request):
61     if request.method == 'GET':
62         name = request.GET["name"]
63         city = request.GET["city"]
64         print(f"name:{name},city:{city}")
65     return HttpResponse(f"<b>Get1!<b>")

```

```
urls.py
project2 > urls.py > ...
12 2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
13 Including another URLconf
14 1. Import the include() function: from django.urls import include,
15 2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22     path('admin/', admin.site.urls),
23     # path('', views.sayhello),
24     path('hello1/<str:username>/', views.hello1),
25     path('hello2/<str:username>/', views.hello2),
26     path('hello3/<str:username>/', views.hello3),
27     path('hello4/<str:username1>/<str:username2>/', views.hello4),
28     path('dice1/', views.dice1),
29     path('dice2/', views.dice2),
30     path('dice3/', views.dice3),
31
32     path('get1/', views.get1),
33
34
35
views.py
myapp > views.py > dice3
44 def dice2(request):
45     student = {'id':1234, 'name': 'J
46     fruit = ['apple', 'banana', 'ora
47     #return HttpResponse(f"<b>Dice
48     return render(request, "dice2.
49
50 def dice3(request):
51     person1 = {'name': 'John', 'phon
52     person2 = {'name': 'Mary', 'phon
53     person3 = {'name': 'Tom', 'phone
54     persons = [person1, person2, p
55     #persons=[]
56     print(persons)
57     #return HttpResponse(f"<b>Dice
58     return render(request, "dice3.
59
60 def get1(request):
61     if request.method == 'GET':
62         name = request.GET["name"]
63         city = request.GET["city"]
64         print(f"name:{name},city:{
65         return HttpResponse(f"<b>Get1!
```

```
basici07.py
13 print(dict2)
14 print(".....3.....")
15 #修改
16 dict1["name"]="Mary"
17 print(dict1)
18 #刪除
19 print(".....4.....")
20 del dict1['code']
21 print(dict1)
22 print(".....5.....")
23 #取值
24 print(dict1['dept'])
25 # print(dict1['sample']) #error
26 print(dict1.get('sample')) #不存在傳回None
27 print(dict1.get('sample', "no")) #不存在傳回None
28 print(dict1.get('dept', "no"))
29 print(".....6.....")
30 #走訪
31 #取key, 藉由key產生value
32 for key in dict1:
33     print(f"{key}->{dict1[key]}")
34 print(".....7.....")
35 # 使用items(), 取得集合tuple
36 for item in dict1.items():
```

MultiValueDictKeyError at /get1/

'name'

Request Method: GET
Request URL: http://192.168.63.51:8080/get1/?city=%E5%8F%B0%E4%B8%AD
Django Version: 6.0.7
Exception Type: MultiValueDictKeyError
Exception Value: 'name'
Exception Location: C:\Users\User\AppData\Local\Programs\Python\Python314\Lib\site-packages\django\utils\datastructures.py, line 88, in __getitem__
Raised during: myapp.views.get1
Python Executable: C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe
Python Version: 3.14.0
Python Path: ['C:\\Users\\User\\python_code\\class_0708\\project2',
C:\\Users\\User\\.vscode\\extensions\\ms-python.debugpy-2026.6.0-win32-x64\\bundled\\libs\\debugpy_vendored\\pydevd',
C:\\Users\\User\\AppData\\Local\\Programs\\Python\\Python314\\python314.zip',
C:\\Users\\User\\AppData\\Local\\Programs\\Python\\Python314\\DLLs',
C:\\Users\\User\\AppData\\Local\\Programs\\Python\\Python314\\Lib',
C:\\Users\\User\\AppData\\Local\\Programs\\Python\\Python314',
C:\\Users\\User\\AppData\\Local\\Programs\\Python\\Python314\\Lib\\site-packages']
Server time: Tue, 14 Jul 2026 11:29:26 +0800

urls.py

get1.html

templates > get1.html

```
1 {% load static %}
2 <!DOCTYPE html>
3 <html lang="en">
4
5 <head>
6     <meta charset="UTF-8">
7     <meta name="viewport" content="width=device-width,
8     <title>Document</title>
9     <link rel="stylesheet" href="{% static 'css/style.
10
11
12 </head>
13
14 <body>
15     <h1>Django網站</h1>
16     {% if name != None and city != None %}
17         <h2>歡迎來自{{city}}的{{name}}光臨本網站!</h2>
18     {% else %}
19         <h2>無資料!</h2>
20     {% endif %}
21 </body>
22
23 </html>
```

views.py

myapp > views.py > get1

```
44 request):
45     t = {'id':1234,'name':'John','sex':'M'}
46     = ['apple','banana','orange']
47     n HttpResponse(f"<b>Dice2!<b>")
48     render(request, "dice2.html",{ 's':student,'f':fruit})
49
50 request):
51     1 = {'name':'John','phone':'09111111','age':20}
52     2 = {'name':'Mary','phone':'09222222','age':31}
53     3 = {'name':'Tom','phone':'09333333','age':42}
54     s = [person1, person2, person3]
55     ns=[]
56     persons)
57     n HttpResponse(f"<b>Dice3!<b>")
58     render(request, "dice3.html",{ 'persons':persons})
59
60 equest):
61     uest.method == 'GET':
62     ame = request.GET["name"]
63     ity = request.GET["city"]
64     me = request.GET.get("name", None ) #若沒有name參數，預設為Guest
65     ty = request.GET.get("city", None ) #若沒有city參數，預設為None
66     int(f"name:{name},city:{city}")
67     n HttpResponse(f"<b>Get1!<b>")
68     render(request, "get1.html",locals())
```

Python Debug Console

```
project2> c:; cd 'c:\S\Python\python_
code\class_0708\project2'; & 'C:\Users
\User\AppData\Local\Programs\Python\Py
thon314\python.exe' 'c:\Users\User\vs
...
raise TemplateSyntaxError(
...<2 lines>...
)
django.template.exceptions.TemplateSyn
taxError: Template: C:\S\Python\python
_code\class_0708\project2\templates\ge
t1.html, Could not parse the remainder
: '!=None' from '!=None'
[14/Jul/2026 11:42:14] "GET /get1/?cit
y=%E5%8F%B0%E4%B8%AD&name=bill HTTP/1.
1" 500 168842
C:\S\Python\python_code\class_0708\pro
ject2\myapp\views.py changed, reloadin
g.
PS C:\S\Python\python_code\class_0708\
project2> c:; cd 'c:\S\Python\python_
code\class_0708\project2'; & 'C:\Users
\User\AppData\Local\Programs\Python\Py
thon314\python.exe' 'c:\Users\User\vs
code\extensions\ms-python.debugpy-2026
.6.0-win32-x64\bundled\libs\debugpy\la
uncher' '58290' '--' 'C:\S\Python\pyth
on_code\class_0708\project2\manage.py'
'runserver' '0.0.0.0:8080'
Watching for file changes with StatRel
oader
Performing system checks...

System check identified no issues (0 s
ilenced).
July 14, 2026 - 11:42:43
Django version 6.0.7, using settings '
project2.settings'
Starting development server at http://
0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server.
Do not use it in a production setting
. Use a production WSGI or ASGI server
instead.
For more information on production ser
vers see: https://docs.djangoproject.c
om/en/6.0/howto/deployment/
name:bill,city:台中
[14/Jul/2026 11:42:44] "GET /get1/?cit
y=%E5%8F%B0%E4%B8%AD&name=bill HTTP/1.
1" 200 358
```



Django網站

無資料!

```

urls.py  < get2.html
project2 > urls.py > ...
1  """
2  URL configuration for project2 project.
3
4  The `urlpatterns` list routes URLs to views. For more information pl
5  | https://docs.djangoproject.com/en/6.0/topics/http/urls/
6  Examples:
7  Function views
8  1. Add an import: from my_app import views
9  2. Add a URL to urlpatterns: path('', views.home, name='home')
10 Class-based views
11 1. Add an import: from other_app.views import Home
12 2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
13 Including another URLconf
14 1. Import the include() function: from django.urls import include
15 2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22     path('admin/', admin.site.urls),
23     # path('', views.sayhello),
24     path('hello1/<str:username>', views.hello1),
25     path('hello2/<str:username>', views.hello2),
26     path('hello3/<str:username>', views.hello3),
27     path('hello4/<str:username1>/<str:username2>', views.hello4),
28     path('dice1/', views.dice1),
29     path('dice2/', views.dice2),
30     path('dice3/', views.dice3),
31
32     path('get1/', views.get1),
33     path('get2/', views.get2),
34
35 ]
36

```

```

urls.py  < get2.html  <
templates > < get2.html
1  {% load static %}
2  <!DOCTYPE html>
3  <html lang="en">
4
5  <head>
6  <meta charset="UTF-8">
7  <meta name="viewport" content="width=device-width, initial-scale=1">
8  <title>Document</title>
9  <link rel="stylesheet" href="{% static 'css/style.css' %}">
10
11 </head>
12
13 <body>
14 <h1>Django網站</h1>
15 {% if status %}
16 <h2>歡迎來自{{city}}的{{name}}光臨本網站!</h2>
17 {% else %}
18 <h2>無資料!</h2>
19 {% endif %}
20
21 </body>
22
23 </html>

```

```

views.py  < get2
myapp > views.py > get2
43
44 def dice2(request):
45     student = {'id':1234,'name':'John','sex':'M'}
46     fruit = ['apple','banana','orange']
47     #return HttpResponse(f"<b>Dice2!<b>")
48     return render(request, "dice2.html",{'s':student,'f':fruit})
49
50 def dice3(request):
51     person1 = {'name':'John','phone':'09111111','age':20}
52     person2 = {'name':'Mary','phone':'09222222','age':31}
53     person3 = {'name':'Tom','phone':'09333333','age':42}
54     persons = [person1, person2, person3]
55     #persons=[]
56     print(persons)
57     #return HttpResponse(f"<b>Dice3!<b>")
58     return render(request, "dice3.html",{'persons':persons})
59
60 def get1(request):
61     if request.method == 'GET':
62         #name = request.GET["name"]
63         #city = request.GET["city"]
64         name = request.GET.get("name", None) #若沒有name參數，預設為Guest
65         city = request.GET.get("city", None) #若沒有city參數，預設為None
66         print(f"name:{name},city:{city}")
67         #return HttpResponse(f"<b>Get1!<b>")
68         return render(request, "get1.html",locals())
69
70 def get2(request):
71     if request.method == 'GET':
72         try:
73             name = request.GET["name"]
74             city = request.GET["city"]
75             #name = request.GET.get("name", None) #若沒有name參數，預設為Guest
76             #city = request.GET.get("city", None) #若沒有city參數，預設為None
77             print(f"name:{name},city:{city}")
78             status = True
79         except:
80             status = False
81             print("name or city is missing")
82         #return HttpResponse(f"<b>Get1!<b>")
83         return render(request, "get2.html",locals())

```

```

Python Debug Console
PS C:\S\Python\python_code\class_0708\project2> & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundled\libs\debugpy\launcher' '61413' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
July 14, 2026 - 13:28:08
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

```

```


WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
name:bill,city:台中
[14/Jul/2026 13:28:13] "GET /get1/?city=%E5%8F%B0%E4%B8%AD&name=bill HTTP/1.1" 200 358
name:None,city:台中
[14/Jul/2026 13:28:22] "GET /get1/?city=%E5%8F%B0%E4%B8%AD HTTP/1.1" 200 327

```

et1/?city=台中

Django網站

無資料!

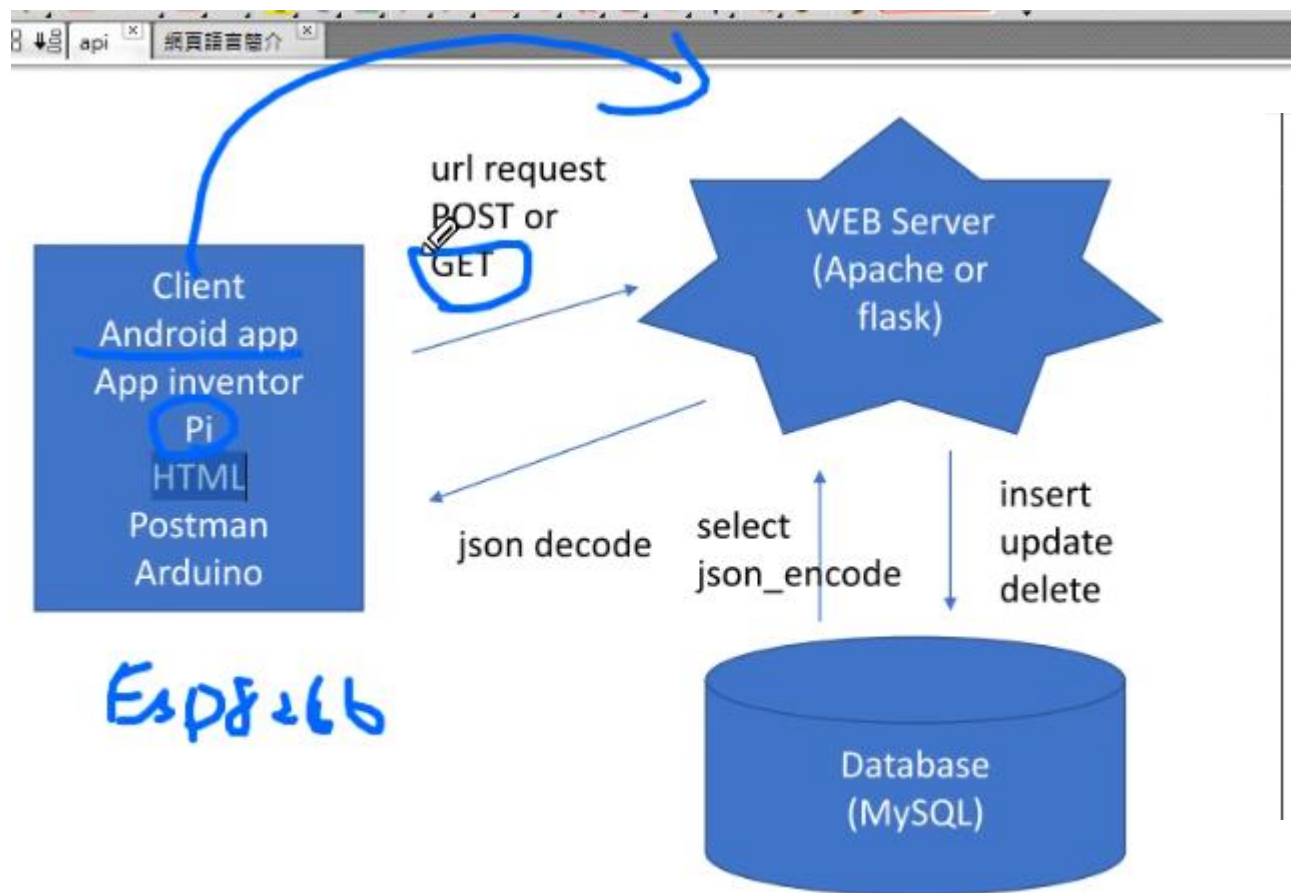

```
# sudo python3 manage.py runserver 0.0.0.0:8000
```

Document x +

127.0.0.1:8000/get3/load/

應用程式 桃竹苗分署學員學... 桃竹苗分署 - 網頁... show django mysql

Django網站

帳號:

密碼:

表單GET之方式：如下頁

urls.py

get2.html

project2 > urls.py > ...

```
1 """
2 URL configuration for project2 project.
3
4 The `urlpatterns` list routes URLs to views. For more information please see:
5     https://docs.djangoproject.com/en/6.0/topics/http/urls/
6 Examples:
7 Function views
8     1. Add an import: from my_app import views
9     2. Add a URL to urlpatterns: path('', views.home, name='home')
10 Class-based views
11     1. Add an import: from other_app.views import Home
12     2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
13 Including another URLconf
14     1. Import the include() function: from django.urls import include
15     2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22     path('admin/', admin.site.urls),
23     # path('', views.sayhello),
24     path('hello1/<str:username>', views.hello1),
25     path('hello2/<str:username>', views.hello2),
26     path('hello3/<str:username>', views.hello3),
27     path('hello4/<str:username1>/<str:username2>', views.hello4),
28     path('dice1/', views.dice1),
29     path('dice2/', views.dice2),
30     path('dice3/', views.dice3),
31
32     path('get1/', views.get1),
33     path('get2/', views.get2),
34     path('get3/', views.get3),
35
36 ]
37
```

views.py

myapp > views.py > get3

```
60 def get1(request):
61     #city = request.GET["city"]
62     name = request.GET.get("name", None) #若沒有name參數, 預設為Guest
63     city = request.GET.get("city", None) #若沒有city參數, 預設為None
64     print(f"name:{name},city:{city}")
65     #return HttpResponse(f"<b>Get1!<b>")
66     return render(request, "get1.html", locals())
67
68 def get2(request):
69     if request.method == 'GET':
70         try:
71             name = request.GET["name"]
72             city = request.GET["city"]
73             #name = request.GET.get("name", None) #若沒有name參數, 預設為Guest
74             #city = request.GET.get("city", None) #若沒有city參數, 預設為None
75             print(f"name:{name},city:{city}")
76             status = True
77         except:
78             status = False
79             print("name or city is missing")
80         #return HttpResponse(f"<b>Get1!<b>")
81         return render(request, "get2.html", locals())
82
83 def get3(request):
84     """
85     if request.method == 'GET':
86         try:
87             name = request.GET["name"]
88             city = request.GET["city"]
89             #name = request.GET.get("name", None) #若沒有name參數, 預設為Guest
90             #city = request.GET.get("city", None) #若沒有city參數, 預設為None
91             print(f"name:{name},city:{city}")
92             status = True
93         except:
94             status = False
95             print("name or city is missing")
96         """
97         return HttpResponse(f"<b>Get3!<b>")
98         #return render(request, "get2.html", locals())
99
100
```

Python Debug Console

project2> & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bin\python_launcher.exe' '0.0.0.0:8080' 'runserver' '0.0.0.0:8080'

```
0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server.
Do not use it in a production setting
. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
PS C:\S\Python\python_code\class_0708\project2> c:; cd 'c:\S\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\.vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundled\libs\debugpy\launcher' '61552' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
July 14, 2026 - 13:32:23
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server.
Do not use it in a production setting
. Use a production WSGI or ASGI server instead.
For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/
name:bill,city:台中
[14/Jul/2026 13:32:28] "GET /get1/?city=%E5%B0%B8%E4%B8%AD&name=bill HTTP/1.1" 200 358
[14/Jul/2026 13:32:43] "GET /get3 HTTP/1.1" 301 0
[14/Jul/2026 13:32:43] "GET /get3/ HTTP/1.1" 200 11
```

192.168.63.51:8080/get3/

192.168.63.51:8080/get3/

Get3!

EXPLORED

OPEN EDITORS

PROJECT2

.vscode

launch.json

myapp

__pycache__migrations__init__.pyadmin.pyapps.pymodels.pytests.pyviews.py

project2

__pycache____init__.pyasgi.pysettings.pyurls.pywsgi.py

static

dice1.htmldice2.htmldice3.htmlget1.htmlget2.htmlget3.htmlhello2.htmlhello3.htmlhello4.html

db.sqlite3manage.py

urls.py

1 """
2 URL configuration for project2 project.
3
4 The `urlpatterns` list routes URLs to views. For more information please see the <https://docs.djangoproject.com/en/6.0/topics/http/urls/>
5 Examples:
6 Function views
7 1. Add an import: from my_app import views
8 2. Add a URL to urlpatterns: path('', views.home, name='home')
9 Class-based views
10 1. Add an import: from other_app.views import Home
11 2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
12 Including another URLconf
13 1. Import the include() function: from django.urls import include
14 2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
15
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22 path('admin/', admin.site.urls),
23 # path('', views.sayhello),
24 path('hello1/<str:username>', views.hello1),
25 path('hello2/<str:username>', views.hello2),
26 path('hello3/<str:username>', views.hello3),
27 path('hello4/<str:username1>/<str:username2>', views.hello4),
28 path('dice1/', views.dice1),
29 path('dice2/', views.dice2),
30 path('dice3/', views.dice3),
31
32 path('get1/', views.get1),
33 path('get2/', views.get2),
34 #path('get3/', views.get3),
35 path('get3/<str:mode>', views.get3),
36
37]
38

views.py

70 def get2(request):
72 try:
73 name = request.GET["name"]
74 city = request.GET["city"]
75 #name = request.GET.get("name", None) #若沒有name參數, 預設為Guest
76 #city = request.GET.get("city", None) #若沒有city參數, 預設為None
77 print(f"name:{name},city:{city}")
78 status = True
79 except:
80 status = False
81 print("name or city is missing")
82 #return HttpResponse(f"Get1")
83 return render(request, "get2.html", locals())
84
85 def get3(request, mode):
86
87 if mode == "save":
88 return HttpResponse(f"已送出")
89 elif mode == "load":
90 return render(request, "get3.html", locals())
91
92 return HttpResponse(f"網址錯誤")

Python Debug Console

project2> c:; cd 'c:\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\vs...
...
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server.
Do not use it in a production setting.
. Use a production WSGI or ASGI server instead.
For more information on production servers see: <https://docs.djangoproject.com/en/6.0/howto/deployment/>
[14/Jul/2026 13:43:24] "GET /get3/load/ HTTP/1.1" 301 0
[14/Jul/2026 13:43:24] "GET /get3/load/ HTTP/1.1" 200 272
Not Found: /favicon.ico
[14/Jul/2026 13:43:24] "GET /favicon.ico HTTP/1.1" 404 3829
PS C:\Python\python_code\class_0708\project2> c:; cd 'c:\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundled\libs\debugpy\launcher' '62200' '--' 'C:\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
July 14, 2026 - 13:43:59
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BREAK.

WARNING: This is a development server.
Do not use it in a production setting.
. Use a production WSGI or ASGI server instead.
For more information on production servers see: <https://docs.djangoproject.com/en/6.0/howto/deployment/>

Document

192.168.63.51:8080/get3/load/
test

Python 3.14 (64-bit) Go Live

Python Debugger: Django

在這裡輸入文字來搜尋

project2

urls.pyget3.htmlviews.py

OPEN EDITORStemplates > get3.html > htmlmyapp > views.py > get3

PROJECT2

.vscode

launch.json

myapp

__pycache__

migrations

__init__.py

admin.py

apps.py

models.py

tests.py

views.py

project2

__pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

static

1

{% load static %}

2

<!DOCTYPE html>

3

<html lang="en">

4

5

<head>

6

<meta charset="UTF-8">

7

<meta name="viewport" content="width=device-width, initial-scale=1">

8

<title>Document</title>

9

10

</head>

11

12

<body>

13

<h1>Django網站</h1>

14

<form action="/get3/save/" method="get">

15

<div>

16

<label for="username">帳號:</label>

17

<input type="text" name="username">

18

</div>

19

<div>

20

<label for="passwd">密碼:</label>

21

<input type="password" name="passwd">

22

</div>

23

<div>

24

<button type="submit"> 登入 </button>

25

<button type="reset"> 清除 </button>

26

</div>

</body>

</form>

</div>

</div>

</html>

70

def get2(request):

72

try:

73

name = request.GET["name"]

74

city = request.GET["city"]

75

#name = request.GET.get("name", None) #name = request.GET.get("city", None) #name = request.GET.get("city", None)

76

#city = request.GET.get("city", None) #name = request.GET.get("city", None)

77

print(f"name:{name},city:{city}")

78

status = True

79

except:

80

status = False

81

print("name or city is missing")

82

#return HttpResponse(f"Get1!")

83

return render(request, "get2.html", locals())

84

85

def get3(request, mode):

86

87

if mode == "save":

88

return HttpResponse(f"已送出")

89

elif mode == "load":

90

return render(request, "get3.html", locals())

91

92

return HttpResponse(f"網址錯誤")

Python Debug Console

project2> c:\cd c:\S\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundled\libs\debugpy\launcher' '62498' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

PS C:\S\Python\python_code\class_0708\project2> c:\cd c:\S\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\Users\User\vscode\extensions\ms-python.debugpy-2026.6.0-win32-x64\bundled\libs\debugpy\launcher' '62498' '--' 'C:\S\Python\python_code\class_0708\project2\manage.py' 'runserver' '0.0.0.0:8080'

Watching for file changes with StatReloader

Performing system checks...

System check identified no issues (0 silenced).

July 14, 2026 - 13:55:05

Django version 6.0.7, using settings 'project2.settings'

Starting development server at http://0.0.0.0:8080/

Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.

For more information on production servers see: https://docs.djangoproject.com/en/6.0/howto/deployment/

[14/Jul/2026 13:55:14] "GET /get3/save / HTTP/1.1" 200 16

[14/Jul/2026 13:56:17] "GET /get3/load / HTTP/1.1" 200 699

[14/Jul/2026 13:57:19] "GET /get3/save / HTTP/1.1" 200 16

192.168.63.51:8080/get3/save

← → ↻ ⚠ 不安全 192.168.63.51:8080/get3/save/ 🔍 ☆ 📄 | 🌐 ⋮

已送出

Python Python 3.14 (64-bit) Go Live

EXPLORER

OPEN EDITORS

PROJECT2

.vscode

launch.json

myapp

__pycache__

migrations

__init__.py

admin.py

apps.py

models.py

tests.py

views.py

project2

__pycache__

__init__.py

asgi.py

settings.py

urls.py

wsgi.py

static

get3_response.html

1 {% load static %}

2 <!DOCTYPE html>

3 <html lang="en">

4

5 <head>

6 <meta charset="UTF-8">

7 <meta name="viewport" content="width=device-width, initial-scale=1">

8 <title>Document</title>

9

10 </head>

11

12 <body>

13 test

14 </body>

15

16 </html>

views.py

myapp > views.py > get3

70 def get2(request):

72 try:

73 name = request.GET["name"]

74 city = request.GET["city"]

75 #name = request.GET.get("name", None) #若沒有name參數

76 #city = request.GET.get("city", None) #若沒有city參數

77 print(f"name:{name},city:{city}")

78 status = True

79 except:

80 status = False

81 print("name or city is missing")

82 #return HttpResponse(f"Get1!")

83 return render(request, "get2.html", locals())

84

85 def get3(request, mode):

86

87 if mode == "save":

88 #username = request.GET["username"]

89 #passwd = request.GET["passwd"]

90 username = request.GET.get("username", None)

91 passwd = request.GET.get("passwd", None)

92 print(f"username:{username},passwd:{passwd}")

93 #return HttpResponse(f"已送出")

94 return render(request, "get3_response.html", locals())

95 elif mode == "load":

96 return render(request, "get3.html", locals())

Python Debug Console

c:\S\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\User...

vers see: https://docs.djangoproject.com/en/6.0/howto/deployment/

PS C:\S\Python\python_code\class_0708\project2> c:: cd 'c:\S\Python\python_code\class_0708\project2'; & 'C:\Users\User\AppData\Local\Programs\Python\Python314\python.exe' 'c:\User...

Watching for file changes with watchdog

Performing system checks...

System check identified no issues (0.00s).

July 14, 2026 - 14:04:20

Django version 6.0.7, using settings 'project2.settings'

Starting development server at 0.0.0.0:8080/

Quit the server with CTRL-BR

WARNING: This is a development server. Do not use it in a production environment. Use a production WSGI or ASGI server instead.

For more information on production deployment, see https://docs.djangoproject.com/en/6.0/howto/deployment/


username=None,passwd=None

[14/Jul/2026 14:04:25] "GET / HTTP/1.1" 200 214

Document

192.168.63.51:8080/get3/save/

test



...

templates > get3 response.html > html

➤ OUTLINE

views.py ×

myapp >  views.py >  get3

```

70 def get2(request):
71     try:
72         name = request.GET["name"]
73         city = request.GET["city"]
74         #name = request.GET.get("name", None) #若沒有name參數，
75         #city = request.GET.get("city", None) #若沒有city參數，
76         print(f"name:{name},city:{city}")
77         status = True
78     except:
79         status = False
80         print("name or city is missing")
81     #return HttpResponse(f"<b>Get1!<b>")
82     return render(request, "get2.html", locals())
83
84
85 def get3(request, mode):
86
87     if mode == "save":
88         #username = request.GET["username"]
89         #passwd = request.GET.get["passwd"]
90         username = request.GET.get("username", None)
91         passwd = request.GET.get("passwd", None)
92         print(f"username:{username},passwd:{passwd}")
93         #return HttpResponse(f"<b>已送出</b>")
94         return render(request, "get3_response.html", locals())
95     elif mode == "load":
96         return render(request, "get3.html", locals())
97
98     return HttpResponse(f"<b>網址錯誤<b>")

```

  Python Debug Console   

```
lass_0708\project2> c:; cd
'c:\S\Python\python_code\cla
ss_0708\project2'; & 'C:\Use
rs\User\AppData\Local\Progra
```

```
System check identified no issues (0 silenced).
July 14, 2026 - 14:07:57
Django version 6.0.7, using settings 'project2.settings'
Starting development server at http://0.0.0.0:8080/
Quit the server with CTRL-BR
EAK.
```

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server instead.



For more information on production servers see: <https://docs.djangoproject.com/en/6>.

```
username:None,passwd:None
[14/Jul/2026 14:07:58] "GET
/get3/save/ HTTP/1.1" 200 31
5
```

```
[14/Jul/2026 14:08:02] "GET /get3/load/ HTTP/1.1" 200 69
```

```
username:,passwd:
[14/Jul/2026 14:08:06] "GET
/get3/save/?username=&passwd
= HTTP/1.1" 200 307
```

```
username:abc,passwd:1234
[14/Jul/2026 14:08:29] "GET
/get3/save/?username=abc&pas
swd=1234 HTTP/1.1" 200 314
```

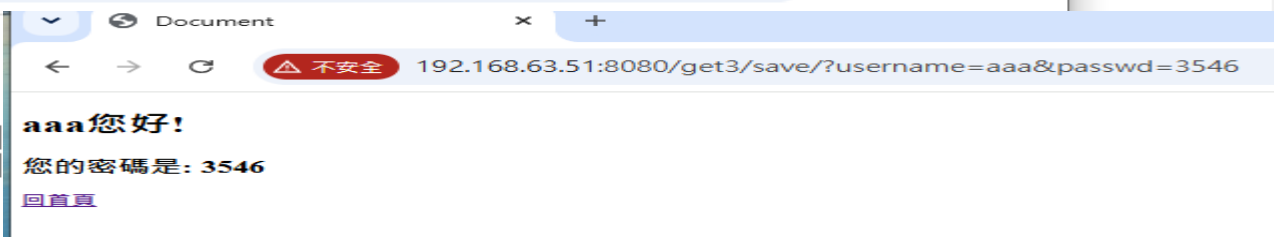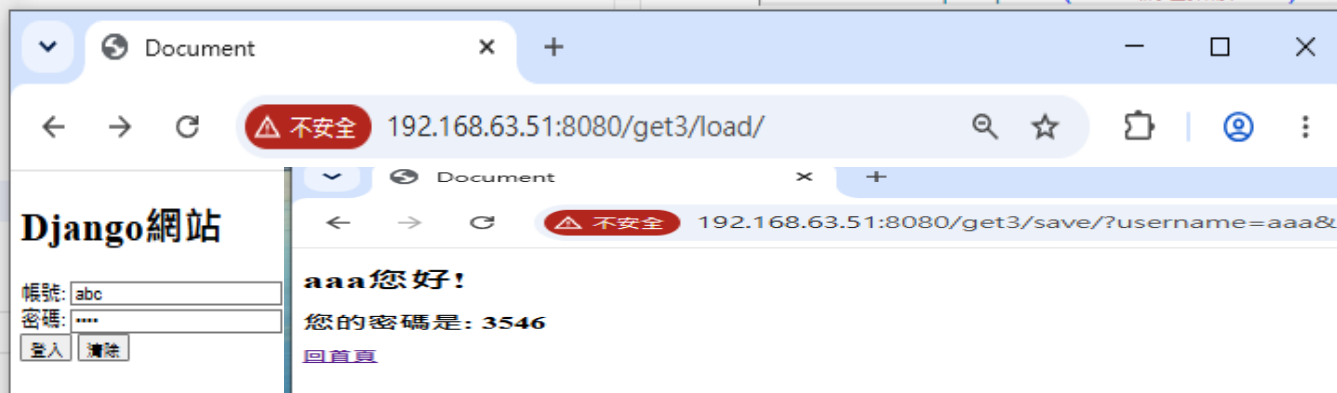

VS Code interface showing the Django project structure and code files.

EXPLORER

- PROJECT2
 - .vscode
 - launch.json
 - myapp
 - __pycache__
 - migrations
 - __init__.py
 - admin.py
 - apps.py
 - models.py
 - tests.py
 - views.py
 - project2
 - __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - static
 - templates
 - dice1.html

templates > <> get3_response.html > html

```
1 static %}
2 PE html>
3 ang="en">
4
5
6 ta charset="UTF-8">
7 ta name="viewport" content="width=device-width, initial-scale=1.0">
8 tle>Document</title>
9
10
11
12
13 >{{username}}您好!</h1>
14 >您的密碼是: {{passwd}}</h2>
15 ><a href="/get3/load/">回首頁</a></h3>
16
17
18
19
```

views.py

```
70 def get2(request):
71     try:
72         name = request.GET["name"]
73         city = request.GET["city"]
74         #name = request.GET.get("name", None) #若沒有name參數,
75         #city = request.GET.get("city", None) #若沒有city參數,
76         print(f"name:{name},city:{city}")
77         status = True
78     except:
79         status = False
80         print("name or city is missing")
81     #return HttpResponse(f"<b>Get1!<b>")
82     return render(request, "get2.html", locals())
83
84 def get3(request, mode):
85
86     if mode == "save":
87         #username = request.GET["username"]
88         #passwd = request.GET["passwd"]
89         username = request.GET.get("username", None)
90         passwd = request.GET.get("passwd", None)
91         print(f"username:{username},passwd:{passwd}")
92         #return HttpResponse(f"<b>已送出</b>")
93         return render(request, "get3_response.html", locals())
94     elif mode == "load":
95         return render(request, "get3.html", locals())
96
97
98 return HttpResponse(f"<b>網址錯誤<b>")
```

Python Debug Console

```
lass_0708\project2> c:; cd
'c:\S\Python\python_code\cla
ss_0708\project2'; & 'C:\Use
rs\User\AppData\Local\Progra
...
Django version 6.0.7, using
settings 'project2.settings'
Starting development server
at http://0.0.0.0:8080/
Quit the server with CTRL-BR
EAK.

WARNING: This is a developme
nt server. Do not use it in
a production setting. Use a
production WSGI or ASGI serv
er instead.
For more information on prod
uction servers see: https://
docs.djangoproject.com/en/6.
0/howto/deployment/
username:None,passwd:None
[14/Jul/2026 14:07:58] "GET
/get3/save/ HTTP/1.1" 200 31
5
[14/Jul/2026 14:08:02] "GET
/get3/load/ HTTP/1.1" 200 69
9
username:,passwd:
```

Browser window showing the Django application running at `192.168.63.51:8080/get3/save/?username=abc&passwd=1234`.

The page displays:

- abc您好!
- 您的密碼是: 1234
- [回首頁](#)

A second browser window shows the Django login form at `192.168.63.51:8080/get3/load/`.

Django網站

帳號:


密碼:

```
urls.py  get3_response.html X
templates > <> get3_response.html > html
1  {% load static %}
2  <!DOCTYPE html>
3  <html lang="en">
4
5  <head>
6      <meta charset="UTF-8">
7      <meta name="viewport" content="width=device-width, initial-scale=1.0">
8      <title>Document</title>
9
10 </head>
11
12 <body>
13     <h1>{{username}}您好!</h1>
14     <h2>您的密碼是: {{passwd}}</h2>
15     <h3><a href="/get3/load/">回首頁</a></h3>
16
17 </body>
18
19 </html>

views.py X
myapp > views.py > get3
70 def get2(request):
71     try:
72         name = request.GET["name"]
73         city = request.GET["city"]
74         #name = request.GET.get("name", None) #若沒有name參數, 預設為Guest
75         #city = request.GET.get("city", None) #若沒有city參數, 預設為None
76         print(f"name:{name},city:{city}")
77         status = True
78     except:
79         status = False
80         print("name or city is missing")
81     #return HttpResponse(f"<b>Get1!<b>")
82     return render(request, "get2.html", locals())
83
84 def get3(request, mode):
85     if mode == "save":
86         #username = request.GET["username"]
87         #passwd = request.GET.get("passwd")
88         username = request.GET.get("username", None)
89         passwd = request.GET.get("passwd", None)
90         print(f"username:{username},passwd:{passwd}")
91         #return HttpResponse(f"<b>已送出</b>")
92         return render(request, "get3_response.html", locals())
93     elif mode == "load":
94         return render(request, "get3.html", locals())
95
96     return HttpResponse(f"<b>網址錯誤<b>")
```

```
urls.py  X  get3_response.html
C:\S\Python\python_code\class_0708\project2\project2\urls.py
1  """
2  URL configuration for project2 project.
3
4  The `urlpatterns` list routes URLs to views. For more information please see:
5      https://docs.djangoproject.com/en/6.0/topics/http/urls/
6  Examples:
7  Function views
8      1. Add an import: from my_app import views
9      2. Add a URL to urlpatterns: path('', views.home, name='home')
10 Class-based views
11     1. Add an import: from other_app.views import Home
12     2. Add a URL to urlpatterns: path('', Home.as_view(), name='home')
13 Including another URLconf
14     1. Import the include() function: from django.urls import include, path
15     2. Add a URL to urlpatterns: path('blog/', include('blog.urls'))
16 """
17 from django.contrib import admin
18 from django.urls import path
19 from myapp import views
20
21 urlpatterns = [
22     path('admin/', admin.site.urls),
23     # path('', views.sayhello),
24     path('hello1/<str:username>', views.hello1),
25     path('hello2/<str:username>', views.hello2),
26     path('hello3/<str:username>', views.hello3),
27     path('hello4/<str:username1>/<str:username2>', views.hello4),
28     path('dice1/', views.dice1),
29     path('dice2/', views.dice2),
30     path('dice3/', views.dice3),
31
32     path('get1/', views.get1),
33     path('get2/', views.get2),
34     #path('get3/', views.get3),
35     path('get3/<str:mode>', views.get3),
36
37 ]
```

```
urls.py  get3_response.html  get3.html X
templates > get3.html
1  {% load static %}
2  <!DOCTYPE html>
3  <html lang="en">
4
5  <head>
6      <meta charset="UTF-8">
7      <meta name="viewport" content="width=device-width, initial-scale=1.0">
8      <title>Document</title>
9
10 </head>
11
12 <body>
13     <h1>Django網站</h1>
14     <form action="/get3/save/" method="get">
15         <div>
16             <label for="username">帳號:</label>
17             <input type="text" name="username" id="username" required placeholder="請輸入帳號">
18         </div>
19         <div>
20             <label for="passwd">密碼:</label>
21             <input type="password" name="passwd" id="passwd" required placeholder="請輸入密碼">
22         </div>
23         <div>
24             <button type="submit"> 登入 </button>
25             <button type="reset"> 清除 </button>
26         </div>
27     </form>
28 </body>
```

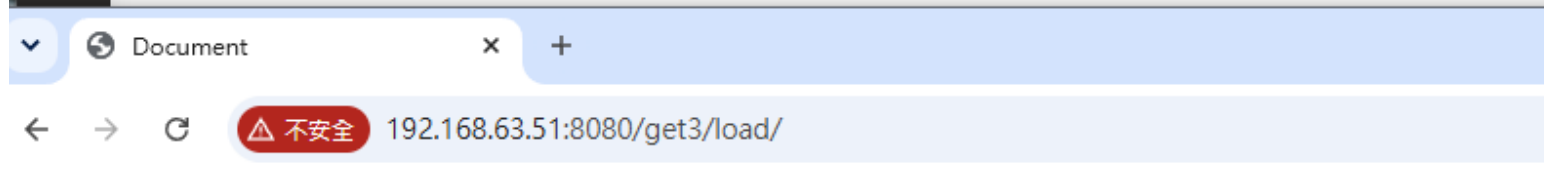

Django網站

帳號:

密碼:

project2

EXPLORER

OPEN EDITORS

PROJECT2

myapp

- admin.py
- apps.py
- models.py
- tests.py
- views.py

project2

- __pycache__
- __init__.py
- asgi.py
- settings.py
- urls.py
- wsgi.py

static

templates

- dice1.html
- dice2.html
- dice3.html
- get1.html
- get2.html
- get3_response.html

templates > get3.html

```
1 {% load static %}
2 <!DOCTYPE html>
3 <html lang="en">
4
5 <head>
6   <meta charset="UTF-8">
7   <meta name="viewport" content="width=device-width, initial-scale=1">
8   <title>Document</title>
9
10 </head>
11
12 <body>
13   <h1>Django網站</h1>
14   <form action="/get3/save/" method="get">
15     <div>
16       <label for="username">帳號:</label>
17       <input type="text" name="username">
18     </div>
19     <div>
20       <label for="passwd">密碼:</label>
21       <input type="password" name="passwd">
22     </div>
23     <div>
24       <button type="submit">登入</button>
25       <button type="reset">清除</button>
26     </div>
27   </form>
28 </body>
```

myapp > views.py > get3

```
70 def get2(request):
71     status = True
72     except:
73         status = False
74         print("name or city is missing")
75     #return HttpResponse(f"<b>Get1!<b>")
76     return render(request, "get2.html", locals())
77
78 from django.shortcuts import redirect
79 def get3(request, mode):
80
81     if mode == "save":
82         #username = request.GET["username"]
83         #passwd = request.GET.get("passwd")
84         username = request.GET.get("username", None)
85         passwd = request.GET.get("passwd", None)
86
87         if username is None or passwd is None:
88             return redirect("/get3/load/")
89
90     print(f"username:{username},passwd:{passwd}")
91     #return HttpResponse(f"<b>已送出</b>")
92     return render(request, "get3_response.html", locals())
93
94 elif mode == "load":
95     return render(request, "get3.html", locals())
96
97 return HttpResponse(f"<b>網址錯誤<b>")
```

Python Debug Console

on_code\class_0708\project2> c:; cd c:\Python\python\code\class_0708\pro

... 'runserver' '0.0.0.0:8080'

Watching for file changes with StatReloader

Performing system checks...

System check identified no issues (0 silenced).

July 14, 2026 - 14:22:50

Django version 6.0.7, using settings 'project2.settings'

Starting development server at http://0.0.0.0:8080/

Quit the server with CTRL-BREAK.

WARNING: This is a development server.

Document

192.168.63.51:8080/get3/load/

Django網站

帳號:

密碼:

project2

EXPLORER

OPEN EDITORS

PROJECT2

myapp

- admin.py
- apps.py
- models.py
- tests.py
- views.py

project2

- __pycache__
- __init__.py
- asgi.py
- settings.py
- urls.py
- wsgi.py
- static
- templates
 - dice1.html
 - dice2.html
 - dice3.html
 - get1.html
 - get2.html
 - get3_response.html
 - get3.html
 - hello2.html
 - hello3.html
 - hello4.html

templates > get3.html

```
1 {% load static %}
2 <!DOCTYPE html>
3 <html lang="en">
4
5 <head>
6   <meta charset="UTF-8">
7   <meta name="viewport" content="width=device
8   <title>Document</title>
9
10 </head>
11
12 <body>
13   <h1>Django網站</h1>
14   <form action="/get3/save/" method="get">
15     <div>
16       <label for="username">帳號:</label>
17       <input type="text" name="username"
18     </div>
19     <div>
20       <label for="passwd">密碼:</label>
21       <input type="password" name="passwd
22     </div>
23     <div>
24       <button type="submit"> 登入 </button>
25       <button type="reset"> 清除 </button>
26     </div>
27   </form>
28 </body>
29
30 </html>
```

myapp > views.py > get3

```
70 def get2(request):
71     status = True
72     except:
73         status = False
74         print("name or city is missing")
75     #return HttpResponse(f"<b>Get1!<b>")
76     return render(request, "get2.html", locals())
77
78 from django.shortcuts import redirect
79 def get3(request, mode):
80
81     if mode == "save":
82         #username = request.GET["username"]
83         #passwd = request.GET["passwd"]
84         username = request.GET.get("username", None)
85         passwd = request.GET.get("passwd", None)
86
87         passwd = request.GET.get("passwd", "")
88         if len(passwd) > 3:
89             passwd = '*' * (len(passwd)-3) + passwd[-3:]
90         else:
91             passwd = '*' * len(passwd)
92
93     if username is None or passwd is None:
94         return redirect("/get3/load/")
95
96     print(f"username:{username},passwd:{passwd}")
97     #return HttpResponse(f"<b>已送出</b>")
98     return render(request, "get3_response.html", locals())
99     elif mode == "load":
100         return render(request, "get3.html", locals())
101
102 return HttpResponse(f"<b>網址錯誤<b>")
```

Python Debug Console

```
on_code\class_0708\
project2> c.;; cd '
c:\S\Python\python_
code\class_0708\pro
...
'runserver' '0.0.0
.0:8080'
Watching for file c
hanges with StatRel
oader
Performing system c
hecks...
```

System check identi
fied no issues (0 s
ilenced).
July 14, 2026 - 14:
28:41
Django version 6.0.
7, using settings '
project2.settings'
Starting developmen
t server at http://
0.0.0.0:8080/
Quit the server wit
h CTRL-BREAK.

WARNING: This is a
development server.
Do not use it in a
production setting
. Use a production
WSGI or ASGI server
instead.
For more informatio

Document x +

192.168.63.51:8080/get3/load/

Django網站

帳號:

密碼:



abc您好!

您的密碼是: **345

[回首頁](#)



Django網站



表單**POST**之方式：如下頁

