



UNIVERSIDAD
POLITÉCNICA
DE MADRID




ETSÍ SISTEMAS
INFORMÁTICOS

next
digital

Microservicios en AWS:

construye soluciones en la nube como un pro!

Ivan García | Data Engineer



¿Quién soy?

- Ingeniero de datos en Next Digital.
- Grado en Ingeniería Electrónica en la UPC
- Máster en Ciencia de datos en la UOC



 ivan.garcia@nextdigital.es



[LinkedIn: Ivan García Jiménez](#)



[iovanic](#)

+140 especialistas

ÁREAS



Cloud



Data & AI



Analítica
Avanzada



Desarrollo de
Software

SECTORES

TRANSPORTE



LOGÍSTICA



TELECOMUNICACIONES



SEGUROS




CONSTRUCCIÓN



ENERGÍA





SirviendoCódigo.com

www.youtube.com/@SirviendoCódigo




Índice

Parte 1

- 1 Recap del primer taller
- 2 Uso de cli o CloudShell
- 3 Amazon CloudFront y WAF
- 4 Amazon Cognito
- 5 Amazon ECR y ECS
- 6 Amazon SNS
- 7 Práctica final



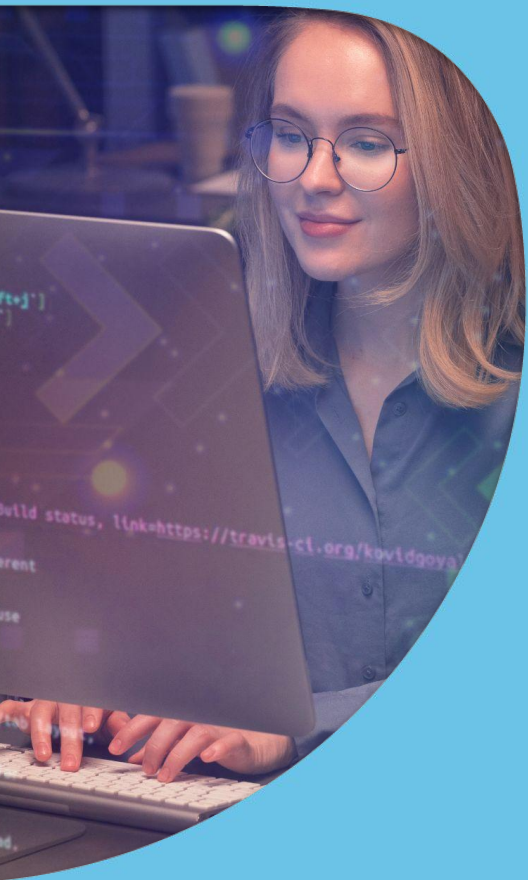


01_

Recap del primer taller

¿Qué es S3?

- Amazon Simple Storage Service = S3
- Conceptos
 - Bucket
 - Objetos
 - Directorios ficticios
- Casos de uso principales:
 - Archivos multimedia
 - Backups de bases de datos o aplicaciones
 - Alojamiento de sitios web
 - Data lake






¿Qué es EC2?

- Amazon Elastic Compute Cloud
- Computación escalable bajo demanda
 - Permite arrancar máquinas virtuales y autoescalarlas si es necesario
- Instancias: cada una de las “máquinas virtuales” creadas
 - Se crean a partir de un AMI (Amazon Machine Image)
 - Puede ser predefinida o personalizada
 - Diferentes tipos, en función de CPU, memoria, etc



Que es un security group?

- Se utilizan para controlar el tráfico que entra y sale de los recursos de AWS
- Por defecto se deniega todo el tráfico que no esté permitido (lista blanca)




Diferencia entre ALB y ASG

- Application Load Balancer



Distribuir el trafico entre instancias,
zonas de disponibilidad y regiones


- AutoScaling Groups

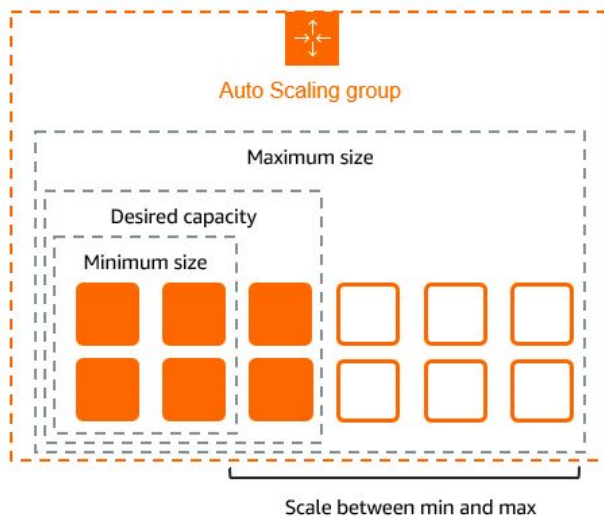


Augmentar o reducir la cantidad de
instancias automáticamente



Arquitectura Autoescalable básica

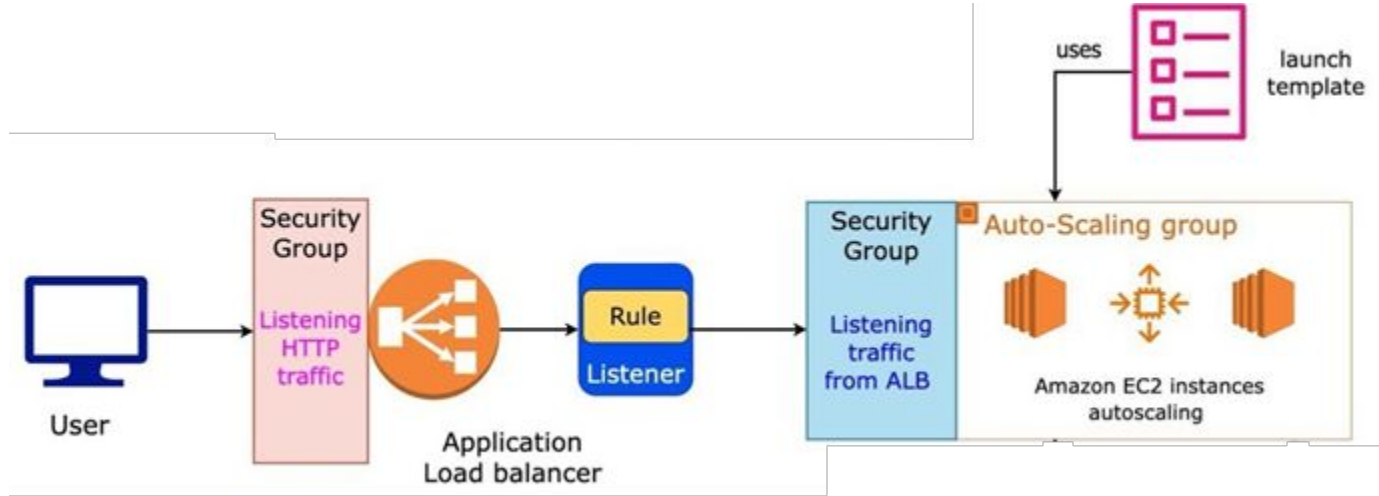



Diferencia entre RDS y DynamoDB

RDS

- Relational Database Service
- Datos estructurados con esquema fijo
- Garantizan la integridad referencial
- Sistemas de bases de datos permitidos
 - Postgres
 - SQLServer
 - MySQL
 - MariaDB
 - Oracle
 - IBM db2
 - Aurora RDS (Postgres, MySQL)


DynamoDB

- Base de datos no relacional (clave-valor)
- Datos con esquema flexible
- Escalabilidad horizontal sacrificando consistencia
- Otras bases de datos NoSQL
 - MongoDB (documentos)
 - Casandra (columnas)
 - Neo4J (grafos)




02_

Uso de cli o
CloudShell




Amazon cli & CloudShell

- Utilidad
 - Manejar servicios de AWS utilizando línea de comandos
 -
- Cli: disponible para [Linux, macOS y Windows](#)
- Cloudshell:
- Alternativa: SDK's

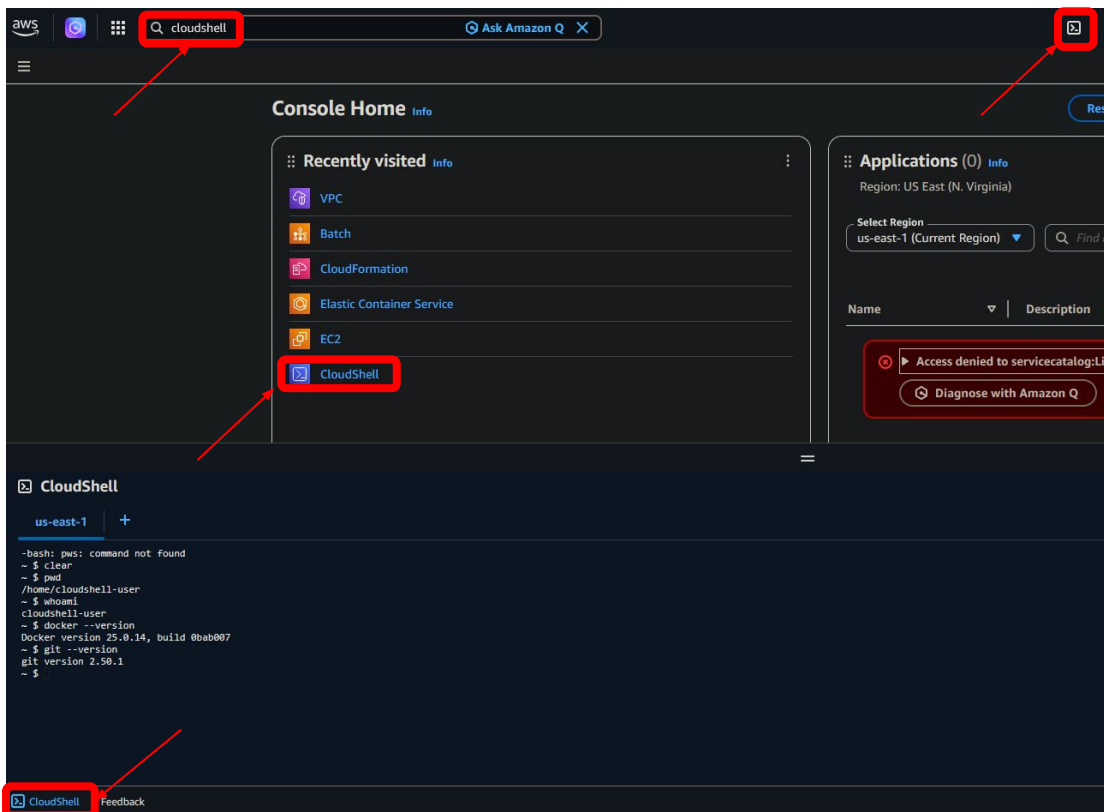


- SO Linux + bash
- Docker y Git instalados por defecto



Ejemplo CloudShell

aws s3 mb
s3://bucket-name

Acción	Comando en Linux (Local)	Comando en AWS S3 (Nube)
Crear	<code>mkdir</code> (make directory)	<code>mb</code> (make bucket)
Eliminar	<code>rmdir</code> (remove directory)	<code>rb</code> (remove bucket)
Listar	<code>ls</code> (list)	<code>ls</code> (list)
Copiar	<code>cp</code> (copy)	<code>cp</code> (copy)
Mover	<code>mv</code> (move)	<code>mv</code> (move)



Ejemplo CloudShell

Repositorio: https://github.com/iovanic/aws_workshop_static_web

En el siguiente repositorio podemos disponemos de:


- Una web estática
- Readme con comandos para:
 - Crear bucket
 - Clonar repositorio
 - Subir la web a s3

```
CloudShell
us-east-1 +
~ $ aws s3 mb s3://static-web-restaurant
make_bucket: static-web-restaurant
~ $ aws s3 ls
2026-04-28 21:14:37 static-web-restaurant
~ $ git clone https://github.com/iovanic/aws_workshop_static_web.git
Cloning into 'aws_workshop_static_web'...
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (7/7), done.
remote: Total 8 (delta 1), reused 8 (delta 1), pack-reused 0 (from 0)
Receiving objects: 100% (8/8), 5.62 KiB | 1.87 MiB/s, done.
Resolving deltas: 100% (1/1), done.
~ $ aws s3 cp aws_workshop_static_web/ s3://static-web-restaurant/ --recursive --exclude ".git/*"
upload: aws_workshop_static_web/index.html to s3://static-web-restaurant/index.html
upload: aws_workshop_static_web/restaurant.jpg to s3://static-web-restaurant/restaurant.jpg
upload: aws_workshop_static_web/styles.css to s3://static-web-restaurant/styles.css
upload: aws_workshop_static_web/README.md to s3://static-web-restaurant/README.md
~ $ aws s3 ls s3://static-web-restaurant/
2026-04-28 21:15:33      1723 README.md
2026-04-28 21:15:33       522 index.html
2026-04-28 21:15:33     4603 restaurant.jpg
2026-04-28 21:15:33       559 styles.css
~ $
```



03_


CloudFront y WAF



Amazon CloudFront

- Content Delivery Network (CDN)
- Mejora el rendimiento de lectura al cachear contenido en el edge
- Optimiza la experiencia de los usuarios
- Cientos de Puntos de Presencia globales (edge locations)
- Protección DDoS integrada con AWS Shield y Web Application Firewall (WAF)






CloudFront: Caché vs Origin

Dinámica de Request

- La request de un recurso siempre se dirige al **origin**.
- **Caché:** Si el contenido está en el *edge*, se sirve inmediatamente (baja latencia).
- **Origin:** Si no está cacheado, CloudFront solicita el archivo al origen y luego lo guarda en caché.

Tipos de Origin

- **S3 Bucket:** Distribución y subida de archivos. Seguridad mediante OAC (Origin Acces Control).
- **VPC Origin:** Para apps en subredes privadas (Private ALB, NLB o EC2).
- **Custom Origin (HTTP):** S3 como sitio estático o cualquier backend HTTP público (ej. Public ALB).




Amazon CloudFront - Caché vs Origin


GET /beach.jpg?size=300x300 HTTP/1.1

User-Agent: Mozilla/4.0 (compatible; MSIE5.01; Windows NT)


Host: www.example.com

Accept-Encoding: gzip, deflate

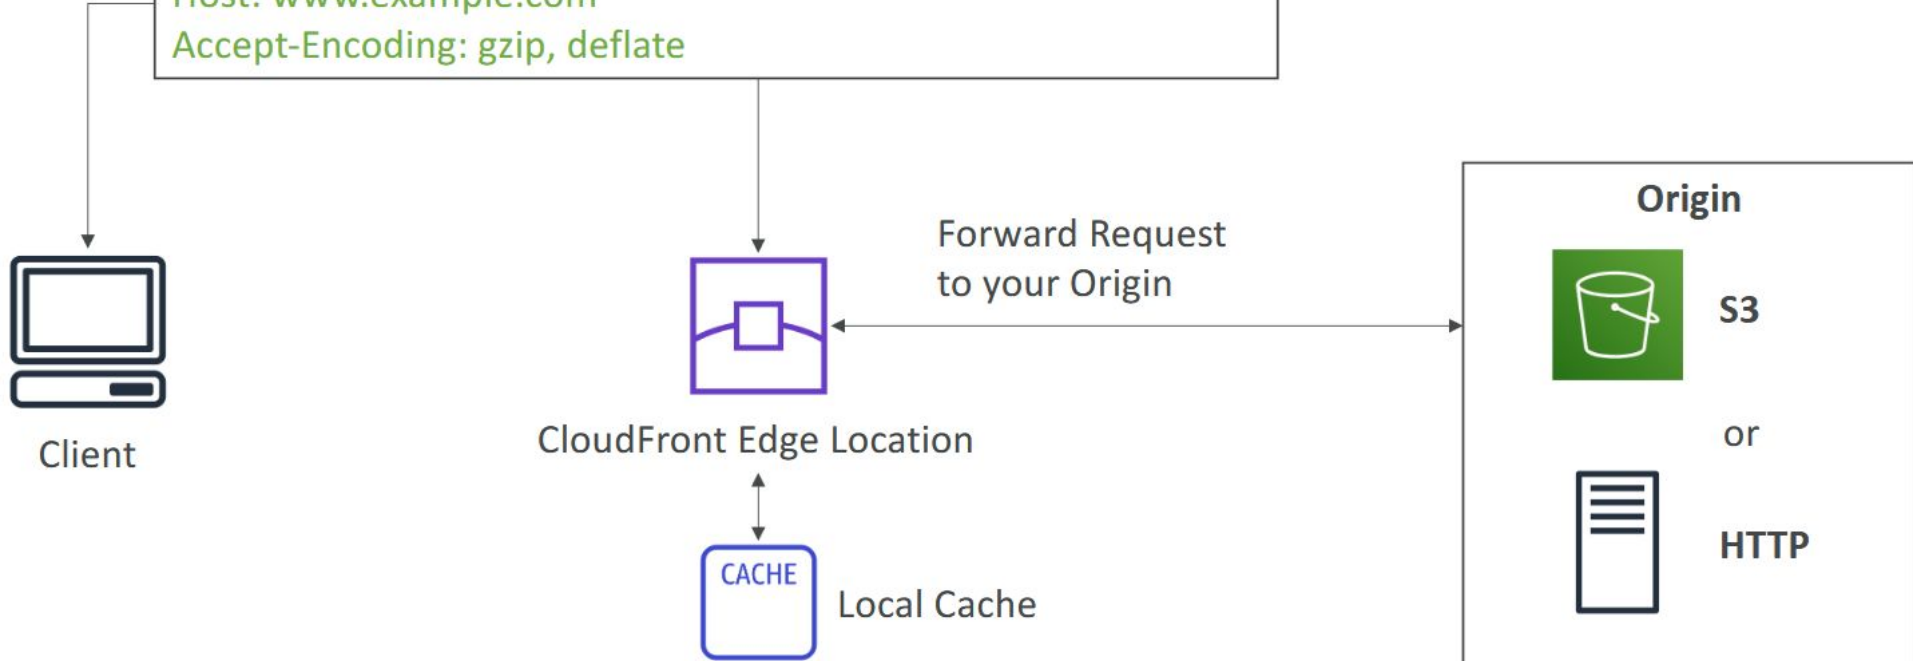

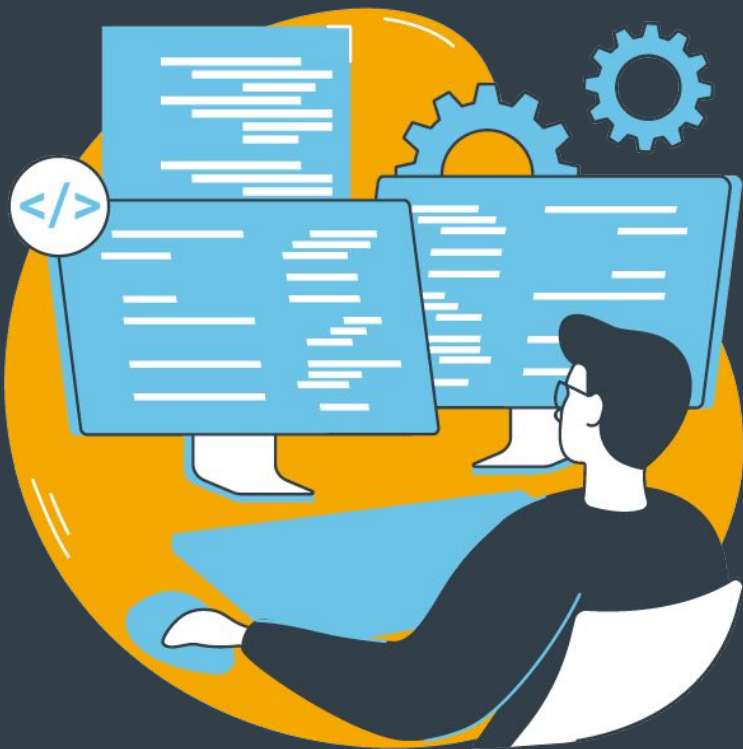

03_ Práctica CloudFront y WAF



Práctica CloudFront

aws [Search] [Alt+S]

☰

Console Home [Info](#)

☰ Recently visited [Info](#)

-  [CloudFront](#)
-  [S3](#)
-  [CloudShell](#)
-  [VPC](#)
-  [Batch](#)
-  [CloudFormation](#)
-  [Elastic Container Service](#)
-  [EC2](#)

[View all services](#)

☰ Welcome to AWS

[Getting started with AWS](#)

☰ AWS Health [Info](#)



Práctica CloudFront

CloudFront > Distributions

CloudFront

Distributions

Policies

Functions

Static IPs

VPC origins

▼ SaaS

Multi-tenant distributions

Distribution tenants

▼ Telemetry

Monitoring

Alarms

Logs

▼ Reports & analytics

Cache statistics

Popular objects

Distributions (0) [Info](#)

Q Search all distributions

Filter type

All distributions ▼



Enable

Disable

Delete

Create distribution

< 1 > ⚙

ID	Status	Description	Type	Domain name (stand...	Alternate domain na...	Origins	Last modified
----	--------	-------------	------	-----------------------	------------------------	---------	---------------

No distributions

You don't have any distributions.

Create distribution



Práctica CloudFront

- Step 1
Choose a plan
- Step 2
Get started
- Step 3
Specify origin
- Step 4
Enable security
- Step 5
Get TLS certificate
- Step 6
Review and create

Choose a plan



Everything you need for a simple monthly price

[Learn more](#)

- Plans include global CDN, WAF, DDoS protection, DNS, TLS certificate, log ingestion, and serverless edge compute.
- No overage charges.
- Blocked requests and DDoS attacks never count against your usage allowance.
- Data transfer costs from your AWS origins (such as Amazon S3, Application Load Balancer, or API Gateway) to CloudFront are automatically waived.

☒ Free

\$0/month

For hobbyists, learners, and developers getting started.

Usage allowance

1M requests / 100GB per month

✓ Always-on DDoS protection

✓ Protect against common web threats with AWS WAF

✓ IP-based rate limiting

✓ Geographic traffic blocking

✓ Serverless edge compute

✓ Smart routing

✓ Global CDN

✓ DNS

✓ Free TLS certificate

✓ Tiered caching

✓ Default caching rules

✓ Fast cache invalidations

✓ 5GB S3 storage included

☐ Pro


\$15/month

☐ Business

\$200/month

☐ Premium

\$1,000/month



Práctica CloudFront

CloudFront > Distributions > Create distribution

- Step 1 Choose a plan
- Step 2 **Get started**
- Step 3 Specify origin
- Step 4 Enable security
- Step 5 Get TLS certificate
- Step 6 Review and create

Get started

Connect your websites, apps, files, video streams, and other content to CloudFront. We optimize the performance, reliability, and security for your web traffic.

Distribution options [Info](#)

Distribution name

Name will be stored as a tag on the resource. You can change the name, or more tags, later.

static-web-distribution

Description - optional

Distribution type

☒ Single website or app

Choose if each website or application will have a unique configuration.

☐ Multi-tenant architecture - New

Choose when you have multiple domains that need to share configurations. This is a common architecture for SaaS providers.

Domain [Info](#)

Route 53 managed domain - optional

Enter a domain that's already registered with Route 53 in your AWS account. CloudFront will provision a TLS certificate for you. If you have a domain from a different DNS provider, skip this step and configure your domain later.

Check domain

Access denied to route53:ListHostedZonesByName

Diagnose with Amazon Q

Tags - optional

Cancel

Previous

Next



Práctica CloudFront

aws



Search

[Alt+S]



Global

Account ID: 7897

voclabs/user5038

CloudFront > Distributions > Create distribution

Step 1

Choose a plan

Step 2

Get started

Step 3

Specify origin

Step 4

Enable security

Step 5

Review and create

Specify origin

Origin type

Your origin is where your content (such as a website or app) lives. CloudFront works with AWS-based origins and origins hosted on other cloud providers.

Origin type

☒ Amazon S3

Deliver static assets like files and images, statically generated websites or single page applications (SPA).

☐ Elastic Load Balancer

Deliver applications hosted behind ELB such as dynamic websites, web services, and APIs.

☐ API Gateway

Deliver API endpoints for REST APIs hosted on API Gateway.

☐ Elemental MediaPackage

Deliver end-to-end live events or video on demand (VOD).

☐ VPC origin

Deliver applications and content hosted within private VPCs, such as EC2 instances and Application Load Balancers.

☐ Other

Refer to any AWS or non-AWS origin through its publicly resolvable URL.

Origin

S3 origin

Choose an AWS origin, or enter your origin's domain name. [Learn more](#)

static-web-restaurant.s3.us-east-1.amazonaws.com

Browse S3

Origin path - optional

The directory path within your origin where your content is stored. [Learn more](#)

/path

Settings Info



Práctica CloudFront

Settings [Info](#)

CloudFront provides default origin and cache settings based on what origin you selected. [View default settings for S3](#)

Allow private S3 bucket access to CloudFront [Info](#)

CloudFront will update your S3 bucket policy to allow CloudFront to access your S3 bucket. The policy allows CloudFront to access the bucket only when the request is on behalf of the CloudFront distribution that contains the S3 origin.

☒ Allow private S3 bucket access to CloudFront - *Recommended*

Origin settings

Origin settings control how CloudFront connects to the specified origin.

☒ Use recommended origin settings

☐ Customize origin settings

Cache settings

Cache settings determine when CloudFront serves cached content and when it fetches new content from the origin.

☒ Use recommended cache settings tailored to serving S3 content

☐ Customize cache settings

[Cancel](#)

[Previous](#)

[Next](#)



Práctica CloudFront

- Step 1
● Choose a plan
- Step 2
● Get started
- Step 3
● Specify origin
- Step 4
● **Enable security**
- Step 5
○ Review and create

Enable security

Web Application Firewall (WAF) [Info](#)

Security protections from WAF are included in your plan at no additional charge.

▼ Included security protections

- Protect against the most common vulnerabilities found in web applications.
- Protect against malicious actors discovering application vulnerabilities.
- Block IP addresses from potential threats based on Amazon internal threat intelligence.

☐ Use monitor mode

Count how many of your requests would be blocked by this WAF configuration. When ready, you can disable monitor mode to begin blocking requests.

☒ Protection against Layer 7 DDoS attacks [Available with the Business plan](#) [Change plan](#)

Stops DDoS attacks within seconds. AWS learns your unique application patterns within minutes of activation, accurately distinguishing between attacks and natural traffic surges.

[Cancel](#)

[Previous](#)

[Next](#)



Práctica CloudFront

- Step 1
Choose a plan
- Step 2
Get started
- Step 3
Specify origin
- Step 4
Enable security
- Step 5
Review and create

Review and create

General configuration

Distribution name static-web-distribution	Description -	Billing Free (\$0/month)	Today's pro-rated charge (estimate) \$0
--	------------------	-----------------------------	--

Edit

Origin

① Because you granted CloudFront access to your origin, CloudFront can write and update S3 bucket policies that restrict access to your S3 origin to CloudFront.

Edit

S3 origin static-web-restaurant.s3.us-east-1.amazonaws.com	Origin path -	Grant CloudFront access to origin Yes	Enable Origin Shield No
Connection attempts 3	Connection timeout 10		

Cache settings

CloudFront will apply default cache settings tailored to serving content from a S3 origin. You can customize settings after you create your distribution.

Edit

Security

Security protections Enabled	Use monitor mode No
---------------------------------	------------------------

Edit

Usage and transfer limits will be prorated for your first month. Subject to [usage and transfer limits](#).

Cancel

Previous

Create distribution



Práctica CloudFront

CloudFront > Distributions > E2YLTEXQMLVBGR

static-web-distribution Standard

Details

Distribution domain name

 d1lliewl2xu382.cloudfront.net

Billing

 Unable to determine billing status.



Everything you need for a simple monthly price

- Plans include global CDN, WAF, DDoS protection, DNS, TLS certificate, log ingestion, and server
- No overage charges.
- Blocked requests and DDoS attacks never count against your usage allowance.
- Data transfer costs from your AWS origins (such as Amazon S3, Application Load Balancer, or API G

General | Security | **Origins** | Behaviors | Error pages | Invalidations | Logging

Origins (1)

 Filter origins by property or value

Origin name	Origin domain	Origin path
☐ static-web-restaurant.s3.us-east-1.an	static-web-restaurant.s3.us-eas...	

 d1lliewl2xu382.cloudfront.net/index.html



LA POSADA

La Posada

Cocina casera. Abierto de martes a domingo,
13:00–16:00 y 20:00–23:00.

Calle Mayor 12 — Reservas: 900 000 000



Práctica CloudFront

static-web-distribution

Standard

[View metrics](#)

Details

Distribution domain name

 d1lliewl2xu382.cloudfront.net

Billing

 Unable to determine billing status.

ARN

 arn:aws:cloudfront::789764440673:distribution/
E2YLTEXQMLVBGR

Last modified

April 28, 2026 at 6:00:46 PM UTC



Everything you need for a simple monthly price

[Learn more](#) →



- Plans include global CDN, WAF, DDoS protection, DNS, TLS certificate, log ingestion, and serverless edge compute.
- No overage charges.
- Blocked requests and DDoS attacks never count against your usage allowance.
- Data transfer costs from your AWS origins (such as Amazon S3, Application Load Balancer, or API Gateway) to CloudFront are automatically waived.

[General](#)

[Security](#)

[Origins](#)

[Behaviors](#)

[Error pages](#)

[Invalidations](#)

[Logging](#)

[Tags](#)

Settings

Name

Alternate domain names

Standard logging

[Edit](#)



Práctica CloudFront

› [E2YLTEXQMLVBGR](#) › Edit settings

☐ HTTP/3

Default root object - optional

The object (file name) to return when a viewer requests the root URL (/) instead of a specific object.

index.html

Connectivity

Price class [Info](#)

Choose the price class associated with the maximum price that you want to pay.

- ☒ Use all edge locations (best performance)
- ☐ Use only North America and Europe
- ☐ Use North America, Europe, Asia, Middle East, and Africa

IPv6

- ☐ Off
- ☒ On

Anycast static IP list

Deliver traffic from a small set of IP addresses

None

There are no Anycast static IP lists available

[Create an Anycast static IP list](#)

☒ Viewer mutual authentication (mTLS)

Require and validate viewer (client) certificates against your certificate authorities.


[Cancel](#)

Save changes




Práctica CloudFront





Práctica CloudFront - probando caché

1. Reemplazamos la imagen de nuestra web por otra nueva
2. Recargamos página
3. La imagen no se ha actualizado en nuestra web
4. Limpiamos la caché del navegador

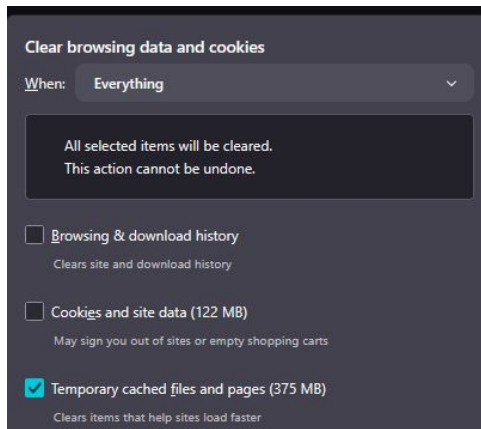

5. Pero la imagen sigue sin actualizarse en nuestra web
 - a. El motivo es que no estamos atacando al origen (s3), sino a una copia en caché en una instancia del Amazon edge, lo que hace muy difícil que nos hagan un ataque DDoS





Práctica CloudFront - limpiando caché

E2YLTEXQMLVBGR

static-web-distribution Standard

Details

Distribution domain name

d1lliewl2xu382.cloudfront.net

Billing

Unable to determine billing status.

ARN

arn:aws:cloudfront:E2YLTEXQMLVBGR



Everything you need for a simple monthly price

- Plans include global CDN, WAF, DDoS protection, DNS, TLS certificate, log ingestion, and serverless edge compute.
- No overage charges.
- Blocked requests and DDoS attacks never count against your usage allowance.
- Data transfer costs from your AWS origins (such as Amazon S3, Application Load Balancer, or API Gateway) to CloudFront are

General

Security

Origins

Behaviors

Error pages

Invalidations

Logging

Tags

Invalidations (0)

Filter invalidations by property or value

Invalidation ID



Status

No invalidations

You don't have any invalidations.

Create invalidation



Práctica CloudFront - limpiando caché

aws CloudFront > Distributions > E2YLTEXQMLVBGR > Create invalidation

Account ID: 7897-6444-0673
voclabs/user5038122=ivan.garcia@nextdi...

CloudFront

- Distributions
- Policies
- Functions
- Static IPs
- VPC origins

▼ SaaS

- Multi-tenant distributions
- Distribution tenants

▼ Telemetry

- Monitoring

Create invalidation

Object paths Info

Add object paths
Add each object path to remove from the CloudFront cache. To use wildcards (*) in the invalidation, you must put the wildcard at the end of the path.

ⓘ To add object paths individually, use the [standard editor](#).

[Cancel](#) [Create invalidation](#)

E2YLTEXQMLVBGR

static-web-distribution Standard

Details

Distribution domain name

d1lliewl2xu382.cloudfront.net

Billing

Unable to determine billing status.



Everything you need for a simple monthly price

- Plans include global CDN, WAF, DDoS protection, DNS, TLS certificate, log ingestion
- No overage charges.
- Blocked requests and DDoS attacks never count against your usage allowance.
- Data transfer costs from your AWS origins (such as Amazon S3, Application Load Balancer)

General

Security

Origins

Behaviors

Error pages

Invalidations

Invalidations (1)

Filter invalidations by property or value

Invalidation ID

Status

[IESPBXME277D8X7GNGZLPP6LDY](#)

In progress



Práctica CloudFront - limpiando caché

E2YLTEXQMLVBGR

- Data transfer costs from your AWS origins (such as Amazon S3, Application Load Balancer, or API Gateway) to CloudFront are automatically waived.

< Origins Behaviors Error pages **Invalidations** Logging Tags >

Invalidations (1)

View details

Copy to new

Create invalidation

🔍 Filter invalidations by property or value

< 1 > ⚙️

Invalidation ID

Status



[IE5PBXME277D8X7GNGZLPP6LDY](#)

✅ Completed

d1lliewl2xu382.cloudfront.net



LA POSADA



Cocina casera. Abierto de martes a domingo,
13:00–16:00 y 20:00–23:00.

Calle Mayor 12 — Reservas: 900 000 000



Práctica CloudFront - bloquear país

< General **Security** Origins Behaviors Error pages Invalidation >

▼ **Security - Web Application Firewall (WAF)** Info [Manage protections](#)

Keep your application secure from the most common web threats and security vulnerabilities using AWS WAF. Blocked requests are stopped before they reach your web servers.

Core protections ☒ Enabled

Advanced DDoS protection ☐ Not enabled

▼ **CloudFront geographic restrictions**

Restriction type

☐ No restrictions

☐ Allow list


☒ Block list

Countries

Select countries

Spain X

Cancel Save changes



403 ERROR

The request could not be satisfied.

The Amazon CloudFront distribution is configured to block access from your country. If you provide content to customers through CloudFront, you can find steps to troubleshoot and help with this error in the documentation.

Generated by cloudfront (CloudFront)

Request ID: Y8nasICW0XDHjNeDu2ZE6CtXsZhF9iotnumxHw6fZ_GV6fChqFsDEg==



04_ Amazon Cognito

Amazon Cognito

Proporciona una identidad a los usuarios para interactuar con nuestra aplicación web o móvil.

Cognito User Pools

- Funcionalidad de inicio de sesión para usuarios de la app.
- Integración con API Gateway y Application Load Balancer.

Cognito Identity Pools (Federated Identity)

- Proporciona credenciales de AWS a los usuarios para acceder a recursos directamente.
- Se integra con User Pools como proveedor de identidad.



Cognito vs IAM: "cientos de usuarios", "usuarios móviles", "autenticación con SAML".


Cognito User Pools (CUP)

Características


- Base de datos serverless para aplicaciones web y móviles.
- Inicio de sesión simple: Usuario (o email) y contraseña.
- Restablecimiento de contraseña y verificación de email/teléfono.
- Autenticación de múltiples factores (MFA).
- Identidades federadas: Facebook, Google, SAML...
- Bloqueo de usuarios si sus credenciales están comprometidas.

Utilidades


- Crear login para una WebApp
- Autenticación en API's

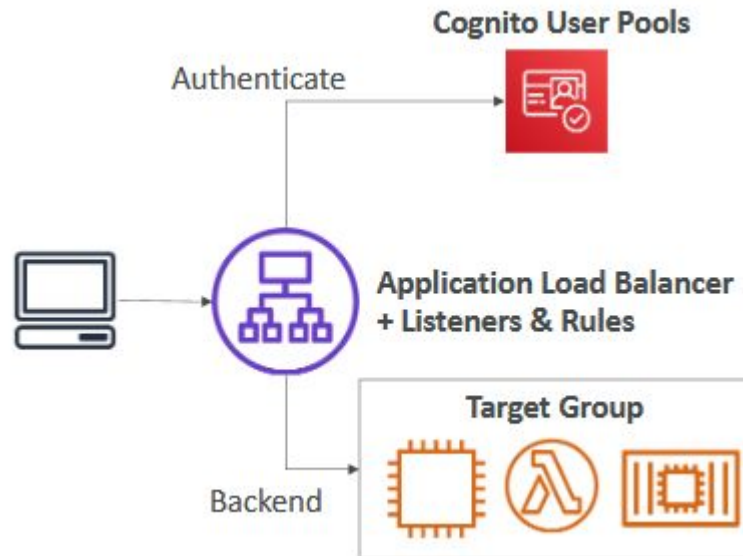

Amazon Cognito permite gestionar la identidad de los usuarios de forma segura y escalable.

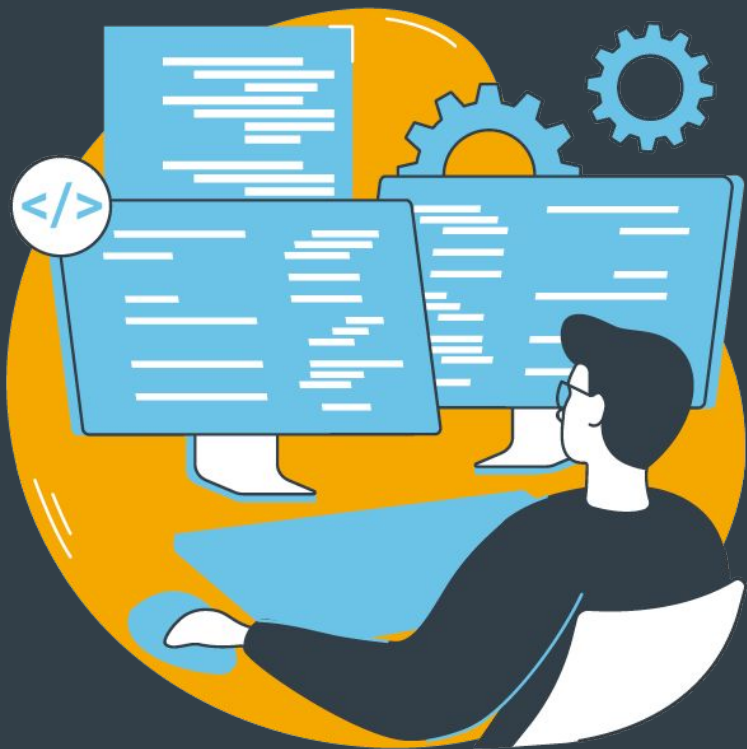

04_ Práctica Amazon Cognito



Práctica Amazon Cognito

aws [Cognito icon] [Grid icon] Search

☰

Console Home [Info](#)

Recently visited [Info](#)

-  **Cognito**
-  S3
-  CloudShell
-  VPC
-  EC2
-  IAM
-  Elastic Container Service

aws [Cognito icon] [Grid icon] Search [Alt+S] ☰

Amazon Cognito

- User pools** 
- Identity pools

Security, Identity & Compliance

Amazon Cognito

Secure identity management

With Amazon Cognito, you can add temporary AWS credentials for access

Add sign-in a

With Amazon Cognito, you ca Amazon Cognito scales to sup

[Get](#)



Práctica Amazon Cognito

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: 0218-2928-5118

voclabs/user5038122=ivan.garcia@nextdigital.e

Amazon Cognito

User pools

Amazon Cognito

User pools

Identity pools

New from Amazon Verified Permissions! Cognito user group authorization for API Gateway

You can now create group-aware authorization policies for your APIs with Amazon Verified Permissions, a fine-grained authorization service for applications. [Learn more](#)

Go to Amazon Verified Permissions

User pools (0) Info

Refresh

Delete

Create user pool

View and configure your user pools. User pools are directories of federated and local user profiles. They provide authentication options for your users.

Search user pools by name or ID

User pool name	User pool ID	Created time
No resources		
No user pools found		
Create user pool		



Práctica Amazon Cognito

Amazon Cognito > Set up resources for your application



Amazon Cognito

User pools

Identity pools

Set up resources for your application [info](#)

▼ How it works



1. Tell us about your application

Make a few choices that customize Amazon Cognito authentication to your application architecture and platform.



2. Create a new Cognito user directory

Create a user directory and authentication service in an Amazon Cognito user pool.



3. Deploy and update your application

Get example code and follow our implementation guide. Extend your user pool to support more applications and features.

Define your application

Choose an application type and give it a name.

Application type [info](#)

Choose the type of application that you're developing. We will show example code for application like yours.

☒ Traditional web application

An application hosted on a webserver. Uses redirects and separate pages to display information. Examples are Java, Python, nodeJS.

☐ Single-page application (SPA)

A website with a single URL that updates content based on user interaction. Examples are JavaScript, Angular, React.

☐ Mobile app

An app built with a mobile SDK. Examples are Android, iOS.

☐ Machine-to-machine application

Platform-independent server-to-server communications without user interaction. Authorizes API access with OAuth 2.0 scopes.

Name your application [info](#)

test-login-cognito

Names are limited to 128 characters or fewer. Names may only contain alphanumeric characters, spaces, and the following special characters: * = , . @ -



Práctica Amazon Cognito

Configure options

You must make a few initial choices about the user pool that supports your application. To change these settings later, you must create a new user pool.

Options for sign-in identifiers [Info](#)

Choose sign-in attributes. Usernames can be an email address, phone number, or a user-selected username. When you select only email and phone, users must select either email or phone as their username type. When username is an option, users can sign in with any options you select if they have provided a value for that option.

- ☒ Email
- ☐ Phone number
- ☐ Username

[Want to set up social, SAML, or OIDC sign-in?](#)

Self-registration [Info](#)

If you activate user sign-up in your user pool, anyone on the internet can sign up for an account and sign in to your apps. Don't enable self-registration in your user pool until you want to open your app to public sign-up. [Learn more](#)

☒ Enable self-registration

Display a "Sign up" link on the sign-in page in the hosted UI, and allow the use of public APIs to create new user accounts. When this feature is not enabled, federation and administrative API operations create user profiles.

Required attributes for sign-up [Info](#)

Choose any attributes that you want to require users to provide. With username alone, you must set email address or phone number as a required attribute.

Select attributes

⚠ Options for sign-in identifiers and required attributes can't be changed after the app has been created.

Add a return URL - optional

Choose a return URL. Cognito redirects to this URL after successful sign-in with the managed login pages on your user pool domain. Your application can then process the resulting tokens.


Return URL [Info](#)

https://

The length of the return URL must be between 1 and 1024 characters. Valid characters are letters, marks, numbers, symbols, and punctuations. Amazon Cognito requires HTTPS over HTTP except for http://localhost for testing purposes only. App return URLs such as myapp://example are also supported. Must not contain a fragment.

[Cancel](#)

[Create user directory](#)



Práctica Amazon Cognito

aws Search [Alt+S]

Amazon Cognito > Set up resources for your application

Amazon Cognito <

User pools
Identity pools

Your application "test-login-cognito" and user pool are ready.

Set up resources for your application

Check out your sign-in page
Your application login pages are ready.
[View login page](#)

Build authentication components
Review a quick setup guide for your application


Sign in

Sign in to your account.

Email address

Next

New user? [Create an account](#)



Práctica Amazon Cognito

Creamos un correo temporal para crear una cuenta de usuario en nuestra app:

www.mailinator.com

test_aws

GO

 Mailinator



Práctica Amazon Cognito

Sign up

Create a new account.

Email address

aws_test@mailinator.com

Password

••••••••

- ✓ Password must be at least 8 characters
- ✓ Use a number
- ✓ Use a lowercase letter
- ✓ Use an uppercase letter
- ✓ Use a special character

Confirm password

••••••••

☐ Show password

Sign up

Have an account already? [Sign in](#)

Recibimos código de confirmación al correo temporal:



Mailinator



Recent Inboxes

democognito

test_aws



Request Trial

Mailinator + AI

Give Your AI Assistant the

Public Messages

From

Subject



no-reply@verificationemail.c... Your verification code




Práctica Amazon Cognito



Successfully signed in

This is the default redirect page for Amazon Cognito user pools.

You're seeing this page because your Amazon Cognito app client doesn't have a return URL set.



Práctica Amazon Cognito

Buscamos el usuario en la user pool:

Amazon Cognito > User pools

Amazon Cognito <

User pools Identity pools

User pools (1) Info

View and configure your user pools.

Search user pools by name or ID

User pool name

User pool - 2mw9rd

aws | [Cognito Icon] | [Grid Icon] | Search

Amazon Cognito > User pools > User p

Amazon Cognito <

Current user pool View all

User pool - 2mw9rd

Overview


▼ Applications

App clients

▼ User management

Users Groups

▼ Authentication



Práctica Amazon Cognito

Buscamos el usuario en la user pool:

aws

Search

[Alt+S]

United States (N. Virginia)

Account ID: voclabs/user

Amazon Cognito

User pools

User pool - 2mw9rd

Users

Amazon Cognito

Current user pool

User pool - 2mw9rd

Overview

▼ Applications

App clients

▼ User management

Users

Groups

▼ Authentication

Authentication methods

Sign-in

Sign-up

Social and external providers

Extensions

Users

Info

Users (1)

Info

View, edit, and create users in your user pool. Users that are enabled and confirmed can sign in to your user pool.

Property: User name

Search users by attribute

	User name	Email address	Email verified	Confirmation status	Status
☐	94589458-20d1-703c-bf7a-4b72856922f4	test_aws@mailinator.com	Yes	Confirmed	Enabled

Import users (0)

Info

View and create user CSV import jobs. Amazon Cognito can import users into this user pool from a specially-formatted CSV file. You can't import user passwords.

Search import jobs by job name

Job name	Status	Imported users	Skipped users	Failed users	CloudWatch logs
----------	--------	----------------	---------------	--------------	-----------------

No user import jobs found

Create import job



Práctica Amazon Cognito

En producción utilizaremos Amazon SES (Simple Email Service) para el envío de correos porque el envío de correos con cognito únicamente permite un máximo de 50 correos diarios

Amazon Cognito > User pools > User pool - 2mw9rd > Authentication methods

Amazon Cognito <

Current user pool [View all](#)

User pool - 2mw9rd

Overview

▼ Applications

App clients

▼ User management

Users

Groups

▼ Authentication

Authentication methods

Sign-in [New](#)

Sign-up

Authentication methods [Info](#)

Email [Info](#)

Configure how your user pool sends email messages to users.

Email provider
Send email with Cognito

SES Region
US East (N. Virginia)

FROM email address
no-reply@verificationemail.com

REPLY-TO email address
-

[Edit](#)

SMS [Info](#)

Configure how your user pool sends SMS messages to your users. Recipient message and data rates apply.

IAM role ARN
-

SNS Region
-

[Edit](#)

⚠ Configure AWS service dependencies to complete your SMS message setup



Práctica Amazon Cognito

aws

Search

[Alt+S]

United S

Account ID: 0218-2928-5118

voclabs/user5038122=ivan.garcia@nextdigital.e

Amazon Cognito

User pools

User pool - 2mw9rd

Authentication methods

Edit email conf...

Amazon Cognito

Current user pool

User pool - 2mw9rd

Overview

Applications

User management

Authentication

View all

Send email with Amazon SES - Recommended

Send email with Cognito

✖ [403 Forbidden] Failed to get SES configuration sets.

AccessDenied (Request ID: e61a9c26-35a6-48f7-9ad1-854c9a15f734)

View details

Edit email configuration

Amazon Cognito uses Amazon SES to send email and Amazon SNS to send SMS messages to users. Amazon Cognito messages may incur additional Amazon SES and Amazon SNS costs. Recipient message and data rates apply.

Email

Configure how your user pool sends email messages to users.

Email provider


Send email with Amazon SES - Recommended

Send email messages using an Amazon SES verified identity in your account. Recommended for higher email volume and production workloads. Required for email MFA.

Send email with Cognito


Use Cognito's default email address as a temporary start for development. You can use it to send up to 50 emails a day.

Máximo de 50 correos diarios

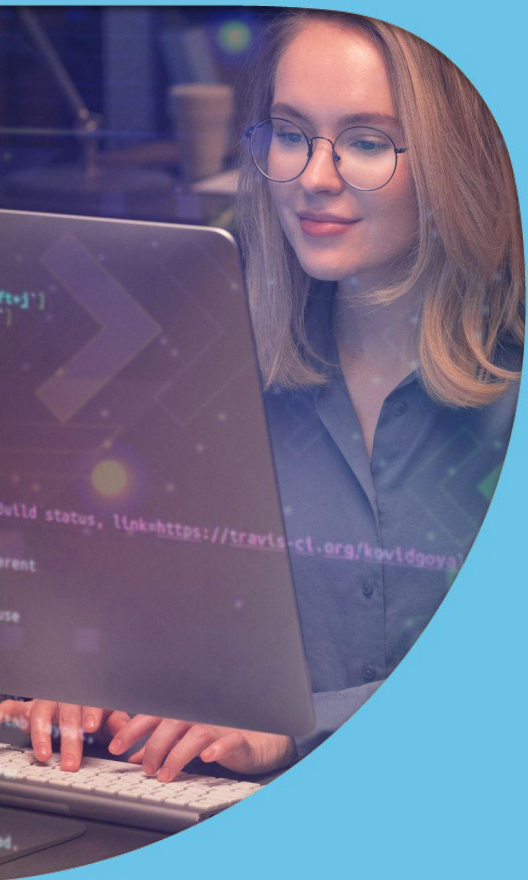


05_

Amazon ECR y ECS




Breve historia de los contenedores en el cloud

Arquitectura On-Premise

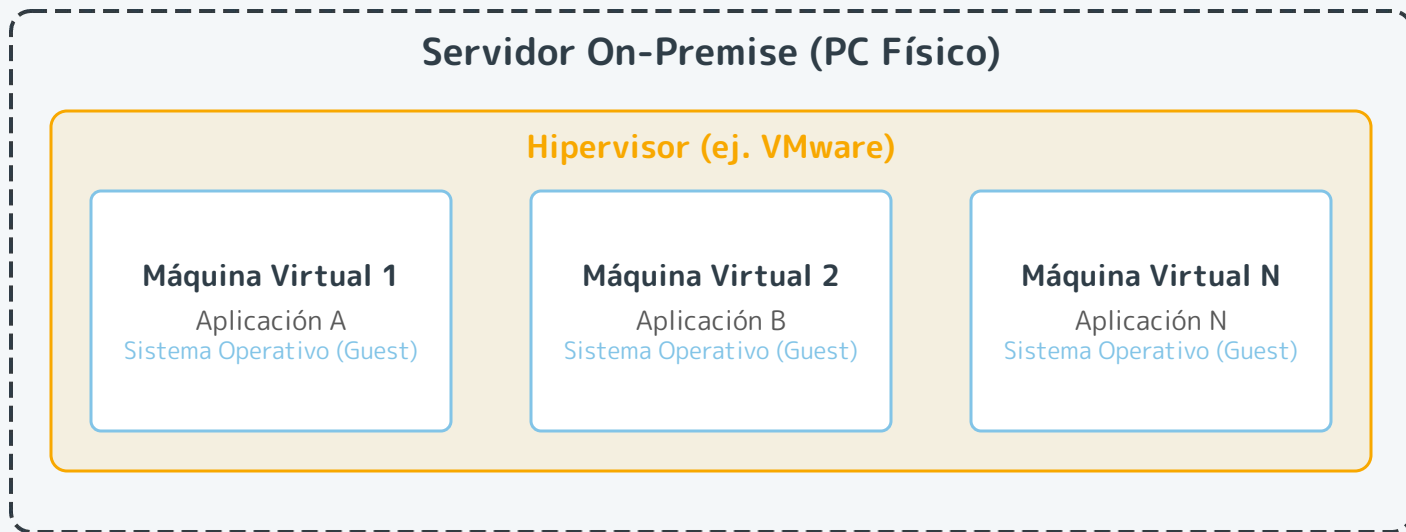

Tradicionalmente, el despliegue on-premise se basaba en virtualización de hardware. Un hipervisor permitía ejecutar múltiples máquinas virtuales (VMs) independientes sobre un único servidor físico, cada una con su propio sistema operativo completo para aislar las aplicaciones.



Breve historia de los contenedores en el cloud

Migración de On-premise a AWS con EC2

Infraestructura Global de AWS

Amazon EC2 (Capa de Cómputo)

Instancia EC2 1

Aplicación A
Amazon Machine Image
(AMI)

Instancia EC2 2

Aplicación B
Amazon Machine Image
(AMI)

Instancia EC2 N

Aplicación N
Amazon Machine Image
(AMI)



En AWS, la virtualización es gestionada por el proveedor. Las instancias de EC2 reemplazan a las máquinas virtuales tradicionales, permitiendo desplegar aplicaciones sobre una infraestructura elástica y escalable sin preocuparse por el mantenimiento del hardware físico o el hipervisor.



Breve historia de los contenedores en el cloud

Docker vs Máquinas Virtuales


- Docker es una especie de “tecnología de virtualización” pero no exactamente
- Con contenedores perdemos algo de aislamiento a cambio de eficiencia
- La portabilidad no depende del hypervisor

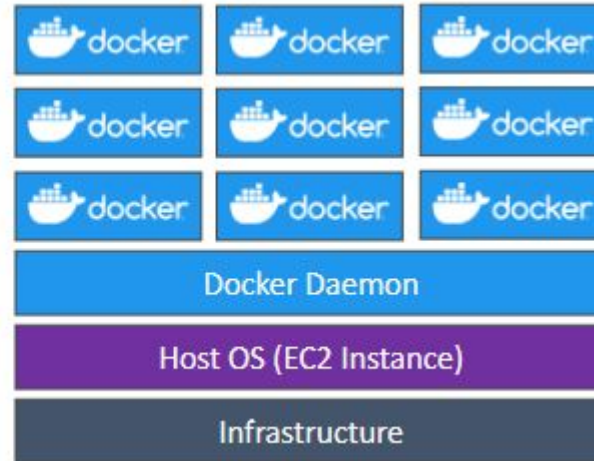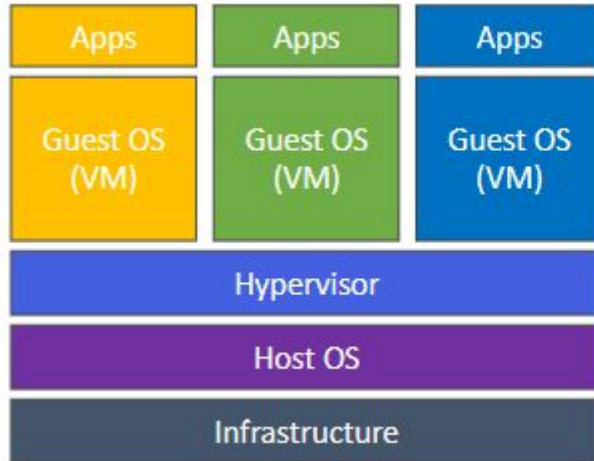

Breve historia de los contenedores en el cloud

¿Que es un docker registry?

- Repositorio para guardar y comparti imágenes de contenedores.
- Pueden ser públicos (DockerHub) o privados (ECR).

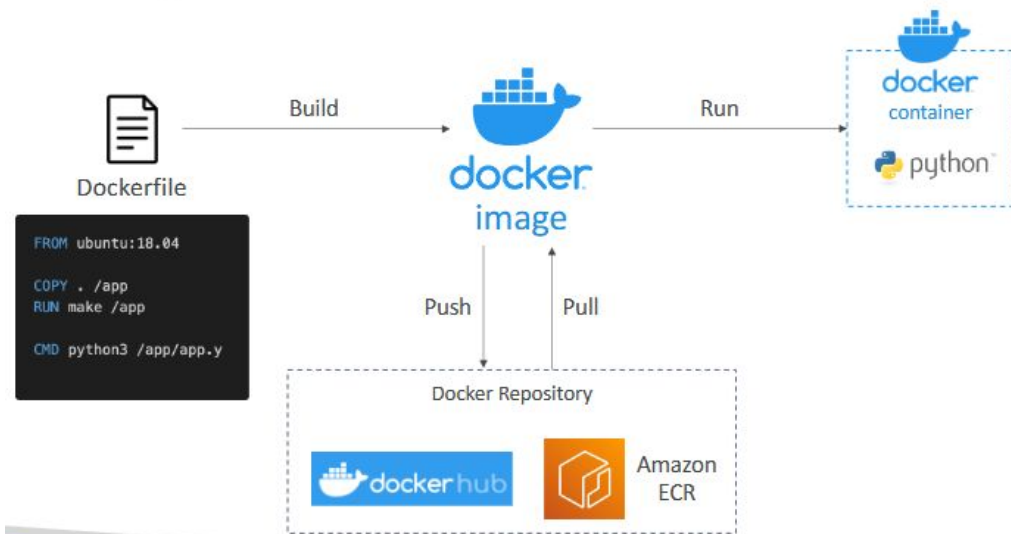



Amazon ECR y ECS


- Amazon Elastic Container Service (Amazon ECS)
 - **Plataforma de contenedores de Amazon**
- Amazon Elastic Container Registry (Amazon ECR)
 - **Registry de Amazon**
 - Nos permite crear repositorios públicos y privados



Amazon ECS




Amazon ECR



Amazon ECS - ECS Cluster vs Fargate


- ECS Cluster

- Controlamos las instancias de EC2

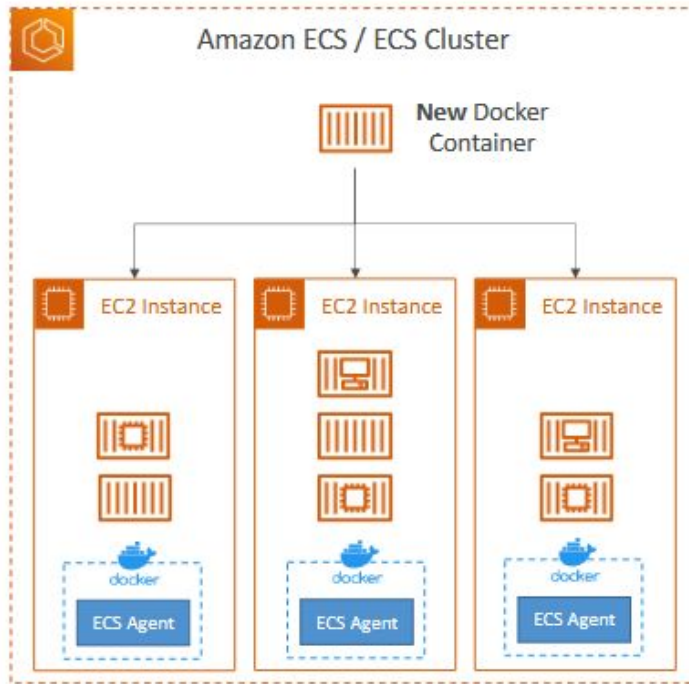

- Fargate

- Serverless: no sabemos en que instancia se está ejecutando el contenedor

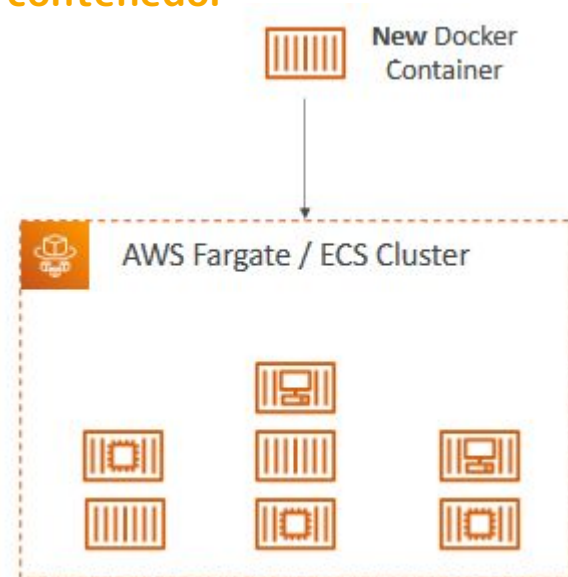


Amazon ECR y ECS

Otras maneras de lanzar contenedores en AWS:

- Amazon Elastic Kubernetes Service (Amazon EKS)
 - **Plataforma de contenedores de Amazon**
- AWS Elastic Beanstalk
 - **Servicio para desplegar apps de forma rápida**
- AWS Batch
 - **Servicio para lanzar procesos Batch, podemos lanzar procesos en contenedores.**
- EC2 🙄



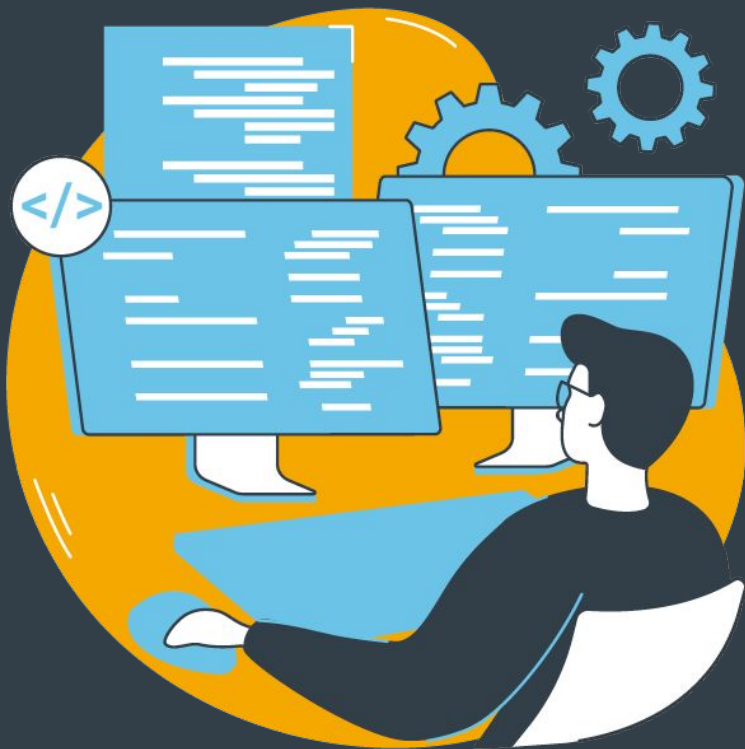

05_ Práctica Amazon ECR



Práctica Amazon ECR


aws   [Alt+S]   

≡

Página de inicio de la Consola [Información](#)

⌵ Visitados recientemente [Información](#) ⋮

-  Elastic Container Registry  Elastic Container Service
-  Route 53
-  S3
-  Cognito
-  CloudShell
-  VPC



Práctica Amazon ECR



[Alt+S] 







Estados Unidos (Norte de Virginia) ▼

ID de cuenta: 0218
voclabs/user50381



Contenedores

Amazon Elastic Container Registry

Compartir e implementar software de contenedores, de forma pública o privada

Amazon Elastic Container Registry (ECR) es un registro de contenedores completamente administrado que facilita el almacenamiento, la administración, el uso compartido y la implementación de imágenes y artefactos de contenedores en cualquier lugar.

Crear un repositorio

Crear

Precios (EE IIII)



Práctica Amazon ECR



[Alt+S]



Estados Unidos (Norte de Virginia) ▼

Amazon ECR > Registro privado > Repositorios > Crear repositorio privado

Crear repositorio privado

Configuración general

Nombre del repositorio

Introduzca un nombre conciso. Los repositorios admiten espacios de nombres, que puede usar para agrupar repositorios similares.

021829285118.dkr.ecr.us-east-1.amazonaws.com/

apps/nginx-test

15 de 256 caracteres máximo (2 mínimo). El nombre debe comenzar con una letra y solo puede contener letras minúsculas, números y caracteres especiales . _ - /.

Configuración de etiquetas de imagen [Información](#)

Mutabilidad de la etiqueta de imagen

Elija la configuración de mutabilidad de las etiquetas.

☒ Mutable

Las etiquetas de imagen se pueden sobrescribir.

☐ Immutable

Las etiquetas de imagen no se pueden sobrescribir.

Exclusiones de etiquetas mutables

Las etiquetas que coincidan con estos filtros serán inmutables (no se podrán sobrescribir). El uso de comodines (*) coincidirá con cero o más caracteres de la etiqueta de la

Agregar filtro



Práctica Amazon ECR

≡ [Amazon ECR](#) > [Registro privado](#) > [Repositorios](#) > Crear repositorio privado



Los filtros únicamente deben contener letras, números y caracteres especiales (._*-). Cada filtro está limitado a 128 caracteres, 2 comodines (*) y puede agregar hasta 5 filtros en la lista de exclusiones.

Configuración de cifrado [Información](#)

⚠ La configuración de cifrado de un repositorio no se puede cambiar una vez creado el repositorio.

Configuración de cifrado

De forma predeterminada, los repositorios usan el cifrado de Advanced Encryption Standard (AES) estándar del sector. Si lo desea, puede optar por usar una clave almacenada en AWS Key Management Service (KMS) para cifrar las imágenes de tu repositorio.

- ☒ **AES-256**
Cifrado Advanced Encryption Standard (AES) estándar del sector
- ☐ **AWS KMS**
AWS Key Management Service (KMS)

► Configuración de análisis de imágenes - *deprecated*

Cancelar

Crear



Práctica Amazon ECR

aws

Buscar

[Alt+S]

Estados Unidos (Norte de Virginia)

ID de cuenta: 0218-2928-5118
voclabs/user5038122=ivan.garcia@nextdigital.e

Amazon ECR

Registro privado

Repositorios

Amazon Elastic Container Service

▼ Registro privado

Repositorios

Características y ajustes

▼ Registro público

Repositorios

Configuración

Galería pública de ECR

Repositorio privado creado correctamente, apps/nginx-test

Repositorios privados (1)

Ver comandos de envío

Eliminar

Acciones

Crear repositorio

Buscar por subcadena de repositorio

Nombre del repositorio	URI	Creado en	Inmutabilidad de etiqueta	Tipo de cifrado
☐ apps/nginx-test	021829285118.dkr.ecr.us-east-1.amazonaws.com/apps/nginx-test	29 de abril de 2026, 08:39:50 (UTC+02)	Mutable	AES-256



Práctica Amazon ECR

aws

Buscar

[Alt+S]

Estados Unidos (Norte de Virginia)

ID de cuenta: 0218-2928-5118

voclabs/user5038122=ivan.garcia@nextdigital.es

Amazon ECR

Registro privado

Repositorios

apps/nginx-test

Amazon Elastic Container Service

Registro privado

Repositorios

apps/nginx-test

Características y ajustes

Registro público

Repositorios

Configuración

Galería pública de ECR

apps/nginx-test

Resumen

Imágenes

Política de ciclo de vida

Permisos

Etiquetas de repositorio

Imágenes

Información

Eliminar

Copiar URI


Detalles

Analizar


Ver comandos de envío

Filtrar imágenes activas

	Etiquetas de imagen	Tipo	Creada a las	Tamaño de imagen (MB)	Resumen de imagen	Extraída por última vez a las
No hay imágenes activas						



Práctica Amazon ECR

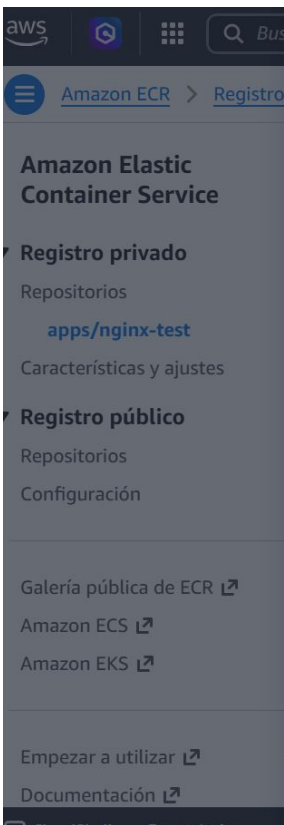

macOS / Linux

Windows

Asegúrese de tener instalada la versión más reciente de **AWS CLI** y **Docker**. Para obtener más información, consulte [Empezar a utilizar Amazon ECR](#).

Siga los siguientes pasos a fin de autenticar y enviar una imagen a su repositorio. Para obtener métodos de autenticación de registro adicionales, incluido el ayudante de credenciales de Amazon ECR, consulte [Autenticación del registro](#).

1. Recupere un token de autenticación y autentique su cliente de Docker en el registro. Use AWS CLI:

```
aws ecr get-login-password --region us-east-1 | docker login --username AWS --password-stdin 021829285118.dkr.ecr.us-east-1.amazonaws.com
```

Nota: Si recibe un error al utilizar AWS CLI, asegúrese de tener instaladas las últimas versiones de AWS CLI y Docker.

2. Cree una imagen de Docker con el siguiente comando. Para obtener información sobre cómo crear un archivo de Docker desde cero, consulte las instrucciones [aquí](#). Puede omitir este paso si ya se creó la imagen:

```
docker build -t apps/nginx-test .
```


3. Cuando se complete la creación, etiquete la imagen para poder enviarla a este repositorio:

```
docker tag apps/nginx-test:latest 021829285118.dkr.ecr.us-east-1.amazonaws.com/apps/nginx-test:latest
```

4. Ejecute el siguiente comando para enviar esta imagen al repositorio de AWS recién creado:

```
docker push 021829285118.dkr.ecr.us-east-1.amazonaws.com/apps/nginx-test:latest
```

Cerrar



Práctica Amazon ECR

1. Descargamos la imagen de nginx del docker-hub

a. `docker pull nginx:latest`

2. Hacemos login al servicio de ECR


a. `aws ecr get-login-password --region us-east-1 | docker login
--username AWS --password-stdin
021829285118.dkr.ecr.us-east-1.amazonaws.com`

3. Renombramos la imagen


a. `docker tag nginx:latest
021829285118.dkr.ecr.us-east-1.amazonaws.com/apps/nginx-test
:latest`

4. Subimos la imagen a nuestro repositorio privado de ECR

a. `docker push
021829285118.dkr.ecr.us-east-1.amazonaws.com/apps/nginx-test
:latest`

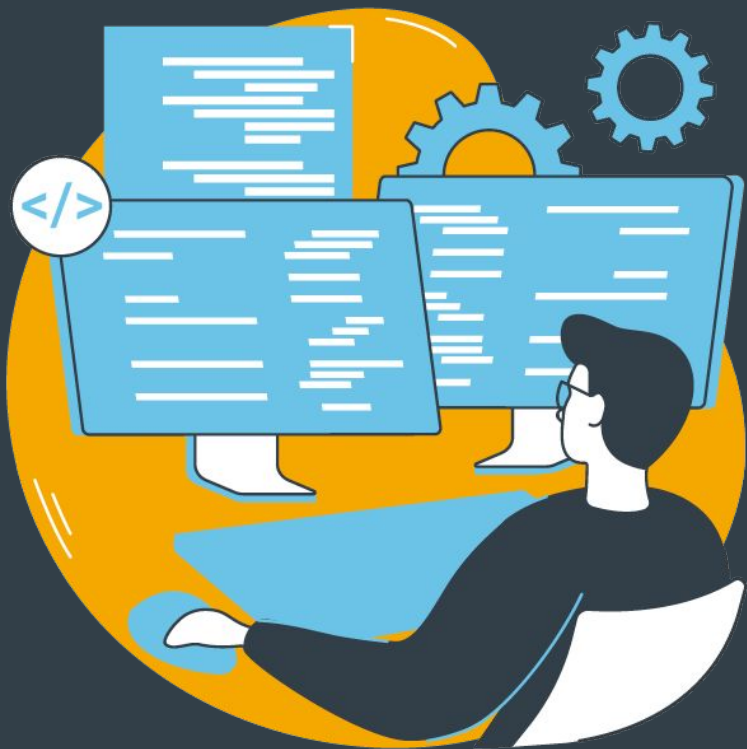

6_ Amazon SNS



Introducción a Amazon SNS

- Siglas de Amazon **S**imple **N**otification **S**ervice
- Servicio de AWS que nos facilita el envío de notificaciones
 - Notificaciones push
 - Email
 - SMS
 - SQS
 - Lambda
- Sistema tipo pub-sub
 - Los publicadores envían mensajes a un **topic**, lo cual desencadena las notificaciones
- Frecuentemente utilizado para:
 - Notificaciones a usuarios
 - Alertas



6_ Práctica SNS



Buscamos SNS y vamos a crear un nuevo topic. Para ello introducimos el nombre y pulsamos en “Next step”

The screenshot shows the AWS Management Console interface for the Amazon Simple Notification Service (SNS). At the top, there's a navigation bar with the AWS logo, a search bar, and various utility icons. Below this, a blue banner announces a new feature: "Amazon SNS now supports High Throughput FIFO topics. [Learn more](#)".

The main content area is titled "Amazon Simple Notification Service" with the subtitle "Pub/sub messaging for microservices and serverless applications." Below this, a paragraph describes the service: "Amazon SNS is a highly available, durable, secure, fully managed pub/sub messaging service that enables you to decouple microservices, distributed systems, and event-driven serverless applications. Amazon SNS provides topics for high-throughput, push-based, many-to-many messaging."

On the right side, the "Create topic" wizard is displayed. It includes a "Topic name" field with the value "taller-sns" and a "Next step" button. Two red arrows point to the "Topic name" field and the "Next step" button. Below the button is a link that says "Start with an overview".

At the bottom, a "Pricing" section is partially visible, stating "Amazon SNS has no upfront costs. You".



Dejamos todos los valores por defecto y pulsamos en “Crear topic”

aws

Search

[Alt+S]

United States (N. Virginia)

voclabs/user3886789=Fernando_Garc_a____lvarez @ 1255-9671-7191

Amazon SNS

Topics

Create topic

Create topic

Details

Type | Info

Topic type cannot be modified after topic is created

☐ FIFO (first-in, first-out)

- Strictly-preserved message ordering
- Exactly-once message delivery
- Subscription protocols: SQS

☒ Standard

- Best-effort message ordering
- At-least once message delivery
- Subscription protocols: SQS, Lambda, Data Firehose, HTTP, SMS, email, mobile application endpoints

Name

taller-sns

Maximum 256 characters. Can include alphanumeric characters, hyphens (-) and underscores (_).

Display name - optional | Info

To use this topic with SMS subscriptions, enter a display name. Only the first 10 characters are displayed in an SMS message.

My Topic

Maximum 100 characters.

► Encryption - optional

Amazon SNS provides in-transit encryption by default. Enabling server-side encryption adds at-rest encryption to your topic.



Una vez hecho esto, podemos crear una subscription: esto es lo que pasará cuando se envíe algo al topic

The screenshot shows the AWS Management Console interface for Amazon SNS. The left sidebar contains navigation links for Amazon SNS, Dashboard, Topics, Subscriptions, Mobile, Push notifications, and Text messaging (SMS). The main content area is titled 'taller-sns' and includes tabs for Details, Subscriptions, Access policy, Data protection policy, Delivery policy (HTTP/S), Delivery status logging, Encryption, Tags, and Integrations. The 'Details' tab is active, displaying the topic's Name (taller-sns), ARN (arn:aws:sns:us-east-1:125596717191:taller-sns), Display name (-), Topic owner (125596717191), and Type (Standard). The 'Subscriptions' tab is also visible, showing a search bar and a table with columns for ID, Endpoint, Status, and Protocol. Below the table, it states 'No subscriptions found' and 'You don't have any subscriptions to this topic.' A red arrow points to the 'Create subscription' button in the top right corner of the Subscriptions section.



Una vez hecho esto, en la siguiente página deberemos especificar el tipo de protocolo. En este caso, pongo “email” para que me envíe un correo electrónico cada vez que pase algo

aws Search [Alt+S]

Amazon SNS > Subscriptions > Create subscription

Create subscription

Details

Topic ARN
arn:aws:sns:us-east-1:125596717191:taller-sns

Protocol
The type of endpoint to subscribe
Email

Endpoint
An email address that can receive notifications from Amazon SNS.
fgarciaa@nextdigital.es

After your subscription is created, you must confirm it. [Info](#)

► **Subscription filter policy - optional** [Info](#)
This policy filters the messages that a subscriber receives.

► **Redrive policy (dead-letter queue) - optional** [Info](#)
Send undeliverable messages to a dead-letter queue.

[Cancel](#) [Create subscription](#)



Os debería haber llegado un correo de confirmación. Pulsad en el enlace para confirmar vuestro mail, porque sino no os llegarán los mensajes

AWS Notification - Subscription Confirmation

External

Inbox x



AWS Notifications <no-reply@sns.amazonaws.com>

to me ▾

You have chosen to subscribe to the topic:

arn:aws:sns:us-east-1:125596717191:taller-sns

To confirm this subscription, click or visit the link below (If this was in error no action is necessary):

[Confirm subscription](#)

Please do not reply directly to this email. If you wish to remove yourself from receiving all future SNS subscription confirmation requests please send an email to [sns-opt-out](#)



Una vez hecho esto, en la siguiente página deberemos especificar el tipo de protocolo. En este caso, pongo “email” para que me envíe un correo electrónico cada vez que pase algo

aws [Search] [Alt+S] United States (N. Virginia) voclabs/user3886789=Fernando_Garc_a____lvarez @ 1255-9671-7191

Amazon SNS > Topics

Amazon SNS <

Dashboard

Topics

Subscriptions

▼ Mobile

Push notifications

Text messaging (SMS)

Topics (1)

Search

	Name ▲	Type	ARN ▼
☐	taller-sns	Standard	arn:aws:sns:us-east-1:125596717191:taller-sns

Edit Delete Publish message Create topic

< 1 > ⚙



Por último, seleccionamos el topic y “publish message”

The screenshot shows the Amazon SNS console interface. At the top, there's a navigation bar with the AWS logo, a search bar, and user information. The left sidebar shows the 'Amazon SNS' menu with options like 'Dashboard', 'Topics', 'Subscriptions', and 'Mobile'. The main content area is titled 'Topics (1)' and contains a table with one topic named 'taller-sns'. The table has columns for 'Name', 'Type', and 'ARN'. The 'taller-sns' topic is of type 'Standard' and has the ARN 'arn:aws:sns:us-east-1:125596717191:taller-sns'. In the top right of the console, there are buttons for 'Edit', 'Delete', 'Publish message', and 'Create topic'. A red arrow points to the 'Publish message' button, and another red arrow points to the 'taller-sns' topic in the table.

Name	Type	ARN
taller-sns	Standard	arn:aws:sns:us-east-1:125596717191:taller-sns



Una vez hecho esto, rellenamos el body del mensaje y lo publicamos

aws

Search

[Alt+S]

United States (N. Virginia)

voclabs/user3886789-Fernando_Garc_a____lvarez @ 1255-9671-7191

Amazon SNS

Topics

taller-sns

Publish message

New Feature

Amazon SNS now supports High Throughput FIFO topics. [Learn more](#)

Publish message to topic

Message details

Topic ARN
arn:aws:sns:us-east-1:125596717191:taller-sns

Subject - optional

Enter message subject

Maximum 100 printable ASCII characters

Time to Live (TTL) - optional [Info](#)
This setting applies only to mobile application endpoints. The number of seconds that the push notification service has to deliver the message to the endpoint.

Message body

Message structure

☒ **Identical payload for all delivery protocols.**
The same payload is sent to endpoints subscribed to the topic, regardless of their delivery protocol.

☐ **Custom payload for each delivery protocol.**
Different payloads are sent to endpoints subscribed to the topic, based on their delivery protocol.

Message body to send to the endpoint

1 Prueba



Nos deberá haber llegado un mail de AWS con ese contenido

AWS Notification Message

External

Inbox x



AWS Notifications <no-reply@sns.amazonaws.com>

to me ▾

Prueba

--

If you wish to stop receiving notifications from this topic, please click or visit the link below to unsubscribe:

<https://sns.us-east-1.amazonaws.com/unsubscribe.html?SubscriptionArn=arn:aws:sns:us-east-1:125596717191:taller-sns:00b3efa2-c679-4c31-9f4e-12e3t>

Please do not reply directly to this email. If you have any questions or comments regarding this email, please contact us at <https://aws.amazon.com/support>



07_

Práctica Final



Práctica Final

- Desarrollar una web estática tipo currículum (puede ser totalmente ficticio) y desplegarla en el edge de Amazon con Cloudfront
- Opcional: hacer un login con Cognito que te redirija a la web desplegada mediante Cloudfront
- ¿Qué entrego?
 - Repositorio de GitHub que contenga:
 - Código desarrollado
 - PDF con capturas de pantalla en las que se vea el sitio web desplegado y los pasos principales realizados

Gracias!

aulaupm@nextdigital.es

La simplicidad es la máxima sofisticación

Leonardo Da Vinci

✉ ivan.garcia@nextdigital.es



[LinkedIn: Ivan García Jiménez](#)



[iovanic](#)

