

Personalized Femoral Implant Planning by Automatic Femur Segmentation

Iwan Paolucci, Severin Tobler University of Bern


16. December 2015, Medical Image Analysis Lab



Introduction

UNIVERSITÄT BERN


> Goal: DICE 0.95 with 0.05 std

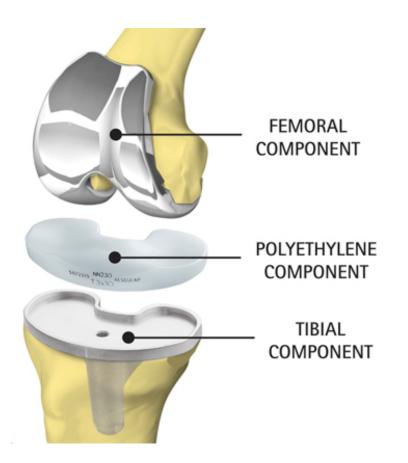





Methods – Algorithm Pipeline

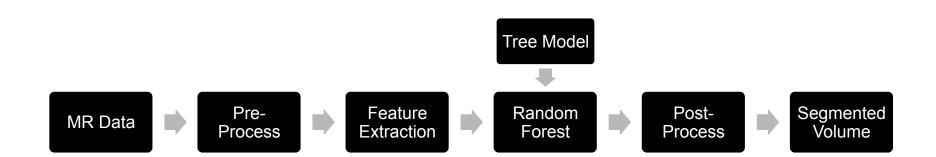




Methods – Pre-Process

UNIVERSITÄT BERN

> Normalization

$$I_n = \frac{I - \mu}{\sigma}$$


Noise removal— 3D Wiener filter

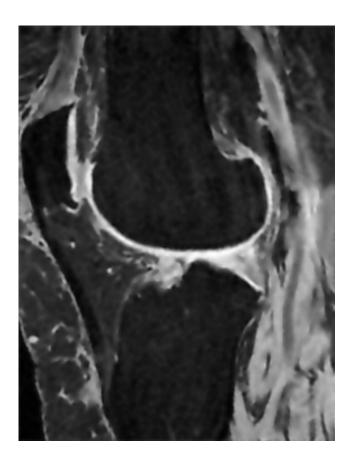



Methods – Feature Extraction


- > Relative position (3D)
- > Standard deviation
- > Entropy
- > Gaussian
- > Average
- > Laplacian of Gaussian
- > Laplacian
- Prewitt (horizontal and vertical)
- Sobel (horizontal and vertical)

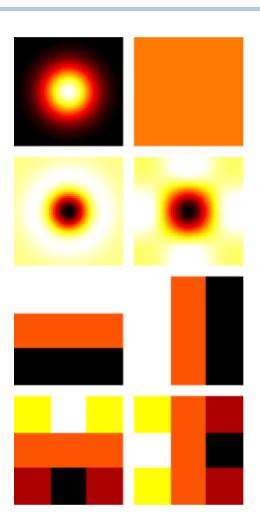




Methods – Post-Processing


- Morphological opening
- > Keep largest area / volume
- > Fill holes

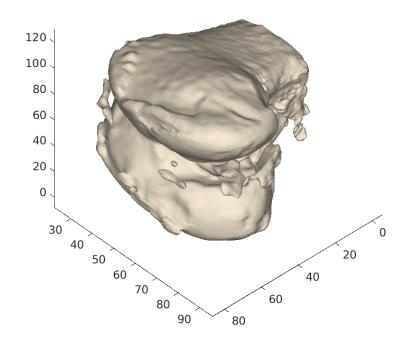

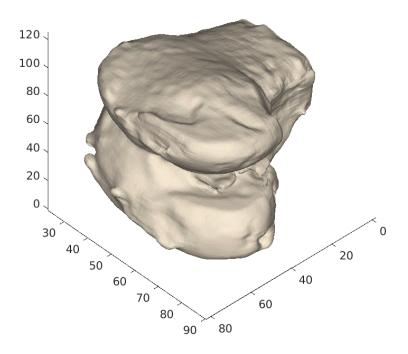



Results

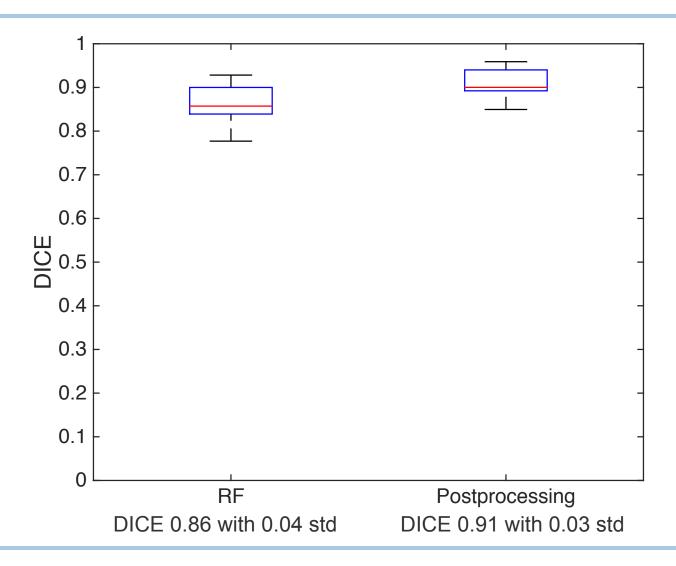




Discussion

UNIVERSITÄ BERN

Objective best and worst case:

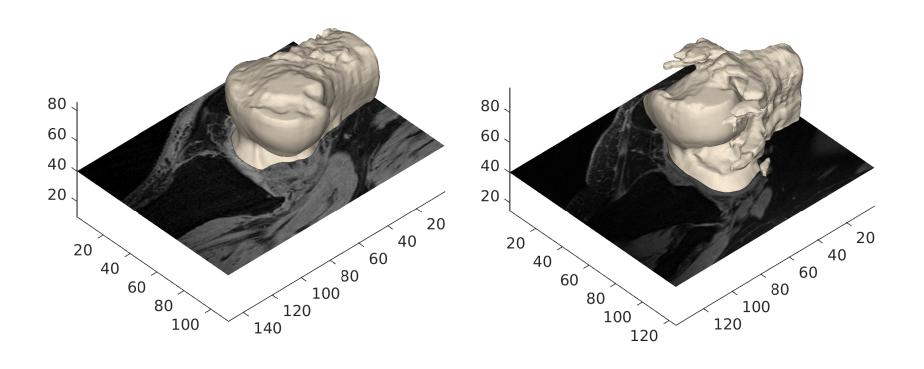



Outlook

- Include prior information
- > Investigate 3D features
- > Extend to further bone structure



UNIVERSITÄT


Thanks for your attention!

Questions?



Results Cross Validation (5 fold)

UNIVERSITÄT Bern

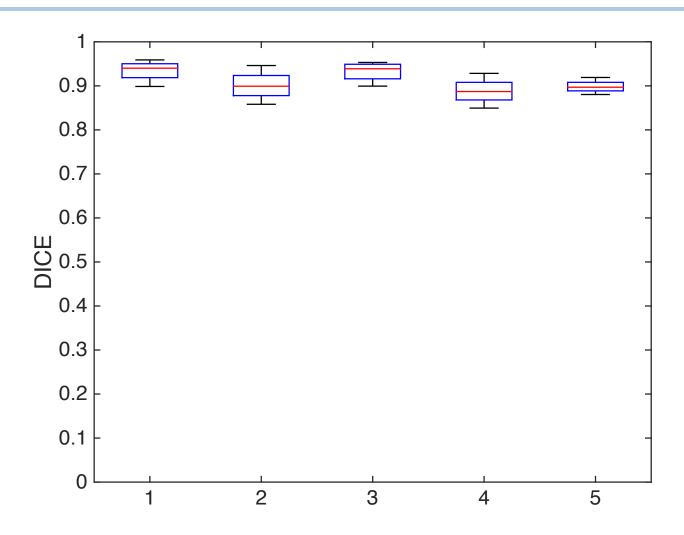



Random Forest

- > 15 Trees
- > Leaf size of 1
- > Trained on 15 volumes
- > 1% Sample proportion
- > 13 Features
- > ~ 5 MB