

first_rmarkdown

Ipek Bensu

12/24/2020

This is how to:

- Make text **bold**
- Make text *italic*
- Create links [repo](#)
- Run inline code `r`

This is Heading 1

This is Heading 2

This is Heading 3

This is a code chunk:

```
print('Hello world')
```

```
## [1] "Hello world"
```

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:


```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   : 2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
```

```
## Mean   :15.4   Mean    : 42.98
## 3rd Qu.:19.0   3rd Qu.: 56.00
## Max.   :25.0   Max.    :120.00
```

Including Plots

You can also embed plots, for example:

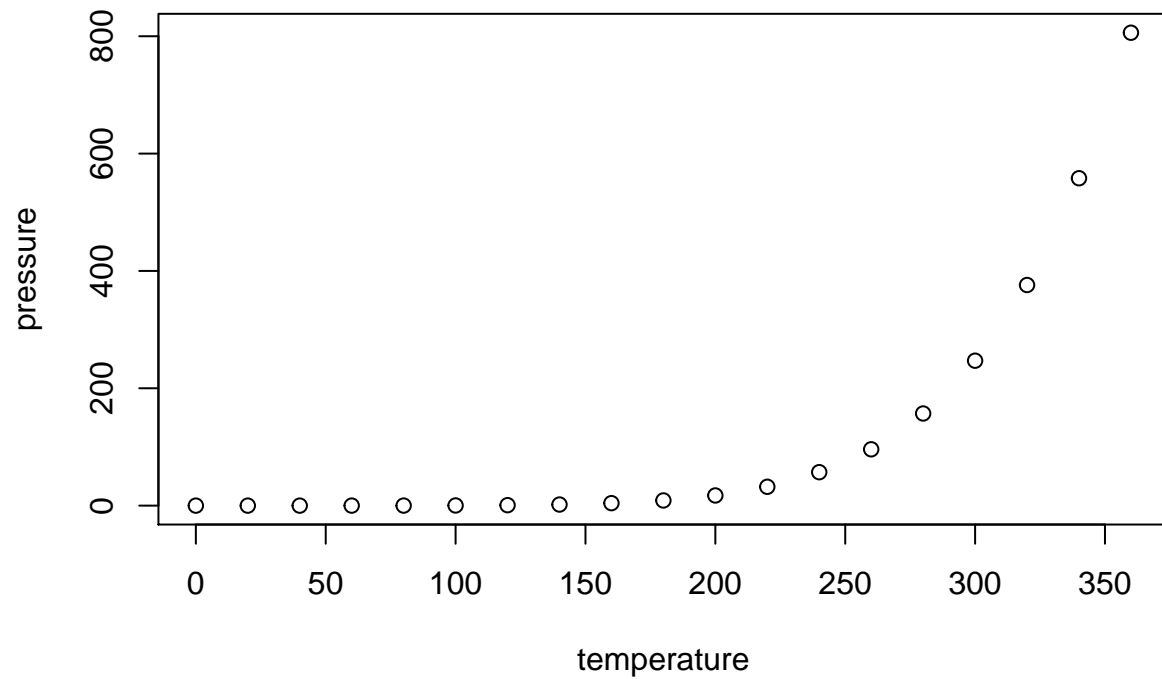

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.