

Details for Query 191


ID	Query ID	Status	Description	Submitted	Duration	Succeeded Jobs	Error Message
191	01a0bca2-bbf5-73b3-b020-be845d66a9a1	COMPLETED	count at <unknown>:0	2026-09-20 12:26:16	0.5 s	480, 482, 478, 479, 481	

[SVG ↕](#)
[Download](#)
[Copy Plan](#)
[Copy Link](#)

Plan Visualization

☐ Show the Stage ID and Task ID that corresponds to the max metric

☐ Show metrics in graph nodes (detailed mode)

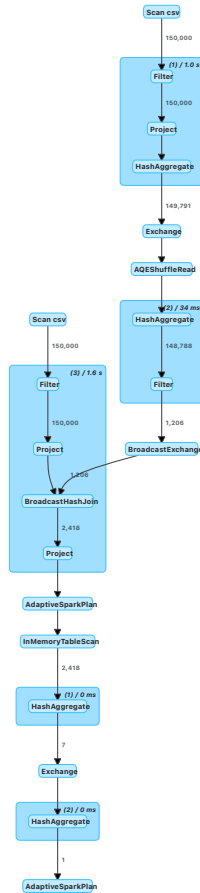

Plan Details

[Unified](#)
[Split](#)

```

== Physical Plan ==
AdaptiveSparkPlan (41)
+- == Final Plan ==
  ResultQueryStage (37), Statistics(sizeInBytes=8.0 EiB)
  +- * HashAggregate (36)
    +- ShuffleQueryStage (35), Statistics(sizeInBytes=112.0 B, rowCount=7)
    +- Exchange (34)
      +- * HashAggregate (33)
        +- TableCacheQueryStage (32), Statistics(sizeInBytes=424.1 KiB, rowCount=2.42E+3)
        +- InMemoryTableScan (1)
          +- InMemoryRelation (2)
            +- AdaptiveSparkPlan (31)
              +- == Final Plan ==

```

```

ResultQueryStage (19)
+- * Project (18)
  +- * BroadcastHashJoin Inner BuildRight (17)
    :- * Project (5)
    : +- * Filter (4)
    :   +- Scan csv (3)
  +- BroadcastQueryStage (16), Statistics(sizeInBytes=2.1 MiB, rowCount=1.21E+3)
    +- BroadcastExchange (15)
      +- * Filter (14)
        +- * HashAggregate (13)
          +- AQEShuffleRead (12), coalesced
            +- ShuffleQueryStage (11), Statistics(sizeInBytes=5.7 MiB,
rowCount=1.50E+5)
              +- Exchange (10)
                +- * HashAggregate (9)
                  +- * Project (8)
                    +- * Filter (7)
                      +- Scan csv (6)

+- == Initial Plan ==
Project (30)
+- BroadcastHashJoin Inner BuildRight (29)
  :- Project (21)
  : +- Filter (20)
  :   +- Scan csv (3)
+- BroadcastExchange (28)
  +- Filter (27)
    +- HashAggregate (26)
      +- Exchange (25)
        +- HashAggregate (24)
          +- Project (23)
            +- Filter (22)
              +- Scan csv (6)

+- == Initial Plan ==
HashAggregate (40)
+- Exchange (39)
  +- HashAggregate (38)
    +- InMemoryTableScan (1)
      +- InMemoryRelation (2)
        +- AdaptiveSparkPlan (31)
          +- == Final Plan ==
            ResultQueryStage (19)
              +- * Project (18)
                +- * BroadcastHashJoin Inner BuildRight (17)
                  :- * Project (5)
                  : +- * Filter (4)
                  :   +- Scan csv (3)
                +- BroadcastQueryStage (16), Statistics(sizeInBytes=2.1 MiB, rowCount=1.21E+3)
                  +- BroadcastExchange (15)
                    +- * Filter (14)
                      +- * HashAggregate (13)
                        +- AQEShuffleRead (12), coalesced
                          +- ShuffleQueryStage (11), Statistics(sizeInBytes=5.7 MiB,
rowCount=1.50E+5)
                            +- Exchange (10)
                              +- * HashAggregate (9)
                                +- * Project (8)
                                  +- * Filter (7)
                                    +- Scan csv (6)

          +- == Initial Plan ==
            Project (30)
              +- BroadcastHashJoin Inner BuildRight (29)
                :- Project (21)
                : +- Filter (20)
                :   +- Scan csv (3)
              +- BroadcastExchange (28)
                +- Filter (27)
                  +- HashAggregate (26)
                    +- Exchange (25)

```

```
+-- HashAggregate (24)
  +- Project (23)
    +- Filter (22)
      +- Scan csv (6)
```

(1) InMemoryTableScan

Output: []

(2) InMemoryRelation

Arguments: [Customer ID#33996, Booking ID#33994, Booking Status#33995, Vehicle Type#33997, Pickup Location#33998, Drop Location#33999, Avg VTAT#34013, Avg CTAT#34014, Cancelled Rides by Customer#34002, Reason for cancelling by Customer#34003, Cancelled Rides by Driver#34004, Driver Cancellation Reason#34005, Incomplete Rides#34006, Incomplete Rides Reason#34007, Booking Value#34015, Ride Distance#34016, Driver Ratings#34017, Customer Rating#34011, Payment Method#34012, Datetime#34018, Repeat_Bookings#34219L], StorageLevel(disk, memory, deserialized, 1 replicas)

(3) Scan csv

Output [21]: [Date#33860, Time#33861, Booking ID#33862, Booking Status#33863, Customer ID#33864, Vehicle Type#33865, Pickup Location#33866, Drop Location#33867, Avg VTAT#33868, Avg CTAT#33869, Cancelled Rides by Customer#33870, Reason for cancelling by Customer#33871, Cancelled Rides by Driver#33872, Driver Cancellation Reason#33873, Incomplete Rides#33874, Incomplete Rides Reason#33875, Booking Value#33876, Ride Distance#33877, Driver Ratings#33878, Customer Rating#33879, Payment Method#33880]

Batched: false

Location: InMemoryFileIndex [file:/Users/ilianapeters/Documents/Documents - Iliana's MacBook Pro/Monash_IT05202/IT05202_TP5_Assess1/ncr_ride_bookings.csv]

ReadSchema: struct<Date:string,Time:string,Booking ID:string,Booking Status:string,Customer ID:string,Vehicle Type:string,Pickup Location:string,Drop Location:string,Avg VTAT:string,Avg CTAT:string,Cancelled Rides by Customer:string,Reason for cancelling by Customer:string,Cancelled Rides by Driver:string,Driver Cancellation Reason:string,Incomplete Rides:string,Incomplete Rides Reason:string,Booking Value:string,Ride Distance:string,Driver Ratings:string,Customer Rating:string,Payment Method:string>

(4) Filter [codegen id : 3]

Input [21]: [Date#33860, Time#33861, Booking ID#33862, Booking Status#33863, Customer ID#33864, Vehicle Type#33865, Pickup Location#33866, Drop Location#33867, Avg VTAT#33868, Avg CTAT#33869, Cancelled Rides by Customer#33870, Reason for cancelling by Customer#33871, Cancelled Rides by Driver#33872, Driver Cancellation Reason#33873, Incomplete Rides#33874, Incomplete Rides Reason#33875, Booking Value#33876, Ride Distance#33877, Driver Ratings#33878, Customer Rating#33879, Payment Method#33880]

Condition : CASE WHEN (Customer ID#33864 = null) THEN false ELSE isnotnull(Customer ID#33864) END

(5) Project [codegen id : 3]

Output [20]: [CASE WHEN (Booking ID#33862 = null) THEN null ELSE Booking ID#33862 END AS Booking ID#33994, CASE WHEN (Booking Status#33863 = null) THEN null ELSE Booking Status#33863 END AS Booking Status#33995, CASE WHEN (Customer ID#33864 = null) THEN null ELSE Customer ID#33864 END AS Customer ID#33996, CASE WHEN (Vehicle Type#33865 = null) THEN null ELSE Vehicle Type#33865 END AS Vehicle Type#33997, CASE WHEN (Pickup Location#33866 = null) THEN null ELSE Pickup Location#33866 END AS Pickup Location#33998, CASE WHEN (Drop Location#33867 = null) THEN null ELSE Drop Location#33867 END AS Drop Location#33999, CASE WHEN (Avg VTAT#33868 = null) THEN null ELSE cast(Avg VTAT#33868 as float) END AS Avg VTAT#34013, CASE WHEN (Avg CTAT#33869 = null) THEN null ELSE cast(Avg CTAT#33869 as float) END AS Avg CTAT#34014, CASE WHEN (Cancelled Rides by Customer#33870 = null) THEN null ELSE Cancelled Rides by Customer#33870 END AS Cancelled Rides by Customer#34002, CASE WHEN (Reason for cancelling by Customer#33871 = null) THEN null ELSE Reason for cancelling by Customer#33871 END AS Reason for cancelling by Customer#34003, CASE WHEN (Cancelled Rides by Driver#33872 = null) THEN null ELSE Cancelled Rides by Driver#33872 END AS Cancelled Rides by Driver#34004, CASE WHEN (Driver Cancellation Reason#33873 = null) THEN null ELSE Driver Cancellation Reason#33873 END AS Driver Cancellation Reason#34005, CASE WHEN (Incomplete Rides#33874 = null) THEN null ELSE Incomplete Rides#33874 END AS Incomplete Rides#34006, CASE WHEN (Incomplete Rides Reason#33875 = null) THEN null ELSE Incomplete Rides Reason#33875 END AS Incomplete Rides Reason#34007, CASE WHEN (Booking Value#33876 = null) THEN null ELSE cast(Booking Value#33876 as float) END AS Booking Value#34015, CASE WHEN (Ride Distance#33877 = null) THEN null ELSE cast(Ride Distance#33877 as float) END AS Ride Distance#34016, CASE WHEN (Driver Ratings#33878 = null) THEN null ELSE cast(Driver Ratings#33878 as float) END AS Driver Ratings#34017, CASE WHEN (Customer Rating#33879 = null) THEN null ELSE Customer Rating#33879 END AS Customer Rating#34011, CASE WHEN (Payment Method#33880 = null) THEN null ELSE Payment Method#33880 END AS Payment Method#34012, cast(concat_ws(, CASE WHEN (Date#33860 = null) THEN null ELSE Date#33860 END, CASE WHEN (Time#33861 = null) THEN null ELSE Time#33861 END) as timestamp) AS Datetime#34018]

Input [21]: [Date#33860, Time#33861, Booking ID#33862, Booking Status#33863, Customer ID#33864, Vehicle Type#33865, Pickup Location#33866, Drop Location#33867, Avg VTAT#33868, Avg CTAT#33869, Cancelled Rides by Customer#33870, Reason for cancelling by Customer#33871, Cancelled Rides by Driver#33872, Driver Cancellation Reason#33873, Incomplete Rides#33874, Incomplete Rides Reason#33875, Booking Value#33876, Ride Distance#33877, Driver Ratings#33878, Customer Rating#33879, Payment Method#33880]

(6) Scan csv

Output [2]: [Booking ID#34399, Customer ID#34401]

Batched: false

Location: InMemoryFileIndex [file:/Users/ilianapeters/Documents/Documents - Iliana's MacBook Pro/Monash_IT05202/IT05202_TP5_Assess1/ncr_ride_bookings.csv]

ReadSchema: struct<Booking ID:string,Customer ID:string>

(7) Filter [codegen id : 1]

Input [2]: [Booking ID#34399, Customer ID#34401]

Condition : CASE WHEN (Customer ID#34401 = null) THEN false ELSE isnotnull(Customer ID#34401) END

(8) Project [codegen id : 1]

Output [2]: [CASE WHEN (Booking ID#34399 = null) THEN null ELSE Booking ID#34399 END AS Booking ID#34420, CASE WHEN (Customer ID#34401 = null) THEN null ELSE Customer ID#34401 END AS Customer ID#34422]

Input [2]: [Booking ID#34399, Customer ID#34401]

(9) HashAggregate [codegen id : 1]

Input [2]: [Booking ID#34420, Customer ID#34422]

Keys [1]: [Customer ID#34422]

Functions [1]: [partial_count(Booking ID#34420)]

Aggregate Attributes [1]: [count#34446L]

Results [2]: [Customer ID#34422, count#34447L]

(10) Exchange

Input [2]: [Customer ID#34422, count#34447L]

Arguments: hashpartitioning(Customer ID#34422, 200), ENSURE_REQUIREMENTS, [plan_id=15291]

(11) ShuffleQueryStage

Output [2]: [Customer ID#34422, count#34447L]

Arguments: 0

(12) AQEShuffleRead

Input [2]: [Customer ID#34422, count#34447L]

Arguments: coalesced

(13) HashAggregate [codegen id : 2]

Input [2]: [Customer ID#34422, count#34447L]

Keys [1]: [Customer ID#34422]

Functions [1]: [count(Booking ID#34420)]

Aggregate Attributes [1]: [count(Booking ID#34420)#34240L]

Results [2]: [Customer ID#34422, count(Booking ID#34420)#34240L AS Repeat_Bookings#34219L]

(14) Filter [codegen id : 2]

Input [2]: [Customer ID#34422, Repeat_Bookings#34219L]

Condition : (Repeat_Bookings#34219L > 1)

(15) BroadcastExchange

Input [2]: [Customer ID#34422, Repeat_Bookings#34219L]

Arguments: HashedRelationBroadcastMode(List(input[0, string, true]),false), [plan_id=15339]

(16) BroadcastQueryStage

Output [2]: [Customer ID#34422, Repeat_Bookings#34219L]

Arguments: 1

(17) BroadcastHashJoin [codegen id : 3]

Left keys [1]: [Customer ID#33996]

Right keys [1]: [Customer ID#34422]

Join type: Inner

Join condition: None

(18) Project [codegen id : 3]

Output [21]: [Customer ID#33996, Booking ID#33994, Booking Status#33995, Vehicle Type#33997, Pickup Location#33998, Drop Location#33999, Avg VTAT#34013, Avg CTAT#34014, Cancelled Rides by Customer#34002, Reason for cancelling by Customer#34003, Cancelled Rides by Driver#34004, Driver Cancellation Reason#34005, Incomplete Rides#34006, Incomplete Rides Reason#34007, Booking Value#34015, Ride Distance#34016, Driver Ratings#34017, Customer Rating#34011, Payment Method#34012, Datetime#34018, Repeat_Bookings#34219L]

Input [22]: [Booking ID#33994, Booking Status#33995, Customer ID#33996, Vehicle Type#33997, Pickup Location#33998, Drop Location#33999, Avg VTAT#34013, Avg CTAT#34014, Cancelled Rides by Customer#34002, Reason for cancelling by Customer#34003, Cancelled Rides by Driver#34004, Driver Cancellation Reason#34005, Incomplete Rides#34006, Incomplete

Rides Reason#34007, Booking Value#34015, Ride Distance#34016, Driver Ratings#34017, Customer Rating#34011, Payment Method#34012, Datetime#34018, Customer ID#34422, Repeat_Bookings#34219L]

(19) ResultQueryStage

Output [21]: [Customer ID#33996, Booking ID#33994, Booking Status#33995, Vehicle Type#33997, Pickup Location#33998, Drop Location#33999, Avg VTAT#34013, Avg CTAT#34014, Cancelled Rides by Customer#34002, Reason for cancelling by Customer#34003, Cancelled Rides by Driver#34004, Driver Cancellation Reason#34005, Incomplete Rides#34006, Incomplete Rides Reason#34007, Booking Value#34015, Ride Distance#34016, Driver Ratings#34017, Customer Rating#34011, Payment Method#34012, Datetime#34018, Repeat_Bookings#34219L]

Arguments: 2

(20) Filter

Input [21]: [Date#33860, Time#33861, Booking ID#33862, Booking Status#33863, Customer ID#33864, Vehicle Type#33865, Pickup Location#33866, Drop Location#33867, Avg VTAT#33868, Avg CTAT#33869, Cancelled Rides by Customer#33870, Reason for cancelling by Customer#33871, Cancelled Rides by Driver#33872, Driver Cancellation Reason#33873, Incomplete Rides#33874, Incomplete Rides Reason#33875, Booking Value#33876, Ride Distance#33877, Driver Ratings#33878, Customer Rating#33879, Payment Method#33880]

Condition : CASE WHEN (Customer ID#33864 = null) THEN false ELSE isnotnull(Customer ID#33864) END

(21) Project

Output [20]: [CASE WHEN (Booking ID#33862 = null) THEN null ELSE Booking ID#33862 END AS Booking ID#33994, CASE WHEN (Booking Status#33863 = null) THEN null ELSE Booking Status#33863 END AS Booking Status#33995, CASE WHEN (Customer ID#33864 = null) THEN null ELSE Customer ID#33864 END AS Customer ID#33996, CASE WHEN (Vehicle Type#33865 = null) THEN null ELSE Vehicle Type#33865 END AS Vehicle Type#33997, CASE WHEN (Pickup Location#33866 = null) THEN null ELSE Pickup Location#33866 END AS Pickup Location#33998, CASE WHEN (Drop Location#33867 = null) THEN null ELSE Drop Location#33867 END AS Drop Location#33999, CASE WHEN (Avg VTAT#33868 = null) THEN null ELSE cast(Avg VTAT#33868 as float) END AS Avg VTAT#34013, CASE WHEN (Avg CTAT#33869 = null) THEN null ELSE cast(Avg CTAT#33869 as float) END AS Avg CTAT#34014, CASE WHEN (Cancelled Rides by Customer#33870 = null) THEN null ELSE Cancelled Rides by Customer#33870 END AS Cancelled Rides by Customer#34002, CASE WHEN (Reason for cancelling by Customer#33871 = null) THEN null ELSE Reason for cancelling by Customer#33871 END AS Reason for cancelling by Customer#34003, CASE WHEN (Cancelled Rides by Driver#33872 = null) THEN null ELSE Cancelled Rides by Driver#33872 END AS Cancelled Rides by Driver#34004, CASE WHEN (Driver Cancellation Reason#33873 = null) THEN null ELSE Driver Cancellation Reason#33873 END AS Driver Cancellation Reason#34005, CASE WHEN (Incomplete Rides#33874 = null) THEN null ELSE Incomplete Rides#33874 END AS Incomplete Rides#34006, CASE WHEN (Incomplete Rides Reason#33875 = null) THEN null ELSE Incomplete Rides Reason#33875 END AS Incomplete Rides Reason#34007, CASE WHEN (Booking Value#33876 = null) THEN null ELSE cast(Booking Value#33876 as float) END AS Booking Value#34015, CASE WHEN (Ride Distance#33877 = null) THEN null ELSE cast(Ride Distance#33877 as float) END AS Ride Distance#34016, CASE WHEN (Driver Ratings#33878 = null) THEN null ELSE cast(Driver Ratings#33878 as float) END AS Driver Ratings#34017, CASE WHEN (Customer Rating#33879 = null) THEN null ELSE Customer Rating#33879 END AS Customer Rating#34011, CASE WHEN (Payment Method#33880 = null) THEN null ELSE Payment Method#33880 END AS Payment Method#34012, cast(concat_ws(, CASE WHEN (Date#33860 = null) THEN null ELSE Date#33860 END, CASE WHEN (Time#33861 = null) THEN null ELSE Time#33861 END) as timestamp) AS Datetime#34018]

Input [21]: [Date#33860, Time#33861, Booking ID#33862, Booking Status#33863, Customer ID#33864, Vehicle Type#33865, Pickup Location#33866, Drop Location#33867, Avg VTAT#33868, Avg CTAT#33869, Cancelled Rides by Customer#33870, Reason for cancelling by Customer#33871, Cancelled Rides by Driver#33872, Driver Cancellation Reason#33873, Incomplete Rides#33874, Incomplete Rides Reason#33875, Booking Value#33876, Ride Distance#33877, Driver Ratings#33878, Customer Rating#33879, Payment Method#33880]

(22) Filter

Input [2]: [Booking ID#34399, Customer ID#34401]

Condition : CASE WHEN (Customer ID#34401 = null) THEN false ELSE isnotnull(Customer ID#34401) END

(23) Project

Output [2]: [CASE WHEN (Booking ID#34399 = null) THEN null ELSE Booking ID#34399 END AS Booking ID#34420, CASE WHEN (Customer ID#34401 = null) THEN null ELSE Customer ID#34401 END AS Customer ID#34422]

Input [2]: [Booking ID#34399, Customer ID#34401]

(24) HashAggregate

Input [2]: [Booking ID#34420, Customer ID#34422]

Keys [1]: [Customer ID#34422]

Functions [1]: [partial_count(Booking ID#34420)]

Aggregate Attributes [1]: [count#34446L]

Results [2]: [Customer ID#34422, count#34447L]

(25) Exchange

Input [2]: [Customer ID#34422, count#34447L]

Arguments: hashpartitioning(Customer ID#34422, 200), ENSURE_REQUIREMENTS, [plan_id=15244]

(26) HashAggregate

Input [2]: [Customer ID#34422, count#34447L]
Keys [1]: [Customer ID#34422]
Functions [1]: [count(Booking ID#34420)]
Aggregate Attributes [1]: [count(Booking ID#34420)#34240L]
Results [2]: [Customer ID#34422, count(Booking ID#34420)#34240L AS Repeat_Bookings#34219L]

(27) Filter

Input [2]: [Customer ID#34422, Repeat_Bookings#34219L]
Condition : (Repeat_Bookings#34219L > 1)

(28) BroadcastExchange

Input [2]: [Customer ID#34422, Repeat_Bookings#34219L]
Arguments: HashedRelationBroadcastMode(List(input[0, string, true]),false), [plan_id=15248]

(29) BroadcastHashJoin

Left keys [1]: [Customer ID#33996]
Right keys [1]: [Customer ID#34422]
Join type: Inner
Join condition: None

(30) Project

Output [21]: [Customer ID#33996, Booking ID#33994, Booking Status#33995, Vehicle Type#33997, Pickup Location#33998, Drop Location#33999, Avg VTAT#34013, Avg CTAT#34014, Cancelled Rides by Customer#34002, Reason for cancelling by Customer#34003, Cancelled Rides by Driver#34004, Driver Cancellation Reason#34005, Incomplete Rides#34006, Incomplete Rides Reason#34007, Booking Value#34015, Ride Distance#34016, Driver Ratings#34017, Customer Rating#34011, Payment Method#34012, Datetime#34018, Repeat_Bookings#34219L]
Input [22]: [Booking ID#33994, Booking Status#33995, Customer ID#33996, Vehicle Type#33997, Pickup Location#33998, Drop Location#33999, Avg VTAT#34013, Avg CTAT#34014, Cancelled Rides by Customer#34002, Reason for cancelling by Customer#34003, Cancelled Rides by Driver#34004, Driver Cancellation Reason#34005, Incomplete Rides#34006, Incomplete Rides Reason#34007, Booking Value#34015, Ride Distance#34016, Driver Ratings#34017, Customer Rating#34011, Payment Method#34012, Datetime#34018, Customer ID#34422, Repeat_Bookings#34219L]

(31) AdaptiveSparkPlan

Output [21]: [Customer ID#33996, Booking ID#33994, Booking Status#33995, Vehicle Type#33997, Pickup Location#33998, Drop Location#33999, Avg VTAT#34013, Avg CTAT#34014, Cancelled Rides by Customer#34002, Reason for cancelling by Customer#34003, Cancelled Rides by Driver#34004, Driver Cancellation Reason#34005, Incomplete Rides#34006, Incomplete Rides Reason#34007, Booking Value#34015, Ride Distance#34016, Driver Ratings#34017, Customer Rating#34011, Payment Method#34012, Datetime#34018, Repeat_Bookings#34219L]
Arguments: isFinalPlan=true

(32) TableCacheQueryStage

Output: []
Arguments: 0

(33) HashAggregate [codegen id : 1]

Input: []
Keys: []
Functions [1]: [partial_count(1)]
Aggregate Attributes [1]: [count#34891L]
Results [1]: [count#34892L]

(34) Exchange

Input [1]: [count#34892L]
Arguments: SinglePartition, ENSURE_REQUIREMENTS, [plan_id=15385]

(35) ShuffleQueryStage

Output [1]: [count#34892L]
Arguments: 1

(36) HashAggregate [codegen id : 2]

Input [1]: [count#34892L]
Keys: []
Functions [1]: [count(1)]
Aggregate Attributes [1]: [count(1)#34575L]
Results [1]: [count(1)#34575L AS count#34553L]

(37) ResultQueryStage

Output [1]: [count#34553L]

Arguments: 2

(38) HashAggregate
Input: []
Keys: []
Functions [1]: [partial_count(1)]
Aggregate Attributes [1]: [count#34891L]
Results [1]: [count#34892L]

(39) Exchange
Input [1]: [count#34892L]
Arguments: SinglePartition, ENSURE_REQUIREMENTS, [plan_id=15262]

(40) HashAggregate
Input [1]: [count#34892L]
Keys: []
Functions [1]: [count(1)]
Aggregate Attributes [1]: [count(1)#34575L]
Results [1]: [count(1)#34575L AS count#34553L]

(41) AdaptiveSparkPlan
Output [1]: [count#34553L]
Arguments: isFinalPlan=true

▼ Associated Jobs (5)

► Job Timeline

Job ID	Description	Submitted	Duration	Stages: Succeeded/Total	Tasks (for a stages): Succeeded/Total
482	\$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768 \$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768	2026/09/20 12:26:17	10 ms	1/1 (1 skipped)	1/1 (7 skipped)
481	\$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768 \$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768	2026/09/20 12:26:17	12 ms	1/1	7/7
480	count at <unknown>:0 count at <unknown>:0	2026/09/20 12:26:17	0.2 s	1/1	7/7
479	\$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768 \$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768	2026/09/20 12:26:16	39 ms	1/1 (1 skipped)	1/1 (7 skipped)
478	\$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768 \$anonfun\$withThreadLocalCaptured\$1 at CompletableFuture.java:1768	2026/09/20 12:26:16	0.2 s	1/1	7/7