```
from google.colab import files
uploaded = files.upload()
```

Choose files titanic.csv

titanic.csv(text/csv) - 39720 bytes, last modified: 17/03/2026 - 100% done

```
Saving titanic.csv to titanic (1).csv
```

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

```
df = pd.read_csv('titanic.csv')
df.head()
```

	survived	pclass	name	sex	age	fare	sibsp	parch
0	0	3	Braund, Mr. Owen Harris	male	22.0	7.2500	1	0
1	1	1	Cumings, Mrs. John Bradley (Florence Briggs Th...	female	38.0	71.2833	1	0
2	1	3	Heikkinen, Miss. Laina	female	26.0	7.9250	0	0
3	1	1	Futrelle, Mrs. Jacques Heath (Lily May Peel)	female	35.0	53.1000	1	0
4	0	3	Allen, Mr. William Henry	male	35.0	8.0500	0	0

Next steps: Generate code with df New interactive sheet

```
df.shape
```

```
(714, 8)
```

```
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 714 entries, 0 to 713
Data columns (total 8 columns):
 #   Column    Non-Null Count  Dtype
---  ------    --------------  -----
 0   survived  714 non-null    int64
 1   pclass    714 non-null    int64
 2   name      714 non-null    object
 3   sex       714 non-null    object
 4   age       714 non-null    float64
 5   fare      714 non-null    float64
 6   sibsp     714 non-null    int64
 7   parch     714 non-null    int64
dtypes: float64(2), int64(4), object(2)
memory usage: 44.8+ KB
```

```
df.describe()
```

	survived	pclass	age	fare	sibsp	parch
count	714.000000	714.000000	714.000000	714.000000	714.000000	714.000000
mean	0.406162	2.236695	29.699118	34.694514	0.512605	0.431373
std	0.491460	0.838250	14.526497	52.918930	0.929783	0.853289
min	0.000000	1.000000	0.420000	0.000000	0.000000	0.000000
25%	0.000000	1.000000	20.125000	8.050000	0.000000	0.000000
50%	0.000000	2.000000	28.000000	15.741700	0.000000	0.000000
75%	1.000000	3.000000	38.000000	33.375000	1.000000	1.000000
max	1.000000	3.000000	80.000000	512.329200	5.000000	6.000000

```
df.isnull().sum()
```

	0
survived	0
pclass	0
name	0
sex	0
age	0
fare	0
sibsp	0
parch	0

dtype: int64

```
sns.heatmap(df.isnull(), cbar=False)
plt.show()
```

```
df['age'].fillna(df['age'].median(), inplace=True)
```

```
ıment using an inplace method.
ıes always behaves as a copy.

ethod(value) instead, to perform the operation inplace on the original object.
```

```
df.isnull().sum()
```

	0
survived	0
pclass	0
name	0
sex	0
age	0
fare	0
sibsp	0
parch	0

dtype: int64

```
sns.countplot(x='survived', data=df)
plt.title("survival count")
plt.show()
```




```
sns.countplot(x='sex', hue='survived', data=df)
plt.show()
```




```
sns.countplot(x='pclass', hue='survived', data=df)
plt.show()
```

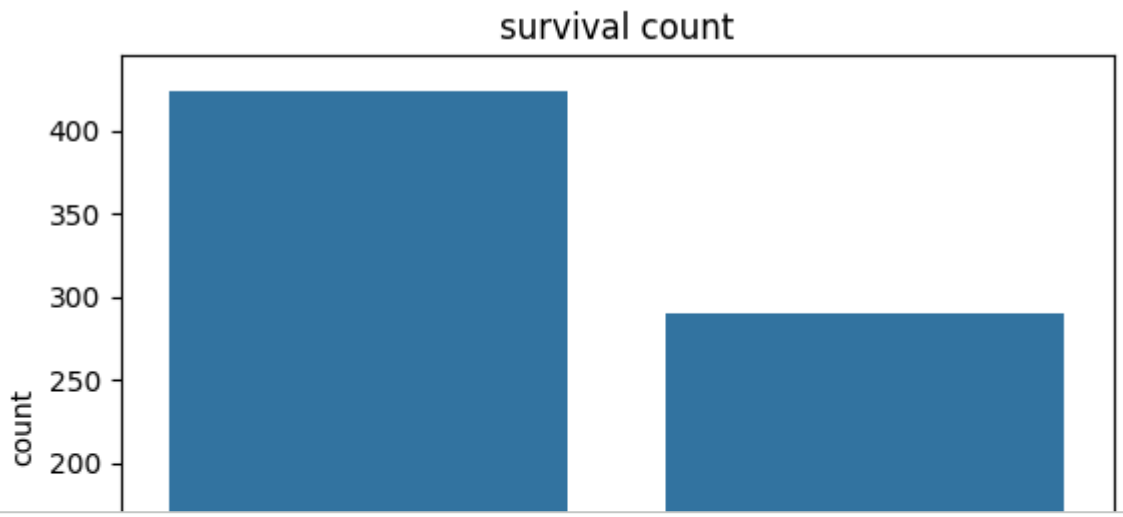


```
sns.histplot(df['age'], bins=30)
plt.show()
```

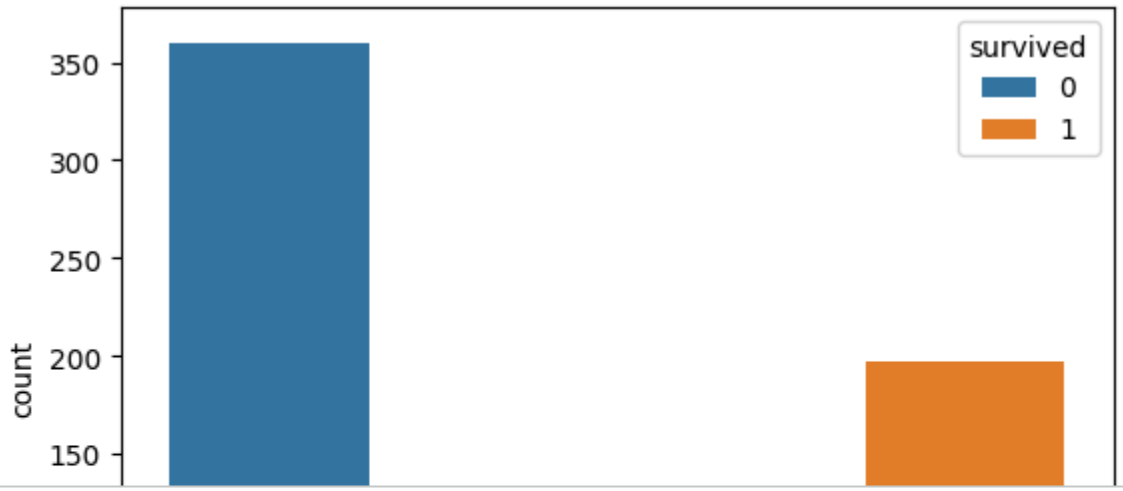


```
df['familysize'] = df['sibsp'] + df['parch']
```

```
df.groupby('sex')['survived'].mean()
```

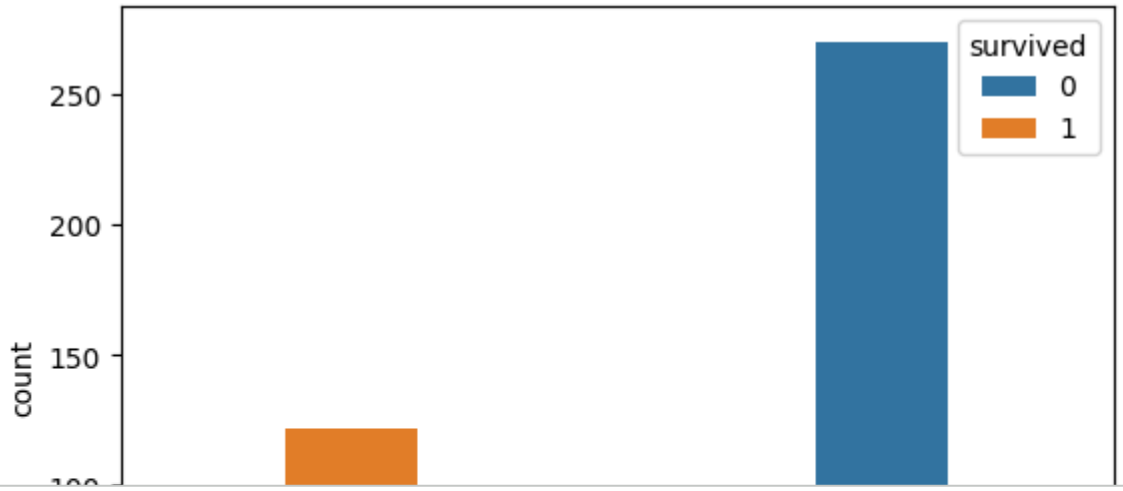sex	survived
female	0.754789
male	0.205298

dtype: float64
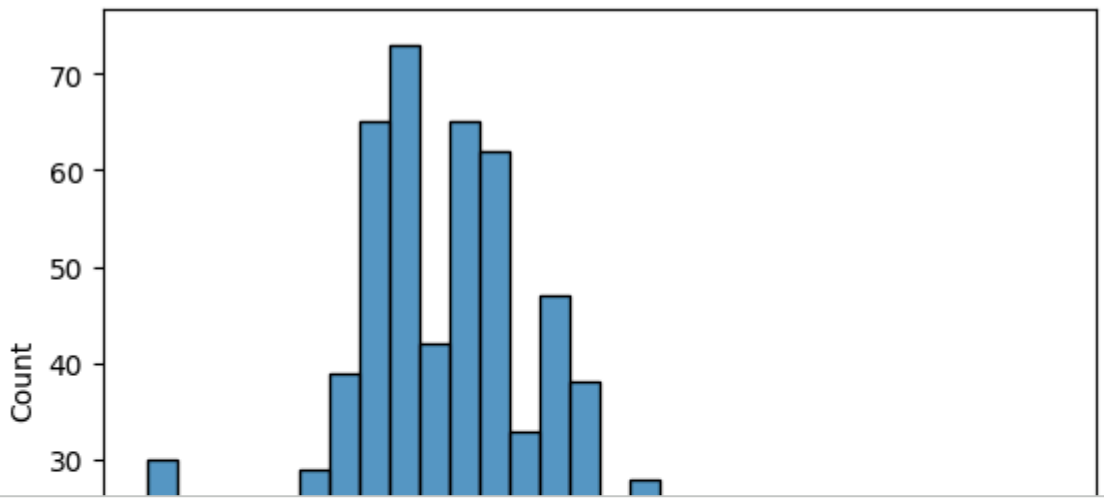
```
df.groupby('pclass')['survived'].mean()
```

pclass	survived
1	0.655914
2	0.479769
3	0.239437

dtype: float64

```
df.to_csv('cleaned_titanic.csv', index=F
```

```
files.download('cleaned_titanic.csv')
```