



# Basic Docker commands

**Course Code: INT332**

# 1

## Finding the version



One of the first things you want to know is how to find the installed docker version.

- `$ docker --version`
- Docker version 18.09.6, build 481bc77

## 2. Docker info



- Get detailed information about docker installed on the system including the kernel version, number of containers and images, etc.
- **\$ docker info**
  - Containers: 3
  - Running: 1
  - Paused: 0
  - Stopped: 2
  - Images: 3
  - Server Version: 18.09.6
  - Storage Driver: overlay2
  - Backing Filesystem: extfs
  - Supports d\_type: true Native Overlay Diff: true Logging Driver:

# 3. Checking History



- Shows the history of a docker image with the image name mentioned in the command

**\$ docker history httpd**

| <b>IMAGE</b> | <b>CREATED</b> | <b>CREATED BY</b> | <b>SIZE</b> | <b>COMMENT</b> |
|--------------|----------------|-------------------|-------------|----------------|
|--------------|----------------|-------------------|-------------|----------------|

# 4 . Downloading Image



When we need to pull the docker image from dockerhub (docker repository) then ,the following example of pulling the the image and here we are taking Apache HTTP server image.

**\$ docker pull httpd**

```
Using default tag: latest

latest: Pulling from library/httpd

f5d23c7fed46: Pull complete

b083c5fd185b: Pull complete

bf5100a89e78: Pull complete

98f47fcaa52f: Pull complete

622a9dd8cfed: Pull complete

Digest: sha256:8bd76c050761610773b484e411612a31f299dbf7273763103edbdba82acd73642

Status: Downloaded newer image for httpd:latest
```

# 5. Images



To list all the docker images pulled on the system with image details such as TAG/IMAGE ID/SIZE etc.

**\$ docker images**

| REPOSITORY               | TAG    | IMAGE ID     | CREATED      | SIZE   |
|--------------------------|--------|--------------|--------------|--------|
| httpd                    | latest | ee39f68eb241 | 2 days ago   | 154MB  |
| hello-world              | latest | fce289e99eb9 | 6 months ago | 1.84kB |
| sequenceiq/hadoop-docker | 2.7.0  | 789fa0a3b911 | 4 years ago  | 1.76GB |

- The '**docker run**' command is used to create and start a new container from a **Docker** image. The basic syntax of the '**docker run**' command is as follows:
- **docker run [OPTIONS] IMAGE [COMMAND] [ARG...]**
- *where,*
- **OPTIONS:** *optional flags that configure the behaviour of the container, such as setting environment variables, mounting volumes, etc.*
- **IMAGE:** *the name of the Docker image to be run.*
- **COMMAND:** *the command to be executed when the container is started. If not provided, the default command specified in the Docker image will be used.*
- **ARG:** *optional arguments passed to the command.*

**-d means**

# Options Available for executing Docker Run Command



- Some commonly used options for executing the docker run command inside a container:
- *-it: Runs the container in interactive mode, allowing you to interact with the container through the command line.*
- *-d: Runs the container in the background.*
- *-- name: Specifies a name for the container.*
- *-- rm: Automatically removes the container when it exits.*
- *-p: Maps a host port to a container port.*
- *-e / --env: Sets an environment variable inside the container.*
- *-v: Mounts a host volume inside the container.*



# 1<sup>st</sup> Example : Running a Simple Image:



***docker run httpd echo “Hello, World!”***

- This command runs a new container from the ‘*httpd*’ image and executes the ‘**echo**’ command with the argument “Hello, World!”.

## Running a Container with a Specific Name:

- ***\$ docker run --name my-container httpd echo “Hello, World!”***
- ***--name** : this option is to give the name of container*
- ***my-container**: it is the name of container*
- ***Echo**: it is the command*
- ***“hello,world!”** – it is argument used*
- This command runs a new container with the specified name “my-container” from the **httpd** image and executes the echo command with the argument “Hello, World!”.

# What are Environment Variables



Environment variables are **key–value pairs** used by applications to:

- Read configuration
- Store secrets (usernames, passwords)
- Control application behavior **without changing the image**
- Environment variables allow us to configure containers dynamically.*

# Need of environment variables in Docker



## Without -e:

- Configuration must be **hard-coded** in the image
- Need to rebuild image for every change

## With -e:

- Same image → different behavior
- Secure & flexible configuration
- Widely used in **microservices & cloud deployments**

# 3<sup>rd</sup> Example : Setting Environment:



- **docker run -e MY\_VAR=value httpd env**
- This command sets an environment variable '**MY\_VAR**' to the value "**value**" and runs a new container from the '**httpd**' image.

The '**env**' command is executed to display the list of environment variables in the container.

2<sup>nd</sup> Example: Run a container from Image and display the variable name inside it.

**docker run -it -e MY\_NAME=Harpreet ubuntu bash**

**It will open the container and you can check the env variable inside it as:**

**Echo \$ MY\_NAME**

**Kindly note :**

**MY\_NAME is created inside the container**

**Host system is not affected**

# Multiple Environment Variables



- `docker run -e APP_ENV=production -e APP_VERSION=1.0 nginx`

## Same for MySQL Container

```
docker run -d \  
-e MYSQL_ROOT_PASSWORD=root123 \  
-e MYSQL_DATABASE=college \  
-e MYSQL_USER=admin \  
-e MYSQL_PASSWORD=admin123 \  
mysql:8
```

**Without these variables, MySQL container will fail to start**

# Next is : Passing Environment Variable from Host System



Ex#1:

Step 1: Set variable on host

```
export APP_PORT=8080
```

Step 2:

```
docker run -e APP_PORT nginx env
```



## Another way : Using --env-file (Clean & Professional Way)

Create .env file

DB\_HOST=localhost

DB\_USER=root

DB\_PASS=secret

Then Run container

`docker run --env-file .env myapp`

# 4th Example



**\$ docker run -it -d httpd**

**Here :**

- **-it** flag enables interactive mode, so you can interact with the container's command line
- The **-d** flag runs the container in the background and the **httpd** argument specifies the image name to use for the container.  
This command will pull the **httpd** image from Docker Hub if it is not already present on your local machine, create a container based on that image, and start it in the background.

# Passing **Environment Variables** to Containers



***Dynamic Configuration at Runtime***

# -p optional flag in run command



- **-p stands for *publish port*.**

It maps a **port on your host machine** to a **port inside the container**.

In simple words:

- **-p allows users outside the container to access an application running inside the container.**

By default:

- Containers run in an **isolated network**
- Applications inside containers are **NOT accessible from the host/browser**
- So if a web server is running **inside a container**, you **must expose it** using -p.

# Syntax of -p



`docker run -p <HOST_PORT>:<CONTAINER_PORT> IMAGE`

| Part                        | Description                          |
|-----------------------------|--------------------------------------|
| <code>HOST_PORT</code>      | Port on your system (Laptop/Server)  |
| <code>CONTAINER_PORT</code> | Port where app runs inside container |

# EX#1:



- Without `-p`
- `docker run nginx`
- Try opening browser: But it is Not accessible  
As no port mapping done here

**Now try to Run Nginx with -p**

•`docker run -p 8080:80 nginx`

**What happens internally?**

Browser → localhost:8080 → Docker Host → Container:80 →  
Nginx

- `docker run -d -p 3307:3306 --name mysql-test -e MYSQL_ROOT_PASSWORD=root123 mysql`

`docker exec -it mysql-test bash`

`mysql -h 127.0.0.1 -P 3306 -u root -p`



# 7 What's running?



- To lists all the docker containers are running with container details.
- **\$ docker ps**

| CONTAINER ID | IMAGE | COMMAND            | CREATED        | STATUS        | PORTS  | NAMES        |
|--------------|-------|--------------------|----------------|---------------|--------|--------------|
| 09ca6feb6efc | httpd | "httpd-foreground" | 36 seconds ago | Up 33 seconds | 80/tcp | suspicious_b |

# TASK #1:



- Run Ubuntu container
- Pass `-e COLLEGE=CSE`
- Show `echo $COLLEGE`
- Stop container then check what happened

# 8. ps -a



To list all the docker containers running/exited/stopped with container details

- **\$ docker ps -a**

| CONTAINER ID | IMAGE                          | COMMAND                  | CREATED        | STATUS                   | PORTS    |
|--------------|--------------------------------|--------------------------|----------------|--------------------------|----------|
| 09ca6feb6efc | httpd                          | "httpd-foreground"       | 51 seconds ago | Up 49 seconds            | 80/tcp   |
| 2f6fb3381078 | sequenceiq/hadoop-docker:2.7.0 | "/etc/bootstrap.sh -d"   | 2 weeks ago    | Exited (137) 9 days ago  |          |
| 9f397feb3a46 | sequenceiq/hadoop-docker:2.7.0 | "/etc/bootstrap.sh -..." | 2 weeks ago    | Exited (255) 2 weeks ago | 2122/tcp |
| 9b6343d3b5a0 | hello-world                    | "/hello"                 | 2 weeks ago    | Exited (0) 2 weeks ago   |          |

# 9. exec



- Access the docker container and run commands inside the container in bash

**\$ docker exec -it 09ca6feb6efc bash/env**

**09ca6feb6efc --- it is Id of the container**

```
root@09ca6feb6efc:/usr/local/apache2# ls
```

```
bin  build  cgi-bin  conf  error  htdocs  icons  include  logs  modules
```

```
root@09ca6feb6efc:/usr/local/apache2#
```

Type *exit* and press enter to come out of the container.

# 10. Removing container



- Remove the docker container with container id mentioned in the command.

```
$ docker rm 9b6343d3b5a0
```

Run the below command to check if the container got removed or not.

```
$ docker ps -a
```

| CONTAINER ID | IMAGE                          | COMMAND                  | CREATED            | STATUS                   | PORTS    |
|--------------|--------------------------------|--------------------------|--------------------|--------------------------|----------|
| 09ca6feb6efc | httpd                          | "httpd-foreground"       | About a minute ago | Up About a minute        | 80/tcp   |
| 2f6fb3381078 | sequenceiq/hadoop-docker:2.7.0 | "/etc/bootstrap.sh -d"   | 2 weeks ago        | Exited (137) 9 days ago  |          |
| 9f397feb3a46 | sequenceiq/hadoop-docker:2.7.0 | "/etc/bootstrap.sh -..." | 2 weeks ago        | Exited (255) 2 weeks ago | 2122/tcp |

# 11. Removing image



- Remove the docker image with the docker image id mentioned in the command

**\$ docker rmi fce289e99eb9**

```
Untagged: hello-world:latest
```

```
Untagged: hello-world@sha256:41a65640635299bab090f783209c1e3a3f11934cf7756b09cb2f1e02147c6ed8
```

```
Deleted: sha256:fce289e99eb9bca977dae136fbe2a82b6b7d4c372474c9235adc1741675f587e
```

```
Deleted: sha256:af0b15c8625bb1938f1d7b17081031f649fd14e6b233688eea3c5483994a66a3
```

```
geekflare@geekflare:/home/geekflare$
```

- To remove the image forcefully

```
$ docker rmi -f <image id>
```

```
docker rmi -f 92fa43a2ff60503fdf250
```

Untagged: httpd:latest

Untagged:

httpd@sha256:7765977cf2063fec486b63ddea574faf8fbed285f  
2b17020fa7ef70a4926cdec

Deleted:

sha256:92fa43a2ff60503fdf250ef0a16d4170aa2a47c4b5a60d4  
27724283543a8792a

# Practice Questions on Basic Docker Commands



- Run a Docker container named “DB-app” based on the “mongodb” image, and expose port 80 on the host to port 8082 on the container?

2. Run a Docker container based on the `nginx` image, exposing port 8080 on the host to port 80 on the container. Set an environment variable `NGINX_PORT=8080` inside the container and start the container interactively



3. How would you use the docker run command with -it, -e, -v, and --name to:

- Set an environment variable APP\_ENV=production.
- Name the container my\_app.
- Start an interactive terminal in an image called my\_image?
- Write the full command for the scenario above.

# Docker container commands:



## 1. Container Lifecycle Management

- **Run a container** (creates and starts it)
  - `docker run -d -p 80:80 --name my_container nginx`
- **Start a stopped container**
  - `docker start <container_id/name>`
- **Stop a running container**
  - `docker stop <container_id/name>`
- **Restart a container**
  - `docker restart <container_id/name>`
- **Pause a container**
  - `docker pause <container_id/name>`

...contd....

- **Unpause a paused container**
- `docker unpause <container_id/name>`
- **Kill a container (force stop)**
- `docker kill <container_id/name>`
- **Remove a container**
- `docker rm <container_id/name>`
- **Remove all stopped containers**
- `docker container prune`

## 2. Listing and Inspecting Containers



- **List all running containers**
- `docker ps`
- **List all containers (including stopped ones)**
- `docker ps -a`
- **Show detailed info about a container**
- `docker inspect <container_id/name>`
- **Display resource usage stats of a container**
- `docker stats <container_id/name>`
- **View container logs**
- `docker logs <container_id/name>`
- **Follow logs in real-time**
- `docker logs -f <container_id/name>`

# 3. Container Interaction



- **Execute a command inside a running container**
- `docker exec -it <container_id/name> <command>`
- **Attach to a running container's interactive shell**
- `docker attach <container_id/name>`
- **Copy files between container and host**
  - From container to host:
    - `docker cp <container_id>:<container_path> <host_path>`
  - From host to container:
    - `docker cp <host_path> <container_id>:<container_path>`
- E.g:

# Practice questions:



- 1. You need to start a new container using the nginx image while setting an environment variable `ENV_MODE=production`. Write the docker run command to achieve this.
- 2. You have a running container named `my_app`, but it's not behaving as expected. You want to check its logs to debug any errors. Write the command to view its logs and follow new log entries in real-time.
- 3. A container named `web_server` was stopped. Write the command to:  
a) Start the container again.  
b) Stop the container when needed.

# Docker Volumes



A **Docker volume** is a **persistent storage mechanism** used by containers to **store data outside the container's writable layer**.

Key idea:

**Containers are temporary, volumes are permanent.**

- If a container:
  - stops
  - crashes
  - is deleted
  - **Volume data stays safe .**

# Why do we need Docker Volumes?



Without volumes:

- Container data is stored **inside the container**
- Deleting the container = **data lost**

With volumes:

- Data is stored on the **host machine**
- Containers can be **recreated without losing data**

## Real-life analogy

Container = Laptop

Volume = External Hard Disk

You can replace the laptop, but the hard disk data remains.



# Types of Storage in Docker




Docker provides **3 types of data storage**:

| Type        | Persistent? | Managed by Docker? | Use Case              |
|-------------|-------------|--------------------|-----------------------|
| Volumes     | ✓ Yes       | ✓ Yes              | Databases, production |
| Bind Mounts | ✓ Yes       | ✗ No               | Development           |
| tmpfs       | ✗ No        | In-memory          | Secrets, cache        |

Stored in:

- /var/lib/docker/volumes/
- Independent of container lifecycle
- Can be shared by **multiple containers**
- Managed fully by Docker

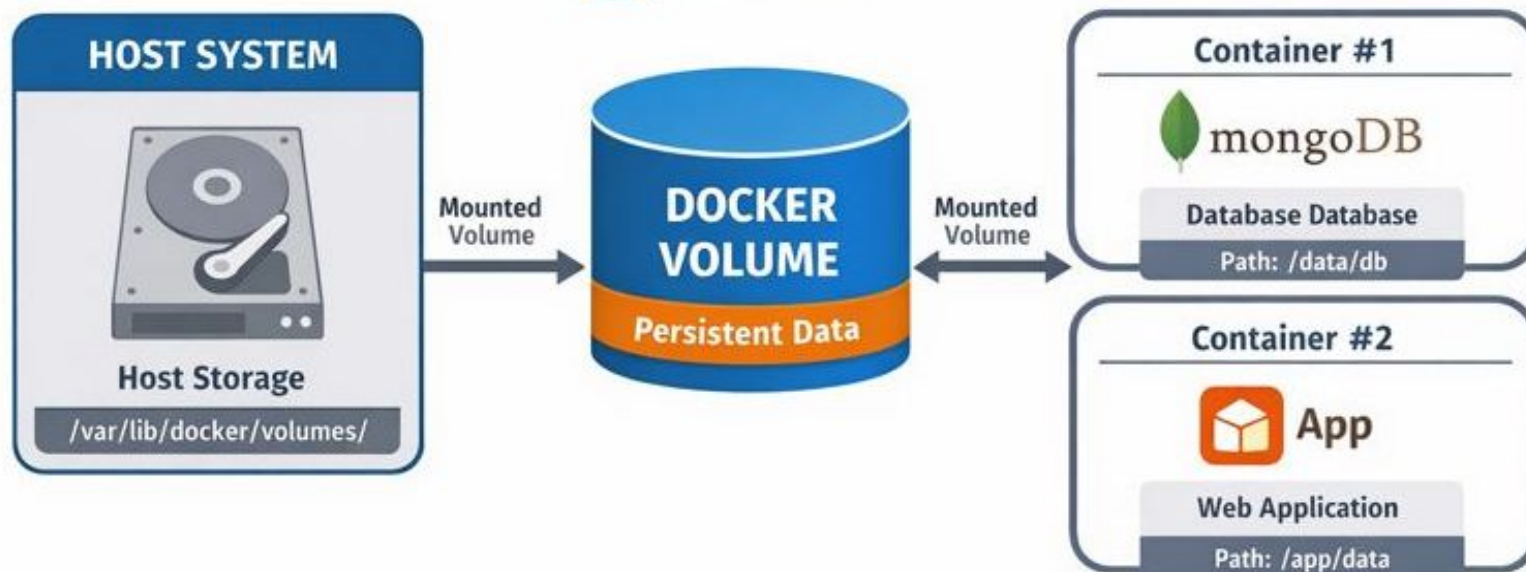

Shared Persistent Storage → Data Stays Safe if Containers are Removed

Basic commands used to create,inspect,verify , delete/remove the volumes

- 1.docker volume create <volume name>
- 2.docker volume ls
- 3.docker volume inspect mydata
- 4.docker run -d -v <volumename>:<path where to store in image>  
--name <containername> <imagename>

## 6. To Store Data in a Volume

```
docker run -it -v <source>:<path of destination> <image name>  
sh
```

Then inside the container

```
echo "msg or data" > /app/data/filename
```

```
exit
```

**To Verify Data Persistence:** Run another container using the same volume

```
docker run -it -v <source>:<path of destination> <image name>  
sh
```

```
cat <path of file>
```

## To Remove a Volume

❑ `Docker volume rm <volume name>`

## To Delete All Unused Volumes

❑ `docker volume prune`

# Example#1



1. `mkdir C:\docker-volume-demo`
2. `echo Hello from HOST machine > C:\docker-volume-demo\hostfile.txt`
3. `docker run -it --name cv1 -v c:\docker-volume-demo:/data ubuntu bash`
4. Inside container
  - `ls`
  - `cd data`
  - `cat hostfile.txt`
5. Modify file INSIDE container
  - `echo "Modified inside container" >> /data/hostfile.txt`
  - `exit`



# Practice Question



- Create a Docker volume named studentdata.
- Run an Ubuntu container and mount studentdata at /student.
- Create a file inside the container and verify it persists after container deletion.
- Attach the same volume to another container and verify the file exists.
- Demonstrate data sharing between two containers using a shared volume.
- Show that deleting a container does NOT delete the volume data.

-- Mount

It is the **modern, explicit, key-value way** to attach storage to a container.

It can be used for:

**Volumes**

**Bind mounts**

**tmpfs mounts**

•  
•  
•

Compared to **-V**, it is:

More readable

Less error-prone

Better for production & teaching concepts

`docker run --mount type=<type>,source=<src>,target=<dest> IMAGE`

## Common keys

| Key                   | Meaning                  |
|-----------------------|--------------------------|
| <code>type</code>     | volume / bind / tmpfs    |
| <code>source</code>   | volume name or host path |
| <code>target</code>   | path inside container    |
| <code>readonly</code> | mount as read-only       |



## Example 1: Named Volume (Most Common & Recommended)

### Create a volume

- `docker volume create mydata`

### Run container with `--mount`

- `docker run -it --mount type=volume,source=mydata,target=/app/data ubuntu`

### Inside container

```
cd /app/data
```

```
echo "Hello from volume" > file1.txt
```

```
exit
```

### Run another container

```
docker run -it --mount type=volume,source=mydata,target=/app/data  
ubuntu
```

```
cat /app/data/file1.txt
```



## Example 2: Bind Mount (Host ↔ Container Sync)



### Host folder

C:\docker\website\index.html

### Run container

```
docker run -it --mounttype=bind,source="C:\docker\website",target=/usr/share/nginx/html  
-p 8080:80 nginx
```

### Edit file on HOST

```
<h1>Hello from Host</h1>
```

### Browser

http://localhost:8080

### Effects .....

Host directory is **directly mapped**

Changes on host reflect **instantly**

Container restart does NOT affect data

**Best for development, live code editing**

# Equivalent commands for Volume and mount



- `-v mydata:/data`
- `--mount type=volume,source=mydata,target=/data`

# Practice Question #



To demonstrate **real-time file synchronization between host and container**.

- i. On the **host system**, create a directory named **webdata**.
- ii. Inside it, create a file **index.html** with the content:  

```
<h1>Welcome from Host</h1>
```
- iii. Run an **Nginx container** and bind mount the host directory to **/usr/share/nginx/html** using **--mount**.
- iv. Expose the container on port **8080**.
- v. Open a browser and verify the page loads.
- vi. Modify **index.html** on the host to:  

```
<h1>Updated from Host</h1>
```
- vii. Refresh the browser and observe the change.



**--network** in `docker run`



The **--network** flag tells Docker how the container should connect to the network.

It decides how containers talk to each other, the host, and the outside world.

## Syntax

```
docker run --network <network_name_or_mode> IMAGE
docker run --net <network_name_or_mode> IMAGE
```

## Default behavior (important concept)

If you do not specify **--network**, Docker automatically connects the container to:

**bridge network**

# Types of Docker networks you can use with `--network`



1. Bridge network (DEFAULT)
2. User-defined bridge network
3. Host network
4. None network
5. Overlay Network

# Comparison among all



| Network Type        | Container IP | Name Resolution | Port Mapping Needed |
|---------------------|--------------|-----------------|---------------------|
| bridge (default)    | Yes          | ✗ No            | ✓ Yes               |
| user-defined bridge | Yes          | ✓ Yes           | Optional            |
| host                | No           | Host DNS        | ✗ No                |
| none                | No           | ✗ No            | ✗ No                |
| overlay             | Yes          | ✓ Yes           | Depends             |

# Real-life analogy

- **bridge** → Private apartment with gate
- **user-defined bridge** → Office LAN
- **host** → Living directly on main road
- **none** → No phone, no internet

# Need of User-Defined Network



- Automatic **DNS-based container name resolution**
- Clean microservices communication
- Isolation + flexibility

For this :

## **Create a custom network**

```
docker network create mynet
```

## **Run containers on same network**

```
docker run -d --name app --network mynet nginx  
docker run -d --name db --network mynet mysql
```

# When to use Host Network



- Container **shares host's network stack**
- No separate IP for container
- Ports are exposed directly on host

## Example

```
docker run --network host nginx
```

Access directly:

```
http://localhost:80
```

## What happens?

- Container has **no network access**
- No IP, no internet, no communication

## Example

```
docker run --network none busybox
```

✓ Fully isolated container

## Use case

- Security
- Offline processing

## Overlay network (Docker Swarm)

- Used in **multi-host** Docker Swarm setups.
- Not used with normal `docker run` unless Swarm is enabled.



