

• To write a small batch program and save as .bat extension and execute in victim machine.

This script will create random directories in the present directory.

Here, "md" command is used to create new directory and "%random%" is used to give random name to the directory and the loop will run x no. of times.

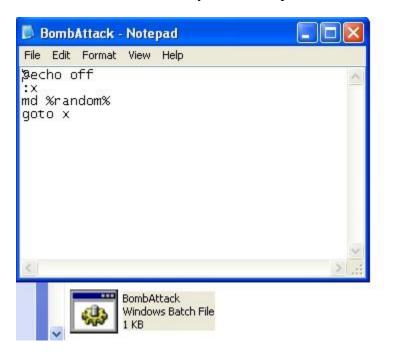

Directories created after the execution of script in the current directory where the bat file was stored.

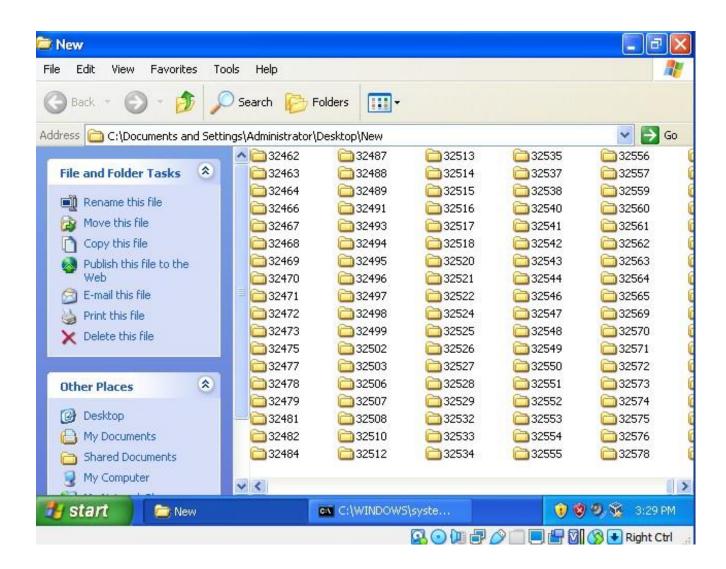


Cmd running the commands.

Command or script will not be visible in cmd because we used "@echo off".

```
A subdirectory or file 27167 already exists.
A subdirectory or file 25720 already exists.
A subdirectory or file 4085 already exists.
A subdirectory or file 20741 already exists.
A subdirectory or file 20741 already exists.
A subdirectory or file 20741 already exists.
A subdirectory or file 10700 already exists.
A subdirectory or file 12548 already exists.
A subdirectory or file 21667 already exists.
A subdirectory or file 21667 already exists.
A subdirectory or file 10242 already exists.
A subdirectory or file 28811 already exists.
A subdirectory or file 5846 already exists.
A subdirectory or file 30 already exists.
A subdirectory or file 29631 already exists.
A subdirectory or file 21041 already exists.
A subdirectory or file 21041 already exists.
A subdirectory or file 2147 already exists.
A subdirectory or file 21482 already exists.
A subdirectory or file 21882 already exists.
```

Script to create random user accounts.

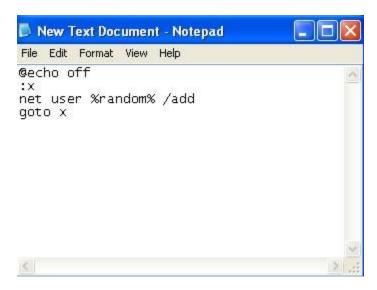


Script running in cmd.

```
_ 0
C:\WINDOWS\system32\cmd.exe
The command completed successfully.
    My Computer
 🮁 start
              New Text Do...
                             New
                                                              🧻 👽 🦁 🧐 😘 3:40 PM
                                             C:\WINDOW...
```

Random user accounts created.

Script to freeze/slow down the system by randomly starting processes in background.

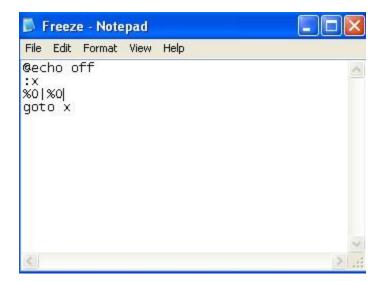

Victim system freezed.

