
• To Perform a DOS(Denial of Service) Attack on windows 7.

Download LOIC from https://sourceforge.net/projects/loic/



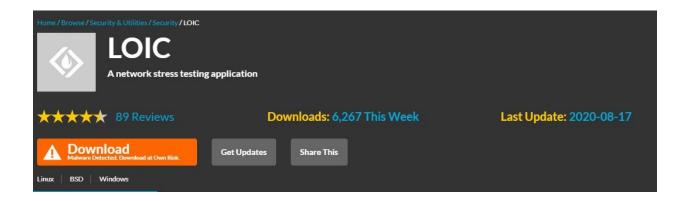

Check for Victim's IP Address

Now open LOIC

Put Victim IP Address in IP section "192.168.0.6"

And then lock the IP Address and Press on IMMA CHARGIN MAH LAZER




And also check for the open/listening port


And type into Port section for example we can use port 135 for the DOS Attack

```
C:\Windows\system32\cmd.exe
C:\Users\Iqbal>netstat -an
Active Connections
           Local Address
0.0.0.0:80
0.0.0.0:135
                                          Foreign Address
0.0.0.0:0
  Proto
TCP
  TCP
                                          0.0.0.0:0
  TCP
           0.0.0.0:445
                                          0.0.0.0:0
           0.0.0.0:535
           0.0.0.0:49156
192.168.0.6:139
[::]:80
            [::]:49154
                                           [::]:0
                                                                         LISTENING
                                              1:0
```

System Performance before DOS Attack

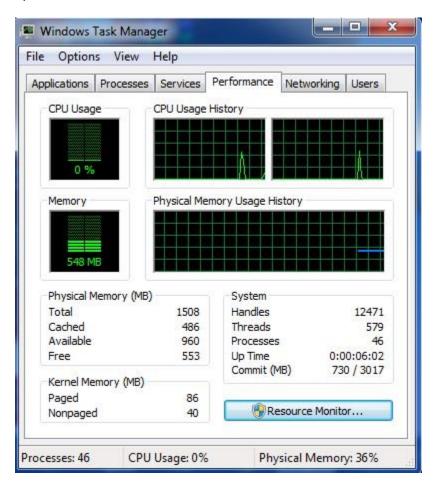

Sudden rise in cpu usage after DOS Attack executed

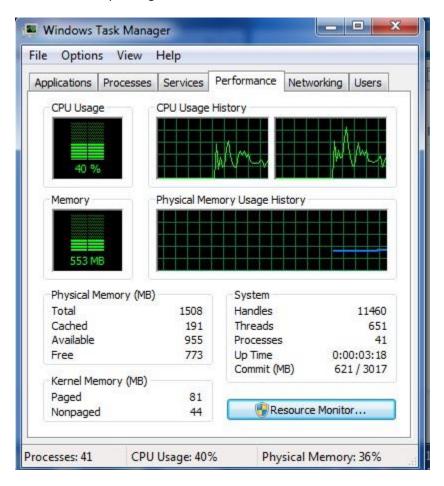

System got crashed.