

Операционные системы

Редактор Emacs

Абзалимов Ильяс Рамилевич

2026-10-03



Цели и задачи работы

Процесс выполнения лабораторной работы

Выводы по проделанной работе

1. Цели и задачи работы



Познакомиться с операционной системой Linux. Получить практические навыки работы с редактором Emacs.



1 Изучить возможности редактора Emacs

2. Процесс выполнения лабораторной работы

1. Откроем Emacs.

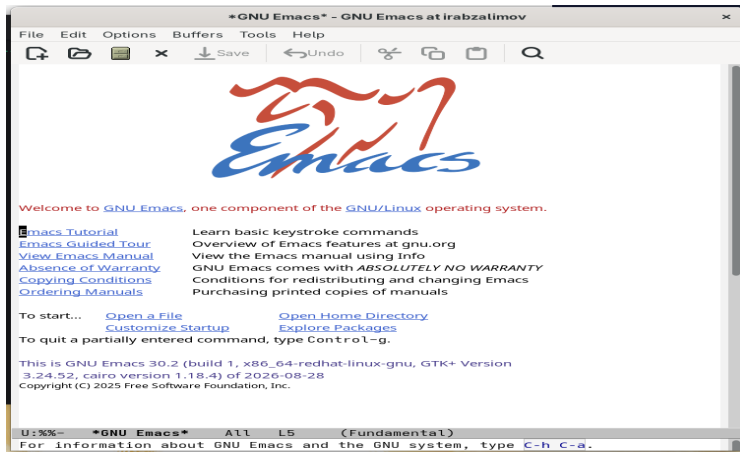


Рисунок 1: Запуск Emacs

```
hello.sh - GNU Emacs at irabzalimov
File Edit Options Buffers Tools Sh-Script Help
[Icons: Open, Save, Undo, Redo, Search]

#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
█


-:--- hello.sh All L10 (Shell-script[bash])
```

Рисунок 2: Новый файл

```
hello.sh - GNU Emacs at irabzalimov
File Edit Options Buffers Tools Sh-Script Help
[Icons] Save Undo [Icons]
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello

-:***- hello.sh All L12 (Shell-script[bash])
Mark set
```

Рисунок 3: Операция вставка

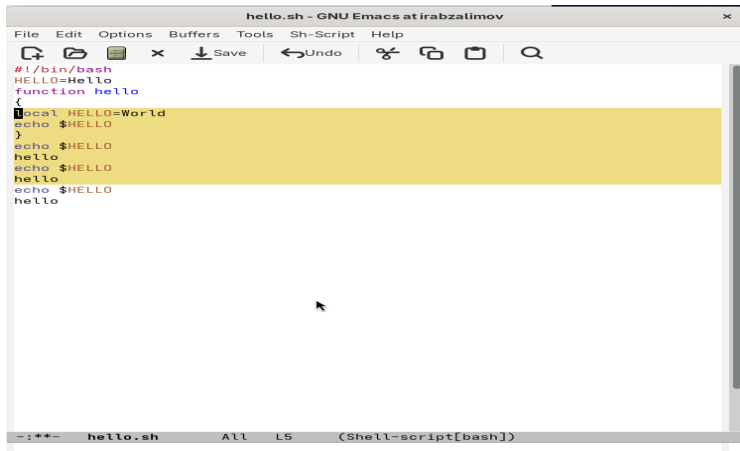


The screenshot shows the GNU Emacs editor window titled "hello.sh - GNU Emacs at irabzalimov". The menu bar includes File, Edit, Options, Buffers, Tools, Sh-Script, and Help. The toolbar contains icons for opening, saving, undo, redo, and search. The code in the buffer is a shell script:

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
```

A yellow rectangular highlight covers the lines from the opening curly brace of the 'hello' function to the closing curly brace, specifically the lines: `{`, `local HELLO=World`, `echo $HELLO`, and `}`. The status bar at the bottom shows the file name "hello.sh", the buffer "All", the line number "L5", and the major mode "(Shell-script[bash])".


Рисунок 4: Выделение блока

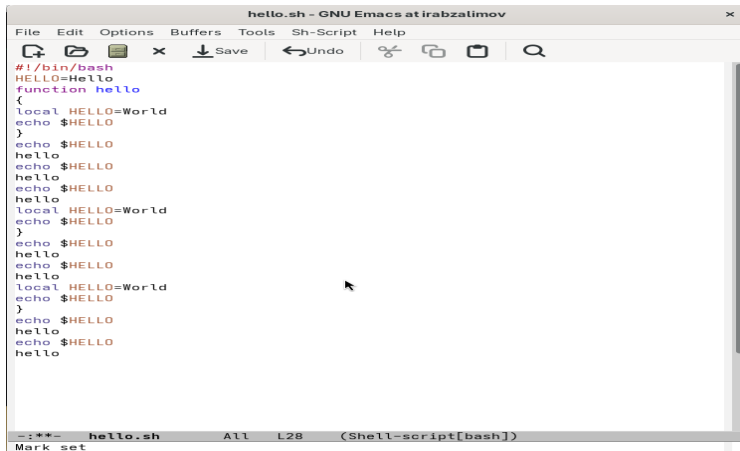

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
```


—:***— hello.sh All L28 (Shell-script[bash])
Mark set

Рисунок 5: Копирование блока

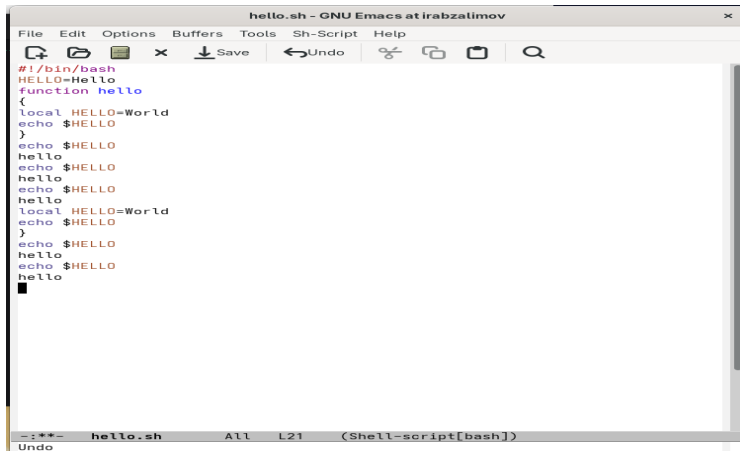

```
#!/bin/bash
HELLO=Hello
function hello
{
    local HELLO=World
    echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
```

Рисунок 6: Удаление блока

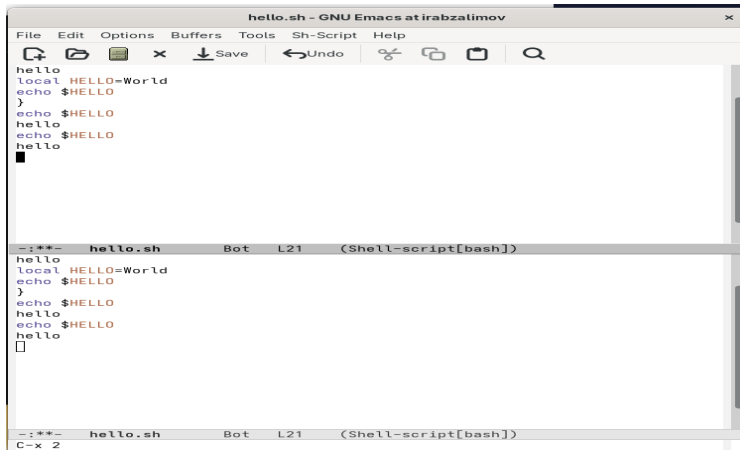


The screenshot shows the GNU Emacs editor window titled "hello.sh - GNU Emacs at irabzalimov". The window is split horizontally into three panes. The top pane contains the source code of the script "hello.sh":

```
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
```

The middle pane shows the same script content, with the status bar at the bottom indicating "Bot L21 (Shell-script[bash])".

The bottom pane shows the same script content, with the status bar at the bottom indicating "C-x 2".

Рисунок 7: Горизонтальное разделение

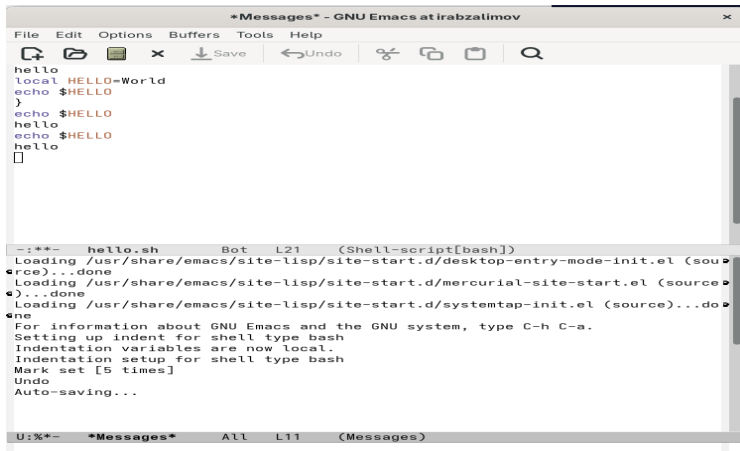

The screenshot shows the GNU Emacs interface with the *Messages* buffer active. The buffer contains the output of a shell script named 'hello.sh'. The script defines a local variable 'HELLO' with the value 'World' and prints it three times. The output shows the variable being set and printed correctly. The buffer also displays Emacs startup messages, including the loading of site files and the setup of indentation for the shell type 'bash'.

```
*Messages* - GNU Emacs at irabzalimov
File Edit Options Buffers Tools Help
[Icons] Save Undo [Icons] Search

hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
[]

-:***- hello.sh Bot L21 (Shell-script[bash])
Loading /usr/share/emacs/site-lisp/site-start.d/desktop-entry-mode-init.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/mercurial-site-start.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/systemtap-init.el (source)...done
For information about GNU Emacs and the GNU system, type C-h C-a.
Setting up indent for shell type bash
Indentation variables are now local.
Indentation setup for shell type bash
Mark set [5 times]
Undo
Auto-saving...

U:%*- *Messages* All L11 (Messages)
```

Рисунок 8: Переключение буфера

```
*Messages* - GNU Emacs at irabzalimov
File Edit Options Buffers Tools Help
[Icons: Open, Save, Undo, Redo, Copy, Paste, Search]
Loading /usr/share/emacs/site-lisp/site-start.d/desktop-entry-mode-init.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/mercurial-site-start.el (source)...done
Loading /usr/share/emacs/site-lisp/site-start.d/systemtap-init.el (source)...done
For information about GNU Emacs and the GNU system, type C-h C-a.
Setting up indent for shell type bash
Indentation variables are now local.
Indentation setup for shell type bash
Mark set [5 times]
Undo
Auto-saving...
█

U:%*~ *Messages* All L11 (Messages)
```

Рисунок 9: Закроем буфер

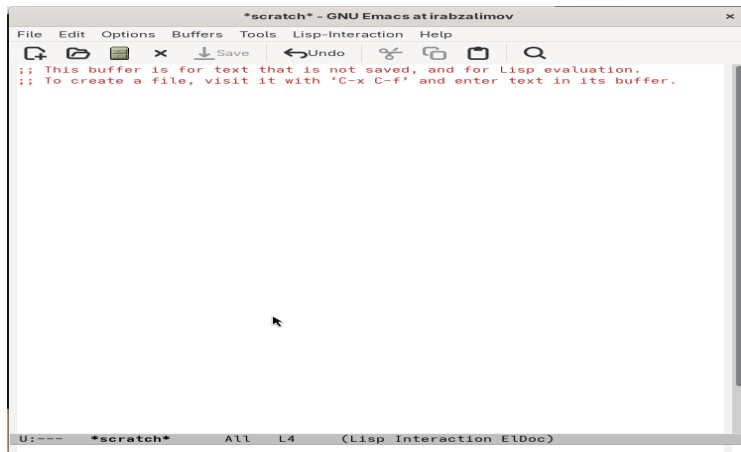


Рисунок 10: Переключение буфера


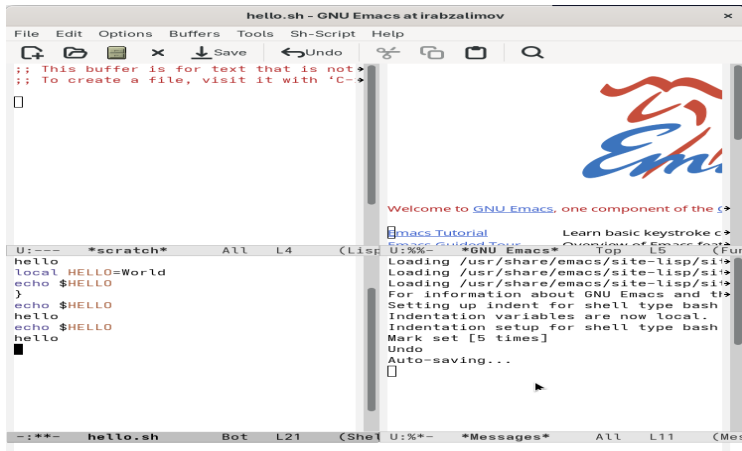


Рисунок 11: Четыре буфера

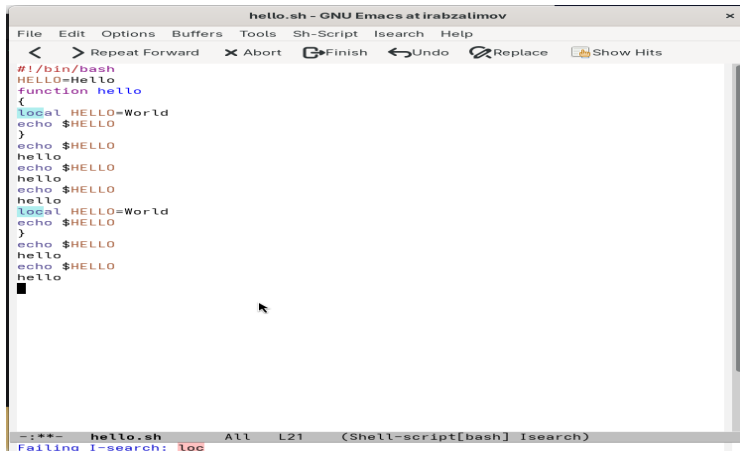

The screenshot shows a GNU Emacs window titled "hello.sh - GNU Emacs at irabzalimov". The menu bar includes File, Edit, Options, Buffers, Tools, Sh-Script, Isearch, and Help. Below the menu bar is a toolbar with icons for navigation and editing. The main text area displays the contents of a shell script named "hello.sh". The script defines a function "hello" that prints "Hello" and "World". The search bar at the bottom shows the search pattern "loc" and the status "Failing I-search: loc".

```
#!/bin/bash
HELLO=Hello
function hello
{
  local HELLO=World
  echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
echo $HELLO
hello
local HELLO=World
echo $HELLO
}
echo $HELLO
hello
echo $HELLO
hello
```

~:***- hello.sh All L21 (Shell-script[bash] Isearch)
Failing I-search: loc

Рисунок 12: Режим поиска

3. Выводы по проделанной работе



В данной работе мы познакомились с еще одним редактором операционной системой Linux. Получили практические навыки работы с редактором Emacs.