




HARCOURT CUSTOM DESIGNS


© COPYRIGHT HARCOURT INDUSTRIAL, INC. 2011. ALL RIGHTS RESERVED.

THREADED PRODUCTS | CAPTIVE BOLTS

UNASSEMBLED VIEW

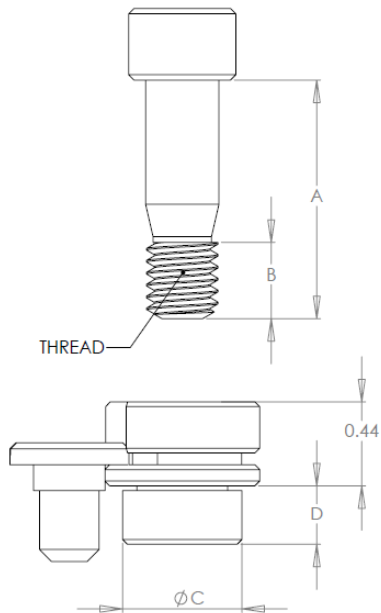

ASSEMBLED VIEW

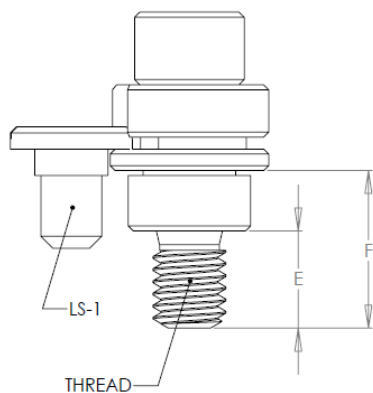

MATERIAL:

Alloy Steel, Hardened

NOTES:

Use LS-1 Lockscrew to secure bushing.

SPECIAL SIZE CALLOUT:

HLBA 4 - 32
Captive Bolt ——— Length in 16ths
Thread Size in 16ths ———

PART NUMBER	THREAD	A	B	C	D	E	F	MIN PLATE THICKNESS (REF)
HLBA-4	1/4-20	1-1/4	0.40	0.4075 - 0.4078	0.31	0.50	0.80	3/8
HLBA-5	5/16-18	1-3/8	0.47	0.5014 - 0.5017	0.31	0.63	0.94	3/8
HLBA-6	3/8-16	1-1/2	0.56	0.6264 - 0.6267	0.31	0.75	1.06	1/2
HLBA-8	1/2-13	2	0.75	0.7515 - 0.7518	0.50	1.06	1.56	3/4

CAD AVAILABLE

[Click here to request CAD](#)



PROPRIETARY & CONFIDENTIAL The entire content of this book is the sole property of Harcourt Industrial, Inc (Harcourt). You may not possess, use, copy or disclose this book or any information in it, for any purpose, including without limitation to design, manufacture, or repair parts, or obtain FAA or other government approval to do so, without Harcourt's express written permission. Neither receipt nor possession of this document alone, from any source, constitutes such permission. Possession, use, copying or disclosure by anyone without Harcourt's express written permission is not authorized and may result in criminal and/or civil liability.