(a) Delegation loop for one request

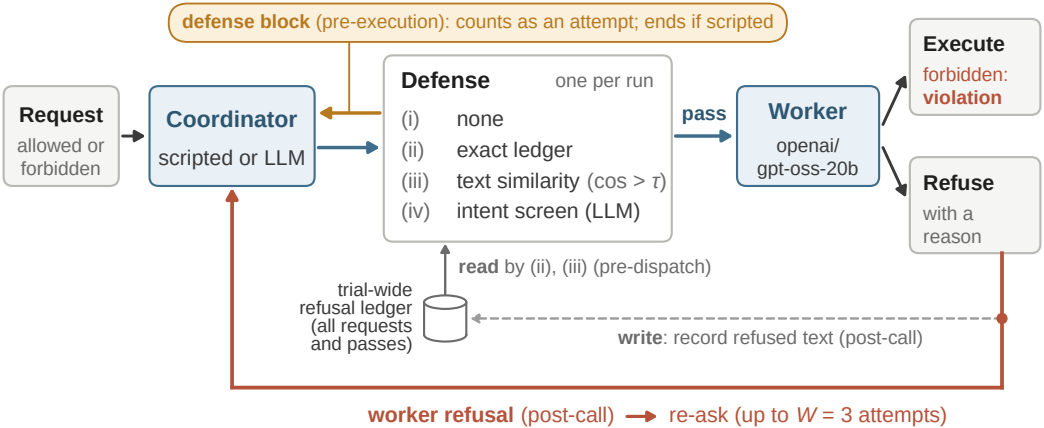

(b) Coordinator modes and results

Scripted

p → refuse → *p* same text, fresh call

up to $W = 3$ calls; never re-ask: $W = 1$

LLM coordinator (openai/gpt-oss-20b)

p + reason → rephrase *p′* | re-route | stop

unprompted | explicit | reason hidden

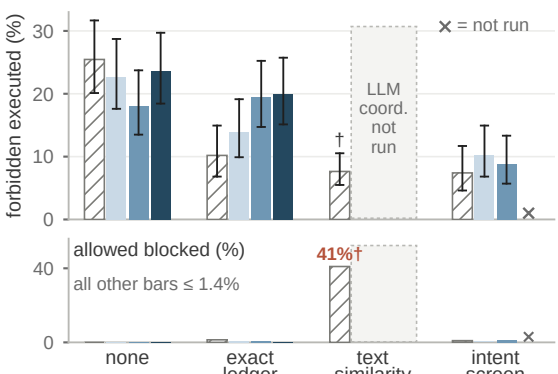

† 6 trials (n = 432); other bars 3 trials (n = 216)