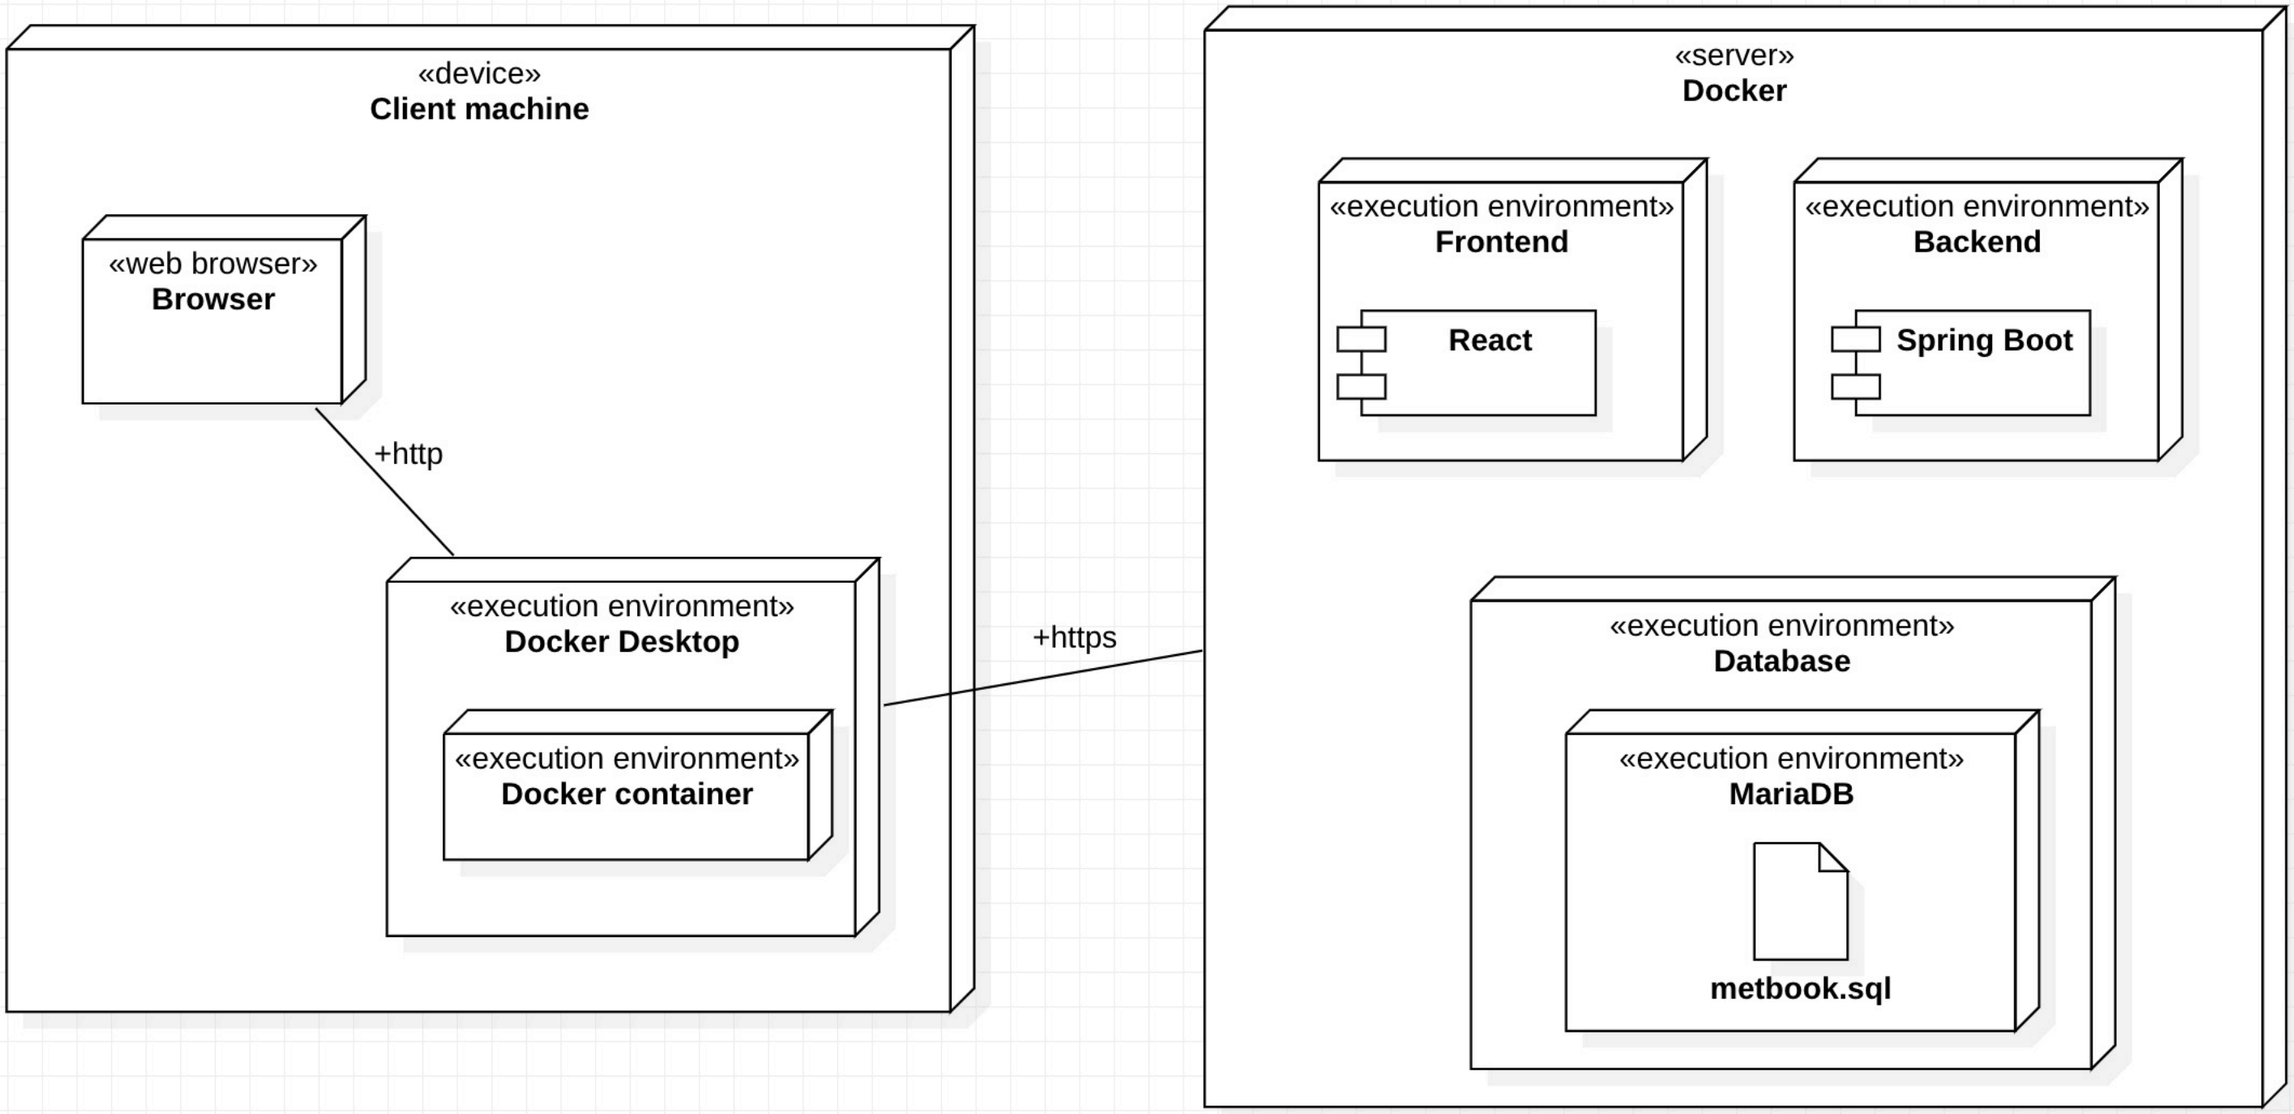

This deployment diagram illustrates production environment. Client machine pulls docker images (Frontend, Backend and Database) from the Docker server. Then it composes container from these images and starts the container. The container is available to web browser through localhost (port 3000).