


First we create the main snapshot for the current state without any text files.




After this I created a file called "State 2.1" making it be a new state that we will call "State

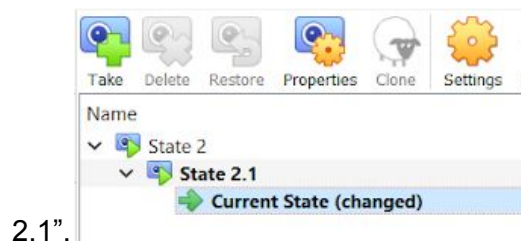


2.1".


Then we restore "State 2"(We can see that the file created on "State 2.1" disappeared.), so we can create another snapshot on the level of "State 2.1".

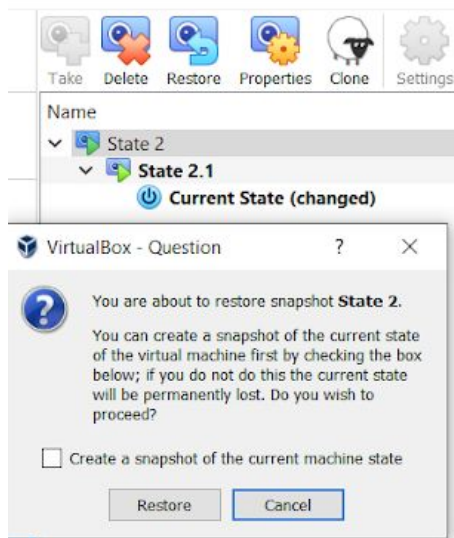

,we do this by creating a text document there called "State 2.2" and then taking a snapshot called "State 2.2"

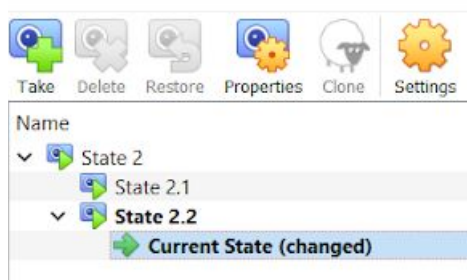

We now delete state 2.1 and we will see that in any state the file created in that state disappears

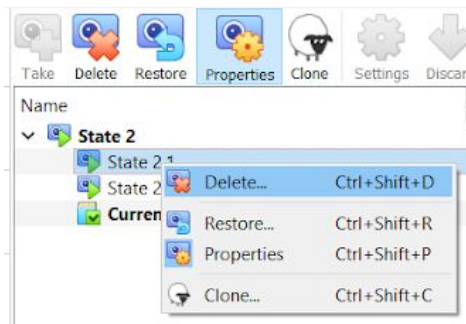

We will then restore state 2.2 and go on and delete it.

