

### **TASK**

# Beginner Control Structures — While Loop

Visit our website

## Introduction

# WELCOME TO THE BEGINNER CONTROL STRUCTURES — WHILE LOOP TASK!

In this task, you will be exposed to *loop statements* to understand how they can be utilised in reducing lengthy code, preventing coding errors, as well as paving the way towards code reusability. This task begins with the *while loop*, which is the simplest loop of the group.



Remember that with our courses, you're not alone! You can contact an expert code reviewer to get support on any aspect of your course.


The best way to get help is to log in to Discord at <a href="https://discord.com/invite/hyperdev">https://discord.com/invite/hyperdev</a> where our specialist team is ready to support you.

Our team is happy to offer you support that is tailored to your individual career or education needs. Do not hesitate to ask a question or for additional support!



By now you should be familiar with the Boolean data type, and the vital role Boolean algebra plays in computer programming. Why is it called a Boolean datatype? It is named after George Boole (1815 - 1864) an English mathematician who helped establish modern symbolic logic and devised Boolean algebra. Boole is best known as the author of The Laws of Thought (1854), which contains Boolean algebra.

Boole was born in Lincoln, Lincolnshire, England. His father, a struggling shoemaker, encouraged him to take an interest in mathematics. Boole went to an elementary school and trade school for a short time, but he mostly educated himself. By the age of fifteen, Boole began teaching. At age nineteen, he set up a school in Lincoln. Boole was appointed as a professor of mathematics at Queen's College, Cork in 1849, despite not holding any university degree.

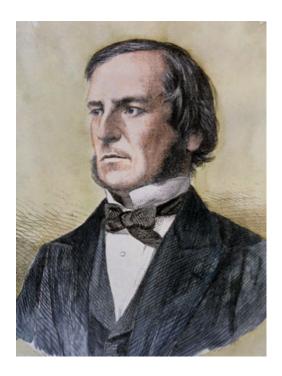

George Boole

#### WHAT IS A WHILE LOOP?

A while loop is the most general form of loop statements. The while statement repeats its action until the controlling condition becomes False. In other words, the statements indented in the loop repeatedly executes "while" the condition is True (hence the name). The while statement begins with the keyword while, followed by a boolean expression. The expression is tested before beginning each iteration or repetition. If the test is True, then the program passes control to the indented statements in the loop body; if False, control passes to the first statement after the body.

Syntax:

```
while <boolean_expression>:
    statement(s)
```

The following code shows a while statement which sums successive even integers 2 + 4 + 6 + 8 + ... until the total is greater than 250. An update statement increments i by 2 so that it becomes the next even integer. This is an event-controlled loop (as opposed to counter-controlled loops, like the *for loop*) because iterations continue until some non-counter-related condition (event) stops the process.

Compile and run the **example.py** file to see the output of the above program.

#### **GET INTO THE LOOP OF THINGS**

Loops are handy tools that enable programmers to do repetitive tasks with minimal effort. To count from 1 to 10, we could write the following program:

```
print(1)
print(2)
print(3)
print(4)
```



```
print(5)
print(6)
print(7)
print(8)
print(9)
print(10)
```

The task will be completed correctly. The numbers 1 to 10 will be printed, but there are a few problems with this solution:

- **Efficiency:** repeatedly coding the same statements takes a lot of time.
- **Flexibility:** what if we wanted to change the start number or end number? We would have to go through and change them, adding extra lines of code where they're needed.
- **Scalability:** 10 repetitions are trivial, but what if we wanted 100 or even 1000 repetitions? The number of lines of code needed would be overwhelming and very tedious for a large number of iterations.
- **Maintenance:** where there is a large amount of code, one is more likely to make a mistake.
- Feature: the number of tasks is fixed and doesn't change at each execution.

Using loops, we can solve all these problems. Once you get your head around them, they will be invaluable in solving many problems in programming.

Consider the following code:

If we run the program, the same result is produced, but looking at the code, we immediately see the advantages of loops. Instead of executing 10 different lines of code, line 4 executes 10 times. 10 lines of code have been reduced to just 4. This is achieved through the assignment statement used to update the variable i in line 3. This adds 1 to the variable i each iteration until i == 10. At this point the logical test (i<10) will fail because i is no longer less than 10, but equal to 10.

We may change the number 10 to any number we like in order to repeat incrementing the variable and printing it out as many times as we like. Try it yourself, replace the 10 with another number.

#### **INFINITE LOOPS**

A while loop runs the risk of running forever if the condition never becomes False. A loop that never ends is called an infinite loop. Creating an infinite loop is not desirable. Make sure that your loop condition eventually becomes False and that your loop is exited.

In any loop, the following three steps are usually used:

- 1. Declare a counter/control variable. The code above does this when it says "i = 0". This creates a variable called i that contains the value 0.
- 2. Increase the counter/control variable in the loop. In the loop above, this is done with the instruction "i+=1" which increases i by one with each pass of the loop.
- 3. Specify a condition to control when the loop ends. The condition of the for loop below is "i < 10". This loop will carry on executing as long as i is less than 10. This loop will, therefore, execute ten times.

#### **BREAK STATEMENTS**

Sometimes, a very specific condition arises in a loop, and it may be worth adding a check into the loop and exiting if that condition is met. In Python (and most other languages), there exists something called a break statement. This statement basically says that the code must exit the loop, even if the condition of the loop hasn't been met. Break statements can only exist in loops: your code won't run if there is a break statement that isn't in a loop.

Consider the following code:

```
my_number = 0
while my_number < 100:
    my_number += 1
    if my_number == 23:
        break</pre>
```

This creates a variable called *my\_number* and adds 1 to it at each iteration. Normally, the loop would finish when *my\_number* reaches 100. However, there is a special condition: when it reaches 23, it will break out of the loop.

#### **CONTINUE STATEMENTS**

Like break statements, continue statements are typically used when a special condition is met. However, while a break statement exits a loop, the continue statement simply takes you to the next iteration of the loop.

Examine the following code:

```
my_number = 0
while my_number < 100:
    my_number += 1
    if my_number > 23:
        continue
    print(my_number)
```

This is similar to the code for the break statement. However, my\_number will reach the value of 100, but only stop printing after it reaches the value 23.

## **Instructions**

Before you get started, we strongly suggest you start using VS Code or Anaconda to open all text files (.txt) and python files (.py).

First, read example.py.

- **example.py** should help you understand some simple Python. Every task will have example code to help you get started. Make sure you read all of **example.py** and try your best to understand.
- You may run example.py to see the output. Feel free to write and run your own example code before doing the Task to become more comfortable with Python.

## **Compulsory Task 1**

Follow these steps:

- Create a new file called **even.py**.
- Write a program that asks the user to enter a number.
- Make use of the *while loop* repetition structure so the program prints out all the even numbers from 1 up to (and possibly including) the number given by the user.

• Compile, save, and run your file.

# **Compulsory Task 2**

#### Follow these steps:

- Create a program called **names.py** to do the following:
  - o Require the user to enter the names of all pupils in a class. The user should be able to type "Stop" to indicate that the names of all the students have been entered.
  - o Print out the total number of names the users entered after the loop has been exited.
- Compile, save, and run your file.

# **Compulsory Task 3**

Follow these steps:

- Create a new file called **while.py**.
- Write a program that always asks the user to enter a number.
- When the user enters -1, the program should stop requesting the user to enter a number.
- The program must then calculate the average of the numbers entered, excluding the -1.
- Make use of the *while loop* repetition structure to implement the program.
- Compile, save, and run your file.

If you are having any difficulties, please feel free to contact our specialist team **on Discord** for support.

# **Optional Bonus Task**

Follow these steps:

- Create a new file in this folder called **optional\_task.py**.
- Ask the user to enter a number less than or equal to 100.
- If they enter one above 100, ask them to try again (and continue to do so until they follow instructions).
- Once they have entered a valid number, check if it is even. If it is, multiply it by 2 and print it out. If it isn't, multiply it by 3 and print it out.

## Thing(s) to look out for:

- 1. Make sure that you have installed and set up all programs correctly. You have set up **Dropbox** correctly if you are reading this, but **Python or your editor** may not be installed correctly.
- 2. If you are not using Windows, please ask a reviewer for alternative instructions.



Hyperion strives to provide internationally-excellent course content that helps you achieve your learning outcomes.

Think that the content of this task, or this course as a whole, can be improved, or think we've done a good job?

**Click here** to share your thoughts anonymously.